

Live

Service Overview

Issue 01
Date 2026-02-24



Copyright © Huawei Cloud Computing Technologies Co., Ltd. 2026. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are the property of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei Cloud and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Cloud Computing Technologies Co., Ltd.

Address: Huawei Cloud Data Center Jiaoxinggong Road
Qianzhong Avenue
Gui'an New District
Gui Zhou 550029
People's Republic of China

Website: <https://www.huaweicloud.com/intl/en-us/>

Contents

1 What Is Live?	1
2 Product Advantages	5
2.1 Cloud Live	5
2.2 Media Live	6
3 Scenarios	7
4 Functions	9
4.1 Cloud Live	9
4.2 Media Live	12
5 PoP Distribution	14
6 Security	16
6.1 Shared Responsibilities on Huawei Cloud Live	16
6.2 Certificates	16
6.3 Identity Authentication and Access Control	18
6.3.1 Permissions Management	18
6.3.2 Access Control for Live	33
6.4 Data Protection	34
6.5 Resilience	34
6.6 Security Risk Monitoring	35
7 Constraints	36
7.1 Regions	36
7.2 Domain Names	36
7.3 Cloud Live	36
7.4 Media Live	46
7.5 Content Compliance	51
8 Related Services	53
9 Concepts	54
9.1 Concepts	54
9.2 Regions and AZs	56

1 What Is Live?

Huawei Cloud Live is the cumulation of years of video expertise. It offers a secure and high-concurrency E2E livestreaming solution while delivering a low-latency HD experience. Live offers the following subproducts:

- [Cloud Live](#)
- [Media Live](#)

Cloud Live


Cloud Live is an easy-to-use livestreaming service. It provides diverse live acceleration capabilities for entertainment, e-commerce, and education scenarios.

Huawei Cloud Live provides Cloud Stream Live and Low Latency Live (LLL). [Table 1-1](#) describes their differences.

- **Cloud Stream Live** improves the stability and efficiency of high-concurrency livestreaming and provides powerful real-time media processing capabilities. [Figure 1-1](#) shows the architecture of Cloud Stream Live.

By default, it is billed by downlink playback traffic. Available billing options include traffic volume, daily peak bandwidth, and 95th percentile bandwidth. For details, see [Billing](#).

Figure 1-1 Cloud Stream Live architecture

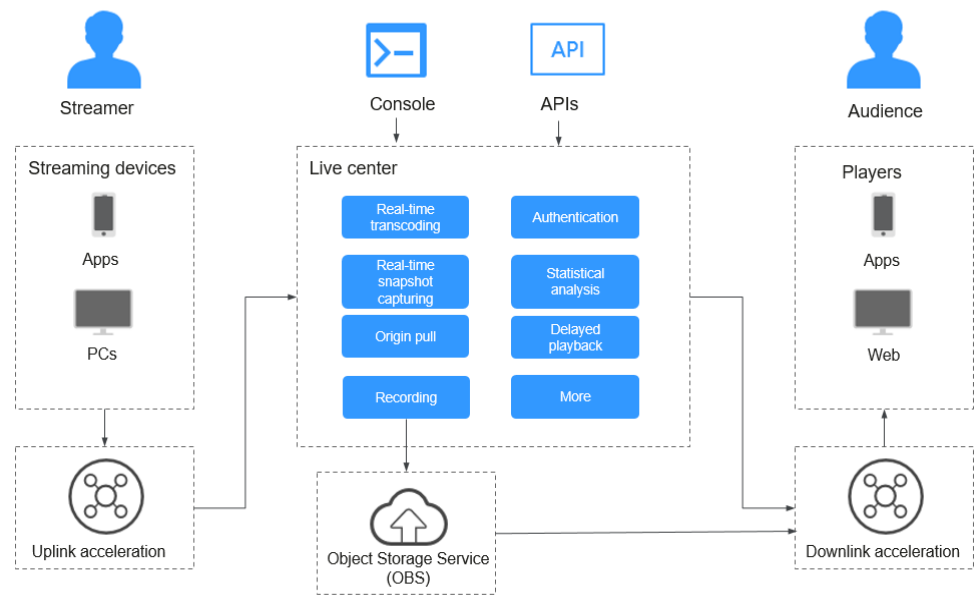

Process of livestreaming:

- a. A streaming tool is used to push a livestream to an origin server with uplink acceleration enabled.
 - b. The origin server transcodes the livestream in real time.
 - c. The processed livestream is distributed to viewers with downlink acceleration enabled.
 - d. Live records the livestream to Object Storage Service (OBS).
- **Low Latency Live** can minimize latency and frame freezing in high-concurrency scenarios. With optimized transmission protocols, dynamic routing, and low-latency transcoding, LLL keeps the latency under milliseconds to help you deliver premium content even under poor network conditions. It is suitable for scenarios that require low latency and good content synchronization. [Figure 1-2](#) shows the LLL architecture.

A multi-terminal demo is provided for you to try out LLL. To obtain the app demo and source code, [submit a service ticket](#) to contact Huawei Cloud technical engineers.

Figure 1-2 LLL architecture

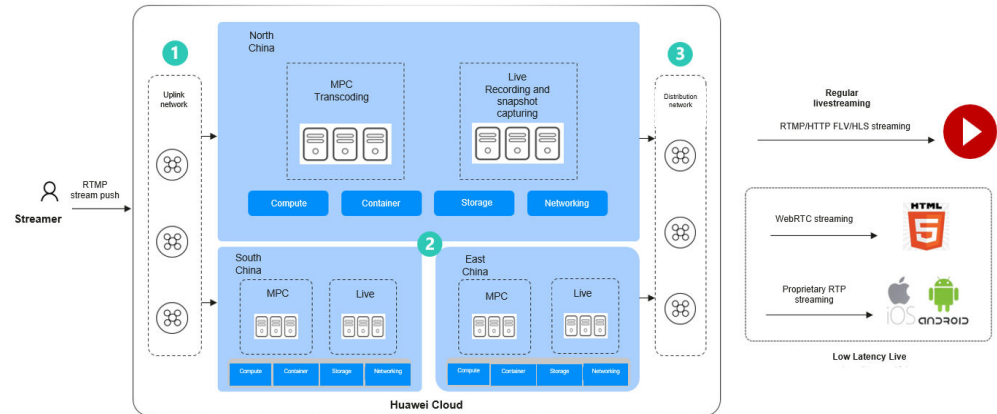



Table 1-1 Comparison of Cloud Live sub-scenarios

Cloud Live Sub-Scenario	Cloud Stream Live	LLL
Streaming Protocol	RTMP, HTTP-FLV, and HLS	WebRTC
E2E Latency	RTMP and HTTP-FLV latency > 3s HLS latency > 6s	E2E latency < 800 ms
Adaptable Network	Average	Good
Application Scenario	Livestreaming that is insensitive to latency	Interactive livestreaming that requires low latency and good image synchronization
General Capability	<ul style="list-style-type: none"> Functions such as real-time transcoding, recording, real-time snapshot capturing, content encryption, authentication, and statistics analysis More than 2800 acceleration nodes in China and more than 800 outside China to provide superlative service experience 	

Media Live

Huawei Cloud Media Live ensures stable broadcast-grade streaming for the industry's leading PGC players, around the clock with zero interruptions. Powered by the abundant compute resources of Huawei Cloud AZs worldwide and Huawei's years of audio/video expertise, Media Live helps TV stations and OTT platforms confidently deliver media content to their global audiences with unparalleled clarity and performance.

Figure 1-3 Media Live architecture

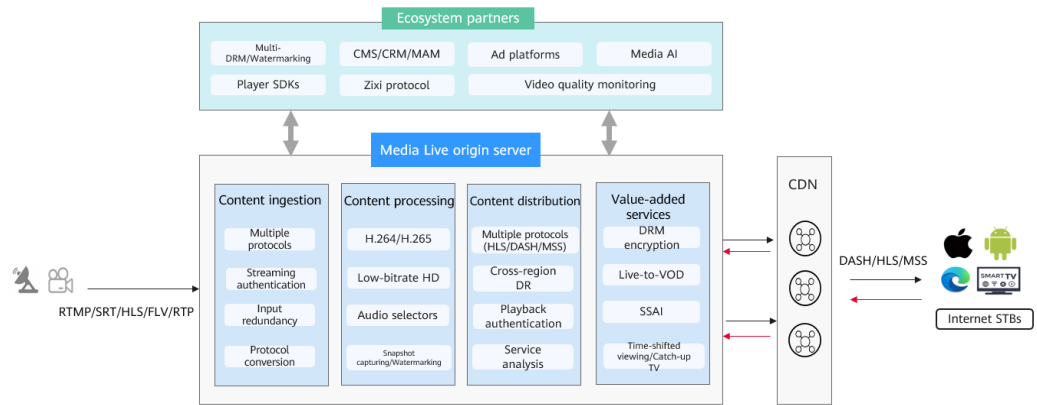

2 Product Advantages

2.1 Cloud Live

Advantages of Cloud Live:

- [Cloud Stream Live](#)
- [LLL](#)

Cloud Stream Live

Livestreaming acceleration: RTMP stream push and RTMP/HTTP-FLV/HLS stream pull are supported. With intelligent scheduling, streams can be pushed to the site nearby, delivering a frame freezing rate lower than 2.5%. A playback success rate of more than 99.9% ensures instant video playback.

Low-bitrate HD: Lower bitrate at a given image quality reduces bandwidth costs by 20–30%.

High cost-effectiveness: H.264/265 transcoding improves livestreaming experience and greatly reduces costs.

Enhanced security & reliability: Cross-region DR and 24/7 technical support safeguard your business. The livestreaming architecture is built on Huawei's 20 years of Cloud Native 2.0 experience. It is an agile and intelligent architecture that combines enhanced security and reliability with fast scaling to safeguard your livestreaming.

LLL

Millisecond-level latency: UDP is used to livestream within milliseconds in high-concurrency scenarios, which outperforms regular livestreaming that suffers from a latency of 3–5 seconds. In addition, core metrics such as first-frame latency and frame freezing rate are improved, minimizing livestreaming latency for viewers.

Comprehensive functions and high compatibility: LLL supports major functions of Cloud Stream Live, such as stream push, live transcoding, recording, snapshot capturing, and playback. You can easily migrate your workloads from Cloud Stream Live to LLL.

Easy usage and enhanced security: Using standard protocols allows playing video on Chrome and Safari with no need for plug-ins. Protocols are encrypted by default, which are secure and reliable.

2.2 Media Live

Global Acceleration and Nearby Access

- 800+ nodes outside the Chinese mainland, covering 130+ countries and regions
- 180 Tbit/s+ bandwidth reserve for elastic scaling upon traffic bursts
- Faster, stable access for users across regions and networks

Industry-leading Proprietary Technology

- Intelligent routing helps identify the optimal route based on factors such as access location and network quality, delivering content 20%+ faster.
- Proprietary software-hardware synergy improves service performance.

Secure Transmission

- Full-link HTTPS transmission and advanced security control ensure stable service running and data security.
- Automatic node failover offers high service availability.
- The 24/7 local expert service responds to your needs in a timely manner.

Lower Costs and Higher Efficiency

- Lower operations costs and latency and less retrieval bandwidth usage
- Easy configuration in just a few steps and more efficient deployment

3 Scenarios

The following lists application scenarios of Live subproducts:

- Cloud Live
 - [Cloud Stream Live](#)
 - [LLL](#)
- [Media Live](#)

Cloud Stream Live

Online education: Cloud Stream Live is an easy-to-integrate cloud service that can guarantee low-latency HD even when there are a massive number of viewers. Powerful real-time media processing ensures that videos can be quickly sent to interactive education websites. The acceleration nodes networkwide allow students to watch smooth videos. With video recording and transcoding, students can review learning materials at any time. In addition, hotlink protection prevents teaching materials from unauthorized use to protect copyrights.

Interactive entertainment: Cloud Stream Live can be used for livestreaming by influencers and enterprises, or livestreaming for entertainment and gaming. This one-stop E2E livestreaming solution supports diverse media processing functions, such as real-time transcoding.

Live commerce: Cloud Stream Live helps e-commerce platforms better present their products to turn more prospects into customers. The ultra-low latency keeps both streamers and viewers informed of transactions in real time so that viewers can buy products while watching the video.

Live events: Cloud Stream Live enables you to manage permissions for playing video using IP address access control lists (ACLs), URL validation, and the Advanced Encryption Standard (AES). These features help protect live content from unauthorized playback. Live video recording and recording file index creation are supported. Together with VOD, a one-stop Live-to-VOD solution is provided to facilitate the livestreaming of sports games, e-games, and enterprise presentations.

LLL

Large online courses: Millisecond-level latency facilitates interactivity in class, such as smoother Q&A sessions and whiteboard sharing, significantly improving student engagement and learning efficiency.

Live commerce: Low latency ensures a fair and consistent experience in live commerce activities such as flash sales. The streamer can answer viewers' questions and on-screen comments in a timely manner, attracting more visitors to the e-commerce platform for higher gross merchandise volume (GMV).

Fashion shows: The streamer can receive gifts sent by viewers immediately, improving interactivity in this latency-sensitive scenario.

Live sports: Fans can watch sports games together in a live room and interact with each other in real time at a low latency.

Media Live

Broadcast & TV: Huawei Cloud Media Live ensures 24/7 broadcast-grade streaming for broadcasters, TV stations, and carriers. With the CDN points of presence (PoPs) deployed worldwide, a higher compression rate for the same image quality improves user experience and inexpensively distributes live content.

Sports: By using local and global CDN PoPs, Media Live facilitates international livestreaming of major sports events, and offers premium live video experience in areas where these programs have a high viewership. SRT streams can be smoothly transmitted even in poor network conditions. Real-time packaging enables streams to play at different bitrate levels to ensure good video experience on multiple devices.

Entertainment: Powerful real-time transcoding allows streaming movies at a high level of bitrate and frame rate. DRM encryption and digital watermarking protect the copyright of high-value media content.

4 Functions

4.1 Cloud Live

This section describes the functions of Cloud Live. You can check if a certain function is available in a region on the console.

Stream Push

Stream push is the process of collecting, encoding, and packaging live content and then transmitting it to Huawei Cloud origin servers.

Stream push protocol: RTMP, audio-only, and video-only

Stream push method: using third-party software, such as Open Broadcaster Software (OBS), XSplit, and FMLE

Uplink acceleration: stream push acceleration, user access point/device scheduling (DNS or HTTP DNS), access control, and auto scaling for live video

Playback

Playback is the process of playing livestreams pushed from Huawei Cloud origin servers or from third-party origin servers.

Playback protocol: RTMP, HTTP-FLV, and HLS for Cloud Stream Live; WebRTC (can be downgraded to HTTP-FLV) for Low Latency Live (LLL)

Playback method: third-party players such as VLC for Cloud Stream Live; LLL online demos or open APIs for low-latency playback on web devices

Downlink acceleration: content distribution acceleration, user access point/device scheduling (DNS or HTTP DNS), access control, and auto scaling for live video

Recording

You can record a livestream as an HLS/FLV/MP4 file and store it in an Object Storage Service (OBS) bucket, where you can download and share the content. For details, see [Recording Live Video to OBS](#).

Transcoding

You can [transcode a livestream](#) into a video stream of different resolutions and bitrates to fit the network conditions. H.264/H.265 standard transcoding and low-bitrate HD transcoding are supported.

Snapshot Capturing

Live captures snapshots (JPG only) from a livestream based on a configured template and stores the captured snapshots in an OBS bucket. Multiple snapshot templates can be configured for an ingest domain name. When stream push starts and snapshot capturing is enabled, the template whose *App Name* is the same as that in the ingest URL takes effect. For details, see [Snapshot Capturing](#).

Stream Status Notifications

You can add a URL on the Live console for receiving messages when stream push starts or ends. A message is sent as a POST request to the user server through an HTTP API. Then the server returns the status code 200 to confirm that the message has been received. For details, see [Stream Status Notifications](#).

Stream Delay

The stream delay of Live defaults to 2 seconds and can be changed to 4 or 6 seconds. You can [configure stream delay](#) for RTMP and HTTP-FLV streams. The group of pictures (GOP) duration of the ingest end cannot be longer than the configured delay. The actual delay is influenced by factors including the player's network conditions.

Note: This function is not recommended for LLL.

Origin Pull

By default, a streaming domain name created on Huawei Cloud Live pulls live content from Huawei origin servers. If you want to play live content pushed from your own origin server on Huawei Cloud, you can configure an origin address on the Live console to pull live content from your own origin server to a Huawei origin server for accelerated content distribution. For details, see [Configuring Origin Pull](#).

Note: If you set **Origin Server** to **My origin server (domain name)** or **My origin server (IP address)** for a streaming domain name, livestreams of the ingest domain name associated with this streaming domain name cannot be played, and functions such as transcoding cannot be used. For LLL, ensure that there is no B-frame for origin pull.

HTTPS Secure Acceleration

Live allows you to configure [HTTPS secure acceleration](#) for streaming domain names. You can configure your own certificates or certificates purchased from Huawei Cloud Certificate & Manager (CCM) on the Live console. Only certificates in PEM format are supported. You can also enable **Force HTTPS** to force redirect user requests to HTTPS.

Access Control

Live provides referer validation, URL validation, and access control lists (ACLs) to identify and filter out malicious visitors. Only authenticated visitors can use Live.

URL validation protects origin server resources from unauthorized download and theft. Referer validation uses referer blacklists/whitelists to prevent hotlinking. However, referer validation cannot well protect origin server resources because the referer content can be forged. As a result, you are advised to use URL validation.

Authentication mechanism of Live:

URL validation: Both ingest and streaming URLs can be validated. You can customize the authentication key and expiration time and use multiple authentication algorithms provided by Live.

Referer validation: You can configure a referer blacklist or whitelist to identify and filter out malicious visitors.

ACL: You can configure an IP address blacklist or whitelist to identify and filter out malicious visitors.

Usage Statistics

With **usage statistics**, you can view the downstream bandwidth/traffic of all streaming domain names, and the total transcoding duration, maximum number of concurrent recording streams, and number of snapshots of all ingest domain names.

Service Monitoring

With **service monitoring**, you can view data of a streaming domain name, such as the downstream bandwidth/traffic, stream playback profile, response status codes, and the number of online viewers of the corresponding livestream. You can also view data of the ingest domain name, such as the upstream bandwidth/traffic, total number of streams, pushed stream details, and frame rate/bitrate of a pushed stream.

LLL Statistical Analysis

You can view the LLL-related statistics of a streaming domain name, including the downstream bandwidth/traffic, number of online viewers, and global and single-stream playback statistics. For details, see **LLL Statistical Analysis**.

Log Management

Live provides the **log management** function that allows you to view detailed logs about the network users' access to all streaming domain names and download logs of the past 90 days.

Note: You can query and download logs in a time span of up to seven days. To query and download logs in a longer time span, repeat the operations.

Monitoring and Alarms

Live has integrated with Cloud Eye. You can query the monitoring metrics and alarms of streaming domain names and ingest domain names on the Cloud Eye console or by calling APIs. For details, see [Monitoring and Alarms](#).

Enterprise Project

Enterprise projects allow you to manage resource instances and services by category. Resources and services in different regions can be added to the same enterprise project. For example, an enterprise can classify resources based on departments or project groups and then put relevant resources into the same enterprise project for management. When [adding a domain name](#), you can specify its enterprise project to facilitate domain name resource and permission management.

4.2 Media Live

This section describes the functions of Media Live. You can check if a certain function is available in a region on the console.

Multi-Protocol Primary/Standby Stream Input

Media Live supports multiple input protocols, including RTMP, SRT, HLS, and FLV. You can provide primary and standby input addresses for each stream to ensure stream stability and reliability. For details, see [Channel Management](#).

High-Quality Transcoding

Media Live enables transcoding with versatile levels of resolution, bitrate, and frame rate. It supports H.264 and H.265, and enables standard and low-bitrate HD transcoding. By delivering the same image quality at lower bitrate, it effectively enhances user experience while reducing distribution costs. For details, see [Creating a Transcoding Template](#).

Image Watermarking

You can add image watermarks to livestreams. For details, see [Media Processing](#).

Real-Time Packaging of Multi-Protocol Livestreams

Livestreaming, catch-up TV, and time-shifted viewing are supported for HLS, DASH, and MSS output streams. Transcoding templates can be applied in real time to distribute content with adaptive bitrate. For details, see [Channel Management](#).

Digital Rights Management (DRM)

FairPlay, Widevine, PlayReady, and Multi-DRM safeguard your high-value media assets. For details, see [Channel Management](#).

Stream Quality Monitoring

Media Live supports minute-level input stream quality monitoring by channel.

You can view the monitoring information about **CDN Downstream Bandwidth/Traffic**, **CDN Status Codes** returned in responses, **CDN Concurrent Downstream Requests**, **Transcoding Metrics**, and **Packaging Metrics**. For details, see [Service Monitoring](#).

Domain Name Management

You can add, delete, disable, and enable ingest domain names and streaming domain names. For details, see [Domain Name Management](#).

Flow Management

You can manage flows in a unified manner. Multiple channels can reference the same flow at a time, which improves channel O&M efficiency. For details, see [Flows](#).

Channel Management

You can create, enable, modify, disable, and delete a channel. For details, see [Channel Management](#).

5 PoP Distribution

Huawei Cloud Live has over 2,000 points of presence (PoPs) in the Chinese mainland and over 800 PoPs outside the Chinese mainland. The network-wide bandwidth reaches 180 Tbit/s. It covers more than 130 countries and regions and connects to networks of over 1,600 carriers. User requests can be scheduled to the most appropriate PoPs, accelerating content delivery.


NOTICE

For the region restrictions, see [Adding Domain Names](#).

PoP Distribution in the Chinese Mainland

Geographic Region	PoP Distribution
North China	Beijing, Hebei, Inner Mongolia Autonomous Region, Shanxi, and Tianjin
East China	Anhui, Fujian, Jiangsu, Jiangxi, Shandong, Shanghai, and Zhejiang
Central China	Henan, Hubei, and Hunan
South China	Guangdong, Guangxi Zhuang Autonomous Region, and Hainan
Northwest China	Gansu, Ningxia Hui Autonomous Region, Qinghai, Shaanxi, and Xinjiang Uygur Autonomous Region
Southwest China	Chongqing, Guizhou, Sichuan, Xizang Autonomous Region, and Yunnan
Northeast China	Heilongjiang, Jilin, and Liaoning

PoP Distribution Outside the Chinese Mainland

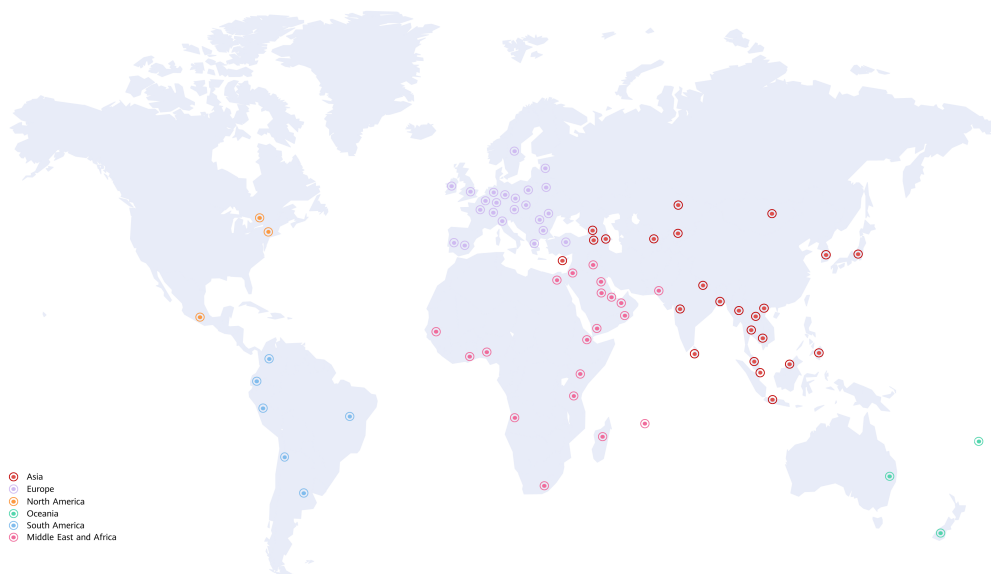

Geographic Region	PoP Distribution (Divided Based on Huawei's Internal Businesses)
Asia	Azerbaijan, Hong Kong (China), India, Indonesia, Japan, Kazakhstan, Macao (China), Malaysia, Philippines, Singapore, Thailand, and Vietnam
Europe	France, Germany, and United Kingdom
Middle East and Africa	Bahrain, Egypt, Iraq, Oman, Qatar, Saudi Arabia, South Africa, and United Arab Emirates
North America	Mexico
South America	Argentina, Brazil, Chile, Colombia, and Peru

6 Security

6.1 Shared Responsibilities on Huawei Cloud Live

Live requires the participation and responsibility sharing of the following roles. The security responsibility boundary of each role is as follows:

- **Huawei Cloud tenant**

Responsible for **livestreaming management**, including the following security responsibilities:

- Application and data security of the livestreaming platform and apps
- Security of livestreaming activities
- End user (streamers or viewers) security management, including security supervision of live video content
- Response to regulators

- **Huawei Cloud Live**

The security responsibilities of **Live** are as follows:

- Transmission network security, which is essential to the transmission and processing of video content
- Tenant data security
- Providing technologies, such as snapshot capturing and recording, to support tenants' video content monitoring
- Response to regulators

- **End user**

Streamers and viewers are responsible for the security of video production and video content.


6.2 Certificates

Compliance Certificates

Huawei Cloud services and platforms have obtained various security and compliance certifications from authoritative organizations, such as International

Organization for Standardization (ISO). You can [download](#) them from the console.


Figure 6-1 Downloading compliance certificates

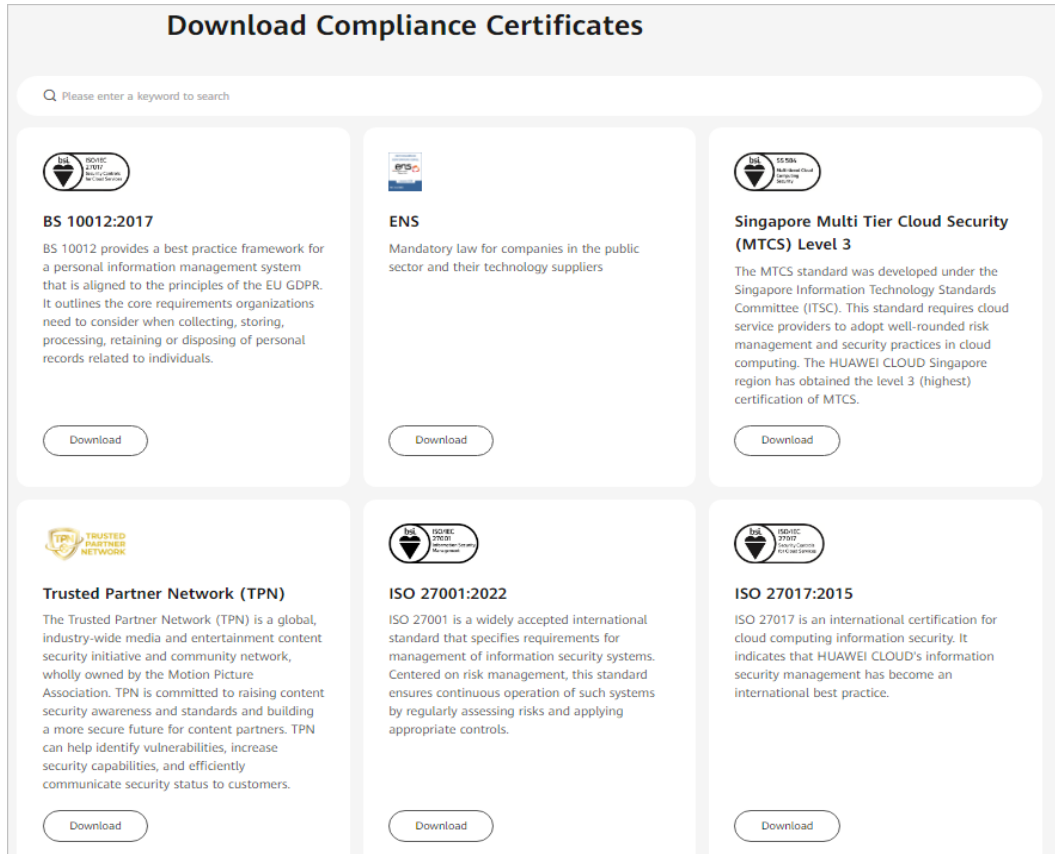

Resource Center

Huawei Cloud also provides the following resources to help users meet compliance requirements. For details, see [Resource Center](#).

Figure 6-2 Resource center

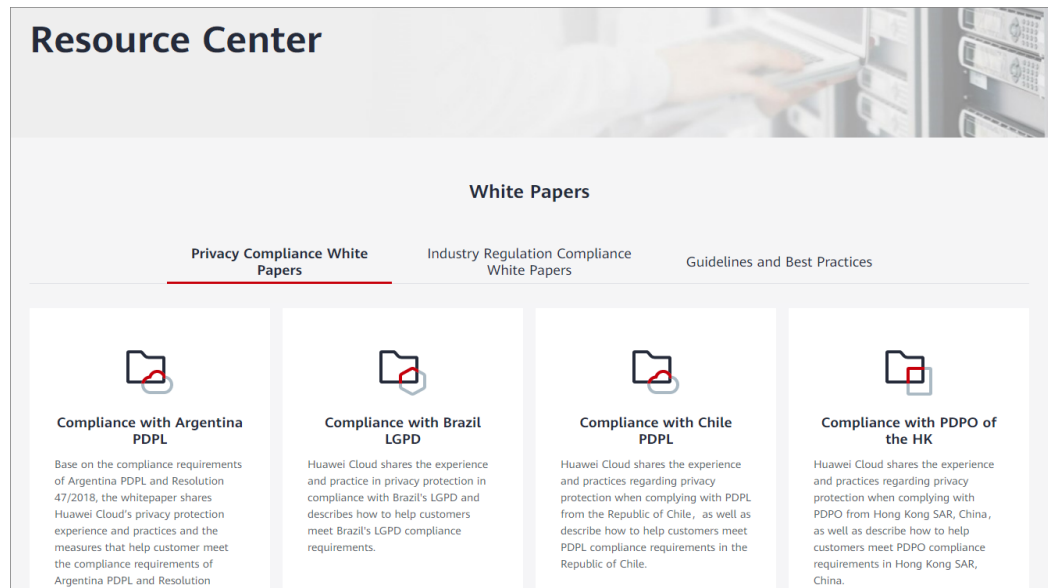

6.3 Identity Authentication and Access Control

6.3.1 Permissions Management

If you need to assign different permissions to employees in your enterprise to access your Live resources, Identity and Access Management (IAM) is a good choice for fine-grained permissions management. IAM provides identity authentication, permissions management, and access control, helping you securely access Huawei Cloud resources. If your Huawei account can meet your requirements and you do not need an IAM account to manage user permissions, skip this section.

IAM is a free service. You only pay for the resources in your account.

With IAM, you can control access to specific Huawei Cloud resources. For example, if you want some software developers in your enterprise to use Live resources but do not want them to delete Live resources or perform any other high-risk operations, you can grant the permission to use Live resources but not the permission to delete them.

IAM supports role/policy-based authorization and identity policy-based authorization.

The following table describes the differences between these two authorization methods.

Table 6-1 Differences between role/policy-based and identity policy-based authorization

Authorization Model	Core Relationship	Permissions	Authorization Method	Description
Role/Policy	User-permission-authorization scope	<ul style="list-style-type: none"> • System-defined roles • System-defined policies • Custom policies 	Assigning roles or policies to principals	To authorize a user, you need to add it to a user group first and then specify the scope of authorization. It is hard to provide fine-grained permissions control using authorization by user groups and a limited number of condition keys. This method is suitable for small- and medium-sized enterprises.
Identity policy	User-policy	<ul style="list-style-type: none"> • System-defined identity policies • Custom identity policies 	<ul style="list-style-type: none"> • Assigning identity policies to principals • Attaching identity policies to principals 	You can authorize a user by attaching an identity policy to it. User-specific authorization and a variety of key conditions allow for more fine-grained permissions control. However, this model can be hard to set up. It requires a certain amount of expertise and is suitable for medium- and large-sized enterprises.

Assume that you want to grant IAM users the permissions needed to use Live in CN North-Beijing4 and OBS buckets in CN South-Guangzhou. With role/policy-based authorization, the administrator needs to create two custom policies and assign both to the IAM users. With identity policy-based authorization, the administrator only needs to create one custom identity policy and configure the condition key **g:RequestedRegion** for the policy, and then attach the policy to the principals or grant the principals the access permissions to the specified regions. Identity policy-based authorization is more flexible than role/policy-based authorization.

Policies and actions in the two authorization models are not interoperable. You are advised to use the identity policy-based authorization model. For details about system-defined permissions of the two models, see [Role/Policy-based Authorization](#) and [Identity Policy-based Authorization](#).

For details about IAM, see [What Is IAM?](#).

Role/Policy-based Authorization

CAUTION

Media Live does not support custom policies. Only system-defined policies are supported.

Live supports role/policy-based authorization. By default, new IAM users do not have any permissions. You need to add them to one or more groups, and then add permissions policies or roles to these groups. The users inherit permissions from their groups and can then perform specified operations on cloud services.

Live is a project-level service deployed in different physical regions. When you set **Scope** to **Region-specific projects** and select the specified projects (for example, **ap-southeast-2**) in the specified regions (for example, AP-Bangkok), the users only have permissions on Live resources in the selected projects. If you set **Scope** to **All resources**, the users have permissions on Live resources in all region-specific projects. When accessing Live, the users need to switch to a region where they have been authorized to use Live.

NOTE

When assigning permissions to a user group in IAM, you cannot select **Enterprise projects** when setting **Specify the authorization scope** on the **Select Scope** page.

Table 6-2 lists all system-defined permissions on Live. System-defined policies in role/policy-based authorization and identity policy-based authorization are not interoperable.

Table 6-2 System-defined permissions on Live

System Role/ Policy Name	Description	Category	Dependency
Live FullAccess	Has all permissions on Live.	System-defined policy	None
Live ReadOnlyAccesses	Has the read-only permission on Live.	System-defined policy	None

Table 6-3 lists the common operations supported by the system-defined permissions on Live.

Table 6-3 Common operations supported by the system-defined permissions

Operation	Live FullAccess	Live ReadOnlyAccess
Creating a domain name	√	x
Modifying a domain name	√	x
Deleting a domain name	√	x
Querying domain names	√	√
Mapping domain names	√	x
Deleting a domain name mapping	√	x
Adding or overwriting stream notification configurations	√	x
Querying stream notification configurations	√	√
Deleting stream notification configurations	√	x
Creating a domain name configuration item	√	x
Modifying a domain name configuration item	√	x
Querying domain name configuration items	√	√
Deleting a domain name configuration item	√	x
Querying IP ACLs	√	√
Modifying an IP ACL	√	x

Operation	Live FullAccess	Live ReadOnlyAccess
Obtaining the list of regions where Live is available	√	√
Modifying the list of regions where Live is available	√	x
Configuring a referer validation ACL	√	x
Deleting a referer validation ACL	√	x
Querying referer validation ACLs	√	√
Querying HTTPS certificate information	√	√
Obtaining the link for downloading playback logs	√	√
Creating a recording template	√	x
Querying recording templates	√	√
Modifying a recording template	√	x
Deleting a recording template	√	x
Querying recording templates	√	√
Querying recorded content	√	√
Submitting a recording command	√	x
Creating a recording callback	√	x
Querying recording callbacks	√	√
Modifying a recording callback	√	x

Operation	Live FullAccess	Live ReadOnlyAccess
Querying recording callbacks	√	√
Deleting a recording callback	√	x
Configuring a snapshot capturing template	√	x
Modifying a snapshot capturing template	√	x
Querying snapshot capturing templates	√	√
Deleting a snapshot capturing template	√	x
Disabling a stream	√	x
Querying disabled streams	√	√
Resuming a stream	√	x
Modifying the attribute of a disabled stream	√	x
Disconnecting a stream	√	x
Querying ongoing streams	√	√
Creating a task for ingesting streams from external networks	√	x
Deleting a task for ingesting streams from external networks	√	x
Querying tasks for ingesting streams from external networks	√	√
Configuring the billing mode	√	x

Operation	Live FullAccess	Live ReadOnlyAccess
Querying tenant information	√	√
Creating a transcoding template	√	x
Deleting a transcoding template	√	x
Modifying a transcoding template	√	x
Querying transcoding templates	√	√
Adding transcoding SEI	√	x
Querying HTTP status codes for pulling streams	√	√
Querying the stream frame rate	√	√
Querying the stream bitrate	√	√
Querying the real-time stream bitrate	√	√
Querying the real-time stream frame rate	√	√
Querying the duration of recordings	√	√
Querying the number of snapshots	√	√
Querying the number of streams by domain name	√	√
Querying historical streams	√	√

Operation	Live FullAccess	Live ReadOnlyAccess
Querying playback profiles	√	√
Querying the number of online streamers	√	√
Querying the playback bandwidth trend	√	√
Querying the playback traffic trend	√	√
Querying the peak playback bandwidth	√	√
Querying the total playback traffic	√	√
Querying the upstream bandwidth	√	√
Querying the distribution of metrics in each region	√	√
Querying the playback bandwidth trend	√	√
Querying the playback traffic trend	√	√
Querying the real-time upstream bandwidth	√	√
Querying the real-time downstream bandwidth	√	√
Querying the real-time stream bandwidth	√	√
Querying details about the real-time downstream bandwidth	√	√

Operation	Live FullAccess	Live ReadOnlyAccess
Querying the bandwidth trend by stream	√	√
Querying the duration of transcoded outputs	√	√
Querying the number of transcoding tasks	√	√
Querying the number of streams for real-time transcoding	√	√
Querying the viewer trend by stream	√	√
Querying the number of online viewers by stream	√	√
Querying the number of online viewers	√	√
Querying details about the number of online viewers	√	√

Roles or Policies Required for Live Console Operations

NOTICE

- To authorize Live console access through a custom policy instead of the system-defined policies **Live FullAccess** and **Live ReadOnlyAccess**, the permission **live:tenant:getTenantInformation** must be included in the custom policy.
- After assigning an IAM user the **Live FullAccess** permission, you need to assign the user the following Cloud Eye permissions to monitor metrics of Live:
 - **CES ReadOnlyAccess**: On the Cloud Eye console, choose **Cloud Service Monitoring > Live** to view resource monitoring metrics of Live.
 - **CES FullAccess**: On the Cloud Eye console, choose **Cloud Service Monitoring > Live** to view resource monitoring metrics of Live and perform operations.

Table 6-4 Roles or policies required for Live console operations

Console Operation	Dependency	Policy/Role Required
Authorizing access to OBS buckets	Object Storage Service (OBS)	After granting an IAM user the Live FullAccess permission, you need to add the following OBS permissions in sequence: <ul style="list-style-type: none"> • OBS ReadOnlyAccess: You can view the OBS bucket list on the OBS Authorization page only after this permission is added. • OBS Administrator: You can authorize Live to use OBS buckets on the OBS Authorization page only after this permission is added.
Querying enterprise projects	Enterprise Project Management Service (EPS)	After granting the Live FullAccess permission to an IAM user, you need to add the EPS ReadOnlyAccess permission so that the user can view the enterprise project list when adding a domain name on the Domains page.
Purchasing a pay-per-use prepaid Live resource package	Billing Center	After granting an IAM user the Live FullAccess permission, you need to add the BSS Operator permission so that the user can purchase a pay-per-use prepaid Live resource package.
Querying the downstream bandwidth/traffic (old version)	Identity and Access Management (IAM)	After granting the Live FullAccess permission to an IAM user, you need to add the Tenant Guest permission so that the user can query the downstream bandwidth/traffic.

Identity Policy-based Authorization

Live supports identity policy-based authorization. [Table 6-5](#) lists all the system-defined identity policies for Live. System-defined policies in identity policy-based authorization are not interoperable with those in role/policy-based authorization.

Table 6-5 System-defined identity policies for Live

Policy Name	Description	Policy Type
LiveFullAccessPolicy	Has all permissions on Live.	System-defined identity policy
LiveReadOnlyPolicy	Has the read-only permission on Live.	System-defined identity policy

Table 6-6 lists the common operations supported by the system-defined identity policies for Live.

Table 6-6 Common operations supported by the system-defined identity policies for Live

Operation	LiveFullAccessPolicy	LiveReadOnlyPolicy
Creating a domain name	√	x
Modifying a domain name	√	x
Deleting a domain name	√	x
Querying domain names	√	√
Mapping domain names	√	x
Deleting a domain name mapping	√	x
Adding or overwriting stream notification configurations	√	x
Querying stream notification configurations	√	√
Deleting stream notification configurations	√	x
Creating a domain name configuration item	√	x
Modifying a domain name configuration item	√	x
Querying domain name configuration items	√	√
Deleting a domain name configuration item	√	x
Querying IP ACLs	√	√
Modifying an IP ACL	√	x

Operation	LiveFullAccessPolicy	LiveReadOnlyPolicy
Obtaining the list of regions where Live is available	√	√
Modifying the list of regions where Live is available	√	x
Configuring a referer validation ACL	√	x
Deleting a referer validation ACL	√	x
Querying referer validation ACLs	√	√
Querying HTTPS certificate information	√	√
Obtaining the link for downloading playback logs	√	√
Creating a recording template	√	x
Querying recording templates	√	√
Modifying a recording template	√	x
Deleting a recording template	√	x
Querying recording templates	√	√
Querying recorded content	√	√
Submitting a recording command	√	x
Creating a recording callback	√	x
Querying recording callbacks	√	√
Modifying a recording callback	√	x
Querying recording callbacks	√	√

Operation	LiveFullAccessPolicy	LiveReadOnlyPolicy
Deleting a recording callback	√	x
Configuring a snapshot capturing template	√	x
Modifying a snapshot capturing template	√	x
Querying snapshot capturing templates	√	√
Deleting a snapshot capturing template	√	x
Disabling a stream	√	x
Querying disabled streams	√	√
Resuming a stream	√	x
Modifying the attribute of a disabled stream	√	x
Disconnecting a stream	√	x
Querying ongoing streams	√	√
Creating a task for ingesting streams from external networks	√	x
Deleting a task for ingesting streams from external networks	√	x
Querying tasks for ingesting streams from external networks	√	√
Configuring the billing mode	√	x
Querying tenant information	√	√

Operation	LiveFullAccessPolicy	LiveReadOnlyPolicy
Creating a transcoding template	√	x
Deleting a transcoding template	√	x
Modifying a transcoding template	√	x
Querying transcoding templates	√	√
Adding transcoding SEI	√	x
Querying HTTP status codes for pulling streams	√	√
Querying the stream frame rate	√	√
Querying the stream bitrate	√	√
Querying the real-time stream bitrate	√	√
Querying the real-time stream frame rate	√	√
Querying the duration of recordings	√	√
Querying the number of snapshots	√	√
Querying the number of streams by domain name	√	√
Querying historical streams	√	√
Querying playback profiles	√	√
Querying the number of online streamers	√	√
Querying the playback bandwidth trend	√	√
Querying the playback traffic trend	√	√

Operation	LiveFullAccessPolicy	LiveReadOnlyPolicy
Querying the peak playback bandwidth	√	√
Querying the total playback traffic	√	√
Querying the upstream bandwidth	√	√
Querying the distribution of metrics in each region	√	√
Querying the playback bandwidth trend	√	√
Querying the playback traffic trend	√	√
Querying the real-time upstream bandwidth	√	√
Querying the real-time downstream bandwidth	√	√
Querying the real-time stream bandwidth	√	√
Querying details about the real-time downstream bandwidth	√	√
Querying the bandwidth trend by stream	√	√
Querying the duration of transcoded outputs	√	√
Querying the number of transcoding tasks	√	√
Querying the number of streams for real-time transcoding	√	√
Querying the viewer trend by stream	√	√

Operation	LiveFullAccessPolicy	LiveReadOnlyPolicy
Querying the number of online viewers by stream	√	√
Querying the number of online viewers	√	√
Querying details about the number of online viewers	√	√

Identity Policies Required for Live Console Operations

Table 6-7 Identity policies required for Live console operations

Console Operation	Dependency	Identity Policy Required
Authorizing access to OBS buckets	Object Storage Service (OBS)	After granting an IAM user the LiveFullAccessPolicy permission, you need to add the OBSOperateAccess permission so that the user can view the OBS bucket list on the OBS Authorization page and authorize Live to access OBS buckets.

Helpful Links

- [IAM Service Overview](#)
- [Granting Permissions Using IAM](#)
- [Identity Policy-based Authorization](#)

6.3.2 Access Control for Live

Identity Authentication

You can access Live through the Live console, APIs, and SDKs. Regardless of the access method, requests are sent through REST APIs provided by Live.

Live APIs can be accessed only after requests are authenticated. You can use either of the following authentication methods to call APIs:

- Token authentication: Requests are authenticated using tokens.
- AK/SK authentication: Requests are encrypted using AK/SK pairs. AK/SK authentication is recommended because it is more secure than token authentication.

For details, see [Authentication](#).

Access Control

Live supports access control based on IAM permissions and hotlink protection.

Table 6-8 Live access control

Method	Description	Details
IAM permissions	IAM permissions define which actions on your cloud resources are allowed or denied. After creating an IAM user, the administrator needs to add them to a user group and grant the permissions required by Live to the user group. Then, all users in this group automatically inherit the granted permissions.	Permissions Management
Hotlink protection	To prevent your data on Live from being stolen, Live provides referer validation, URL validation, and access control list (ACL) to identify and filter out malicious visitors. Only authorized visitors can use Live.	Hotlink Protection

6.4 Data Protection

Live takes different measures to keep data stored in Live secure and reliable.

Table 6-9 Live data protection methods and features

Measure	Description	Details
Transmission encryption (HTTPS)	Live supports HTTP and HTTPS, but HTTPS is recommended as it is more secure than HTTP.	HTTPS Configuration
Sensitive data encryption and protection	Sensitive data configured by tenants, such as URLs used for validation, is stored using secure encryption algorithms.	-

6.5 Resilience

Live provides a four-level reliability architecture. It ensures data durability and reliability through technical solutions such as cross-region/AZ data DR, intelligent scheduling at edge nodes, and automatic microservice scale-out.

Reliability Level	Measure
Level 1 Service reliability	Automatic microservice scale-out
Level 2 Access reliability	Scheduling at multiple edge nodes
Level 3 Data center reliability	Multi-AZ
Level 4 Region reliability	Multi-region

6.6 Security Risk Monitoring

Cloud Eye provides multi-dimensional monitoring for your resources on the cloud. With Cloud Eye, you can view the resource usage and service status, and respond to exceptions in a timely manner.

Live uses Cloud Eye to perform monitoring over resources, helping you monitor the usage of ingest and streaming domain names and receive alarms and notifications in real time.

For details about the monitoring metrics supported by Live and how to create monitoring alarm rules, see [Using Cloud Eye to Monitor Live Resources](#).

7 Constraints

7.1 Regions

Live includes Cloud Live and Media Live. Currently, the origin servers are deployed only in the following regions:

- Cloud Live: CN North-Beijing4, AP-Singapore, and LA-Sao Paulo
- Media Live: CN North-Beijing4, AP-Singapore, and ME-Riyadh

The origin server in CN North-Beijing1 is no longer available for new service functions and users due to limited resources. Support will be provided only for existing service functions and users. If you want to try the latest functions of Live or your service volume is large, you are advised to migrate your workloads to the primary origin server of Live (CN North-Beijing4 for users in the Chinese mainland and AP-Singapore for international users).

7.2 Domain Names

By default, you can add up to 64 domain names in your account.

If you want to livestream an event in the Chinese mainland or globally, ensure that the domain name to be added has been licensed by the Ministry of Industry and Information Technology (MIIT) and the ICP license is valid.

NOTICE

If you add, modify, or delete a domain name, the change will be displayed in [My Resources](#) within 24 hours. Please check the data later.

7.3 Cloud Live

Before using Cloud Live, understand the following constraints.

Constraints

Table 7-1 Constraints

Item	Description
Concurrent livestreams	There is no restriction on concurrent livestreams. If you require a bandwidth exceeding 100 Gbit/s, you are advised to submit a service ticket for further consultation.
Stream push	There is no limit on the bitrate. Common resolutions and bitrates are supported. To ensure smooth streaming, a bitrate no greater than 4 Mbit/s is recommended.
Playback	You can play a livestream only after the ingest and streaming domain names are associated. The values of AppName and StreamName in the streaming URL must be the same as those in the ingest URL.

Item	Description
Input/Output format	<p>Cloud Stream Live</p> <ul style="list-style-type: none"> ● Video packaging protocols <ul style="list-style-type: none"> - RTMP and FLV Video codec: H.264 and H.265, etc. - HLS output protocol Video codec: H.264 and H.265, etc. ● Audio packaging protocols <ul style="list-style-type: none"> - RTMP and FLV Audio codec: AAC, etc. - HLS output protocol Audio codec: AAC <p>Low Latency Live (LLL)</p> <ul style="list-style-type: none"> ● Transmission protocol requirements <ul style="list-style-type: none"> - Signaling transmission protocol: HTTPS, HTTP, and UDP are supported. HTTP listening port 80 is enabled. HTTP and UDP are insecure. - Media transmission protocol: UDP and TCP are supported. Media streams can be encrypted. It is recommended that DTLS be used for signaling negotiation, as UDP is insecure. ● Encoding format requirements <ul style="list-style-type: none"> - Audience: The supported video encoding format is H.264 without B frames, and the supported audio encoding format is OPUS. - Streamer: The supported video encoding format is H.264 without B frames, and the supported audio encoding format is AAC (LC/HE). <p>NOTE</p> <ul style="list-style-type: none"> ● If the format of the streaming device is not supported, you need to create a transcoding template. LLL supports real-time transcoding, and you will be billed for using this function. The conversion from AAC to OPUS is supported and no fee will be generated. ● To reduce latency, you can set the GOP at the streaming device to 2s.
Streaming management	This function is available only in CN North-Beijing4, AP-Singapore, and EU-Dublin.
Recording	This function is unavailable in AP-Bangkok.
Transcoding	In the AP-Bangkok region, submit a service ticket for review after configuring a template. The configuration takes effect only after it is approved.
Snapshot capturing	
Stream status notifications	

API Constraints

Live sets a limit on the number of API calls to prevent service interruption caused by repeated API calls in a short period of time.

Table 7-2 API request throttling

API Category	API Name	Max. User Requests	Max. API Requests
Domain name management	<ul style="list-style-type: none"> Creating a domain name Querying domain names 	300 times/minute	3,000 times/minute
	<ul style="list-style-type: none"> Deleting a domain name Modifying a domain name Mapping domain names Deleting a domain name mapping Configuring the domain name IPv6 switch Modifying the HLS configuration of a domain name Querying HLS configurations of domain names 	100 times/minute	1,000 times/minute
	<ul style="list-style-type: none"> Modifying the streaming domain name delay Modifying origin pull settings 	30 times/minute	100 times/minute

API Category	API Name	Max. User Requests	Max. API Requests
	<ul style="list-style-type: none"> Querying the streaming domain name delay Querying origin pull settings 	30 times/minute	300 times/minute
Domain name management	Querying IP address information	5 times/second	5 times/second
Transcoding template management	<ul style="list-style-type: none"> Creating a transcoding template Deleting a transcoding template Modifying a transcoding template Querying transcoding templates 	100 times/minute	1,000 times/minute
Stream management	<ul style="list-style-type: none"> Disabling stream push Modifying the attribute of a disabled stream 	4,000 times/minute	12,000 times/minute
	<ul style="list-style-type: none"> Querying disabled streams Resuming stream push 	3,000 times/minute	6,000 times/minute
	Pausing stream push	300 times/minute	3,000 times/minute

API Category	API Name	Max. User Requests	Max. API Requests
Notification management	<ul style="list-style-type: none"> • Adding and modifying stream notification configurations • Querying stream notification configurations • Deleting stream notification configurations 	300 times/minute	3,000 times/minute
Authentication	<ul style="list-style-type: none"> • Configuring a referer validation ACL • Deleting a referer validation ACL • Querying referer validation ACLs • Querying IP ACLs • Modifying an IP ACL • Generating a signed URL 	300 times/minute	3,000 times/minute
	Querying supported areas of a streaming domain name	30 times/minute	300 times/minute
	Modifying supported areas of a streaming domain name	30 times/minute	100 times/minute

API Category	API Name	Max. User Requests	Max. API Requests
	<ul style="list-style-type: none"> Querying the URL validation configuration of a specified domain name Modifying the URL validation configuration of a specified domain name Deleting the URL validation configuration of a specified domain name 	150 times/minute	300 times/minute
Snapshot management	<ul style="list-style-type: none"> Creating a snapshot capturing template Modifying a snapshot capturing template Querying snapshot capturing templates Deleting a snapshot capturing template 	150 times/minute	300 times/minute
Stream pull management	<ul style="list-style-type: none"> Creating a relay task Deleting a relay task Querying a relay task Modifying a relay task 	300 times/minute	3,000 times/minute
Log management	Obtaining livestreaming logs	300 times/minute	3,000 times/minute

API Category	API Name	Max. User Requests	Max. API Requests
Recording management	<ul style="list-style-type: none"> • Creating a recording template • Querying recording templates • Modifying a recording template • Deleting a recording template • Querying recording template configurations • Submitting a recording command 	300 times/minute	3,000 times/minute
	Creating a video recording index	1,200 times/minute	3,000 times/minute
Recording callback management	<ul style="list-style-type: none"> • Creating a recording callback • Querying recording callbacks • Modifying a recording callback • Querying a recording callback • Deleting a recording callback 	300 times/minute	300 times/minute
HTTPS certificate management	Querying HTTPS certificate information	300 times/minute	3,000 times/minute

API Category	API Name	Max. User Requests	Max. API Requests
	<ul style="list-style-type: none"> Modifying the HTTPS certificate configuration of a specified domain name Querying the HTTPS certificate configuration of a specified domain name Deleting the HTTPS certificate configuration of a specified domain name 	150 times/minute	300 times/minute
OBS bucket management	Granting or canceling authorization of accessing OBS buckets	150 times/minute	300 times/minute
Livestreaming watermark management	Creating a watermark template Modifying a watermark template Deleting a watermark template Creating a watermark rule Modifying a watermark rule Deleting a watermark rule Querying watermark rule configurations	50 times/minute	200 times/minute

API Category	API Name	Max. User Requests	Max. API Requests
	Querying watermark templates Querying watermark template configurations Querying watermark rules	300 times/minute	3,000 times/minute
Statistical analysis	Querying bandwidth utilization	100 times/second	600 times/second
	Querying traffic utilization	20 times/second	200 times/second
	Querying the number of viewers	20 times/second	200 times/second
Statistical analysis	Querying the peak bandwidth	20 times/second	200 times/second
	Querying the total playback traffic	20 times/second	300 times/second
	Querying HTTP status codes	30 times/second	300 times/second
	Querying the duration of transcoded outputs	20 times/second	200 times/second
	Querying upstream bandwidth	20 times/second	300 times/second
	Querying the number of streams by domain name	20 times/second	300 times/second
	Querying historical streams	30 times/second	300 times/second
	Querying playback profiles	10 times/second	100 times/second

API Category	API Name	Max. User Requests	Max. API Requests
	Querying the distribution of livestreaming metrics by region	50 times/second	150 times/second
Statistical analysis	Querying the duration of recorded outputs	20 times/second	200 times/second
	Querying the number of snapshots	20 times/second	200 times/second
	Querying stream data of a streaming domain name	20 times/second	50 times/second
	Querying transcoded streams of ingest domain names	10 times/second	50 times/second
	Querying transcoding information	3 times/second	30 times/second
Stream analytics	Querying the stream frame rate	10 times/second	200 times/second
	Querying the stream bitrate	10 times/second	200 times/second
	Querying stream analytics data	10 times/second	200 times/second
	Querying CDN upstream quality data	30 times/second	300 times/second
	Querying ongoing streams	20 times/second	60 times/second

7.4 Media Live

Before using Media Live, understand the following constraints.

PoP Distribution

If Media Live uses Huawei Cloud CDN for acceleration, see [CDN PoP Distribution](#).

Channel Inputs

Table 7-3 Channel input constraints

Item	Description
Transcoded stream frame rate	The transcoded stream frame rate cannot be higher than the input frame rate.
Transcoded stream resolution	The transcoded stream resolution cannot be higher than the input resolution.
Audio/Video encoder	<ul style="list-style-type: none"> ● Video: H.264 and H.265 ● Audio: AAC, MP1, MP2, and MP3 Note: MP1, MP2, and MP3 are only available for TS inputs. By default, the inputs are transcoded into AAC outputs. ● Subtitling is not supported.
Input specifications	<p>Details:</p> <ul style="list-style-type: none"> ● RTMP stream push is supported. ● HTTP-FLV stream pull is supported. The sequence header must be carried when playback starts. ● HLS-PULL stream pull is supported, as well as the HLS V3, HTTP, or HTTPS. ● SRT-Listener stream push is supported. Only TS streams are supported and streamid is optional. ● SRT-Caller stream pull is supported. Only TS streams are supported. ● Encrypted streams are not supported. ● Audio-only inputs are not supported, with at least one video stream required. Video-only outputs are not supported. For video-only outputs, one mute stream will be automatically added. ● The encoder parameters of the primary and standby inputs must be the same. Otherwise, the playback may be interrupted during input redundancy. ● Inputs: bitrate ≤ 50 Mbit/s, frame rate ≤ 60 FPS, resolution ≤ 4K ● An input audio/video timestamp jump of less than 3 seconds may cause playback stutter. You are advised to reset the input stream timestamp when re-pushing with the encoder.
Input GOP duration	<p>Recommendations:</p> <ul style="list-style-type: none"> ● Set the value to 1 second or an integer multiple of 1 second. ● Set the segment duration configured for a channel to an integer multiple of the GOP duration.

Item	Description
Ad signal arrival time	SCTE-35 signals must arrive ahead of ad insertion points to ensure that downstream systems have sufficient time to process ad information and enable seamless ad insertion.

Channel Outputs

Table 7-4 Channel output constraints

Item	Description
Audio/Video encoder	<ul style="list-style-type: none"> • Video: H.264 and H.265 • Audio: AAC • Subtitling is not supported.
MSS	Neither encrypted nor unencrypted MSS streams (H.265) can be output.
DRM encryption	DRM encryption algorithms supported: <ul style="list-style-type: none"> • HLS: sample-aes • DASH: CENC • MSS: CENC

Resources

Table 7-5 Resource constraints

Item	Description
Number of channels	A tenant can create a maximum of 500 channels. If you need more channels, submit a service ticket to increase the quota.

Functions

Table 7-6 Function constraints

Item	Description
Channel function	<ul style="list-style-type: none"> • All channels support only single-bitrate inputs, and multi-bitrate outputs are available only after transcoding. • RTMP_PUSH channels require RTMP ingest domain names. SRT_PUSH channels require SRT ingest domain names. SRT_PUSH channels and RTMP_PUSH channels cannot be created simultaneously for the same domain name.

Clients

Table 7-7 Client constraints

Item	Description
Encoding format	In iOS 16.0 or later, the maximum HE-AAC audio bitrate is 64 Kbit/s. This constraint does not apply to AAC-LC.
Client	If the displayed segment duration of the source stream is different from the actual segment duration, the audio and video may be out of sync. To solve this potential issue, the client should support audio-to-video synchronization.

APIs

Media Live sets a limit on the number of API calls to prevent service interruption caused by repeated API calls in a short period of time.

Table 7-8 API request throttling

API Category	API Name	Max. User Requests	Max. API Requests
OTT Channel Management	<ul style="list-style-type: none"> • Creating an OTT Channel • Querying Channel Information • Deleting Channel Information • Modifying Channel Packaging Information • Modifying Channel Input Information • Modifying Channel Recording Information • Modifying General Channel Information • Changing the Channel Status • Modifying Channel Transcoding Template Information • Querying Channel Statistics 	80 times/minute	80 times/minute
Integration with Cloud Eye	<ul style="list-style-type: none"> • Querying Dimension Configurations • Querying Instances 	80 times/minute	80 times/minute

API Category	API Name	Max. User Requests	Max. API Requests
StreamConnect	<ul style="list-style-type: none"> ● Creating a Flow ● Querying Flows ● Deleting a Flow ● Obtaining Flow Details ● Starting a Flow Task ● Stopping a Flow Task ● Modifying a Flow Source ● Creating an Output of Pushing Streams to a Third Party Through SRT ● Updating an Output of Pushing Streams to a Third Party Through SRT ● Querying Outputs of Pushing Streams to a Third Party Through SRT ● Deleting an Output of Pushing Streams to a Third Party Through SRT 	80 times/minute	80 times/minute

7.5 Content Compliance

Live does not allow accessing websites that violate related laws and regulations, including but not limited to:

- Websites that contain pornographic content or content related to gambling, illegal drugs, frauds, or infringement
- Gaming websites that run on illegal private servers
- Websites that provide pirated games/software/videos
- P2P lending websites
- Unofficial lottery websites
- Unlicensed hospital and pharmaceutical websites
- Inaccessible websites or websites that do not contain any substantial information

 **NOTE**

- If the use of your domain name violates related laws and regulations, you shall bear the related risks.
- If any pornographic content or content related to gambling, illegal drugs, or frauds is found on your domain name, the domain name and other domain names that use the same origin server will be deleted from Live and can no longer access Live. Acceleration domain name quota of the account will be reduced to 0.

8 Related Services

Before using live recording and snapshot capturing, you must enable the related services listed in [Table 8-1](#).

Table 8-1 Related services

Interactive Function	Service Name	Reference
Saving snapshots or recordings in OBS buckets	OBS	Creating a Bucket Uploading a File

9 Concepts

9.1 Concepts

Stream Push

A process of transmitting collected, encoded, and packaged live content to the origin server

Stream Pull

A process of pulling live content from the origin server to a specific address for playback

Edge Streaming

A livestream is pushed to a nearby edge node. Then, the scheduling system of Huawei Cloud transmits the livestream to the origin server for processing and distribution. This ensures that the livestream is transmitted over the optimal uplink network, with minimized lags.

Streaming Domain Name

Domain name for playing livestreams. You must add a streaming domain name to Live before using Live. After a streaming domain name is added, a streaming URL will be generated. Then you need to [assemble the streaming URL](#).

Ingest Domain Name

Domain name for pushing livestreams. You must add an ingest domain name to Live before using Live. After an ingest domain name is added, an ingest URL will be generated. Then you need to [assemble the ingest URL](#).

CNAME Record

After ingest and streaming domain names are configured, the system assigns a respective CNAME record to the ingest and streaming domain names. You must

add the records to your domains' DNS records for livestreaming acceleration to take effect.

H.264

H.264 or MPEG-4 Part 10, a video compression standard developed by the ITU-T Video Coding Experts Group (VCEG) and ISO/IEC JTC1 Moving Picture Experts Group (MPEG).

H.265

H.265 is a video compression standard, designed as a successor to H.264. Based on the video coding standard H.264, H.265 keeps some of the original technologies, while improves some relevant techniques. H.265 adopts the advanced techniques to improve the bit-stream, promote the coding quality, and better the relationship between time delay and algorithm complexity, to achieve best possible optimization. H.264 can transmit SD (resolution lower than 1280 x 720) digital images at a rate lower than 1 Mbit/s, whereas H.265 can transmit standard HD (resolution of 1280 x 720) audio and video at a rate of 1 Mbit/s to 2 Mbit/s.

Low-Bitrate HD

Based on the human visual system model and Huawei's transcoding technology, Live analyzes each scenario, action, content, and texture in a video to deliver lower bitrate while keeping the bandwidth costs down but without compromising the video quality.

Real-time Transcoding

A process of transcoding one livestream into another or more in real time to meet different bandwidth, device, and user requirements

Weak Network

The QoS of a weak network is not stable.

95th Percentile Bandwidth

A billing option. Within a calendar month, the bandwidth is measured and recorded every 5 minutes on each valid day. At the end of the month, the records are sorted from the highest to the lowest, and the top 5% of the recorded bandwidth values are thrown away. Then the highest bandwidth value in the remaining records is the billable bandwidth of the month.

Stream Name

This is used to identify a livestream with the domain name and **App Name**. **Stream Name** can be customized.

App Name

Path for storing streaming media files. The default value is **live**.

Livestreaming URL

This includes an ingest URL and streaming URL. A livestreaming URL consists of the domain name, **App Name**, and **Stream Name**. You can create multiple applications for each domain name, and create multiple livestreams for each application.

9.2 Regions and AZs


Concepts

A region or an availability zone (AZ) identifies the location of a data center. You can create resources in a specific region or an AZ.

- Regions are divided from the dimensions of geographical location and network latency. Public services, such as Elastic Cloud Server (ECS), Elastic Volume Service (EVS), Object Storage Service (OBS), Virtual Private Cloud (VPC), Elastic IP (EIP), and Image Management Service (IMS), are shared within the same region. Regions are classified as universal regions and dedicated regions. A universal region provides universal cloud services for common tenants. A dedicated region provides services of the same type only or for specific tenants.
- An AZ contains one or multiple physical data centers. Each AZ has independent cooling, fire extinguishing, moisture-proof, and electricity facilities. Within an AZ, computing, network, storage, and other resources are logically divided into multiple clusters. AZs within a region are interconnected using high-speed optical fibers to allow you to build cross-AZ high-availability systems.

Figure 9-1 shows the relationship between regions and AZs.

Figure 9-1 Regions and AZs

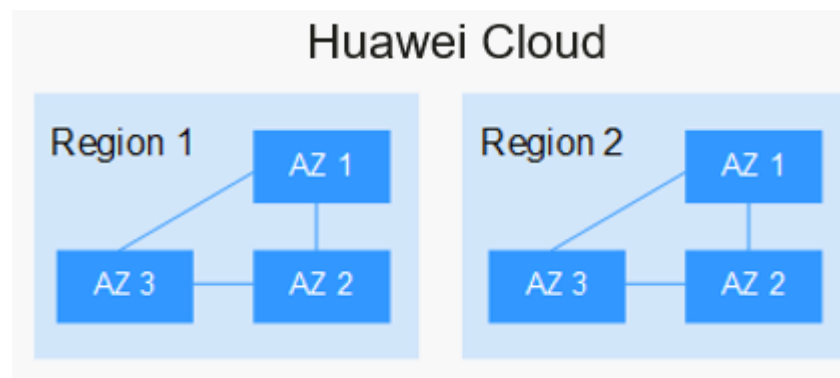

Huawei Cloud provides services in many regions around the world. You can select a region and AZ as needed. For more information, see [Huawei Cloud Global Regions](#).

Regions and Endpoints

Before using an API to call resources, specify its region and endpoint. For details, see [Regions and Endpoints](#).