

SparkRTC

API Reference

Issue 01
Date 2023-04-06



HUAWEI TECHNOLOGIES CO., LTD.



Copyright © Huawei Technologies Co., Ltd. 2023. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Contents

1 Before You Start.....	1
2 API Overview.....	4
3 Calling APIs.....	8
3.1 Making an API Request.....	8
3.2 Authentication.....	12
3.3 Response.....	14
4 Examples.....	16
4.1 Example 1: Creating a Single Stream Recording Job.....	16
4.2 Example 2: Creating a Mixed Stream Recording Job.....	20
4.3 Application callback management.....	26
4.3.1 Configuring a Recording Event Callback.....	27
4.3.2 Querying a Recording Event Callback.....	31
4.4 Single stream recording job management.....	35
4.4.1 Starting a Single Stream Recording Job.....	35
4.4.2 Querying a Single Stream Recording Job.....	43
4.4.3 Stopping a Single Stream Recording Job.....	47
4.4.4 Updates a single stream recording job.....	50
4.5 Application management.....	56
4.5.1 Creating an Application.....	56
4.5.2 Listing Applications.....	59
4.5.3 Querying an Application.....	65
4.5.4 Deleting an Application.....	71
4.5.5 Enabling an Application.....	75
4.5.6 Disabling an Application.....	78
4.6 Automatic recording configuration.....	81
4.6.1 Updating the Automatic Recording Configuration.....	82
4.6.2 Querying the Automatic Recording Configuration.....	86
4.7 Room management.....	90
4.7.1 Removes an online user.....	90
4.7.2 Dismisses a room.....	93
4.8 Mixed stream recording job management.....	96
4.8.1 Starting a Mixed Stream Recording Job.....	96

4.8.2 Querying a Mixed Stream Recording Job.....	113
4.8.3 Modifying a Mixed Stream Recording Job.....	121
4.8.4 Stopping a Mixed Stream Recording Job.....	134
4.9 Recording rule management.....	137
4.9.1 Creating or Updating a Recording Rule.....	137
4.9.2 Listing Recording Rules.....	146
4.9.3 Querying a Recording Rule.....	152
4.9.4 Updating a Recording Rule.....	158
4.9.5 Deleting a Recording Rule.....	168
5 Statistical Analysis.....	172
5.1 Listing Rooms.....	172
5.2 Listing Users.....	176
5.3 Querying Real-Time Scale Data.....	181
5.4 Querying Real-Time Scale Data Distribution.....	185
5.5 Querying Real-Time Quality Data.....	188
5.6 Querying Real-Time Network Data.....	191
5.7 Querying Usage.....	195
5.8 Querying Historical Scale Data.....	198
5.9 Querying Historical Quality Data.....	202
5.10 Querying User Call Indicators.....	208
5.11 Queries abnormal user experience events.....	214
5.12 Queries the distribution of users with abnormal events.....	222
6 Appendix.....	230
6.1 Status Codes.....	230
6.2 Error Codes.....	232
6.3 Obtaining a Project ID.....	235
6.4 Obtaining an Account ID.....	237
6.5 Abbreviations for Provinces.....	237
6.6 Receiving a Recording Event Callback Notification.....	239
7 Change History.....	241

1

Before You Start

Overview

With years of technological experience in video services, Huawei Cloud SparkRTC provides audio and video services featuring high concurrency, low latency, uninterrupted HD, security, and reliability. It is perfect for real-time and interactive scenarios, such as online education, cloud conferencing, and social entertainment.

This document describes how to use APIs to perform operations such as managing applications and mixed stream recording jobs. For details about all supported operations, see [API Overview](#).

Before calling SparkRTC APIs, ensure that you have fully understood related concepts. For details, see [Service Overview](#).

API Calling

SparkRTC supports Representational State Transfer (REST) APIs, allowing you to call APIs using HTTPS. For details about API calling, see [Calling APIs](#).

Endpoints

An endpoint is the **request address** for calling an API. SparkRTC is a global service deployed for all physical regions. [Table 1-1](#) lists SparkRTC endpoints.

Table 1-1 SparkRTC endpoints

Region Name	Region	Endpoint
ALL	ALL	rtc-api.myhuaweicloud.com

Constraints

API request throttling is configured for SparkRTC to prevent service interruption caused by repeated API calls in a short period. [Table 1-2](#) describes the API request throttling.

Table 1-2 API request throttling

API Category	API Name	Request Throttling
Application management	<ul style="list-style-type: none">• Creating an application• Querying applications• Querying an application• Deleting an application• Enabling an application• Disabling an application	60 times per minute
Recording template management	<ul style="list-style-type: none">• Creating or updating a recording template• Querying recording templates• Querying a recording template• Updating a recording template• Deleting a recording template	
Automatic recording configuration	<ul style="list-style-type: none">• Updating the automatic recording configuration• Querying the automatic recording configuration	
Application callback management	<ul style="list-style-type: none">• Configuring a recording event callback• Querying a recording event callback	
Mixed stream recording job management	<ul style="list-style-type: none">• Starting a mixed stream recording job• Querying a mixed stream recording job• Modifying a mixed stream recording job• Stopping a mixed stream recording job	10 times per second

API Category	API Name	Request Throttling
Single stream recording job management	<ul style="list-style-type: none">Starting a single stream recording jobQuerying a single stream recording jobStopping a single stream recording jobUpdating a single stream recording job	
Room management	<ul style="list-style-type: none">Removing an online userDismissing a room	60 times per minute
Statistical analysis	<ul style="list-style-type: none">Querying roomsQuerying usersQuerying real-time scale dataQuerying real-time scale data distributionQuerying real-time quality dataQuerying real-time network dataQuerying usageQuerying historical scale dataQuerying historical quality dataQuerying user call indicatorsQuerying exceptionsQuerying exception distribution	30 times per minute

2 API Overview

The following tables list the SparkRTC APIs. Before calling a SparkRTC API, you need to obtain a user token, which can then be used to authenticate the calling of other APIs. For details about how to call a SparkRTC API, see [Example 1: Creating a Single Stream Recording Job](#).

Application Management APIs

Table 2-1 Application management APIs

API	Description
POST /v2/apps	Creating an Application
GET /v2/apps	Querying Applications
GET /v2/apps/{app_id}	Querying an Application
DELETE /v2/apps/{app_id}	Deleting an Application
POST /v2/apps/{app_id}/enable	Enabling an Application
POST /v2/apps/{app_id}/disable	Disabling an Application

Recording Template Management APIs

Table 2-2 Recording template management APIs

API	Description
POST /v2/apps/{app_id}/record-rules	Creating or Updating a Recording Template
GET /v2/apps/{app_id}/record-rules	Querying Recording Templates
GET /v2/apps/{app_id}/record-rules/{rule_id}	Querying a Recording Template

API	Description
PUT /v2/apps/{app_id}/record-rules/{rule_id}	Updating a Recording Template
DELETE /v2/apps/{app_id}/record-rules/{rule_id}	Deleting a Recording Template

Automatic Recording Configuration APIs

Table 2-3 Automatic recording configuration APIs

API	Description
PUT /v2/apps/{app_id}/auto-record-mode	Updating the Automatic Recording Configuration
GET /v2/apps/{app_id}/auto-record-mode	Querying the Automatic Recording Configuration

Application Callback Management APIs

Table 2-4 Application callback management APIs

API	Description
PUT /v2/apps/{app_id}/record-callback	Configuring a Recording Event Callback
GET /v2/apps/{app_id}/record-callback	Querying a Recording Event Callback

Mixed Stream Recording Job Management APIs

Table 2-5 Mixed stream recording job management APIs

API	Description
POST /v2/apps/{app_id}/mix-stream-jobs	Starting a Mixed Stream Recording Job
GET /v2/apps/{app_id}/mix-stream-jobs/{job_id}	Querying a Mixed Stream Recording Job
PUT /v2/apps/{app_id}/mix-stream-jobs/{job_id}	Modifying a Mixed Stream Recording Job
DELETE /v2/apps/{app_id}/mix-stream-jobs/{job_id}	Stopping a Mixed Stream Recording Job

Single Stream Recording Job Management APIs

Table 2-6 Single stream recording job management APIs

API	Description
POST /v2/apps/{app_id}/individual-stream-jobs	Starting a Single Stream Recording Job
GET /v2/apps/{app_id}/individual-stream-jobs/{job_id}	Querying a Single Stream Recording Job
DELETE /v2/apps/{app_id}/individual-stream-jobs/{job_id}	Stopping a Single Stream Recording Job
PUT /v2/apps/{app_id}/individual-stream-jobs/{job_id}	Updating a Single Stream Recording Job

Room Management

Table 2-7 Room management APIs

API	Description
POST /v2/apps/{app_id}/rooms/{room_id}/batch-remove-users	Removing an online user
POST /v2/apps/{app_id}/rooms/{room_id}/dismiss	Dismissing a Room

Statistical Analysis APIs

Table 2-8 Statistical analysis APIs

API	Description
GET /v1/{project_id}/rtc/rooms	Querying Rooms
GET /v1/{project_id}/rtc/users	Querying Users
GET /v1/{project_id}/rtc/realtimetime/scale	Querying Real-time Scale Data
GET /v1/{project_id}/rtc/realtimetime/scale/dimension	Querying Real-time Scale Data Distribution
GET /v1/{project_id}/rtc/realtimetime/quality	Querying Real-time Quality Data
GET /v1/{project_id}/rtc/realtimetime/network	Querying Real-time Network Data

API	Description
GET /v1/{project_id}/rtc/history/usage	Querying Usage
GET /v1/{project_id}/rtc/history/scale	Querying Historical Scale Data
GET /v1/{project_id}/rtc/history/quality	Querying Historical Quality Data
GET /v1/{project_id}/rtc/client/qos/details	Querying User Call Indicators
GET /v1/rtc/data/abnormal-event	Querying Exceptions
GET /v1/rtc/data/abnormal-event/dimension	Querying Exception Distribution

3 Calling APIs

[Making an API Request](#)

[Authentication](#)

[Response](#)

3.1 Making an API Request

This section describes the structure of a REST API request, and uses the IAM API for [obtaining a user token](#) as an example to demonstrate how to call an API. The obtained token can then be used to authenticate the calling of other APIs.

Request URI

A request URI is in the following format:

{URI-scheme}://{Endpoint}/{resource-path}?{query-string}

Although a request URI is included in the request header, most programming languages or frameworks require the request URI to be transmitted separately.

Table 3-1 URI parameter description


Parameter	Description
URI-scheme	Protocol used to transmit requests. All APIs use HTTPS.
Endpoint	Domain name or IP address of the server bearing the REST service. The endpoint varies between services in different regions. It can be obtained from Regions and Endpoints . For example, the endpoint of IAM in region CN-Hong Kong is iam.ap-southeast-1.myhuaweicloud.com .
resource-path	Access path of an API for performing a specified operation. Obtain the path from the URI of an API. For example, the resource-path of the API used to obtain a user token is /v3/auth/tokens .

Parameter	Description
query-string	Query parameter, which is optional. Ensure that a question mark (?) is included before each query parameter that is in the format of <i>Parameter name=Parameter value</i> . For example, <code>?limit=10</code> indicates that a maximum of 10 data records will be displayed.

For example, to obtain an IAM token in the **CN-Hong Kong** region, obtain the endpoint of IAM (`iam.ap-southeast-1.myhuaweicloud.com`) for this region and the resource-path (`/v3/auth/tokens`) in the URI of the API used to [obtain a user token](#). Then, construct the URI as follows:

`https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/tokens`

Figure 3-1 Example URI

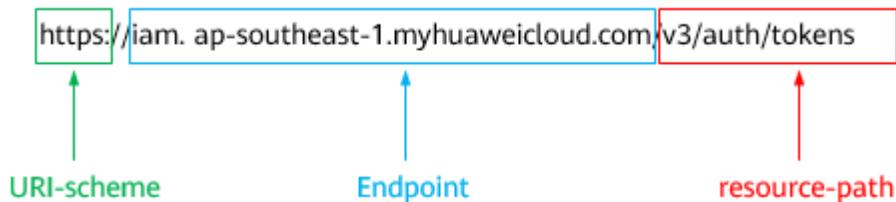

NOTE

To simplify the URI display in this document, each API is provided only with a **resource-path** and a request method. The **URI-scheme** of all APIs is **HTTPS**, and the endpoints of all APIs in the same region are identical.

Request Methods

The HTTP protocol defines the following request methods that can be used to send a request to the server.

Table 3-2 HTTP methods

Method	Description
GET	Requests the server to return specified resources.
PUT	Requests the server to update specified resources.
POST	Requests the server to add resources or perform special operations.
DELETE	Requests the server to delete specified resources, for example, an object.
HEAD	Same as GET except that the server must return only the response header.

Method	Description
PATCH	Requests the server to update partial content of a specified resource. If the resource does not exist, a new resource will be created.

For example, in the case of the API used to [obtain a user token](#), the request method is **POST**. The request is as follows:

```
POST https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/tokens
```

Request Header

You can also add additional header fields to a request, such as the fields required by a specified URI or HTTP method. For example, to request for the authentication information, add **Content-Type**, which specifies the request body type.

Common request header fields are as follows.

Table 3-3 Common request header fields

Parameter	Description	Mandatory	Example Value
Host	Specifies the server domain name and port number of the resources being requested. The value can be obtained from the URL of the service API. The value is in the format of <i>Hostname:Port number</i> . If the port number is not specified, the default port is used. The default port number for https is 443 .	No This field is mandatory for AK/SK authentication.	code.test.com or code.test.com: 443
Content-Type	Specifies the type (or format) of the message body. The default value application/json is recommended. Other values of this field will be provided for specific APIs if any.	Yes	application/json
Content-Length	Specifies the length of the request body. The unit is byte.	No	3495

Parameter	Description	Mandatory	Example Value
X-Project-Id	Specifies the project ID. Obtain the project ID by following the instructions in Obtaining a Project ID .	No This field is mandatory for requests that use AK/SK authentication in the Dedicated Cloud (DeC) scenario or multi-project scenario.	e9993fc787d94b6c886cbba340f9c0f4
X-Auth-Token	Specifies the user token. It is a response to the API for obtaining a user token (This is the only API that does not require authentication). After the request is processed, the value of X-Subject-Token in the response header is the token value.	No This field is mandatory for token authentication.	The following is part of an example token: MIIPAgYJKoZIhvcNAQcCo...ggg1BBIINPXsidG9rZ

NOTE

In addition to supporting authentication using tokens, APIs support authentication using AK/SK, which uses SDKs to sign a request. During the signature, the **Authorization** (signature authentication) and **X-Sdk-Date** (time when a request is sent) headers are automatically added in the request.

For more details, see "Authentication Using AK/SK" in [Authentication](#).

The API used to [obtain a user token](#) does not require authentication. Therefore, only the **Content-Type** field needs to be added to requests for calling the API. An example of such requests is as follows:

```
POST https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/tokens
Content-Type: application/json
```

(Optional) Request Body

This part is optional. The body of a request is often sent in a structured format as specified in the **Content-Type** header field. The request body transfers content except the request header.

The request body varies between APIs. Some APIs do not require the request body, such as the APIs requested using the GET and DELETE methods.

In the case of the API used to [obtain a user token](#), the request parameters and parameter description can be obtained from the API request. The following provides an example request with a body included. Replace *username*,

domainname, ***** (login password), and xxxxxxxxxxxxxxxx (project name) with the actual values. Obtain a project name from [Regions and Endpoints](#).

NOTE

The **scope** parameter specifies where a token takes effect. You can set **scope** to an account or a project under an account. In the following example, the token takes effect only for the resources in a specified project. For more information about this API, see [Obtaining a User Token](#).

```
POST https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/tokens
Content-Type: application/json
```

```
{
  "auth": {
    "identity": {
      "methods": [
        "password"
      ],
      "password": {
        "user": {
          "name": "username",
          "password": "*****",
          "domain": {
            "name": "domainname"
          }
        }
      }
    },
    "scope": {
      "project": {
        "name": "xxxxxxxxxxxxxx"
      }
    }
  }
}
```

If all data required for the API request is available, you can send the request to call the API through [curl](#), [Postman](#), or coding. In the response to the API used to obtain a user token, **x-subject-token** is the desired user token. This token can then be used to authenticate the calling of other APIs.

3.2 Authentication

Requests for calling an API can be authenticated using either of the following methods:

- Token authentication: Requests are authenticated using tokens.
- AK/SK authentication: Requests are encrypted using AK/SK pairs. AK/SK authentication is recommended because it is more secure than token authentication.

Token Authentication

NOTE

The validity period of a token is 24 hours. When using a token for authentication, cache it to prevent frequently calling the IAM API used to obtain a user token.

A token specifies temporary permissions in a computer system. During API authentication using a token, the token is added to requests to get permissions for calling the API. You can obtain a token by calling the [Obtaining User Token](#) API.

IMS is a project-level service. When you call the API, set **auth.scope** in the request body to **project**.

```
{  
  "auth": {  
    "identity": {  
      "methods": [  
        "password"  
      ],  
      "password": {  
        "user": {  
          "name": "username", // IAM user name  
          "password": "*****", // IAM user password  
          "domain": {  
            "name": "domainname" // Name of the account to which the IAM user belongs  
          }  
        }  
      }  
    },  
    "scope": {  
      "project": {  
        "name": "xxxxxxx" // Project name  
      }  
    }  
  }  
}
```

After a token is obtained, the **X-Auth-Token** header field must be added to requests to specify the token when calling other APIs. For example, if the token is **ABCDEFJ....**, **X-Auth-Token: ABCDEFJ....** can be added to a request as follows:

```
POST https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/projects  
Content-Type: application/json  
X-Auth-Token: ABCDEFJ....
```

AK/SK Authentication



NOTE

AK/SK authentication supports API requests with a body not larger than 12 MB. For API requests with a larger body, token authentication is recommended.

In AK/SK authentication, AK/SK is used to sign requests and the signature is then added to the requests for authentication.

- AK: access key ID, which is a unique identifier used in conjunction with a secret access key to sign requests cryptographically.
- SK: secret access key, which is used in conjunction with an AK to sign requests cryptographically. It identifies a request sender and prevents the request from being modified.

In AK/SK authentication, you can use an AK/SK to sign requests based on the signature algorithm or using the signing SDK. For details about how to sign requests and use the signing SDK, see [API Request Signing Guide](#).



The signing SDK is only used for signing requests and is different from the SDKs provided by services.

3.3 Response

Status Code

After sending a request, you will receive a response, including a status code, response header, and response body.

A status code is a group of digits, ranging from 1xx to 5xx. It indicates the status of a request. For more information, see [Status Codes](#).

For example, if status code **201** is returned for calling the API used to [obtain a user token](#), the request is successful.

Response Header

Similar to a request, a response also has a header, for example, **Content-Type**.

Figure 3-2 shows the response header fields for the API used to [obtain a user token](#). The **x-subject-token** header field is the desired user token. This token can then be used to authenticate the calling of other APIs.

Figure 3-2 Header fields of the response to the request for obtaining a user token

```
connection → keep-alive
content-type → application/json
date → Tue, 12 Feb 2019 06:52:13 GMT
server → Web Server
strict-transport-security → max-age=31536000; includeSubdomains;
transfer-encoding → chunked
via → proxy A
x-content-type-options → nosniff
x-download-options → noopener
x-frame-options → SAMEORIGIN
x-iam-trace-id → 218d45ab-d674-4995-af3a-2d0255ba41b5
x-subject-token
→ MIIYXQYJKoZIhvNAQcCoIYTjCCGEoCAQEeDTALBglhgkBGZQMEAegEwgharBgkqhkiG9w0BBwGgghacBIIWmHsidG9rZW4iOnsiZXhwaXJlc19hdCI6ijlwMTktMDItMTNUMCfj3Kj56vgKnpVNRbW2eZSeb78S2OqkACgkIqO1wi4JlGzpd18LGK5txldfq4lqHCYb8P4NaY0NYejcAgzJVeFIYtLWT1GSO0zxKZmlQHQj82HBqHdgIZ09fuEbL5dMhdavj+33wElxHRE9187o+k9-
j+CMZSEb7buUGd5Uj6eRASX1jipPEGA270g1FruoL6jqglFkNPQuFSOU8+u5sttVwRtnfsC+qTp22Rkd5MCqFGQ8LcuUxC3a+9CM8nOintWW7oeRUvhVpxk8pxiX1wTEboX-RzT6MUbpvGw-oPNFYxJECKnoH3Hrozv0vN--n5d6Nbxxg=+
x-xss-protection → 1; mode=block;
```

(Optional) Response Body

The body of a response is often returned in structured format as specified in the **Content-Type** header field. The response body transfers content except the response header.

The following is part of the response body for the API used to [obtain a user token](#).

```
{ "token": {
```

```
"expires_at": "2019-02-13T06:52:13.855000Z",
"methods": [
    "password"
],
"catalog": [
    {
        "endpoints": [
            {
                "region_id": "az-01",
.....
```

If an error occurs during API calling, an error code and a message will be displayed. The following shows an error response body.

```
{
    "error_msg": "The format of message is error",
    "error_code": "AS.0001"
}
```

In the response body, **error_code** is an error code, and **error_msg** provides information about the error.

4 Examples

[Example 1: Creating a Single Stream Recording Job](#)

[Example 2: Creating a Mixed Stream Recording Job](#)

[Application callback management](#)

[Single stream recording job management](#)

[Application management](#)

[Automatic recording configuration](#)

[Room management](#)

[Mixed stream recording job management](#)

[Recording rule management](#)

4.1 Example 1: Creating a Single Stream Recording Job


Scenarios

If you need to record real-time audios and videos in a room, join the room and call the recording API to create a single stream recording job.

Prerequisites

- You have obtained the SparkRTC endpoint **rtc-api.myhuaweicloud.com**.
- You have created an OBS bucket for storing recording files and authorized SparkRTC to access the OBS bucket.

General Process

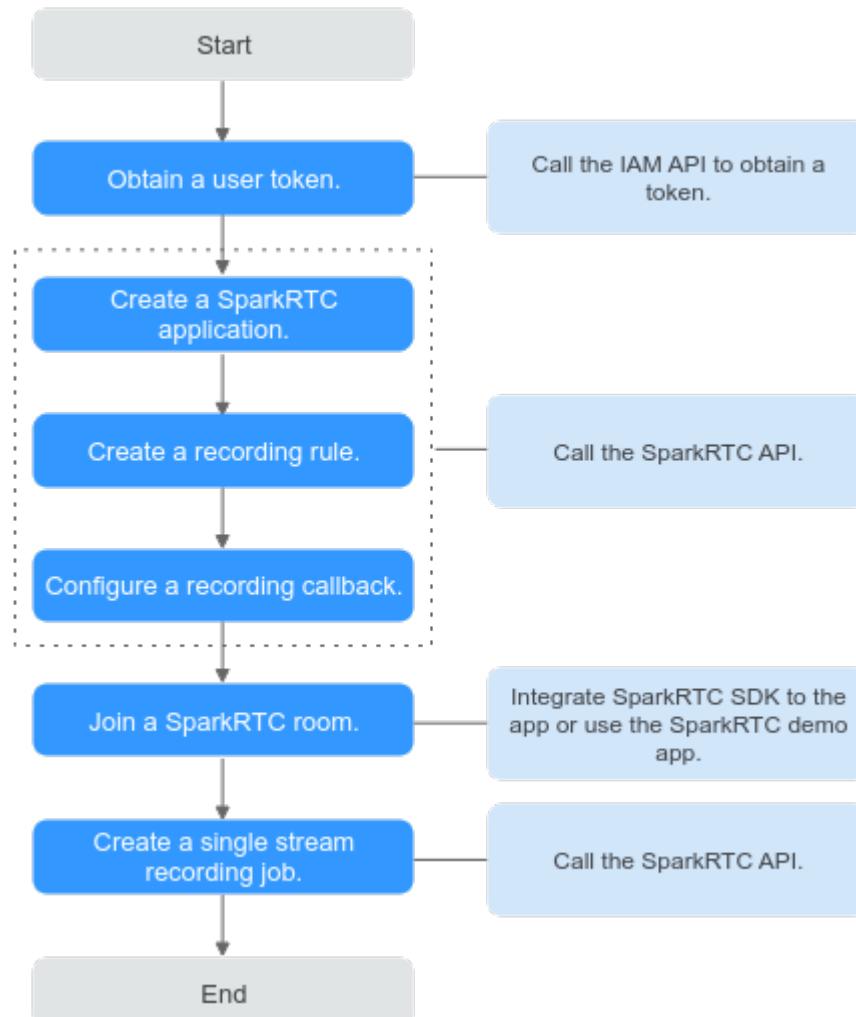

1. **Obtain a user token.**
2. **Create a SparkRTC application.**
3. **Create a recording template.**
4. **Configure a recording callback.**
5. **Join a SparkRTC room.**
6. **Create a single stream recording job.**

Procedure

Step 1 **Obtain a user token** for authenticating the calling of SparkRTC APIs.

Obtain *username*, *password*, and *domainname* in **My Credentials** and call the following API to obtain the token. For details, see [Making an API Request](#).

POST <https://iam.myhuaweicloud.com/v3/auth/tokens>

Content-Type: application/json

```
{  
  "auth": {  
    "identity": {  
      "methods": [  
        "password"  
      ],  
      "password": {  
        "user": {  
          "domain_name": "domainname",  
          "name": "username",  
          "password": "password"  
        }  
      }  
    }  
  }  
}
```

```
"password": {  
    "user": {  
        "name": "username", //Username  
        "password": "password", //Login password  
        "domain": {  
            "name": "domainname" //Name of the account to which the user belongs  
        }  
    }  
},  
"scope": {  
    "domain": {  
        "name": "domainname" //Name of the account to which the user belongs  
    }  
}
```

Information in the red box in **Figure 4-1** indicates the obtained user token.

Figure 4-1 Obtaining a user token

```
cache-control → no-cache, no-store, must-revalidate  
connection → keep-alive  
content-length → 15185  
content-type → application/json; charset=UTF-8  
date → Wed, 29 May 2019 08:02:38 GMT  
expires → Thu, 01 Jan 1970 00:00:00 GMT  
pragma → no-cache  
server → api-gateway  
strict-transport-security → max-age=31536000; includeSubdomains;  
via → proxy A  
x-content-type-options → nosniff  
x-download-options → noopen  
x-frame-options → SAMEORIGIN  
x-iam-trace-id → token_global_null_2fed19b42067d0b94ae73dbe0b8b7841  
x-request-id → fd8e4d01ae9ca9f58af20cbd2c88e2  
  
x-subject-token  
= MidYdwVJKoZJfvcNAQcCoIYadCCGGQCAQEzDTALBgIgkbgBZQMEAgEwghbfBqkjhkiG9w0BwGggha2BIIWsnsidG9rZW4OnsiXjhwaXUlc19hdCI6jwMTktMDUtMzBUDg6MDl6MzguNTgxMDAwWiSlm1dGhvZHMiOlsicGfzc3dvcmQiXswY2F0YWxvZjwN-qN0wpSwy/RGYupPYauVL-E275QpmEOPG4qKsPwYe02Hr8ZdfptB6AZt-RGdroVLe95InegpR0PGK9zgbuRwWYAtdQL3xGxVvC1Um8XIAdnwO2TWxgbmrPwfBvhP3f20TK4v9XhwWHUxH2yo+KScgsXHAzv6VURCIWMdV+UeEswZa7vB22C7p289d88syb3oQzmtYrlaupZf6U4Pf21+rW4aplwEszdvrRQLLYOzsnnGG3Af  
x-xss-protection → 1; mode=block;
```

Step 2 Call the API for **creating a SparkRTC application**.

1. Select the POST request method and enter the URI.
<https://rtc-api.myhuaweicloud.com/v2/apps>
2. In the request header, add **X-Auth-Token** and set its value to the token obtained in **Step 1**.
3. Specify the following parameter in the request body:

```
{  
    "app_name" : "rtctest"  
}
```
4. If the request is successful, the ID of the created application is returned.

```
{  
    "app_id": "5ff9701f2346968bb306cb43",  
}
```

Step 3 Call the API for **creating or updating a recording template** to create a recording template.

1. Select the POST request method and enter the URI.
https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-rules
2. In the request header, add **X-Auth-Token** and set its value to the token obtained in **Step 1**.

3. Specify the following parameters in the request body:

```
{  
    "obs_addr": {  
        "bucket": "obsName",  
        "location": "cn-north-4",  
        "object": "Record/",  
        "project_id": "01234567890123456789012345678901"  
    },  
    "record_formats": ["MP4"],  
    "mp4_config": {}  
}
```

4. If the request is successful, the created recording template is returned.

```
{  
    "app_id": "5ff9701f2346968bb306cb43",  
    "rule_id": "5d0ec2c53a2c15625017adb8bbcd9ab",  
    "create_time": "2021-04-21T10:29:33Z",  
    "hls_config": {  
        "record_cycle": 0,  
        "record_max_duration_to_merge_file": 0  
    },  
    "mp4_config": {  
        "record_cycle": 7200,  
        "record_max_duration_to_merge_file": 0,  
        "record_prefix": "Record/{publish_domain}/{app}/{record_type}/{record_format}/  
{stream}_{file_start_time}/{stream}_{file_start_time}"  
    },  
    "obs_addr": {  
        "bucket": "obsName",  
        "location": "cn-north-4",  
        "object": "Record/",  
        "project_id": "01234567890123456789012345678901"  
    },  
    "record_formats": [  
        "MP4"  
    ],  
    "update_time": "2021-04-21T10:29:33Z"  
}
```

Step 4 Call the API for [configuring a SparkRTC recording event callback](#).

1. Select the PUT request method and enter the URI.

https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-callback

2. In the request header, add **X-Auth-Token** and set its value to the token obtained in [Step 1](#).

3. Specify the following parameters in the request body:

```
{  
    "url": "http://mydomain.com/callback",  
    "auth_key": "8923ab8c2dcef4538923ab8c2dcef453"  
}
```

4. If the request is successful, information about the created callback is returned.

```
{  
    "app_id": "5ff9701f2346968bb306cb43",  
    "record_callback": {  
        "auth_key": "8923ab8c2dcef4538923ab8c2dcef453",  
        "update_time": "2021-04-07T12:05:18.0718Z",  
        "url": "http://mydomain.com/callback",  
        "notify_event_subscription": [  
            "RECORD_NEW_FILE_START",  
            "RECORD_FILE_COMPLETE",  
            "CLOUD_RECORD_OVER"  
        ]  
    }  
}
```

Step 5 An end user joins a SparkRTC room using the SparkRTC app. For details about the integration development of the SparkRTC app, see [Client SDK](#).

Step 6 Call the API for **starting a single stream recording job** to create a recording job.

1. Select the POST request method and enter the URI.
https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/individual-stream-jobs
2. In the request header, add **X-Auth-Token** and set its value to the token obtained in **Step 1**.
3. Specify the following parameters in the request body:

```
{  
    "room_id": "room001",  
    "user_id": "user001",  
    "is_record_audio": true,  
    "video_type": "CAMERASTREAM",  
    "resolution": "1280*720",  
    "resolution_policy": "DOWNWARD",  
    "max_idle_time": 30,  
    "record_param": {  
        "record_rule_id": "5d0ec2c53a2c15625017adb8bbcd9ab"  
    }  
}
```

4. If the request is successful, information about the recording job is returned.

```
{  
    "app_id": "5fff9701f2346968bb306cb43",  
    "create_time": "2021-04-21T10:51:55Z",  
    "is_record_audio": true,  
    "job_id": "607f87cf00d861eeefffa6c88054cdab",  
    "job_unique_id": "a77bb33dbdc948d8",  
    "max_idle_time": 30,  
    "push_param": {  
        "rtmp_urls": null  
    },  
    "record_files": null,  
    "record_param": {  
        "record_rule_id": "5d0ec2c53a2c15625017adb8bbcd9ab"  
    },  
    "resolution_policy": "DOWNWARD",  
    "resolution": "1280*720",  
    "room_id": "room001",  
    "start_time": "2021-04-21T10:51:55Z",  
    "state": "INIT",  
    "stop_time": "0001-01-01T00:00:00Z",  
    "stream_name": "s_607f87cf00d861eeefffa6c88054cdab_room001_user001",  
    "update_time": "2021-04-21T10:51:55Z",  
    "user_id": "user001",  
    "video_type": "CAMERASTREAM"  
}
```

Step 7 After the audio or video interaction is complete in the SparkRTC room, obtain the recording files from the configured OBS bucket.

----End

4.2 Example 2: Creating a Mixed Stream Recording Job


Scenarios

Example 1: Creating a Single Stream Recording Job describes how to record audio and video streams of each user in a room and save them into independent files. This section describes how to record multiple streams of users in a room and save them into one file by calling the SparkRTC APIs.

Prerequisites

- You have obtained the SparkRTC endpoint **rtc-api.myhuaweicloud.com**.
- You have created an OBS bucket for storing recording files and authorized SparkRTC to access the OBS bucket.

General Process

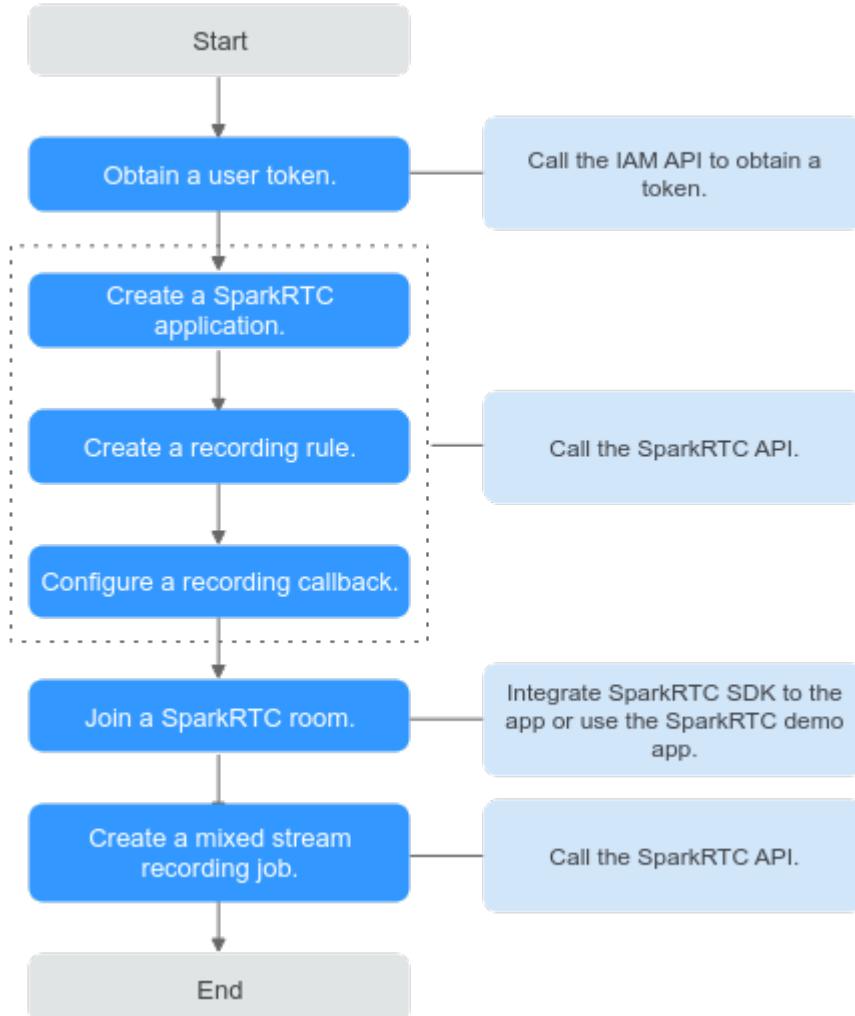

1. **Obtain a token.**
2. **Create an application.**
3. **Create a recording template.**
4. **Configure a recording callback.**
5. **Join a room.**
6. **Create a mixed stream recording job.**

Procedure

Step 1 **Obtain a user token** for authenticating the calling of SparkRTC APIs.

Obtain *username*, *password*, and *domainname* in **My Credentials** and call the following API to obtain the token. For details, see [Making an API Request](#).

```
POST https://iam.myhuaweicloud.com/v3/auth/tokens
Content-Type: application/json
{
  "auth": {
    "identity": {
      "methods": [
        "password"
      ],
      "password": {
        "user": {
          "name": "username", //Username
          "password": "password", //Login password
          "domain": {
            "name": "domainname" //Name of the account to which the user belongs
          }
        }
      }
    },
    "scope": {
      "domain": {
        "name": "domainname" //Name of the account to which the user belongs
      }
    }
  }
}
```

Information in the red box in **Figure 4-2** indicates the obtained user token.

Figure 4-2 Obtaining a user token

```
cache-control → no-cache, no-store, must-revalidate
connection → keep-alive
content-length → 15185
content-type → application/json; charset=UTF-8
date → Wed, 29 May 2019 08:02:38 GMT
expires → Thu, 01 Jan 1970 00:00:00 GMT
pragma → no-cache
server → api-gateway
strict-transport-security → max-age=31536000; includeSubdomains;
via → proxy A
x-content-type-options → nosniff
x-download-options → noopener
x-frame-options → SAMEORIGIN
x-iam-trace-id → token_global_null_2fed19b42067d0b94ae73dbe0b8b7841
x-request-id → f8e4-d01ae9caf9f58af20cbdb2c88e2
x-subject-token → MIIYdwYJKoZIhvvcNAQzC0llyA0CCGGQCAQExDTALBgIghkgBZQMxEAgEwghbfBqkqhkG9w0BwGggha2BIIWsnsidG9rZW4OnsiZXhwaXlc19hdCI6JlwMTktMDUHmzBUMDg6Mf6MzguNTgxMDAwWihsIm1ldGhvZHMiOlscGFzc3dvcmQjXSwiY2F0YWxvZjwN-yN0wpSwyRGtYupPyOauVL-E275QpnEP0G4qK9Pw4YeozHr8ZdfptB6AzT-RGdroWLe95InegR0PG9zgbuRWYATdQL3xGxVc1Um8XAxDnwO2TwxgbmrPwfvhP3f20TK4-9XhxWHUxH2yfo+KScgsXHAxz6VURCIWMDv+UeE5wZo7vB22C77p289d8lsyb3oQoZmTyrlauZf6U4PxJ+rW4aplwEszdvrRQLlYOzxinGG3Af
x-xss-protection → 1; mode=block;
```

Step 2 Call the API for **creating a SparkRTC application**.

1. Select the POST request method and enter the URI.
<https://rtc-api.myhuaweicloud.com/v2/apps>
2. In the request header, add **X-Auth-Token** and set its value to the token obtained in **Step 1**.
3. Specify the following parameter in the request body:

```
{
  "app_name" : "rtctest"
}
```
4. If the request is successful, the ID of the created application is returned.

```
{
  "app_id": "5ff9701f2346968bb306cb43",
}
```

Step 3 Call the API for **creating or updating a recording template** to create a recording template.

1. Select the POST request method and enter the URI.
https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-rules
2. In the request header, add **X-Auth-Token** and set its value to the token obtained in **Step 1**.
3. Specify the following parameters in the request body:

```
{  
    "obs_addr": {  
        "bucket": "obsName",  
        "location": "cn-north-4",  
        "object": "Record/",  
        "project_id": "01234567890123456789012345678901"  
    },  
    "record_formats": ["MP4"],  
    "mp4_config": {}  
}
```
4. If the request is successful, the created recording template is returned.

```
{  
    "app_id": "5ff9701f2346968bb306cb43",  
    "rule_id": "5d0ec2c53a2c15625017adb8bbcd9ab",  
    "create_time": "2021-04-21T10:29:33Z",  
    "hls_config": {  
        "record_cycle": 0,  
        "record_max_duration_to_merge_file": 0  
    },  
    "mp4_config": {  
        "record_cycle": 7200,  
        "record_max_duration_to_merge_file": 0,  
        "record_prefix": "Record/{publish_domain}/{app}/{record_type}/{record_format}/{stream}_{file_start_time}/{stream}_{file_start_time}"  
    },  
    "obs_addr": {  
        "bucket": "obsName",  
        "location": "cn-north-4",  
        "object": "Record/",  
        "project_id": "01234567890123456789012345678901"  
    },  
    "record_formats": [  
        "MP4"  
    ],  
    "update_time": "2021-04-21T10:29:33Z"  
}
```

Step 4 Call the API for **configuring a SparkRTC recording event callback**.

1. Select the PUT request method and enter the URI.
https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-callback
2. In the request header, add **X-Auth-Token** and set its value to the token obtained in **Step 1**.
3. Specify the following parameters in the request body:

```
{  
    "url": "http://mydomain.com/callback",  
    "auth_key": "8923ab8c2dcef4538923ab8c2dcef453"  
}
```
4. If the request is successful, information about the created callback is returned.

```
{  
    "app_id": "5ff9701f2346968bb306cb43",  
    "record_callback": {  
        "auth_key": "8923ab8c2dcef4538923ab8c2dcef453",  
        "update_time": "2021-04-07T12:05:18.0718Z",  
        "url": "http://mydomain.com/callback",  
        "notify_event_subscription": [  
    ]  
}
```

```
        "RECORD_NEW_FILE_START",
        "RECORD_FILE_COMPLETE",
        "CLOUD_RECORD_OVER"
    ]
}
```

Step 5 An end user joins a SparkRTC room using the SparkRTC app. For details about the integration development of the SparkRTC app, see [Client SDK](#).

Step 6 Call the API for [starting a mixed stream recording job](#) to create a recording job.

1. Select the POST request method and enter the URI.
https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/mix-stream-jobs
2. In the request header, add **X-Auth-Token** and set its value to the token obtained in [Step 1](#).
3. Specify the following parameters in the request body:

```
{
  "mix_param": {
    "room_id": "room001",
    "encode_template": "1920x1080_30_4620",
    "max_idle_time": 30,
    "layout_template": "nine_grids_view" //If the video layout is in screen sharing mode, set this parameter to screen_share_left or screen_share_right.
  },
  "record_param": {
    "record_rule_id": "5d0ec2c53a2c15625017adb8bbcd9ab"
  }
}
```

layout_template: video layout template.


- **nine_grids_view**: adaptive gallery view template.

Images of each user are tiled and have the same size. The size and position of each image are dynamically adjusted based on the number of users. A maximum of 25 images are supported. The following figure shows the layouts with different numbers of users.


Gallery view template




1 user




2 users




3-4 users



7-9 users



10-16 users




17-25 users

- If the aspect ratio of the actual video stream is different from that of the screen, a video image will be cropped to adapt to the screen size.
- If a user exits the room, the image of this user will be replaced by the next user who enters the room.
- If there are not enough users in the room, the rest of the screen displays a background color.


- A user who only sends audio still occupies a screen.
- A background image is supported. If there are not enough users in the room, the rest of the screen displays a background image.
- **screen_share_left** and **screen_share_right**: adaptive screen sharing templates with the main screen on the left or right.

A shared screen or a presenter view is displayed in the main screen on the right or left. Other users are arranged vertically on the side of the main screen. A maximum of 17 screens are supported. The following figures show the layouts with different numbers of users.

screen_share_left: screen sharing template (main screen on the left)

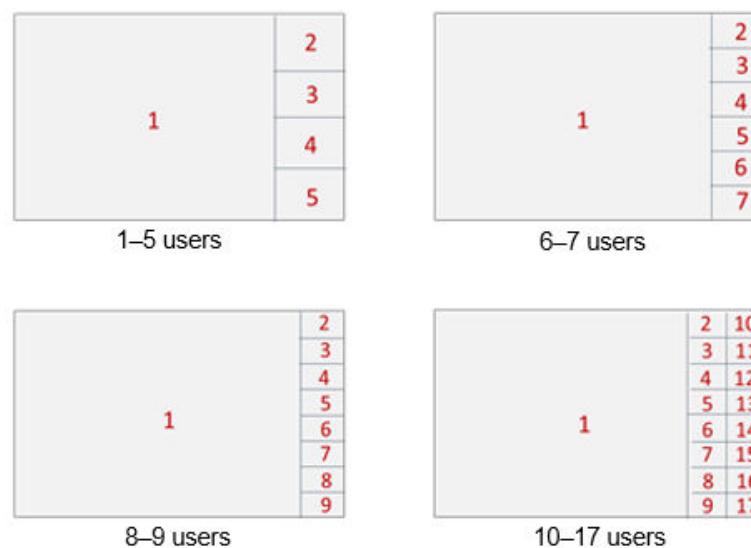

screen_share_right: screen sharing template (main screen on the right)

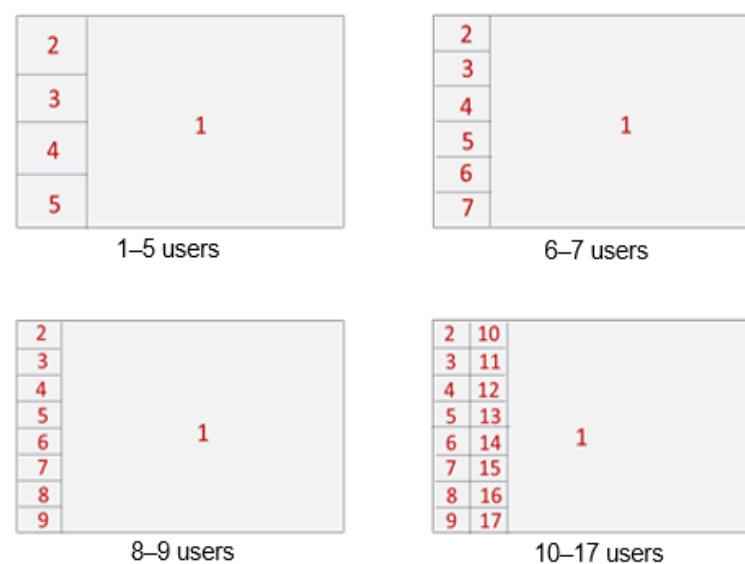

- The main screen displays a presenter view or a shared screen.

- The main screen displays the video of a specific user. If no user is specified or the specified user does not enter the room, the main screen displays the background color.
 - Images in the main screen on the left are zoomed in or out to display the complete content. Images in the small screens on the right are cropped to adapt to the screen size.
 - The small screens of users on the right are sorted by the time when they enter the room.
 - If a user in the right small screen exits the room, the image of this user will be replaced by the next user who enters the room.
 - If there are not enough users in the room, the rest of the screen displays a background color.
 - A user who only sends audio still occupies a screen.
 - A background image is supported. If there are not enough users in the room, the rest of the screen displays a background image.
4. If the request is successful, information about the mixed stream recording job is returned.

```
{  
    "app_id": "5ff9701f2346968bb306cb43",  
    "create_time": "2021-04-21T11:47:32Z",  
    "job_id": "607f9fc100d861eeefff9b300b388dab",  
    "job_unique_id": "87b1f2b8da9c44cd",  
    "mix_param": {  
        "room_id": "room001",  
        "layout_template": "nine_grids_view",  
        "encode_template": "1920x1080_30_4620",  
        "max_idle_time": 30  
    },  
    "push_param": {  
        "rtmp_urls": null  
    },  
    "record_param": {  
        "record_rule_id": "5d0ec2c53a2c15625017adb8bbcd9ab"  
    },  
    "room_id": "room001",  
    "start_time": "2021-04-21T11:47:32Z",  
    "state": "INIT",  
    "stop_time": "0001-01-01T00:00:00Z",  
    "stream_name": "m_607f9fc100d861eeefff9b300b388dab_room001",  
    "update_time": "2021-04-21T11:47:32Z"  
}
```

Step 7 After the audio or video interaction is complete in the SparkRTC room, obtain the recording files from the configured OBS bucket.

----End

4.3 Application callback management

4.3.1 Configuring a Recording Event Callback

Function

Configures a recording event callback.

When a subscribed event occurs in a task, the callback address configured through this API is used to receive a notification.

For details about the callback content, see [Value-added \(Recording\) Event Callback Notification Content](#).

URI

PUT /v2/apps/{app_id}/record-callback

Table 4-1 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-2 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-3 Request body parameters

Parameter	Mandatory	Type	Description
url	Yes	String	Callback notification URL, which must start with http:// or https:// and support POST.
auth_key	No	String	Callback key, which is used for authentication.

Response Parameters

Status code: 200

Table 4-4 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-5 Response body parameters

Parameter	Type	Description
app_id	String	Application ID.
record_callback	AppCallbackUrl object	Callback information.

Table 4-6 AppCallbackUrl

Parameter	Type	Description
url	String	Callback notification URL, which must start with http:// or https:// and support POST.
auth_key	String	Callback key, which is used for authentication. If this parameter is not set or left empty, the authentication header field will not be added to the callback.

Parameter	Type	Description
notify_event_subscription	Array of strings	Cloud recording notification subscription message. The options are as follows: <ul style="list-style-type: none">• RECORD_NEW_FILE_START: Recording started.• RECORD_FILE_COMPLETE: Recording file generated.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Status code: 400**Table 4-7** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-8 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-9** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-10 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-11** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-12 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
PUT https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-callback
{
  "url" : "http://mydomain.com/callback",
  "auth_key" : "8923ab8c2dcef4538923ab8c2dcef453"
}
```

Example Responses

Status code: 200

The configuration is successful.

```
{
  "app_id" : "123456789abcdefghijklmn",
  "record_callback" : {
    "url" : "http://mydomain.com",
    "auth_key" : "78912374ae8cdb38",
    "notify_event_subscription" : [ "RECORD_NEW_FILE_START", "RECORD_FILE_COMPLETE",
"RTC_USER_ROLE_CHANGED", "RTC_AUDIO_STREAM_OPEN", "RTC_AUDIO_STREAM_CLOSE",
"RTC_VIDEO_STREAM_OPEN", "RTC_VIDEO_STREAM_CLOSE" ],
    "update_time" : "2020-07-26T07:53:05.075Z"
  }
}
```

Status code: 400

Configuration failed because the request cannot be understood by the server or parameters are incorrect.

```
{
  "error_code" : "RTC.00001003",
  "error_msg" : "InvalidParameterValue"
}
```

Status code: 404

Configuration failed because the application does not exist.

```
{
  "error_code" : "RTC.00001003",
```

```
        "error_msg" : "InvalidParameterValue"
    }
```

Status code: 500

Configuration failed due to server error.

```
{
    "error_code" : "RTC.00002xxx",
    "error_msg" : "InternalError"
}
```

Status Codes

Status Code	Description
200	The configuration is successful.
400	Configuration failed because the request cannot be understood by the server or parameters are incorrect.
404	Configuration failed because the application does not exist.
500	Configuration failed due to server error.

Error Codes

See [Error Codes](#).

4.3.2 Querying a Recording Event Callback

Function

This API is used to query the recording event callback configuration.

URI

GET /v2/apps/{app_id}/record-callback

Table 4-13 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-14 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-15 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-16 Response body parameters

Parameter	Type	Description
app_id	String	Application ID.
record_callback	AppCallback Url object	Callback information.

Table 4-17 AppCallbackUrl

Parameter	Type	Description
url	String	Callback notification URL, which must start with http:// or https:// and support POST.
auth_key	String	Callback key, which is used for authentication. If this parameter is not set or left empty, the authentication header field will not be added to the callback.
notify_event_subscription	Array of strings	Cloud recording notification subscription message. The options are as follows: <ul style="list-style-type: none">• RECORD_NEW_FILE_START: Recording started.• RECORD_FILE_COMPLETE: Recording file generated.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Status code: 400**Table 4-18** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-19 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-20** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-21 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-22** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-23 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

GET https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-callback

Example Responses

Status code: 200

Details about an application.

```
{  
    "app_id" : "123456789abcdefghijklmn",  
    "record_callback" : {  
        "url" : "http://mydomain.com",  
        "auth_key" : "78912374ae8cdb38",  
        "notify_event_subscription" : [ "RECORD_NEW_FILE_START", "RECORD_FILE_COMPLETE" ],  
        "update_time" : "2020-07-26T07:53:05.075Z"  
    }  
}
```

Status code: 400

The request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

The application ID does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Query failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
200	Details about an application.
400	The request cannot be understood by the server or parameters are incorrect.
404	The application ID does not exist.
500	Query failed due to server error.

Error Codes

See [Error Codes](#).

4.4 Single stream recording job management

4.4.1 Starting a Single Stream Recording Job

Function

Starts a single stream recording job.

The naming rule of single-stream recording triggered by the API is as follows:
{jobtype}_{jobid}_{roomid}_{userid}

If the value of jobtype is **s**, the job is a single stream recording job.

URI

POST /v2/apps/{app_id}/individual-stream-jobs

Table 4-24 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-25 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-26 Request body parameters

Parameter	Mandatory	Type	Description
room_id	Yes	String	Room ID.
user_id	Yes	String	ID of the user who is selected. The ID must be unique in a single recording job.

Parameter	Mandatory	Type	Description
is_record_audio	No	Boolean	<p>Whether to record audios.</p> <ul style="list-style-type: none">• true: Audios are recorded.• false: Audios are not recorded. <p>The default value is true.</p>
video_type	No	String	<p>Video stream type. The options are camera stream and screen sharing stream. If this parameter is not specified, the video is not recorded.</p> <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream <p>The default value is CAMERASTREAM.</p>
select_stream_type	No	String	<p>Resolution level for pulling a window.</p> <ul style="list-style-type: none">• LD• SD• HD• FHD <p>The default value is FHD.</p>
max_idle_time	No	Integer	<p>Maximum duration of an idle channel.</p> <p>The value ranges from 5 to 43200. The default value is 30.</p> <p>Unit: second</p> <p>If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated.</p> <p>The co-host refers to a joiner or publisher.</p>
publish_param	No	PublishParam object	Forwarding parameters.
record_param	No	RecordParam object	Recording parameters.

Table 4-27 PublishParam

Parameter	Mandatory	Type	Description
rtmp_urls	Yes	Array of strings	RTMP stream push URL after a mixed stream streaming job is complete.

Table 4-28 RecordParam

Parameter	Mandatory	Type	Description
record_rule_id	Yes	String	Recording rule ID.

Response Parameters

Status code: 201

Table 4-29 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-30 Response body parameters

Parameter	Type	Description
job_id	String	Job ID.
stream_name	String	Stream name.
app_id	String	Application ID.
room_id	String	Room ID.
user_id	String	ID of the user who is selected. The ID must be unique in a single recording job.
is_record_audio	Boolean	Whether to record audios. <ul style="list-style-type: none">• true: Audios are recorded.• false: Audios are not recorded. The default value is true.

Parameter	Type	Description
video_type	String	<p>Video stream type. The options are camera stream and screen sharing stream. If this parameter is not specified, the video is not recorded.</p> <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream <p>The default value is CAMERASTREAM.</p>
select_stream_type	String	<p>Resolution level for pulling a window.</p> <ul style="list-style-type: none">• LD• SD• HD• FHD <p>The default value is FHD.</p>
max_idle_time	Integer	<p>Maximum duration of an idle channel.</p> <p>The value ranges from 5 to 43200. The default value is 30.</p> <p>Unit: second</p> <p>If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated.</p> <p>The co-host refers to a joiner or publisher.</p>
record_param	RecordParam object	Recording parameters.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
state	String	<p>Job status.</p> <ul style="list-style-type: none">• INIT: The job is being initialized.• RUNNING: The job is running.• STOPPED: The job has been stopped.
stop_reason	String	Job termination cause.
description	String	Detailed description of the job status.

Parameter	Type	Description
start_time	String	Time when a job starts, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
stop_time	String	Time when a job ends, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-31 RecordParam

Parameter	Type	Description
record_rule_id	String	Recording rule ID.

Status code: 400**Table 4-32** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-33 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-34** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-35 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-36** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-37 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
POST https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/individual-stream-jobs
{
    "room_id": 100,
    "user_id": "user001",
    "is_record_audio": true,
    "video_type": "CAMERASTREAM",
    "select_stream_type": "FHD",
    "max_idle_time": 30,
    "record_param": {
        "record_rule_id": "5f5e172b9016ed5b0961a43"
    }
}
```

Example Responses

Status code: 201

The job is created, and the job summary information is returned, including job_id.

```
{
    "job_id": 1,
    "app_id": 1,
    "room_id": 100,
    "user_id": "user001",
    "is_record_audio": true,
    "video_type": "CAMERASTREAM",
    "select_stream_type": "FHD",
    "max_idle_time": 30,
    "publish_param": {
```

```
        "rtmp_urls" : [ "rtmp://your.rtmp-server.com" ]  
    },  
    "record_param" : {  
        "record_rule_id" : "5f5e172b9016ed5b0961a43"  
    },  
    "create_time" : "2006-01-02T15:04:05.075Z",  
    "start_time" : "2006-01-02T15:04:05.075Z"  
}
```

Status code: 400

Failed to create the single stream recording job because the request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

Failed to create the single stream recording job because the application does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Failed to create the single stream recording job due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
201	The job is created, and the job summary information is returned, including job_id.
400	Failed to create the single stream recording job because the request cannot be understood by the server or parameters are incorrect.
404	Failed to create the single stream recording job because the application does not exist.
500	Failed to create the single stream recording job due to server error.

Error Codes

See [Error Codes](#).

4.4.2 Querying a Single Stream Recording Job

Function

This API is used to query a single stream recording job.

Information in the OBS bucket of a tenant cannot be queried.

URI

GET /v2/apps/{app_id}/individual-stream-jobs/{job_id}

Table 4-38 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.
job_id	Yes	String	Job ID.

Request Parameters

Table 4-39 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-40 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-41 Response body parameters

Parameter	Type	Description
job_id	String	Job ID.
stream_name	String	Stream name.
app_id	String	Application ID.
room_id	String	Room ID.
user_id	String	ID of the user who is selected. The ID must be unique in a single recording job.
is_record_audio	Boolean	Whether to record audios. <ul style="list-style-type: none">• true: Audios are recorded.• false: Audios are not recorded. The default value is true.
video_type	String	Video stream type. The options are camera stream and screen sharing stream. If this parameter is not specified, the video is not recorded. <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream The default value is CAMERASTREAM.
select_stream_type	String	Resolution level for pulling a window. <ul style="list-style-type: none">• LD• SD• HD• FHD The default value is FHD.

Parameter	Type	Description
max_idle_time	Integer	Maximum duration of an idle channel. The value ranges from 5 to 43200. The default value is 30. Unit: second If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated. The co-host refers to a joiner or publisher.
record_param	RecordParam object	Recording parameters.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
state	String	Job status. <ul style="list-style-type: none">• INIT: The job is being initialized.• RUNNING: The job is running.• STOPPED: The job has been stopped.
stop_reason	String	Job termination cause.
description	String	Detailed description of the job status.
start_time	String	Time when a job starts, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
stop_time	String	Time when a job ends, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-42 RecordParam

Parameter	Type	Description
record_rule_id	String	Recording rule ID.

Status code: 404

Table 4-43 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-44 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-45** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-46 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

GET https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/individual-stream-jobs/{job_id}

Example Responses

Status code: 200

The query is successful, and the query result details are returned.

```
{  
    "job_id": 1,  
    "app_id": 1,  
    "room_id": 100,  
    "user_id": "user001",  
    "is_record_audio": true,  
    "video_type": "CAMERASTREAM",  
    "select_stream_type": "FHD",  
    "max_idle_time": 30,  
    "record_param": {  
        "record_rule_id": "5f5e172b9016ed5b0961a43"  
    },  
}
```

```
"create_time" : "2006-01-02T15:04:05.075Z",
"start_time" : "2006-01-02T15:04:05.075Z"
}
```

Status code: 404

Query failed because the application or job ID does not exist.

```
{
  "error_code" : "RTC.00001003",
  "error_msg" : "InvalidParameterValue"
}
```

Status code: 500

Query failed due to server error.

```
{
  "error_code" : "RTC.00002xxx",
  "error_msg" : "InternalError"
}
```

Status Codes

Status Code	Description
200	The query is successful, and the query result details are returned.
404	Query failed because the application or job ID does not exist.
500	Query failed due to server error.

Error Codes

See [Error Codes](#).

4.4.3 Stopping a Single Stream Recording Job

Function

This API is used to stop a single stream recording job.

URI

DELETE /v2/apps/{app_id}/individual-stream-jobs/{job_id}

Table 4-47 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.
job_id	Yes	String	Job ID.

Request Parameters

Table 4-48 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 204**Table 4-49** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Status code: 404**Table 4-50** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-51 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-52** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-53 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

DELETE https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/individual-stream-jobs/{job_id}

Example Responses

Status code: 404

Failed to stop the job because the application or job ID does not exist.

{
 "error_code" : "RTC.00001003",
 "error_msg" : "InvalidParameterValue"
}**Status code: 500**

Failed to stop the job due to server error.

{
 "error_code" : "RTC.00002xxx",
 "error_msg" : "InternalError"
}

Status Codes

Status Code	Description
204	The job is stopped.
404	Failed to stop the job because the application or job ID does not exist.
500	Failed to stop the job due to server error.

Error Codes

See [Error Codes](#).

4.4.4 Updates a single stream recording job

Function

Modifies a single stream recording job.

The job can be modified only in some scenarios.

URI

PUT /v2/apps/{app_id}/individual-stream-jobs/{job_id}

Table 4-54 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID
job_id	Yes	String	Task ID

Request Parameters

Table 4-55 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is a token.
Authorization	No	String	Authentication information. This parameter is mandatory for AK/SK authentication.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory for AK/SK authentication.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-56 Request body parameters

Parameter	Mandatory	Type	Description
publish_param	No	PublishParam object	Forwarding parameters.
record_param	No	RecordParam object	Recording parameters.

Table 4-57 PublishParam

Parameter	Mandatory	Type	Description
rtmp_urls	Yes	Array of strings	RTMP stream push URL after a mixed stream streaming job is complete.

Table 4-58 RecordParam

Parameter	Mandatory	Type	Description
record_rule_id	Yes	String	Recording rule ID.

Response Parameters

Status code: 200

Table 4-59 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-60 Response body parameters

Parameter	Type	Description
job_id	String	Job ID.
stream_name	String	Stream name.
app_id	String	Application ID.
room_id	String	Room ID.
user_id	String	ID of the user who is selected. The ID must be unique in a single recording job.
is_record_audio	Boolean	Whether to record audios. <ul style="list-style-type: none">• true: Audios are recorded.• false: Audios are not recorded. The default value is true.
video_type	String	Video stream type. The options are camera stream and screen sharing stream. If this parameter is not specified, the video is not recorded. <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream The default value is CAMERASTREAM.
select_stream_type	String	Resolution level for pulling a window. <ul style="list-style-type: none">• LD• SD• HD• FHD The default value is FHD.

Parameter	Type	Description
max_idle_time	Integer	Maximum duration of an idle channel. The value ranges from 5 to 43200. The default value is 30. Unit: second If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated. The co-host refers to a joiner or publisher.
record_param	RecordParam object	Recording parameters.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
state	String	Job status. <ul style="list-style-type: none">• INIT: The job is being initialized.• RUNNING: The job is running.• STOPPED: The job has been stopped.
stop_reason	String	Job termination cause.
description	String	Detailed description of the job status.
start_time	String	Time when a job starts, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
stop_time	String	Time when a job ends, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-61 RecordParam

Parameter	Type	Description
record_rule_id	String	Recording rule ID.

Status code: 400

Table 4-62 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-63 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-64** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-65 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-66** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-67 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
PUT https://{{endpoint}}/v2/apps/{{app_id}}/individual-stream-jobs/{{job_id}}  
  
{  
    "publish_param": {  
        "rtmp_urls": [ "rtmp://your.rtmp-server.com" ]  
    }  
}
```

Example Responses

Status code: 200

The job is modified, and the job summary information is returned, including job_id.

```
{  
    "job_id": 1,  
    "app_id": 1,  
    "room_id": 100,  
    "user_id": "user001",  
    "is_record_audio": true,  
    "video_type": "CAMERASTREAM",  
    "select_stream_type": "FHD",  
    "max_idle_time": 30,  
    "publish_param": {  
        "rtmp_urls": [ "rtmp://your.rtmp-server.com" ]  
    },  
    "record_param": {  
        "record_rule_id": "5f5e172b9016ed5b0961a43"  
    },  
    "create_time": "2006-01-02T15:04:05.075Z",  
    "start_time": "2006-01-02T15:04:05.075Z"  
}
```

Status code: 400

Failed to modify the single stream recording job because the request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code": "RTC.00001003",  
    "error_msg": "InvalidParameterValue"  
}
```

Status code: 404

Failed to modify the single stream recording job because the application or job ID does not exist.

```
{  
    "error_code": "RTC.00001003",  
    "error_msg": "InvalidParameterValue"  
}
```

Status code: 500

Failed to modify the single stream recording job due to server error.

```
{  
    "error_code": "RTC.00002xxx",  
    "error_msg": "InternalError"  
}
```

Status Codes

Status Code	Description
200	The job is modified, and the job summary information is returned, including job_id.
400	Failed to modify the single stream recording job because the request cannot be understood by the server or parameters are incorrect.
404	Failed to modify the single stream recording job because the application or job ID does not exist.
500	Failed to modify the single stream recording job due to server error.

Error Codes

See [Error Codes](#).

4.5 Application management

4.5.1 Creating an Application

Function

This API is used to create an application.

Constraints

A tenant cannot create multiple applications with the same app_name.

URI

POST /v2/apps

Request Parameters

Table 4-68 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-69 Request body parameters

Parameter	Mandatory	Type	Description
app_name	Yes	String	Application name. Only the UTF-8 format is supported.

Response Parameters

Status code: 201

Table 4-70 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-71 Response body parameters

Parameter	Type	Description
app_id	String	Application ID.

Status code: 400**Table 4-72** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-73 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-74** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-75 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
POST https://rtc-api.myhuaweicloud.com/v2/apps
{
  "app_name" : "rtc"
}
```

Example Responses

Status code: 201

The application is created, and app_id is returned.

```
{
  "app_id" : "60d539ba00d861ef0802742ce404400c"
}
```

Status code: 400

The request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Request failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
201	The application is created, and app_id is returned.
400	The request cannot be understood by the server or parameters are incorrect.
500	Request failed due to server error.

Error Codes

See [Error Codes](#).

4.5.2 Listing Applications

Function

This API is used to list applications.

URI

GET /v2/apps

Table 4-76 Query Parameters

Parameter	Mandatory	Type	Description
state	No	String	Application status. The options are as follows: <ul style="list-style-type: none">• ACTIVATION: The application is enabled.• DEACTIVATION: The application is disabled.• ARREARS: The application is in arrears.

Parameter	Mandatory	Type	Description
offset	No	Integer	Start number of the query result, indicating the page number. The default value is 0.
limit	No	Integer	Number of records on each page. The value ranges from 1 to 100. The default value is 100.

Request Parameters

Table 4-77 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-78 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-79 Response body parameters

Parameter	Type	Description
count	Integer	Total number of applications.
apps	Array of App objects	Application list.

Table 4-80 App

Parameter	Type	Description
app_name	String	Application name.
app_id	String	Application ID.
state	AppState object	Application status.
scope	String	RTC coverage range. The options are as follows: <ul style="list-style-type: none">• DOMESTIC: inside the Chinese mainland• OVERSEA: outside the Chinese mainland• GLOBAL: global
tenant_name	String	Account name.
domain	String	Domain name corresponding to the application.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
authentication	AppAuth object	Authentication configuration.
callbacks	AppCallbacks object	Callback configuration.
auto_record_mode	AppAutoRecordMode object	Automatic recording configuration.

Table 4-81 AppState

Parameter	Type	Description
state	String	Status <ul style="list-style-type: none">• ACTIVATION: enabled• DEACTIVATION: disabled• ARREARS: outstanding amount• DELETED: The task has been deleted.
update_time	String	Update time of the application authentication, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-82 AppAuth

Parameter	Type	Description
enable	Boolean	Whether to enable or disable URL authentication.
expire	Integer	Validity period of the signature for authenticating the connection to RTC. Unit: second. The default value is 300. The signature is generated based on app_key.
app_key	String	Application authentication key.
update_time	String	Update time of the application authentication, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-83 AppCallbacks

Parameter	Type	Description
push_callback	AppCallbackUrl object	Forwarding callback.
record_callback	AppCallbackUrl object	Recording callback.

Table 4-84 AppCallbackUrl

Parameter	Type	Description
url	String	Callback notification URL, which must start with http:// or https:// and support POST.

Parameter	Type	Description
auth_key	String	Callback key, which is used for authentication. If this parameter is not set or left empty, the authentication header field will not be added to the callback.
notify_event_subscription	Array of strings	Cloud recording notification subscription message. The options are as follows: <ul style="list-style-type: none">• RECORD_NEW_FILE_START: Recording started.• RECORD_FILE_COMPLETE: Recording file generated.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-85 AppAutoRecordMode

Parameter	Type	Description
mode	String	Recording mode. <ul style="list-style-type: none">• AUTO_RECORD_OFF: Automatic recording is disabled.• AUTO_INDIVIDUAL_RECORD: Automatic recording is enabled for single streams. In this case, record_rule_id must not be left empty.
record_rule_id	String	Recording rule ID.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Status code: 400**Table 4-86** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-87 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-88** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-89 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

GET https://rtc-api.myhuaweicloud.com/v2/apps

Example Responses

Status code: 200

Listing Applications

```
{  
    "count" : 1,  
    "apps" : [ {  
        "app_name" : "example",  
        "app_id" : "123456789abcdefghijklmn",  
        "state" : {  
            "state" : "ACTIVATION",  
            "update_time" : "2020-07-26T07:03:05.075Z"  
        },  
        "scope" : "DOMESTIC",  
        "tenant_name" : "hwstaff_pub_videortc",  
        "domain" : "123456789abcdefghijklmn rtc.huawei.com",  
        "create_time" : "2020-07-26T07:03:05.075Z",  
        "authentication" : {  
            "enable" : true,  
            "expire" : 300,  
            "app_key" : "12345ABCDEF12345",  
            "update_time" : "2020-07-26T07:03:05.075Z"  
        },  
        "callbacks" : {  
            "push_callback" : {  
                "url" : ""  
            }  
        }  
    }]  
}
```

```
        "auth_key" : "",  
        "update_time" : ""  
    },  
    "record_callback" : {  
        "url" : "http://mydomain.com",  
        "auth_key" : "78912374ae8cdb38",  
        "update_time" : "2020-07-26T07:53:05.075Z"  
    }  
},  
"auto_record_mode" : {  
    "mode" : "AUTO_RECORD_OFF",  
    "update_time" : "2020-07-26T07:53:05.075Z"  
}  
]  
}
```

Status code: 400

The request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Query failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
200	Listing Applications
400	The request cannot be understood by the server or parameters are incorrect.
500	Query failed due to server error.

Error Codes

See [Error Codes](#).

4.5.3 Querying an Application

Function

This API is used to query details about an application.

URI

GET /v2/apps/{app_id}

Table 4-90 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-91 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-92 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-93 Response body parameters

Parameter	Type	Description
app_name	String	Application name.
app_id	String	Application ID.
state	AppState object	Application status.
scope	String	RTC coverage range. The options are as follows: <ul style="list-style-type: none">• DOMESTIC: inside the Chinese mainland• OVERSEA: outside the Chinese mainland• GLOBAL: global
tenant_name	String	Account name.
domain	String	Domain name corresponding to the application.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
authentication	AppAuth object	Authentication configuration.
callbacks	AppCallbacks object	Callback configuration.
auto_record_mode	AppAutoRecordMode object	Automatic recording configuration.

Table 4-94 AppState

Parameter	Type	Description
state	String	Status <ul style="list-style-type: none">• ACTIVATION: enabled• DEACTIVATION: disabled• ARREARS: outstanding amount• DELETED: The task has been deleted.
update_time	String	Update time of the application authentication, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-95 AppAuth

Parameter	Type	Description
enable	Boolean	Whether to enable or disable URL authentication.
expire	Integer	Validity period of the signature for authenticating the connection to RTC. Unit: second. The default value is 300. The signature is generated based on app_key.
app_key	String	Application authentication key.
update_time	String	Update time of the application authentication, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-96 AppCallbacks

Parameter	Type	Description
push_callback	AppCallbackUrl object	Forwarding callback.
record_callback	AppCallbackUrl object	Recording callback.

Table 4-97 AppCallbackUrl

Parameter	Type	Description
url	String	Callback notification URL, which must start with http:// or https:// and support POST.
auth_key	String	Callback key, which is used for authentication. If this parameter is not set or left empty, the authentication header field will not be added to the callback.
notify_event_subscription	Array of strings	Cloud recording notification subscription message. The options are as follows: <ul style="list-style-type: none">• RECORD_NEW_FILE_START: Recording started.• RECORD_FILE_COMPLETE: Recording file generated.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-98 AppAutoRecordMode

Parameter	Type	Description
mode	String	Recording mode. <ul style="list-style-type: none">• AUTO_RECORD_OFF: Automatic recording is disabled.• AUTO_INDIVIDUAL_RECORD: Automatic recording is enabled for single streams. In this case, record_rule_id must not be left empty.
record_rule_id	String	Recording rule ID.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Status code: 400**Table 4-99** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-100 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-101** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-102 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-103** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-104 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

GET https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}

Example Responses

Status code: 200

Details about an application.

```
{  
    "app_name" : "example",  
    "app_id" : "123456789abcdefghijklmn",  
    "state" : {  
        "state" : "ACTIVATION",  
        "update_time" : "2020-07-26T07:03:05.075Z"  
    },  
    "scope" : "DOMESTIC",  
    "tenant_name" : "hwstaff_pub_videortc",  
    "domain" : "123456789abcdefghijklmn rtc.huawei.com",  
    "create_time" : "2020-07-26T07:03:05.075Z",  
    "authentication" : {  
        "enable" : true,  
        "expire" : 300,  
        "app_key" : "12345ABCDEF12345",  
        "update_time" : "2020-07-26T07:03:05.075Z"  
    },  
    "callbacks" : {  
        "record_callback" : {  
            "url" : "http://mydomain.com",  
            "auth_key" : "78912374ae8cdb38",  
            "update_time" : "2020-07-26T07:53:05.075Z"  
        }  
    }  
}
```

```
        },
        "auto_record_mode" : {
            "mode" : "AUTO_RECORD_OFF",
            "update_time" : "2020-07-26T07:53:05.075Z"
        }
    }
```

Status code: 400

The request cannot be understood by the server or parameters are incorrect.

```
{
    "error_code" : "RTC.00001003",
    "error_msg" : "InvalidParameterValue"
}
```

Status code: 404

The application ID does not exist.

```
{
    "error_code" : "RTC.00001003",
    "error_msg" : "InvalidParameterValue"
}
```

Status code: 500

Query failed due to server error.

```
{
    "error_code" : "RTC.00002xxx",
    "error_msg" : "InternalError"
}
```

Status Codes

Status Code	Description
200	Details about an application.
400	The request cannot be understood by the server or parameters are incorrect.
404	The application ID does not exist.
500	Query failed due to server error.

Error Codes

See [Error Codes](#).

4.5.4 Deleting an Application

Function

This API is used to delete an application.

URI

DELETE /v2/apps/{app_id}

Table 4-105 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-106 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 204

Table 4-107 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Status code: 400**Table 4-108** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-109 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-110** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-111 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-112** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-113 Response body parameters

Parameter	Type	Description
error_code	String	Error code.

Parameter	Type	Description
error_msg	String	Description.

Example Requests

```
DELETE https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}
```

Example Responses

Status code: 400

Deletion failed because the deletion condition is not met.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

Deletion failed because the application ID does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Deletion failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
204	The deletion succeeded.
400	Deletion failed because the deletion condition is not met.
404	Deletion failed because the application ID does not exist.
500	Deletion failed due to server error.

Error Codes

See [Error Codes](#).

4.5.5 Enabling an Application

Function

This API is used to enable an application.

URI

POST /v2/apps/{app_id}/enable

Table 4-114 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-115 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-116 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-117 Response body parameters

Parameter	Type	Description
app_id	String	Application ID.
state	AppState object	Application status

Table 4-118 AppState

Parameter	Type	Description
state	String	Status <ul style="list-style-type: none">• ACTIVATION: enabled• DEACTIVATION: disabled• ARREARS: outstanding amount• DELETED: The task has been deleted.
update_time	String	Update time of the application authentication, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Status code: 404**Table 4-119** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-120 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-121** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-122 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

POST https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/enable

Example Responses

Status code: 200

The application is enabled.

```
{  
    "app_id" : "123456789abcdefghijklmn",  
    "state" : {  
        "state" : "ACTIVATION",  
        "update_time" : "2020-07-26T07:03:05.075Z"  
    }  
}
```

Status code: 404

The application ID does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Configuration failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
200	The application is enabled.
404	The application ID does not exist.
500	Configuration failed due to server error.

Error Codes

See [Error Codes](#).

4.5.6 Disabling an Application

Function

Disables an application.

After the application is disabled, new rooms cannot be added or joined, and rooms that have been joined can still be used. The stream mixing and recording functions are also unavailable.

URI

POST /v2/apps/{app_id}/disable

Table 4-123 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-124 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-125 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-126 Response body parameters

Parameter	Type	Description
app_id	String	Application ID.
state	AppState object	Application status

Table 4-127 AppState

Parameter	Type	Description
state	String	Status <ul style="list-style-type: none">• ACTIVATION: enabled• DEACTIVATION: disabled• ARREARS: outstanding amount• DELETED: The task has been deleted.
update_time	String	Update time of the application authentication, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Status code: 404**Table 4-128 Response header parameters**

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-129 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-130 Response header parameters**

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-131 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
POST https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/disable
```

Example Responses

Status code: 200

The application is disabled.

```
{  
    "app_id" : "123456789abcdefghijklmn",  
    "state" : {  
        "state" : "DEACTIVATION",  
        "update_time" : "2020-07-26T07:03:05.075Z"  
    }  
}
```

Status code: 404

The application ID does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Configuration failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
200	The application is disabled.
404	The application ID does not exist.
500	Configuration failed due to server error.

Error Codes

See [Error Codes](#).

4.6 Automatic recording configuration

4.6.1 Updating the Automatic Recording Configuration

Function

This API is used to update the automatic recording configuration. Tenants can enable or disable automatic single-stream recording on demands.

Constraints

After the automatic recording function is enabled, it takes effect only for newly created rooms and does not take effect for rooms that have been created before the automatic recording function is enabled.

The stream name of a single-stream automatic recording job is as follows:

{appid}_{roomid}_{userid}_{media_type}_{video_type}

The value of {media_type} can be v (video recording) or av (audio and video recording).

The value of {video_type} can be m (recording video streams) or a (recording presentation streams).

The possible combination can be _av_m (automatic recording of video and audio) or _v_a (automatic recording of presentation video without audio).

URI

PUT /v2/apps/{app_id}/auto-record-mode

Table 4-132 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-133 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.

Parameter	Mandatory	Type	Description
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-134 Request body parameters

Parameter	Mandatory	Type	Description
mode	Yes	String	Recording mode. <ul style="list-style-type: none">• AUTO_RECORD_OFF: Automatic recording is disabled.• AUTO_INDIVIDUAL_RECORD: Enable single-stream automatic recording. In this case, record_rule_id must be not empty.
record_rule_id	No	String	Recording rule ID.

Response Parameters

Status code: 200

Table 4-135 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-136 Response body parameters

Parameter	Type	Description
app_id	String	Application ID.

Parameter	Type	Description
auto_record_mode	AppAutoRecordMode object	Automatic recording configuration.

Table 4-137 AppAutoRecordMode

Parameter	Type	Description
mode	String	Recording mode. <ul style="list-style-type: none">• AUTO_RECORD_OFF: Automatic recording is disabled.• AUTO_INDIVIDUAL_RECORD: Automatic recording is enabled for single streams. In this case, record_rule_id must not be left empty.
record_rule_id	String	Recording rule ID.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Status code: 400**Table 4-138** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-139 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404

Table 4-140 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-141 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-142** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-143 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
PUT https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/auto-record-mode
{
  "mode" : "AUTO_RECORD_OFF"
}
```

Example Responses

Status code: 200

The job is created, and the application summary information is returned, including app_id.

```
{
  "app_id" : "123456789abcdefghijklmn",
  "auto_record_mode" : {
    "mode" : "AUTO_RECORD_OFF",
    "update_time" : "2020-07-26T07:53:05.075Z"
```

```
}
```

Status code: 400

Failed to update the automatic recording job because the request cannot be understood by the server or parameters are incorrect.

```
{
  "error_code" : "RTC.00001003",
  "error_msg" : "InvalidParameterValue"
}
```

Status code: 404

Failed to update the automatic recording job because the application does not exist.

```
{
  "error_code" : "RTC.00001003",
  "error_msg" : "InvalidParameterValue"
}
```

Status code: 500

Failed to update the automatic recording job due to server error.

```
{
  "error_code" : "RTC.00002xxx",
  "error_msg" : "InternalError"
}
```

Status Codes

Status Code	Description
200	The job is created, and the application summary information is returned, including app_id.
400	Failed to update the automatic recording job because the request cannot be understood by the server or parameters are incorrect.
404	Failed to update the automatic recording job because the application does not exist.
500	Failed to update the automatic recording job due to server error.

Error Codes

See [Error Codes](#).

4.6.2 Querying the Automatic Recording Configuration

Function

This API is used to query the automatic recording configuration.

URI

GET /v2/apps/{app_id}/auto-record-mode

Table 4-144 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-145 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-146 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-147 Response body parameters

Parameter	Type	Description
app_id	String	Application ID.
auto_record_mode	AppAutoRecordMode object	Automatic recording configuration.

Table 4-148 AppAutoRecordMode

Parameter	Type	Description
mode	String	Recording mode. <ul style="list-style-type: none">• AUTO_RECORD_OFF: Automatic recording is disabled.• AUTO_INDIVIDUAL_RECORD: Automatic recording is enabled for single streams. In this case, record_rule_id must not be left empty.
record_rule_id	String	Recording rule ID.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Status code: 400**Table 4-149** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-150 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404

Table 4-151 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-152 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-153** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-154 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

GET https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/auto-record-mode

Example Responses

Status code: 200

Details about an application.

```
{  
    "app_id" : "123456789abcdefghijklmn",  
    "auto_record_mode" : {  
        "mode" : "AUTO_RECORD_OFF",  
        "update_time" : "2020-07-26T07:53:05.075Z"  
    }  
}
```

Status code: 400

The request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

The application ID does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Query failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
200	Details about an application.
400	The request cannot be understood by the server or parameters are incorrect.
404	The application ID does not exist.
500	Query failed due to server error.

Error Codes

See [Error Codes](#).

4.7 Room management

4.7.1 Removes an online user.

Function

Forces a user to leave a room.

URI

POST /v2/apps/{app_id}/rooms/{room_id}/batch-remove-users

Table 4-155 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID
room_id	Yes	String	Room ID

Request Parameters

Table 4-156 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory for AK/SK authentication.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory for AK/SK authentication.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-157 Request body parameters

Parameter	Mandatory	Type	Description
user_ids	Yes	Array of strings	User ID list.

Response Parameters

Status code: 202

Table 4-158 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Status code: 400**Table 4-159** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-160 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-161** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-162 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
POST https://{endpoint}/v2/apps/{app_id}/rooms/{room_id}/batch-remove-users
{
  "user_ids" : [ "user001", "user002" ]
}
```

Example Responses

Status code: 400

The request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Request failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
202	The request for kicking out a participant has been delivered.
400	The request cannot be understood by the server or parameters are incorrect.
500	Request failed due to server error.

Error Codes

See [Error Codes](#).

4.7.2 Dismisses a room.

Function

Dismisses a room and removes all users from the room.

URI

POST /v2/apps/{app_id}/rooms/{room_id}/dismiss

Table 4-163 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID
room_id	Yes	String	Room ID.

Request Parameters

Table 4-164 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory for AK/SK authentication.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory for AK/SK authentication.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 202

Table 4-165 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Status code: 400

Table 4-166 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-167 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-168** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-169 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-170** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-171 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

POST https://{endpoint}/v2/apps/{app_id}/rooms/{room_id}/dismiss

Example Responses

Status code: 400

The request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

The corresponding room cannot be found.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Request failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
202	The room dismissal request has been delivered.
400	The request cannot be understood by the server or parameters are incorrect.
404	The corresponding room cannot be found.
500	Request failed due to server error.

Error Codes

See [Error Codes](#).

4.8 Mixed stream recording job management

4.8.1 Starting a Mixed Stream Recording Job

Function

Creates and starts a mixed stream recording job.

Both audio-only recording and audio & video recording are supported.

- Audio-only recording

If encode_template is set to audio_only, the three parties with the loudest voices are dynamically selected during audio stream mixing.

Leave layout_template, layout_panes, and other video-related parameters empty.

- Audio & video recording (including desktop sharing)
If encode_template is not audio_only, layout_template and layout_panes must not be left empty.
The three parties with the loudest voices are dynamically selected during audio stream mixing.
The name of the stream mixing recording triggered by the API is in the format of {jobtype}_{jobid}_{roomid}, in which the value of jobtype is **m**, indicating that the stream mixing recording is triggered.

URI

POST /v2/apps/{app_id}/mix-stream-jobs

Table 4-172 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-173 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-174 Request body parameters

Parameter	Mandatory	Type	Description
mix_param	Yes	MixParam object	Mixed stream parameters.
publish_param	No	PublishParam object	Forwarding parameters.
record_param	No	RecordParam object	Recording parameters.

Table 4-175 MixParam

Parameter	Mandatory	Type	Description
room_id	Yes	String	Room ID.

Parameter	Mandatory	Type	Description
encode_template	Yes	String	<p>Name of the encoding template.</p> <ul style="list-style-type: none">• 1920*1080_30_4620: The output stream is 1080p, the frame rate is 30 FPS, and the bitrate is 4.62 Mbit/s.• 1920*1080_30_3150: The output stream is 1080p, the frame rate is 30 FPS, and the bitrate is 3.15 Mbit/s.• 1920*1080_15_3460: The output stream is 1080p, the frame rate is 15 FPS, and the bitrate is 3.46 Mbit/s.• 1920*1080_15_2080: The output stream is 1080p, the frame rate is 15 FPS, and the bitrate is 2.08 Mbit/s.• 1280*720_30_3420: The output stream is 720p, the frame rate is 30 FPS, and the bitrate is 3.42 Mbit/s.• 1280*720_30_1710: The output stream is 720p, the frame rate is 30 FPS, and the bitrate is 1.71 Mbit/s.• 1280*720_15_2260: The output stream is 720p, the frame rate is 15 FPS, and the bitrate is 2.26 Mbit/s.• 1280*720_15_1130: The output stream is 720p, the frame rate is 15 FPS, and the bitrate is 1.13 Mbit/s.• 640*480_30_1000: The output stream is 480p, the frame rate is 30 FPS, and the bitrate is 1.00 Mbit/s.• 640*480_15_500: The output stream is 480p, the frame rate is 15 FPS, and the bitrate is 500 kbit/s.• 480*360_30_490: The output stream is 360p, the frame rate is 30 FPS, and the bitrate is 490 kbit/s.

Parameter	Mandatory	Type	Description
			<ul style="list-style-type: none">• 480*360_15_320: The output stream is 360p, the frame rate is 15 FPS, and the bitrate is 320 kbit/s.
max_idle_time	No	Integer	<p>Maximum duration of an idle channel.</p> <p>The value ranges from 5 to 43200. The default value is 30.</p> <p>Unit: second</p> <p>If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated.</p> <p>The co-host refers to a joiner or publisher.</p>
layout_template	No	String	<p>Video layout template ID. If mixed video is not required, this parameter does not need to be transferred.</p> <ul style="list-style-type: none">• nine_grids_view: adaptive gallery view template.• screen_share_left: adaptive screen sharing templates with the main screen on the left• screen_share_right: adaptive screen sharing templates with the main screen on the right• custom: customized layout
default_user_background_image	No	String	Default user background image address. The image is first uploaded to OBS in the format of s3://bucket/object. By default, proportional scaling and cropping is used to ensure full display.

Parameter	Mandatory	Type	Description
screen_background_image	No	String	<p>Background image address of the shared screen. The image must be first uploaded to OBS in the format of s3://bucket/object.</p> <p>In the one-large-multiple-small layout scenario, this parameter is used to specify the background image regardless of whether the large window displays the desktop of a non-specified user (desktop sharer) or the shared desktop of a specified user.</p>
background_image	No	String	<p>Address of the background image of the canvas. To use the background image function, you need to upload the image to OBS. The format of this parameter must be s3://bucket/object, where bucket and object indicate the bucket and path where the image is located. By default, proportional scaling and cropping is used to ensure full display.</p>
layout_panes	No	Array of MixLayoutPane objects	<p>List of videos that require mixed streams. If mixed video is not required, this parameter does not need to be transferred.</p> <p>You do not need to set this parameter for the nine_grids_view template.</p>
user_background_images	No	Array of MixUserBackgroundImage objects	Background image of a user. The priority is higher than that of default_user_background_image.

Table 4-176 MixLayoutPane

Parameter	Mandatory	Type	Description
id	No	Integer	Window ID, which starts from 1.
user_id	No	String	ID of the user who joins the room.
video_type	No	String	Video stream type, which can be camera stream or screen sharing stream. <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream The default value is CAMERASTREAM.
x	No	Float	X coordinate (normalized percentage), which is a relative value of the horizontal coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Left-to-right layout. 0.0 is at the leftmost and 1.0 is at the rightmost. The decimal value range is within float. Set this parameter in custom layout scenarios.
y	No	Float	Y coordinate (normalized percentage), which is a relative value of the vertical coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Top-to-bottom layout. 0.0 is at the top and 1.0 is at the bottom. The decimal value range is within float. Set this parameter in custom layout scenarios.
width	No	Float	Pane width (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.

Parameter	Mandatory	Type	Description
height	No	Float	Pane height (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.
zorder	No	Integer	Stacking sequence. A maximum of 25 floors are supported, with 0 at the bottom. Set this parameter in custom layout scenarios.
crop_mode	No	String	Tailoring mode. Set this parameter in custom layout scenarios. Two modes are supported: <ul style="list-style-type: none">• KEEP_RATIO_PADDING: padding at a fixed ratio• KEEP_RATIO_CROP: cropping at a fixed ratio
filling_policy	No	String	Filling policy. This parameter is mandatory only in screen sharing templates (including screen_share_right and screen_share_left). The options are as follows: <ul style="list-style-type: none">• FIXED_USER: This field is filled for fixed users.• SHARED_SCREEN: Fill in the shared screen.

Table 4-177 MixUserBackgroundImage

Parameter	Mandatory	Type	Description
user_id	Yes	String	ID of the user for whom the background image needs to be configured.
image_uri	Yes	String	Background image address. The image is first uploaded to OBS in the format of s3://bucket/object.

Table 4-178 PublishParam

Parameter	Mandatory	Type	Description
rtmp_urls	Yes	Array of strings	RTMP stream push URL after a mixed stream streaming job is complete.

Table 4-179 RecordParam

Parameter	Mandatory	Type	Description
record_rule_id	Yes	String	Recording rule ID.

Response Parameters

Status code: 201

Table 4-180 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-181 Response body parameters

Parameter	Type	Description
job_id	String	Job ID, which can be used to modify, view, and stop a mixed stream recording job.
stream_name	String	Stream name.
app_id	String	Application ID.
room_id	String	Room ID.
mix_param	MixParam object	Mixed stream parameters.
record_param	RecordParam object	Recording parameters.
create_time	String	Time when a job is created, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Time when the layout of a job is updated, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Parameter	Type	Description
state	String	Job status. <ul style="list-style-type: none">• INIT: The job is being initialized.• RUNNING: The job is running.• STOPPED: The job has been stopped.
stop_reason	String	Job termination cause.
description	String	Status description, which is the supplementary description of the state field and can be used for manual query.
start_time	String	Time when a job starts, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
stop_time	String	Time when a job ends, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-182 MixParam

Parameter	Type	Description
room_id	String	Room ID.

Parameter	Type	Description
encode_template	String	<p>Name of the encoding template.</p> <ul style="list-style-type: none">• 1920*1080_30_4620: The output stream is 1080p, the frame rate is 30 FPS, and the bitrate is 4.62 Mbit/s.• 1920*1080_30_3150: The output stream is 1080p, the frame rate is 30 FPS, and the bitrate is 3.15 Mbit/s.• 1920*1080_15_3460: The output stream is 1080p, the frame rate is 15 FPS, and the bitrate is 3.46 Mbit/s.• 1920*1080_15_2080: The output stream is 1080p, the frame rate is 15 FPS, and the bitrate is 2.08 Mbit/s.• 1280*720_30_3420: The output stream is 720p, the frame rate is 30 FPS, and the bitrate is 3.42 Mbit/s.• 1280*720_30_1710: The output stream is 720p, the frame rate is 30 FPS, and the bitrate is 1.71 Mbit/s.• 1280*720_15_2260: The output stream is 720p, the frame rate is 15 FPS, and the bitrate is 2.26 Mbit/s.• 1280*720_15_1130: The output stream is 720p, the frame rate is 15 FPS, and the bitrate is 1.13 Mbit/s.• 640*480_30_1000: The output stream is 480p, the frame rate is 30 FPS, and the bitrate is 1.00 Mbit/s.• 640*480_15_500: The output stream is 480p, the frame rate is 15 FPS, and the bitrate is 500 kbit/s.• 480*360_30_490: The output stream is 360p, the frame rate is 30 FPS, and the bitrate is 490 kbit/s.• 480*360_15_320: The output stream is 360p, the frame rate is 15 FPS, and the bitrate is 320 kbit/s.

Parameter	Type	Description
max_idle_time	Integer	<p>Maximum duration of an idle channel. The value ranges from 5 to 43200. The default value is 30.</p> <p>Unit: second</p> <p>If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated.</p> <p>The co-host refers to a joiner or publisher.</p>
layout_template	String	<p>Video layout template ID. If mixed video is not required, this parameter does not need to be transferred.</p> <ul style="list-style-type: none">• nine_grids_view: adaptive gallery view template.• screen_share_left: adaptive screen sharing templates with the main screen on the left• screen_share_right: adaptive screen sharing templates with the main screen on the right• custom: customized layout
default_user_background_image	String	<p>Default user background image address. The image is first uploaded to OBS in the format of s3://bucket/object. By default, proportional scaling and cropping is used to ensure full display.</p>
screen_background_image	String	<p>Background image address of the shared screen. The image must be first uploaded to OBS in the format of s3://bucket/object.</p> <p>In the one-large-multiple-small layout scenario, this parameter is used to specify the background image regardless of whether the large window displays the desktop of a non-specified user (desktop sharer) or the shared desktop of a specified user.</p>
background_image	String	<p>Address of the background image of the canvas. To use the background image function, you need to upload the image to OBS. The format of this parameter must be s3://bucket/object, where bucket and object indicate the bucket and path where the image is located.</p> <p>By default, proportional scaling and cropping is used to ensure full display.</p>

Parameter	Type	Description
layout_panes	Array of MixLayoutPane objects	List of videos that require mixed streams. If mixed video is not required, this parameter does not need to be transferred. You do not need to set this parameter for the nine_grids_view template.
user_background_images	Array of MixUserBackgroundImage objects	Background image of a user. The priority is higher than that of default_user_background_image.

Table 4-183 MixLayoutPane

Parameter	Type	Description
id	Integer	Window ID, which starts from 1.
user_id	String	ID of the user who joins the room.
video_type	String	Video stream type, which can be camera stream or screen sharing stream. <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream The default value is CAMERASTREAM.
x	Float	X coordinate (normalized percentage), which is a relative value of the horizontal coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Left-to-right layout. 0.0 is at the leftmost and 1.0 is at the rightmost. The decimal value range is within float. Set this parameter in custom layout scenarios.
y	Float	Y coordinate (normalized percentage), which is a relative value of the vertical coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Top-to-bottom layout. 0.0 is at the top and 1.0 is at the bottom. The decimal value range is within float. Set this parameter in custom layout scenarios.
width	Float	Pane width (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.

Parameter	Type	Description
height	Float	Pane height (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.
zorder	Integer	Stacking sequence. A maximum of 25 floors are supported, with 0 at the bottom. Set this parameter in custom layout scenarios.
crop_mode	String	Tailoring mode. Set this parameter in custom layout scenarios. Two modes are supported: <ul style="list-style-type: none">• KEEP_RATIO_PADDING: padding at a fixed ratio• KEEP_RATIO_CROP: cropping at a fixed ratio
filling_policy	String	Filling policy. This parameter is mandatory only in screen sharing templates (including screen_share_right and screen_share_left). The options are as follows: <ul style="list-style-type: none">• FIXED_USER: This field is filled for fixed users.• SHARED_SCREEN: Fill in the shared screen.

Table 4-184 MixUserBackgroundImage

Parameter	Type	Description
user_id	String	ID of the user for whom the background image needs to be configured.
image_uri	String	Background image address. The image is first uploaded to OBS in the format of s3://bucket/object.

Table 4-185 RecordParam

Parameter	Type	Description
record_rule_id	String	Recording rule ID.

Status code: 400

Table 4-186 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-187 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-188** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-189 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-190** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-191 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

- Sample request for a nine-grid recording

```
POST https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/mix-stream-jobs

{
  "mix_param": {
    "room_id": "room001",
    "encode_template": "1280x720_15_2260",
    "max_idle_time": 30,
    "layout_template": "nine_grids_view"
  },
  "record_param": {
    "record_rule_id": "5f5e172b9016ed5b0961a43"
  }
}
```

- Sample request for a shared screen recording: displaying the shared screen in the main window

```
POST https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/mix-stream-jobs

{
  "mix_param": {
    "room_id": "room001",
    "encode_template": "1280x720_15_2260",
    "max_idle_time": 30,
    "layout_template": "screen_share_right",
    "layout_panes": [ {
      "id": 1,
      "user_id": "",
      "video_type": "SCREENSTREAM",
      "filling_policy": "SHARED_SCREEN"
    } ]
  },
  "record_param": {
    "record_rule_id": "5f5e172b9016ed5b0961a43"
  }
}
```

- Sample request for a shared screen recording: displaying the camera in the main window

```
POST https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/mix-stream-jobs

{
  "mix_param": {
    "room_id": "room001",
    "encode_template": "1280x720_15_2260",
    "max_idle_time": 30,
    "layout_template": "screen_share_right",
    "layout_panes": [ {
      "id": 1,
      "user_id": "user1",
      "video_type": "CAMERASTREAM",
      "filling_policy": "FIXED_USER"
    } ]
  },
  "record_param": {
    "record_rule_id": "5f5e172b9016ed5b0961a43"
  }
}
```

- Sample request for a customized layout recording

```
POST https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/mix-stream-jobs

{
  "mix_param": {
    "room_id": "room001",
    "encode_template": "1280x720_15_2260",
    "max_idle_time": 30
  },
  "record_param": {
    "record_rule_id": "5f5e172b9016ed5b0961a43"
  }
}
```

```
"max_idle_time" : 30,
"layout_template" : "custom",
"layout_panes" : [ {
  "id" : 1,
  "user_id" : "user1",
  "video_type" : "CAMERASTREAM",
  "x" : 0,
  "y" : 0,
  "width" : 0.666,
  "height" : 0.333,
  "crop_mode" : "KEEP_RATIO_CROP"
}, {
  "id" : 2,
  "user_id" : "user2",
  "video_type" : "CAMERASTREAM",
  "x" : 0.666,
  "y" : 0,
  "width" : 0.333,
  "height" : 0.666,
  "crop_mode" : "KEEP_RATIO_CROP"
} ],
"record_param" : {
  "record_rule_id" : "5f5e172b9016ed5b0961a43"
}
}
```

Example Responses

Status code: 201

The job is created, and the job summary information is returned.

```
{
  "job_id" : "607824b4fa163e19fe301cc817dda855",
  "stream_name" : "m_607824b4fa163e19fe301cc817dda855_gigu",
  "app_id" : "123456789abcdefghijklmn",
  "room_id" : "gigu",
  "mix_param" : {
    "room_id" : "gigu",
    "encode_template" : "1920x1080_30_4620",
    "max_idle_time" : 0,
    "layout_template" : "nine_grids_view"
  },
  "record_param" : {
    "record_rule_id" : "5f5e172b9016ed5b0961a43"
  },
  "create_time" : "2021-04-16T16:22:44Z",
  "update_time" : "2021-04-16T16:22:44Z",
  "state" : "INIT",
  "start_time" : "2021-04-16T16:22:44Z",
  "stop_time" : "0001-01-01T00:00:00Z"
}
```

Status code: 400

Failed to create the mixed stream recording job because the request cannot be understood by the server or parameters are incorrect.

```
{
  "error_code" : "RTC.00001003",
  "error_msg" : "InvalidParameterValue"
}
```

Status code: 404

The application ID does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Failed to create the mixed stream recording job due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
201	The job is created, and the job summary information is returned.
400	Failed to create the mixed stream recording job because the request cannot be understood by the server or parameters are incorrect.
404	The application ID does not exist.
500	Failed to create the mixed stream recording job due to server error.

Error Codes

See [Error Codes](#).

4.8.2 Querying a Mixed Stream Recording Job

Function

This API is used to query a mixed stream recording job.

URI

GET /v2/apps/{app_id}/mix-stream-jobs/{job_id}

Table 4-192 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.
job_id	Yes	String	Job ID.

Request Parameters

Table 4-193 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-194 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-195 Response body parameters

Parameter	Type	Description
job_id	String	Job ID, which can be used to modify, view, and stop a mixed stream recording job.
stream_name	String	Stream name.
app_id	String	Application ID.

Parameter	Type	Description
room_id	String	Room ID.
mix_param	MixParam object	Mixed stream parameters.
record_param	RecordParam object	Recording parameters.
create_time	String	Time when a job is created, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Time when the layout of a job is updated, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
state	String	Job status. <ul style="list-style-type: none">• INIT: The job is being initialized.• RUNNING: The job is running.• STOPPED: The job has been stopped.
stop_reason	String	Job termination cause.
description	String	Status description, which is the supplementary description of the state field and can be used for manual query.
start_time	String	Time when a job starts, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
stop_time	String	Time when a job ends, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-196 MixParam

Parameter	Type	Description
room_id	String	Room ID.

Parameter	Type	Description
encode_template	String	<p>Name of the encoding template.</p> <ul style="list-style-type: none">• 1920*1080_30_4620: The output stream is 1080p, the frame rate is 30 FPS, and the bitrate is 4.62 Mbit/s.• 1920*1080_30_3150: The output stream is 1080p, the frame rate is 30 FPS, and the bitrate is 3.15 Mbit/s.• 1920*1080_15_3460: The output stream is 1080p, the frame rate is 15 FPS, and the bitrate is 3.46 Mbit/s.• 1920*1080_15_2080: The output stream is 1080p, the frame rate is 15 FPS, and the bitrate is 2.08 Mbit/s.• 1280*720_30_3420: The output stream is 720p, the frame rate is 30 FPS, and the bitrate is 3.42 Mbit/s.• 1280*720_30_1710: The output stream is 720p, the frame rate is 30 FPS, and the bitrate is 1.71 Mbit/s.• 1280*720_15_2260: The output stream is 720p, the frame rate is 15 FPS, and the bitrate is 2.26 Mbit/s.• 1280*720_15_1130: The output stream is 720p, the frame rate is 15 FPS, and the bitrate is 1.13 Mbit/s.• 640*480_30_1000: The output stream is 480p, the frame rate is 30 FPS, and the bitrate is 1.00 Mbit/s.• 640*480_15_500: The output stream is 480p, the frame rate is 15 FPS, and the bitrate is 500 kbit/s.• 480*360_30_490: The output stream is 360p, the frame rate is 30 FPS, and the bitrate is 490 kbit/s.• 480*360_15_320: The output stream is 360p, the frame rate is 15 FPS, and the bitrate is 320 kbit/s.

Parameter	Type	Description
max_idle_time	Integer	<p>Maximum duration of an idle channel. The value ranges from 5 to 43200. The default value is 30.</p> <p>Unit: second</p> <p>If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated.</p> <p>The co-host refers to a joiner or publisher.</p>
layout_template	String	<p>Video layout template ID. If mixed video is not required, this parameter does not need to be transferred.</p> <ul style="list-style-type: none">• nine_grids_view: adaptive gallery view template.• screen_share_left: adaptive screen sharing templates with the main screen on the left• screen_share_right: adaptive screen sharing templates with the main screen on the right• custom: customized layout
default_user_background_image	String	<p>Default user background image address. The image is first uploaded to OBS in the format of s3://bucket/object. By default, proportional scaling and cropping is used to ensure full display.</p>
screen_background_image	String	<p>Background image address of the shared screen. The image must be first uploaded to OBS in the format of s3://bucket/object.</p> <p>In the one-large-multiple-small layout scenario, this parameter is used to specify the background image regardless of whether the large window displays the desktop of a non-specified user (desktop sharer) or the shared desktop of a specified user.</p>
background_image	String	<p>Address of the background image of the canvas. To use the background image function, you need to upload the image to OBS. The format of this parameter must be s3://bucket/object, where bucket and object indicate the bucket and path where the image is located.</p> <p>By default, proportional scaling and cropping is used to ensure full display.</p>

Parameter	Type	Description
layout_panes	Array of MixLayoutPane objects	List of videos that require mixed streams. If mixed video is not required, this parameter does not need to be transferred. You do not need to set this parameter for the nine_grids_view template.
user_background_images	Array of MixUserBackgroundImage objects	Background image of a user. The priority is higher than that of default_user_background_image.

Table 4-197 MixLayoutPane

Parameter	Type	Description
id	Integer	Window ID, which starts from 1.
user_id	String	ID of the user who joins the room.
video_type	String	Video stream type, which can be camera stream or screen sharing stream. <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream The default value is CAMERASTREAM.
x	Float	X coordinate (normalized percentage), which is a relative value of the horizontal coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Left-to-right layout. 0.0 is at the leftmost and 1.0 is at the rightmost. The decimal value range is within float. Set this parameter in custom layout scenarios.
y	Float	Y coordinate (normalized percentage), which is a relative value of the vertical coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Top-to-bottom layout. 0.0 is at the top and 1.0 is at the bottom. The decimal value range is within float. Set this parameter in custom layout scenarios.
width	Float	Pane width (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.

Parameter	Type	Description
height	Float	Pane height (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.
zorder	Integer	Stacking sequence. A maximum of 25 floors are supported, with 0 at the bottom. Set this parameter in custom layout scenarios.
crop_mode	String	Tailoring mode. Set this parameter in custom layout scenarios. Two modes are supported: <ul style="list-style-type: none">• KEEP_RATIO_PADDING: padding at a fixed ratio• KEEP_RATIO_CROP: cropping at a fixed ratio
filling_policy	String	Filling policy. This parameter is mandatory only in screen sharing templates (including screen_share_right and screen_share_left). The options are as follows: <ul style="list-style-type: none">• FIXED_USER: This field is filled for fixed users.• SHARED_SCREEN: Fill in the shared screen.

Table 4-198 MixUserBackgroundImage

Parameter	Type	Description
user_id	String	ID of the user for whom the background image needs to be configured.
image_uri	String	Background image address. The image is first uploaded to OBS in the format of s3://bucket/object.

Table 4-199 RecordParam

Parameter	Type	Description
record_rule_id	String	Recording rule ID.

Status code: 404

Table 4-200 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-201 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-202** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-203 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

GET https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/mix-stream-jobs/{job_id}

Example Responses

Status code: 200

The mixed stream recording job is successfully queried. The query result is as follows:

```
{  
    "job_id": "607824b4fa163e19fe301cc817dda855",  
    "stream_name": "m_607824b4fa163e19fe301cc817dda855_gigu",  
    "app_id": "123456789abcdefghijklmn",  
    "room_id": "gigu",  
    "mix_param": {  
        "room_id": "gigu",  
        "encode_template": "1920x1080_30_4620",  
        "max_idle_time": 0,  
        "layout_template": "nine_grids_view"
```

```
},
"record_param" : {
    "record_rule_id" : "5f5e172b9016ed5b0961a43"
},
"create_time" : "2021-04-16T16:22:44Z",
"update_time" : "2021-04-16T16:22:44Z",
"state" : "INIT",
"start_time" : "2021-04-16T16:22:44Z",
"stop_time" : "0001-01-01T00:00:00Z"
}
```

Status code: 404

Failed to query the mixed stream recording job because the job ID does not exist.

```
{
    "error_code" : "RTC.00001003",
    "error_msg" : "InvalidParameterValue"
}
```

Status code: 500

Failed to query the mixed stream recording job due to server error.

```
{
    "error_code" : "RTC.00002xxx",
    "error_msg" : "InternalError"
}
```

Status Codes

Status Code	Description
200	The mixed stream recording job is successfully queried. The query result is as follows:
404	Failed to query the mixed stream recording job because the job ID does not exist.
500	Failed to query the mixed stream recording job due to server error.

Error Codes

See [Error Codes](#).

4.8.3 Modifying a Mixed Stream Recording Job

Function

This API is used to update the layout of a mixed stream recording job.

URI

PUT /v2/apps/{app_id}/mix-stream-jobs/{job_id}

Table 4-204 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.
job_id	Yes	String	Job ID.

Request Parameters

Table 4-205 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-206 Request body parameters

Parameter	Mandatory	Type	Description
mix_param	Yes	UpdateMixParam object	Mixed stream parameters.

Table 4-207 UpdateMixParam

Parameter	Mandatory	Type	Description
layout_template	No	String	ID of a video layout template. Only custom templates can be updated.
background_image	No	String	Address of the canvas background image. Upload the image to OBS first. By default, proportional scaling and cropping is used to ensure full display. Format: s3://bucket/object
default_user_background_image	No	String	Default user background image address. The image is first uploaded to OBS in the format of s3://bucket/object. By default, proportional scaling and cropping is used to ensure full display.
screen_background_image	No	String	Background image address of the shared screen. The image must be first uploaded to OBS in the format of s3://bucket/object. In the one-large-multiple-small layout scenario, this parameter is used to specify the background image regardless of whether the large window displays the desktop of a non-specified user (desktop sharer) or the shared desktop of a specified user.

Parameter	Mandatory	Type	Description
max_idle_time	No	Integer	<p>Maximum duration of an idle channel.</p> <p>The value ranges from 5 to 43200. The default value is 30.</p> <p>Unit: second</p> <p>If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated.</p> <p>The co-host refers to a joiner or publisher.</p>
layout_panes	No	Array of MixLayoutPane objects	List of videos that require mixed streams. If mixed video streams are not required, this parameter does not need to be transferred.
user_background_images	No	Array of MixUserBackgroundImage objects	Background image of a user. The priority is higher than that of default_user_background_image.

Table 4-208 MixLayoutPane

Parameter	Mandatory	Type	Description
id	No	Integer	Window ID, which starts from 1.
user_id	No	String	ID of the user who joins the room.
video_type	No	String	<p>Video stream type, which can be camera stream or screen sharing stream.</p> <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream <p>The default value is CAMERASTREAM.</p>

Parameter	Mandatory	Type	Description
x	No	Float	X coordinate (normalized percentage), which is a relative value of the horizontal coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Left-to-right layout. 0.0 is at the leftmost and 1.0 is at the rightmost. The decimal value range is within float. Set this parameter in custom layout scenarios.
y	No	Float	Y coordinate (normalized percentage), which is a relative value of the vertical coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Top-to-bottom layout. 0.0 is at the top and 1.0 is at the bottom. The decimal value range is within float. Set this parameter in custom layout scenarios.
width	No	Float	Pane width (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.
height	No	Float	Pane height (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.
zorder	No	Integer	Stacking sequence. A maximum of 25 floors are supported, with 0 at the bottom. Set this parameter in custom layout scenarios.

Parameter	Mandatory	Type	Description
crop_mode	No	String	Tailoring mode. Set this parameter in custom layout scenarios. Two modes are supported: <ul style="list-style-type: none">• KEEP_RATIO_PADDING: padding at a fixed ratio• KEEP_RATIO_CROP: cropping at a fixed ratio
filling_policy	No	String	Filling policy. This parameter is mandatory only in screen sharing templates (including screen_share_right and screen_share_left). The options are as follows: <ul style="list-style-type: none">• FIXED_USER: This field is filled for fixed users.• SHARED_SCREEN: Fill in the shared screen.

Table 4-209 MixUserBackgroundImage

Parameter	Mandatory	Type	Description
user_id	Yes	String	ID of the user for whom the background image needs to be configured.
image_uri	Yes	String	Background image address. The image is first uploaded to OBS in the format of s3://bucket/object.

Response Parameters

Status code: 200

Table 4-210 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-211 Response body parameters

Parameter	Type	Description
job_id	String	Job ID, which can be used to modify, view, and stop a mixed stream recording job.
stream_name	String	Stream name.
app_id	String	Application ID.
room_id	String	Room ID.
mix_param	MixParam object	Mixed stream parameters.
record_param	RecordParam object	Recording parameters.
create_time	String	Time when a job is created, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Time when the layout of a job is updated, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
state	String	Job status. <ul style="list-style-type: none">• INIT: The job is being initialized.• RUNNING: The job is running.• STOPPED: The job has been stopped.
stop_reason	String	Job termination cause.
description	String	Status description, which is the supplementary description of the state field and can be used for manual query.
start_time	String	Time when a job starts, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
stop_time	String	Time when a job ends, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-212 MixParam

Parameter	Type	Description
room_id	String	Room ID.

Parameter	Type	Description
encode_template	String	<p>Name of the encoding template.</p> <ul style="list-style-type: none">• 1920*1080_30_4620: The output stream is 1080p, the frame rate is 30 FPS, and the bitrate is 4.62 Mbit/s.• 1920*1080_30_3150: The output stream is 1080p, the frame rate is 30 FPS, and the bitrate is 3.15 Mbit/s.• 1920*1080_15_3460: The output stream is 1080p, the frame rate is 15 FPS, and the bitrate is 3.46 Mbit/s.• 1920*1080_15_2080: The output stream is 1080p, the frame rate is 15 FPS, and the bitrate is 2.08 Mbit/s.• 1280*720_30_3420: The output stream is 720p, the frame rate is 30 FPS, and the bitrate is 3.42 Mbit/s.• 1280*720_30_1710: The output stream is 720p, the frame rate is 30 FPS, and the bitrate is 1.71 Mbit/s.• 1280*720_15_2260: The output stream is 720p, the frame rate is 15 FPS, and the bitrate is 2.26 Mbit/s.• 1280*720_15_1130: The output stream is 720p, the frame rate is 15 FPS, and the bitrate is 1.13 Mbit/s.• 640*480_30_1000: The output stream is 480p, the frame rate is 30 FPS, and the bitrate is 1.00 Mbit/s.• 640*480_15_500: The output stream is 480p, the frame rate is 15 FPS, and the bitrate is 500 kbit/s.• 480*360_30_490: The output stream is 360p, the frame rate is 30 FPS, and the bitrate is 490 kbit/s.• 480*360_15_320: The output stream is 360p, the frame rate is 15 FPS, and the bitrate is 320 kbit/s.

Parameter	Type	Description
max_idle_time	Integer	<p>Maximum duration of an idle channel.</p> <p>The value ranges from 5 to 43200. The default value is 30.</p> <p>Unit: second</p> <p>If the channel is not connected for a period longer than the value of this parameter, the recording program automatically exits. If the start request is called again after the exit, a new recording task is generated.</p> <p>The co-host refers to a joiner or publisher.</p>
layout_template	String	<p>Video layout template ID. If mixed video is not required, this parameter does not need to be transferred.</p> <ul style="list-style-type: none">• nine_grids_view: adaptive gallery view template.• screen_share_left: adaptive screen sharing templates with the main screen on the left• screen_share_right: adaptive screen sharing templates with the main screen on the right• custom: customized layout
default_user_background_image	String	<p>Default user background image address. The image is first uploaded to OBS in the format of s3://bucket/object. By default, proportional scaling and cropping is used to ensure full display.</p>
screen_background_image	String	<p>Background image address of the shared screen. The image must be first uploaded to OBS in the format of s3://bucket/object.</p> <p>In the one-large-multiple-small layout scenario, this parameter is used to specify the background image regardless of whether the large window displays the desktop of a non-specified user (desktop sharer) or the shared desktop of a specified user.</p>
background_image	String	<p>Address of the background image of the canvas. To use the background image function, you need to upload the image to OBS. The format of this parameter must be s3://bucket/object, where bucket and object indicate the bucket and path where the image is located.</p> <p>By default, proportional scaling and cropping is used to ensure full display.</p>

Parameter	Type	Description
layout_panes	Array of MixLayoutPane objects	List of videos that require mixed streams. If mixed video is not required, this parameter does not need to be transferred. You do not need to set this parameter for the nine_grids_view template.
user_background_images	Array of MixUserBackgroundImage objects	Background image of a user. The priority is higher than that of default_user_background_image.

Table 4-213 MixLayoutPane

Parameter	Type	Description
id	Integer	Window ID, which starts from 1.
user_id	String	ID of the user who joins the room.
video_type	String	Video stream type, which can be camera stream or screen sharing stream. <ul style="list-style-type: none">• CAMERASTREAM: camera video stream• SCREENSTREAM: screen sharing video stream The default value is CAMERASTREAM.
x	Float	X coordinate (normalized percentage), which is a relative value of the horizontal coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Left-to-right layout. 0.0 is at the leftmost and 1.0 is at the rightmost. The decimal value range is within float. Set this parameter in custom layout scenarios.
y	Float	Y coordinate (normalized percentage), which is a relative value of the vertical coordinate at the upper left corner of an image on the canvas. The value range is [0.0,1.0]. Top-to-bottom layout. 0.0 is at the top and 1.0 is at the bottom. The decimal value range is within float. Set this parameter in custom layout scenarios.
width	Float	Pane width (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.

Parameter	Type	Description
height	Float	Pane height (normalized percentage). The decimal value range is within float. Set this parameter in custom layout scenarios.
zorder	Integer	Stacking sequence. A maximum of 25 floors are supported, with 0 at the bottom. Set this parameter in custom layout scenarios.
crop_mode	String	Tailoring mode. Set this parameter in custom layout scenarios. Two modes are supported: <ul style="list-style-type: none">• KEEP_RATIO_PADDING: padding at a fixed ratio• KEEP_RATIO_CROP: cropping at a fixed ratio
filling_policy	String	Filling policy. This parameter is mandatory only in screen sharing templates (including screen_share_right and screen_share_left). The options are as follows: <ul style="list-style-type: none">• FIXED_USER: This field is filled for fixed users.• SHARED_SCREEN: Fill in the shared screen.

Table 4-214 MixUserBackgroundImage

Parameter	Type	Description
user_id	String	ID of the user for whom the background image needs to be configured.
image_uri	String	Background image address. The image is first uploaded to OBS in the format of s3://bucket/object.

Table 4-215 RecordParam

Parameter	Type	Description
record_rule_id	String	Recording rule ID.

Status code: 400

Table 4-216 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-217 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-218** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-219 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-220** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-221 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
PUT https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/mix-stream-jobs/{job_id}

{
  "mix_param" : {
    "layout_template" : "nine_grids_view"
  }
}
```

Example Responses

Status code: 200

Modified successfully.

```
{
  "jobs" : [ {
    "job_id" : "607824b4fa163e19fe301cc817dda855",
    "job_unique_id" : "707e5bfb1ccf4eeff",
    "stream_name" : "m_607824b4fa163e19fe301cc817dda855_gigu",
    "app_id" : "123456789abcdefghijklmn",
    "room_id" : "gigu",
    "mix_param" : {
      "room_id" : "gigu",
      "encode_template" : "1920x1080_30_4620",
      "max_idle_time" : 0,
      "layout_template" : "nine_grids_view"
    },
    "record_param" : {
      "record_rule_id" : "5f5e172b9016ed5b0961a43"
    },
    "create_time" : "2021-04-16T16:22:44Z",
    "update_time" : "2021-04-16T16:22:44Z",
    "state" : "INIT",
    "start_time" : "2021-04-16T16:22:44Z",
    "stop_time" : "0001-01-01T00:00:00Z"
  } ]
}
```

Status code: 400

Modification failed because the request cannot be understood by the server or parameters are incorrect.

```
{
  "error_code" : "RTC.00001003",
  "error_msg" : "InvalidParameterValue"
}
```

Status code: 404

Modification failed because the application does not exist.

```
{
  "error_code" : "RTC.00001003",
  "error_msg" : "InvalidParameterValue"
}
```

Status code: 500

Modification failed due to server error.

```
{
  "error_code" : "RTC.00002xxx",
  "error_msg" : "InternalError"
}
```

Status Codes

Status Code	Description
200	Modified successfully.
400	Modification failed because the request cannot be understood by the server or parameters are incorrect.
404	Modification failed because the application does not exist.
500	Modification failed due to server error.

Error Codes

See [Error Codes](#).

4.8.4 Stopping a Mixed Stream Recording Job

Function

This API is used to stop a delivered mixed stream recording job.

URI

DELETE /v2/apps/{app_id}/mix-stream-jobs/{job_id}

Table 4-222 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.
job_id	Yes	String	Job ID.

Request Parameters

Table 4-223 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 204

Table 4-224 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Status code: 404

Table 4-225 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-226 Response body parameters

Parameter	Type	Description
error_code	String	Error code.

Parameter	Type	Description
error_msg	String	Description.

Status code: 500**Table 4-227** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-228 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
DELETE https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/mix-stream-jobs/{job_id}
```

Example Responses

Status code: 404

Failed to stop the mixed stream recording job because the job ID does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Failed to stop the mixed stream recording job due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
204	The mixed stream recording job is stopped.

Status Code	Description
404	Failed to stop the mixed stream recording job because the job ID does not exist.
500	Failed to stop the mixed stream recording job due to server error.

Error Codes

See [Error Codes](#).

4.9 Recording rule management

4.9.1 Creating or Updating a Recording Rule

Function

Creates or updates a recording rule.

- If the current application does not have a recording rule in the requested location, a new recording rule will be created.
- If the current application has a recording rule in the requested location, the recording rule will be replaced with the new one.

Constraints

Only one recording rule can be created for each application in a location.

URI

POST /v2/apps/{app_id}/record-rules

Table 4-229 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Request Parameters

Table 4-230 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-231 Request body parameters

Parameter	Mandatory	Type	Description
obs_addr	Yes	RecordObsFileAddr object	Bucket where recording files are stored.
record_formats	Yes	Array of strings	Recording format: The HLS and MP4 formats are supported. <ul style="list-style-type: none">• If HLS is configured, the HLSRecordConfig parameter must be carried.• If MP4 is configured, the MP4RecordConfig parameter must be carried.
hls_config	No	HLSRecordConfig object	HLS recording rule configuration.
mp4_config	No	MP4RecordConfig object	MP4 recording rule configuration.

Table 4-232 RecordObsFileAddr

Parameter	Mandatory	Type	Description
location	Yes	String	ID of the region where the OBS bucket resides.
project_id	Yes	String	Project ID of the region where the OBS bucket resides.
bucket	Yes	String	OBS bucket name.
object	No	String	OBS object path, which complies with the OBS Object definition. If this parameter is left empty, recordings will be saved to the root directory.

Table 4-233 HLSRecordConfig

Parameter	Mandatory	Type	Description
record_cycle	Yes	Integer	Duration of periodic recording. Value range: [60,43200] or 0. If the value is 0, the entire stream is recorded as a file. Unit: second
record_prefix	No	String	Prefix of the M3U8 recording file containing the path and file name. Default value: {app_id}/{record_format}/{stream}_{file_start_time}/{stream}_{file_start_time} The following special variables can be customized: <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_slice_duration	No	Integer	TS slice duration for HLS recording, which is optional. The value ranges from 2 to 60. The default value is 10. Unit: second

Parameter	Mandatory	Type	Description
record_max_duration_to_merge_file	No	Integer	<p>Interval threshold for combining HLS chunks. If the stream interruption duration exceeds this threshold, a new file will be generated.</p> <p>The value ranges from -1 to 300. The default value is 0.</p> <p>Unit: second</p> <p>If the value is set to 0, a new file will be generated once the stream is interrupted.</p> <ul style="list-style-type: none">• If the value is set to -1, the stream is appended to the original file after the stream is resumed (the interval does not exceed 30 days).

Table 4-234 MP4RecordConfig

Parameter	Mandatory	Type	Description
record_cycle	Yes	Integer	<p>Duration of periodic recording.</p> <p>Value range: [60, 10800].</p> <p>Unit: second</p>
record_prefix	No	String	<p>Prefix of the recording file containing the path and file name.</p> <p>Default value: {app_id}/{record_format}/{stream}_{file_start_time}/{stream}_{file_start_time}</p> <p>The following special variables can be customized:</p> <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time

Parameter	Mandatory	Type	Description
record_max_duration_to_merge_file	No	Integer	<p>Interval threshold for combining MP4 chunks. If the stream interruption duration exceeds this threshold, a new file will be generated.</p> <p>The value ranges from 0 to 300. The default value is 0.</p> <p>Unit: second</p> <p>If the value is set to 0, a new file will be generated once the stream is interrupted.</p>

Response Parameters

Status code: 201

Table 4-235 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-236 Response body parameters

Parameter	Type	Description
rule_id	String	Rule ID, which is returned by the server. This parameter does not need to be carried during rule creation or modification.
app_id	String	Application ID.
obs_addr	RecordObsFileAddr object	Bucket where recording files are stored.
record_formats	Array of strings	Recording format: HLS or MP4.
hls_config	HLSRecordConfig object	HLS recording rule configuration.
mp4_config	MP4RecordConfig object	MP4 recording rule configuration.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Parameter	Type	Description
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-237 RecordObsFileAddr

Parameter	Type	Description
location	String	ID of the region where the OBS bucket resides.
project_id	String	Project ID of the region where the OBS bucket resides.
bucket	String	OBS bucket name.
object	String	OBS object path, which complies with the OBS Object definition. If this parameter is left empty, recordings will be saved to the root directory.

Table 4-238 HLSRecordConfig

Parameter	Type	Description
record_cycle	Integer	Duration of periodic recording. Value range: [60,43200] or 0. If the value is 0, the entire stream is recorded as a file. Unit: second
record_prefix	String	Prefix of the M3U8 recording file containing the path and file name. Default value: {app_id}/{record_format}/ {stream}_{file_start_time}/ {stream}_{file_start_time} The following special variables can be customized: <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_slice_duration	Integer	TS slice duration for HLS recording, which is optional. The value ranges from 2 to 60. The default value is 10. Unit: second

Parameter	Type	Description
record_max_duration_to_merge_file	Integer	<p>Interval threshold for combining HLS chunks. If the stream interruption duration exceeds this threshold, a new file will be generated.</p> <p>The value ranges from -1 to 300. The default value is 0.</p> <p>Unit: second</p> <p>If the value is set to 0, a new file will be generated once the stream is interrupted.</p> <ul style="list-style-type: none">• If the value is set to -1, the stream is appended to the original file after the stream is resumed (the interval does not exceed 30 days).

Table 4-239 MP4RecordConfig

Parameter	Type	Description
record_cycle	Integer	<p>Duration of periodic recording.</p> <p>Value range: [60, 10800].</p> <p>Unit: second</p>
record_prefix	String	<p>Prefix of the recording file containing the path and file name.</p> <p>Default value: {app_id}/{record_format}/ {stream}_{file_start_time}/ {stream}_{file_start_time}</p> <p>The following special variables can be customized:</p> <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_max_duration_to_merge_file	Integer	<p>Interval threshold for combining MP4 chunks. If the stream interruption duration exceeds this threshold, a new file will be generated.</p> <p>The value ranges from 0 to 300. The default value is 0.</p> <p>Unit: second</p> <p>If the value is set to 0, a new file will be generated once the stream is interrupted.</p>

Status code: 400

Table 4-240 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-241 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404**Table 4-242** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-243 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-244** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-245 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
POST https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-rules
```

```
{  
    "obs_addr" : {  
        "bucket" : "obsName",  
        "location" : "cn-north-4",  
        "object" : "Record/",  
        "project_id" : "ad7456ce8ef89adf567"  
    },  
    "record_formats" : [ "MP4" ],  
    "mp4_config" : {  
        "record_cycle" : 60,  
        "record_max_duration_to_merge_file" : 0  
    }  
}
```

Example Responses

Status code: 201

The configuration is successful.

```
{  
    "app_id" : "123456abc",  
    "rule_id" : "456789abc",  
    "create_time" : "2006-01-02T15:04:05.075Z",  
    "obs_addr" : {  
        "bucket" : "obsName",  
        "location" : "cn-north-4",  
        "object" : "Record/",  
        "project_id" : "ad7456ce8ef89adf567"  
    },  
    "record_formats" : [ "MP4" ],  
    "mp4_config" : {  
        "record_cycle" : 60,  
        "record_max_duration_to_merge_file" : 0  
    },  
    "update_time" : "2006-01-02T15:04:05.075Z"  
}
```

Status code: 400

Configuration failed because the request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

Configuration failed because the application does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Configuration failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
}
```

```
        "error_msg" : "InternalError"
    }
```

Status Codes

Status Code	Description
201	The configuration is successful.
400	Configuration failed because the request cannot be understood by the server or parameters are incorrect.
404	Configuration failed because the application does not exist.
500	Configuration failed due to server error.

Error Codes

See [Error Codes](#).

4.9.2 Listing Recording Rules

Function

This API is used to list recording rules.

URI

GET /v2/apps/{app_id}/record-rules

Table 4-246 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.

Table 4-247 Query Parameters

Parameter	Mandatory	Type	Description
offset	No	Integer	Start number of the query result, indicating the page number.
limit	No	Integer	Number of records on each page.

Request Parameters

Table 4-248 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-249 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-250 Response body parameters

Parameter	Type	Description
rules	Array of RecordRule objects	Recording rule list.

Table 4-251 RecordRule

Parameter	Type	Description
rule_id	String	Rule ID, which is returned by the server. This parameter does not need to be carried during rule creation or modification.
app_id	String	Application ID.
obs_addr	RecordObsFileAddr object	Bucket where recording files are stored.
record_formats	Array of strings	Recording format: HLS or MP4.
hls_config	HLSRecordConfig object	HLS recording rule configuration.
mp4_config	MP4RecordConfig object	MP4 recording rule configuration.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-252 RecordObsFileAddr

Parameter	Type	Description
location	String	ID of the region where the OBS bucket resides.
project_id	String	Project ID of the region where the OBS bucket resides.
bucket	String	OBS bucket name.
object	String	OBS object path, which complies with the OBS Object definition. If this parameter is left empty, recordings will be saved to the root directory.

Table 4-253 HLSRecordConfig

Parameter	Type	Description
record_cycle	Integer	Duration of periodic recording. Value range: [60,43200] or 0. If the value is 0, the entire stream is recorded as a file. Unit: second
record_prefix	String	Prefix of the M3U8 recording file containing the path and file name. Default value: {app_id}/{record_format}/ {stream}_{file_start_time}/ {stream}_{file_start_time} The following special variables can be customized: <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_slice_duration	Integer	TS slice duration for HLS recording, which is optional. The value ranges from 2 to 60. The default value is 10. Unit: second
record_max_duration_to_merge_file	Integer	Interval threshold for combining HLS chunks. If the stream interruption duration exceeds this threshold, a new file will be generated. The value ranges from -1 to 300. The default value is 0. Unit: second If the value is set to 0 , a new file will be generated once the stream is interrupted. <ul style="list-style-type: none">• If the value is set to -1, the stream is appended to the original file after the stream is resumed (the interval does not exceed 30 days).

Table 4-254 MP4RecordConfig

Parameter	Type	Description
record_cycle	Integer	Duration of periodic recording. Value range: [60, 10800]. Unit: second

Parameter	Type	Description
record_prefix	String	<p>Prefix of the recording file containing the path and file name.</p> <p>Default value: {app_id}/{record_format}/ {stream}_{file_start_time}/ {stream}_{file_start_time}</p> <p>The following special variables can be customized:</p> <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_max_duration_to_merge_file	Integer	<p>Interval threshold for combining MP4 chunks. If the stream interruption duration exceeds this threshold, a new file will be generated.</p> <p>The value ranges from 0 to 300. The default value is 0.</p> <p>Unit: second</p> <p>If the value is set to 0, a new file will be generated once the stream is interrupted.</p>

Status code: 400**Table 4-255** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-256 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404

Table 4-257 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-258 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-259** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-260 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

GET https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-rules

Example Responses

Status code: 200

The configuration is successful.

```
{  
    "rules" : [ {  
        "app_id" : "123456789abcdefghijklmn",  
        "rule_id" : "456789abc",  
        "create_time" : "2006-01-02T15:04:05.075Z",  
        "obs_addr" : {  
            "bucket" : "obsName",  
            "location" : "cn-north-4",  
            "object" : "Record/",  
            "project_id" : "ad7456ce8ef89adf567"  
        },  
        "record_formats" : [ "MP4" ],  
        "rule_type" : "Record",  
        "status" : "Normal",  
        "update_time" : "2006-01-02T15:04:05.075Z"  
    }]  
}
```

```
"mp4_config" : {  
    "record_cycle" : 60,  
    "record_max_duration_to_merge_file" : 0  
},  
"update_time" : "2006-01-02T15:04:05.075Z"  
}  
}
```

Status code: 400

Configuration failed because the request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

Configuration failed because the application does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Configuration failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
200	The configuration is successful.
400	Configuration failed because the request cannot be understood by the server or parameters are incorrect.
404	Configuration failed because the application does not exist.
500	Configuration failed due to server error.

Error Codes

See [Error Codes](#).

4.9.3 Querying a Recording Rule

Function

This API is used to query a specified recording rule.

URI

GET /v2/apps/{app_id}/record-rules/{rule_id}

Table 4-261 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.
rule_id	Yes	String	Rule ID.

Request Parameters

Table 4-262 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 4-263 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-264 Response body parameters

Parameter	Type	Description
rule_id	String	Rule ID, which is returned by the server. This parameter does not need to be carried during rule creation or modification.
app_id	String	Application ID.
obs_addr	RecordObsFileAddr object	Bucket where recording files are stored.
record_formats	Array of strings	Recording format: HLS or MP4.
hls_config	HLSRecordConfig object	HLS recording rule configuration.
mp4_config	MP4RecordConfig object	MP4 recording rule configuration.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-265 RecordObsFileAddr

Parameter	Type	Description
location	String	ID of the region where the OBS bucket resides.
project_id	String	Project ID of the region where the OBS bucket resides.
bucket	String	OBS bucket name.
object	String	OBS object path, which complies with the OBS Object definition. If this parameter is left empty, recordings will be saved to the root directory.

Table 4-266 HLSRecordConfig

Parameter	Type	Description
record_cycle	Integer	Duration of periodic recording. Value range: [60,43200] or 0. If the value is 0, the entire stream is recorded as a file. Unit: second
record_prefix	String	Prefix of the M3U8 recording file containing the path and file name. Default value: {app_id}/{record_format}/ {stream}_{file_start_time}/ {stream}_{file_start_time} The following special variables can be customized: <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_slice_duration	Integer	TS slice duration for HLS recording, which is optional. The value ranges from 2 to 60. The default value is 10. Unit: second
record_max_duration_to_merge_file	Integer	Interval threshold for combining HLS chunks. If the stream interruption duration exceeds this threshold, a new file will be generated. The value ranges from -1 to 300. The default value is 0. Unit: second If the value is set to 0 , a new file will be generated once the stream is interrupted. <ul style="list-style-type: none">• If the value is set to -1, the stream is appended to the original file after the stream is resumed (the interval does not exceed 30 days).

Table 4-267 MP4RecordConfig

Parameter	Type	Description
record_cycle	Integer	Duration of periodic recording. Value range: [60, 10800]. Unit: second

Parameter	Type	Description
record_prefix	String	<p>Prefix of the recording file containing the path and file name.</p> <p>Default value: {app_id}/{record_format}/ {stream}_{file_start_time}/ {stream}_{file_start_time}</p> <p>The following special variables can be customized:</p> <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_max_duration_to_merge_file	Integer	<p>Interval threshold for combining MP4 chunks. If the stream interruption duration exceeds this threshold, a new file will be generated.</p> <p>The value ranges from 0 to 300. The default value is 0.</p> <p>Unit: second</p> <p>If the value is set to 0, a new file will be generated once the stream is interrupted.</p>

Status code: 400**Table 4-268** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-269 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404

Table 4-270 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-271 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-272** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-273 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

GET https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-rules/{rule_id}

Example Responses

Status code: 200

The recording rule configuration is successfully obtained.

```
{  
    "app_id" : "123456abc",  
    "rule_id" : "456789abc",  
    "create_time" : "2006-01-02T15:04:05.075Z",  
    "obs_addr" : {  
        "bucket" : "obsName",  
        "location" : "cn-north-4",  
        "object" : "Record/",  
        "project_id" : "ad7456ce8ef89adf567"  
    },  
    "record_formats" : [ "MP4" ],  
    "mp4_config" : {
```

```
        "record_cycle" : 60,  
        "record_max_duration_to_merge_file" : 0  
    },  
    "update_time" : "2006-01-02T15:04:05.075Z"  
}
```

Status code: 400

Failed to obtain the configuration because the request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

Failed to obtain the configuration because the configuration does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Failed to obtain the configuration due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
200	The recording rule configuration is successfully obtained.
400	Failed to obtain the configuration because the request cannot be understood by the server or parameters are incorrect.
404	Failed to obtain the configuration because the configuration does not exist.
500	Failed to obtain the configuration due to server error.

Error Codes

See [Error Codes](#).

4.9.4 Updating a Recording Rule

Function

This API is used to update a recording rule.

Constraints

If a rule is modified, the modified rule does not take effect for the stream that is being recorded.

The modification is valid for new streams and takes effect 5 minutes later. That is, the new rule can be used for recording tasks 5 minutes after being modified.

URI

PUT /v2/apps/{app_id}/record-rules/{rule_id}

Table 4-274 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.
rule_id	Yes	String	Rule ID.

Request Parameters

Table 4-275 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Table 4-276 Request body parameters

Parameter	Mandatory	Type	Description
obs_addr	Yes	RecordObsFileAddr object	Bucket where recording files are stored.
record_formats	Yes	Array of strings	Recording format: The HLS and MP4 formats are supported. <ul style="list-style-type: none">• If HLS is configured, the HLSRecordConfig parameter must be carried.• If MP4 is configured, the MP4RecordConfig parameter must be carried.
hls_config	No	HLSRecordConfig object	HLS recording rule configuration.
mp4_config	No	MP4RecordConfig object	MP4 recording rule configuration.

Table 4-277 RecordObsFileAddr

Parameter	Mandatory	Type	Description
location	Yes	String	ID of the region where the OBS bucket resides.
project_id	Yes	String	Project ID of the region where the OBS bucket resides.
bucket	Yes	String	OBS bucket name.
object	No	String	OBS object path, which complies with the OBS Object definition. If this parameter is left empty, recordings will be saved to the root directory.

Table 4-278 HLSRecordConfig

Parameter	Mandatory	Type	Description
record_cycle	Yes	Integer	Duration of periodic recording. Value range: [60,43200] or 0. If the value is 0, the entire stream is recorded as a file. Unit: second

Parameter	Mandatory	Type	Description
record_prefix	No	String	<p>Prefix of the M3U8 recording file containing the path and file name.</p> <p>Default value: {app_id}/{record_format}/{stream}_{file_start_time}/{stream}_{file_start_time}</p> <p>The following special variables can be customized:</p> <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_slice_duration	No	Integer	<p>TS slice duration for HLS recording, which is optional.</p> <p>The value ranges from 2 to 60. The default value is 10.</p> <p>Unit: second</p>
record_max_duration_to_merge_file	No	Integer	<p>Interval threshold for combining HLS chunks. If the stream interruption duration exceeds this threshold, a new file will be generated.</p> <p>The value ranges from -1 to 300. The default value is 0.</p> <p>Unit: second</p> <p>If the value is set to 0, a new file will be generated once the stream is interrupted.</p> <ul style="list-style-type: none">• If the value is set to -1, the stream is appended to the original file after the stream is resumed (the interval does not exceed 30 days).

Table 4-279 MP4RecordConfig

Parameter	Mandatory	Type	Description
record_cycle	Yes	Integer	Duration of periodic recording. Value range: [60, 10800]. Unit: second
record_prefix	No	String	Prefix of the recording file containing the path and file name. Default value: {app_id}/{record_format}/{stream}_{file_start_time}/{stream}_{file_start_time} The following special variables can be customized: <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_max_duration_to_merge_file	No	Integer	Interval threshold for combining MP4 chunks. If the stream interruption duration exceeds this threshold, a new file will be generated. The value ranges from 0 to 300. The default value is 0. Unit: second If the value is set to 0, a new file will be generated once the stream is interrupted.

Response Parameters

Status code: 200

Table 4-280 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-281 Response body parameters

Parameter	Type	Description
rule_id	String	Rule ID, which is returned by the server. This parameter does not need to be carried during rule creation or modification.
app_id	String	Application ID.
obs_addr	RecordObsFileAddr object	Bucket where recording files are stored.
record_formats	Array of strings	Recording format: HLS or MP4.
hls_config	HLSRecordConfig object	HLS recording rule configuration.
mp4_config	MP4RecordConfig object	MP4 recording rule configuration.
create_time	String	Creation time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.
update_time	String	Update time, for example, 2006-01-02T15:04:05.075Z. The time zone is UTC.

Table 4-282 RecordObsFileAddr

Parameter	Type	Description
location	String	ID of the region where the OBS bucket resides.
project_id	String	Project ID of the region where the OBS bucket resides.
bucket	String	OBS bucket name.
object	String	OBS object path, which complies with the OBS Object definition. If this parameter is left empty, recordings will be saved to the root directory.

Table 4-283 HLSRecordConfig

Parameter	Type	Description
record_cycle	Integer	Duration of periodic recording. Value range: [60,43200] or 0. If the value is 0, the entire stream is recorded as a file. Unit: second
record_prefix	String	Prefix of the M3U8 recording file containing the path and file name. Default value: {app_id}/{record_format}/ {stream}_{file_start_time}/ {stream}_{file_start_time} The following special variables can be customized: <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_slice_duration	Integer	TS slice duration for HLS recording, which is optional. The value ranges from 2 to 60. The default value is 10. Unit: second
record_max_duration_to_merge_file	Integer	Interval threshold for combining HLS chunks. If the stream interruption duration exceeds this threshold, a new file will be generated. The value ranges from -1 to 300. The default value is 0. Unit: second If the value is set to 0 , a new file will be generated once the stream is interrupted. <ul style="list-style-type: none">• If the value is set to -1, the stream is appended to the original file after the stream is resumed (the interval does not exceed 30 days).

Table 4-284 MP4RecordConfig

Parameter	Type	Description
record_cycle	Integer	Duration of periodic recording. Value range: [60, 10800]. Unit: second

Parameter	Type	Description
record_prefix	String	<p>Prefix of the recording file containing the path and file name.</p> <p>Default value: {app_id}/{record_format}/ {stream}_{file_start_time}/ {stream}_{file_start_time}</p> <p>The following special variables can be customized:</p> <ul style="list-style-type: none">• <i>app_id</i>: application ID• <i>record_format</i>: recording format• <i>stream</i>: stream name• <i>file_start_time</i>: file generation time
record_max_duration_to_merge_file	Integer	<p>Interval threshold for combining MP4 chunks. If the stream interruption duration exceeds this threshold, a new file will be generated.</p> <p>The value ranges from 0 to 300. The default value is 0.</p> <p>Unit: second</p> <p>If the value is set to 0, a new file will be generated once the stream is interrupted.</p>

Status code: 400**Table 4-285** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-286 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404

Table 4-287 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-288 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500

Table 4-289 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-290 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

```
PUT https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-rules/{rule_id}

{
  "obs_addr": {
    "bucket": "obsName",
    "location": "cn-north-4",
    "object": "Record/",
    "project_id": "ad7456ce8ef89adf567"
  },
  "record_formats": [ "MP4" ],
  "mp4_config": {
    "record_cycle": 60,
    "record_max_duration_to_merge_file": 0
  }
}
```

Example Responses

Status code: 200

The configuration is successful.

```
{  
    "app_id" : "123456abc",  
    "rule_id" : "456789abc",  
    "create_time" : "2006-01-02T15:04:05.075Z",  
    "obs_addr" : {  
        "bucket" : "obsName",  
        "location" : "cn-north-4",  
        "object" : "Record/",  
        "project_id" : "ad7456ce8ef89adf567"  
    },  
    "record_formats" : [ "MP4" ],  
    "mp4_config" : {  
        "record_cycle" : 60,  
        "record_max_duration_to_merge_file" : 0  
    },  
    "update_time" : "2006-01-02T15:04:05.075Z"  
}
```

Status code: 400

Configuration failed because the request cannot be understood by the server or parameters are incorrect.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 404

Configuration failed because the application does not exist.

```
{  
    "error_code" : "RTC.00001003",  
    "error_msg" : "InvalidParameterValue"  
}
```

Status code: 500

Configuration failed due to server error.

```
{  
    "error_code" : "RTC.00002xxx",  
    "error_msg" : "InternalError"  
}
```

Status Codes

Status Code	Description
200	The configuration is successful.
400	Configuration failed because the request cannot be understood by the server or parameters are incorrect.
404	Configuration failed because the application does not exist.
500	Configuration failed due to server error.

Error Codes

See [Error Codes](#).

4.9.5 Deleting a Recording Rule

Function

This API is used to delete a recording rule. Recording rules that are being used cannot be deleted.

URI

DELETE /v2/apps/{app_id}/record-rules/{rule_id}

Table 4-291 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID.
rule_id	Yes	String	Rule ID.

Request Parameters

Table 4-292 Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Content type.
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. It can be obtained by calling the IAM API that is used for obtaining a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.

Parameter	Mandatory	Type	Description
X-Project-Id	No	String	Project ID. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 204

Table 4-293 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Status code: 400

Table 4-294 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-295 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 404

Table 4-296 Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-297 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Status code: 500**Table 4-298** Response header parameters

Parameter	Type	Description
X-request-Id	String	Request ID for task tracing.

Table 4-299 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Description.

Example Requests

DELETE https://rtc-api.myhuaweicloud.com/v2/apps/{app_id}/record-rules/{rule_id}

Example Responses

Status code: 400

Failed to delete the recording rule because the request cannot be understood by the server or parameters are incorrect.

{
 "error_code" : "RTC.00001003",
 "error_msg" : "InvalidParameterValue"
}**Status code: 404**

Failed to delete the recording rule because the configuration does not exist.

{
 "error_code" : "RTC.00001003",
 "error_msg" : "InvalidParameterValue"
}**Status code: 500**

Failed to delete the recording rule due to server error.

{
 "error_code" : "RTC.00002xxx",
}

```
        "error_msg" : "InternalError"  
    }
```

Status Codes

Status Code	Description
204	The recording rule is deleted.
400	Failed to delete the recording rule because the request cannot be understood by the server or parameters are incorrect.
404	Failed to delete the recording rule because the configuration does not exist.
500	Failed to delete the recording rule due to server error.

Error Codes

See [Error Codes](#).

5 Statistical Analysis

[Listing Rooms](#)

[Listing Users](#)

[Querying Real-Time Scale Data](#)

[Querying Real-Time Scale Data Distribution](#)

[Querying Real-Time Quality Data](#)

[Querying Real-Time Network Data](#)

[Querying Usage](#)

[Querying Historical Scale Data](#)

[Querying Historical Quality Data](#)

[Querying User Call Indicators](#)

[Queries abnormal user experience events.](#)

[Queries the distribution of users with abnormal events.](#)

5.1 Listing Rooms

Function

Lists rooms created in a specified period.

The maximum query time span is 90 days.

URI

GET /v1/{project_id}/rtc/rooms

Table 5-1 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-2 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application identifier.
room_id	No	String	Room ID.
state	No	String	Room status. The options are as follows: <ul style="list-style-type: none">• RUNNING: The room is in use.• CLOSED: The room is closed.
start_time	No	String	Time when the query starts. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z. If this parameter is not specified, data of the last hour is read by default.
end_time	No	String	Time when the query ends. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T07:00:00Z. If this parameter is not specified, the current time is used by default.
limit	No	Integer	Total number of records in the query result.
offset	No	Integer	Query offset.

Request Parameters

Table 5-3 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-4 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-5 Response body parameters

Parameter	Type	Description
total	Integer	Total number of records.
limit	Integer	Number of records in the query result.
offset	Integer	Query offset.

Parameter	Type	Description
room_info_list	Array of RtcServerRoomInfo objects	Room list.

Table 5-6 RtcServerRoomInfo

Parameter	Type	Description
domain	String	Domain name.
app	String	Application identifier.
room_id	String	Room ID.
state	String	Room status. The options are as follows: <ul style="list-style-type: none">• RUNNING: The room is in use.• CLOSED: The room is closed.
duration	Integer	Room duration.
start_time	String	Start time of the room, that is, the time when the first user joins the room. The value is UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T07:00:00Z.
end_time	String	End time of the room, that is, the time when the last user leaves the room. The value is UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T07:00:00Z. If the room is not closed, a hyphen (-) is returned.

Status code: 400**Table 5-7** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

GET /v1/{project_id}/rtc/rooms?app=5fa682b34a974f7ad24d223b

Example Responses

Status code: 200

This status code is returned if the request succeeds.

```
{  
    "total" : 1,  
    "room_info_list" : [ {  
        "domain" : "603f71bdःfa163e500aff1106c8xxxxxx.sparkrtc.myhuaweicloud.com",  
        "app" : "603f71bdःfa163e500aff1106c8xxxxxx",  
        "room_id" : "ac146d0f2779916191716070xxxxxx",  
        "state" : "RUNNING",  
        "start_time" : "2021-04-23T09:55:30Z",  
        "end_time" : "-"  
    } ],  
    "offset" : 0,  
    "limit" : 2  
}
```

Status code: 400

This status code is returned if the request fails.

```
{  
    "error_code" : "DATA.100011001",  
    "error_msg" : "Required String parameter 'app' is not present"  
}
```

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.2 Listing Users

Function

Lists users who joined a room within a specified period.

The maximum query time span is 90 days.

URI

GET /v1/{project_id}/rtc/users

Table 5-8 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-9 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application ID.
room_id	No	String	Room ID.
uid	No	String	User ID.
nickname	No	String	Nickname of the user.
region	No	Array	Province where the user is located. The value can be the full name or abbreviation of a province, for example, Guangdong or GD.
isp	No	Array	ISP to which the user belongs.
state	No	Array	User status. The options are as follows: <ul style="list-style-type: none">• FAIL: The user fails to join a room.• ONLINE: The user is in the room.• OFFLINE: The user has left the room.
start_time	No	String	Time when the query starts. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z. If this parameter is not specified, data of the last hour is read by default.

Parameter	Mandatory	Type	Description
end_time	No	String	Time when the query ends. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z. If this parameter is not specified, the current time is used by default.
limit	No	Integer	Number of records in the query result.
offset	No	Integer	Query offset.
type	No	String	Query mode. The options are as follows: <ul style="list-style-type: none">• detail: session level• summary: subscriber level (default)

Request Parameters

Table 5-10 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.

Parameter	Mandatory	Type	Description
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-11 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-12 Response body parameters

Parameter	Type	Description
total	Integer	Total number of records.
limit	Integer	Number of records in the query result.
offset	Integer	Query offset.
users	Array of RtcUser objects	User list.

Table 5-13 RtcUser

Parameter	Type	Description
domain	String	Domain name.
app	String	Application identifier.
room_id	String	Room ID.
uid	String	User ID.
session	String	Session ID.

Parameter	Type	Description
state	String	User Status <ul style="list-style-type: none">• FAIL: The user fails to join a room.• ONLINE: The user is in the room.• OFFLINE: The user has left the room.
nick_name	String	Nickname of the user.
ip	String	User IP address.
region	String	Province where the user IP address is located.
isp	String	ISP to which the user IP address belongs.
device_model	String	User device model.
platform	String	User device platform.
sdk	String	User SDK version.
join_time	String	Time when the user joins a room. The format is YYYY-MM-DDThh:mm:ssZ.
leave_time	String	Time when the user leaves a room. The format is YYYY-MM-DDThh:mm:ssZ. If the user does not leave a room, a hyphen (-) is returned.

Status code: 400

Table 5-14 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/{project_id}/rtc/users?app=5fa682b34a974f7ad24d223b
```

Example Responses

Status code: 200

This status code is returned if the request succeeds.

```
{
  "total": "1",
  "limit": "10",
  "offset": 0,
  "users": [
    {
      "domain": "603f71bd़fa163e500aff1106c8bxxxx.sparkrtc.myhuaweicloud.com",
```

```
"app" : "603f71bdःfa163e500aff1106c8xxxxx",
"room_id" : "ac146d0f27799161917160702xxxxx",
"uid" : "xxxxx",
"session" : "0afa1af5a41a11eb802b7d4bc77xxxxx",
"state" : "ONLINE",
"nick_name" : "xxxxx",
"ip" : "113.140.81.xx",
"region" : "Shaanxi",
"isp" : "CTCC",
"device_model" : "iphone",
"platform" : "web-Mac10_15_4",
"sdk" : "1.4.0",
"join_time" : "2021-04-23T09:55:32Z",
"leave_time" : "-"
} ]
}
```

Status code: 400

This status code is returned if the request fails.

```
{
  "error_code" : "DATA.100011001",
  "error_msg" : "Required String parameter 'app' is not present"
}
```

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.3 Querying Real-Time Scale Data

Function

Queries the statistics on scale-related indicators of every minute in a specified period.

The maximum query time span is one day.

URI

GET /v1/{project_id}/rtc/realtimedata

Table 5-15 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-16 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application identifier.
room_id	No	String	Room ID.
metric	Yes	String	Data type: <ul style="list-style-type: none">● OnlineUsers: number of online users● RoomCount: number of rooms in use
start_time	No	String	Time when the query starts. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z. If this parameter is not specified, data of the last hour is read by default.
end_time	No	String	Time when the query ends. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T07:00:00Z. If this parameter is not specified, the current time is used by default.

Request Parameters

Table 5-17 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-18 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-19 Response body parameters

Parameter	Type	Description
scale	Array of TimeValueData objects	Timestamp and indicator list at the corresponding time.

Table 5-20 TimeValueData

Parameter	Type	Description
time	String	Sampling time. The format must comply with the ISO 8601 standard (UTC time). The format is YYYY-MM-DDThh:mm:ssZ.
value	Long	Traffic indicators.

Status code: 400**Table 5-21** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

GET /v1/{project_id}/rtc/realtime/scale?app=5fa682b34a974f7ad24d223b

Example Responses

Status code: 200

This status code is returned if the request succeeds.

{
 "scale" : [{
 "time" : "2020-06-04T07:00:00Z",
 "value" : 0
 }
]**Status code: 400**

This status code is returned if the request fails.

{
 "error_code" : "DATA.100011001",
 "error_msg" : "Required String parameter 'app' is not present"
}

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.4 Querying Real-Time Scale Data Distribution

Function

This API is used to query the statistics on scale-related indicators in a specified dimension. Scale-related data can be ranked based on the number of online users in a specified dimension.

URI

GET /v1/{project_id}/rtc/realtme/scale/dimension

Table 5-22 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-23 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application identifier.
room_id	No	String	Room ID.
metric	Yes	String	Data type: OnlineUsers: number of online users
dimension	Yes	String	Dimension type. <ul style="list-style-type: none">● region: province● access_net: network type● platform: system platform● sdk: SDK version
time	Yes	String	Query time. UTC time in the format of YYYY-MM-DDThh:mm:ssZ.

Request Parameters

Table 5-24 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-25 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-26 Response body parameters

Parameter	Type	Description
dimensions	Array of RealtimeScaleDimensionValue objects	Dimension distribution information.

Table 5-27 RealtimeScaleDimensionValue

Parameter	Type	Description
dimension	String	Dimension value. For example, if the query dimension is region, the value of this parameter may be GD.
online_users	Long	Number of online users.

Status code: 400**Table 5-28** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

GET /v1/{project_id}/rtc/realtime/scale/dimension?app=5fa682b34a974f7ad24d223b

Example Responses

Status code: 200

This status code is returned if the request succeeds.

{
 "dimensions" : [{
 "dimension" : "GD",
 "online_users" : 10
 }
]**Status code: 400**

This status code is returned if the request fails.

{
 "error_code" : "DATA.100011001",
 "error_msg" : "Required String parameter 'app' is not present"
}

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.5 Querying Real-Time Quality Data

Function

Queries the statistics on real-time quality-related indicators of every minute in a specified period.

The maximum query time span is one day.

URI

GET /v1/{project_id}/rtc/realtme/quality

Table 5-29 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-30 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application identifier.
room_id	No	String	Room ID.
metric	Yes	String	Data type. <ul style="list-style-type: none">• JoinSuccessRate: success rate of joining a room• JoinSuccess5SecsRate: success rate of joining a room in 5 seconds• VideoFreezeRate: video freeze rate• AudioFreezeRate: audio freeze rate
sdk_type	Yes	String	SDK type. <ul style="list-style-type: none">• native: non-web SDK• webrtc: web-based SDK

Parameter	Mandatory	Type	Description
start_time	No	String	Time when the query starts. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z. If this parameter is not specified, data of the last hour is read by default.
end_time	No	String	Time when the query ends. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z. If this parameter is not specified, the current time is used by default.

Request Parameters

Table 5-31 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-32 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-33 Response body parameters

Parameter	Type	Description
quality	Array of TimeDoubleValueData objects	Timestamp and indicator list at the corresponding time.

Table 5-34 TimeDoubleValueData

Parameter	Type	Description
time	String	Sampling time. The format must comply with the ISO 8601 standard (UTC time). The format is YYYY-MM-DDThh:mm:ssZ.
value	Double	Timestamp and indicator list at the corresponding time.

Status code: 400

Table 5-35 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/{project_id}/rtc/realtime/quality?app=5fa682b34a974f7ad24d223b
```

Example Responses

Status code: 200

This status code is returned if the request succeeds.

```
{  
  "quality" : [ {  
    "time" : "2020-06-04T07:00:00Z",  
    "value" : 0  
  } ]  
}
```

Status code: 400

This status code is returned if the request fails.

```
{  
  "error_code" : "DATA.100011001",  
  "error_msg" : "Required String parameter 'app' is not present"  
}
```

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.6 Querying Real-Time Network Data

Function

Obtains the statistics on real-time network indicators of every minute in a specified period.

The maximum query time span is one day.

URI

GET /v1/{project_id}/rtc/realtme/network

Table 5-36 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-37 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application identifier.
room_id	No	String	Room ID.
metric	Yes	String	Data type. <ul style="list-style-type: none">• VideoUpstreamExcellentTransRate: uplink high-quality transmission rate of videos on the client• AudioUpstreamExcellentTransRate: uplink high-quality transmission rate of audios on the client• VideoExcellentTransRate: end-to-end high-quality video transmission rate• AudioExcellentTransRate: end-to-end high-quality audio transmission rate
sdk_type	Yes	String	SDK type. <ul style="list-style-type: none">• native: non-web SDK• webrtc: web-based SDK
start_time	No	String	Time when the query starts. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z. If this parameter is not specified, data of the last hour is read by default.
end_time	No	String	Time when the query ends. UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z. If this parameter is not specified, the current time is used by default.

Request Parameters

Table 5-38 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-39 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-40 Response body parameters

Parameter	Type	Description
network	Array of TimeDoubleValueData objects	Timestamp and indicator list at the corresponding time.

Table 5-41 TimeDoubleValueData

Parameter	Type	Description
time	String	Sampling time. The format must comply with the ISO 8601 standard (UTC time). The format is YYYY-MM-DDThh:mm:ssZ.
value	Double	Timestamp and indicator list at the corresponding time.

Status code: 400**Table 5-42** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/{project_id}/rtc/realtime/network?app=5fa682b34a974f7ad24d223b
```

Example Responses

Status code: 200

This status code is returned if the request succeeds.

```
{  
  "network" : [ {  
    "time" : "2020-06-04T07:00:00Z",  
    "value" : 0  
  } ]  
}
```

Status code: 400

This status code is returned if the request fails.

```
{  
  "error_code" : "DATA.100011001",  
  "error_msg" : "Required String parameter 'app' is not present"  
}
```

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.7 Querying Usage

Function

This API is used to query usage data of various services in a past period.

URI

GET /v1/{project_id}/rtc/history/usage

Table 5-43 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-44 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application identifier.
metric	Yes	String	Data type. <ul style="list-style-type: none">• CommunicationDuration: audio and video call duration• TranscodeDuration: transcoding duration• RecordDuration: recording duration
start_date	Yes	String	Time when the query starts. UTC time in the format of YYYY-MM-DD, for example, 2020-04-23. If this parameter is not specified, data of the last day is read by default.
end_date	Yes	String	Queries end time. UTC time in the format of YYYY-MM-DD, for example, 2020-04-23.

Request Parameters

Table 5-45 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-46 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-47 Response body parameters

Parameter	Type	Description
usage	Array of RtcHistoryUsage objects	Timestamp and indicator value list at the corresponding time

Table 5-48 RtcHistoryUsage

Parameter	Type	Description
date	String	Sampling time. The format must comply with the ISO 8601 standard (UTC time). The format is YYYY-MM-DD.
video_sd	Long	SD video duration, in seconds.
video_hd	Long	HD video duration, in seconds.
video_hdp	Long	UHD video duration, in seconds.
audio	Long	Audio duration, in seconds.
total_duration	Long	Total audio and video duration, in seconds.

Status code: 400**Table 5-49** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/{project_id}/rtc/history/usage?  
app=5fa682b34a974f7ad24d223b&metric=TranscodeDuration&start_date=2020-04-23&end_date=2020-04-26
```

Example Responses

Status code: 200

This status code is returned if the request succeeds.

```
{  
  "usage": [ {  
    "date": "2020-06-04",  
    "video_sd": 1,  
    "video_hd": 1,  
    "video_hdp": 1,  
    "audio": 1,  
    "total_duration": 4  
  } ]  
}
```

Status code: 400

This status code is returned if the request fails.

```
{  
  "error_code": "DATA.100011001",  
}
```

```
        "error_msg" : "Required String parameter 'app' is not present"  
    }
```

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.8 Querying Historical Scale Data

Function

This API is used to query scale data of indicators of each day in the last 31 days. You cannot obtain the number of rooms and users of the current day.

The maximum query time span is 31 days.

URI

GET /v1/{project_id}/rtc/history/scale

Table 5-50 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-51 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application identifier.

Parameter	Mandatory	Type	Description
metric	Yes	Array	<p>Data type.</p> <ul style="list-style-type: none">• UserCount: number of users in calls. The users with the same user ID in different channels are counted as different users.• SessionCount: number of calls. Each time a user joins a channel, a call is counted.• RoomCount: number of rooms. A call room is counted from the time when a user joins a room to the time when all users leave the room.• MaxOnlineUserCount: maximum number of concurrent online users• MaxOnlineRoomCount: maximum number of online rooms• CommunicationDuration: audio and video call duration• VideoCommunicationDuration: video call duration• AudioCommunicationDuration: audio call duration
start_date	No	String	Start time of the query (UTC time in the format of YYYY-MM-DD, for example, 2020-04-23). If this parameter is not specified, the data of the last day is read by default.
end_date	No	String	Queries end time. UTC time in the format of YYYY-MM-DD, for example, 2020-04-23.

Request Parameters

Table 5-52 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-53 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-54 Response body parameters

Parameter	Type	Description
scale	Array of RtcHistoryScaleTimeValue objects	Timestamp and indicator value list at the corresponding time

Table 5-55 RtcHistoryScaleTimeValue

Parameter	Type	Description
date	String	Sampling time. The format must comply with the ISO 8601 standard (UTC time). The format is YYYY-MM-DD.
user_count	Long	Number of users in a call, that is, the total number of UIDs.
session_count	Long	Total number of sessions.
room_count	Long	Number of rooms.
max_online_user_count	Long	Maximum number of concurrent online users.
max_online_room_count	Long	Maximum number of concurrent online rooms.
communication_duration	Long	Total audio and video duration, in seconds.
video_communication_duration	Long	Total video duration, in seconds.
audio_communication_duration	Long	Total audio duration, in seconds.

Status code: 400**Table 5-56 Response body parameters**

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/{project_id}/rtc/history/scale?  
app=5fa682b34a974f7ad24d223b&metric=SessionCount,MaxOnlineRoomCount&start_date=2020-04-23&end_date=2020-04-26
```

Example Responses

Status code: 200

This status code is returned if the request succeeds.

```
{  
  "scale" : [ {
```

```
    "date" : "2020-06-04",
    "user_count" : 1,
    "session_count" : 1,
    "room_count" : 3,
    "max_online_user_count" : 5,
    "max_online_room_count" : 4,
    "communication_duration" : 123,
    "video_communication_duration" : 234,
    "audio_communication_duration" : 132
  ]
}
```

Status code: 400

This status code is returned if the request fails.

```
{
  "error_code" : "DATA.100011001",
  "error_msg" : "Required String parameter 'app' is not present"
}
```

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.9 Querying Historical Quality Data

Function

This API is used to query experience data of quality indicators in the last 31 days. You cannot obtain the experience data of the current day.

The maximum query time span is 31 days.

URI

GET /v1/{project_id}/rtc/history/quality

Table 5-57 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-58 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	Application identifier.

Parameter	Mandatory	Type	Description
metric	Yes	Array	<p>Data type.</p> <ul style="list-style-type: none">• JoinSuccessRate: success rate of joining a room• JoinSuccess5SecsRate: success rate of joining a room in 5 seconds• VideoFreezeRate: video freeze rate• AudioFreezeRate: audio freeze rate• FirstVideoRecvTime: time required for receiving the first video frame• FirstAudioRecvTime: time required for receiving the first audio frame• PullStreamSuccessRate: stream pulling success rate• PushStreamSuccessRate: stream pushing success rate• VideoUpstreamExcellentTransRate: uplink high-quality transmission rate of videos on the client• AudioUpstreamExcellentTransRate: uplink high-quality transmission rate of audios on the client• VideoExcellentTransRate: end-to-end high-quality video transmission rate• AudioExcellentTransRate: end-to-end high-quality audio transmission rate• VideoTransDelay: end-to-end video latency, in milliseconds. The average latency of all users on a day is used.• AudioTransDelay: end-to-end audio latency, in milliseconds. The average latency of all users on a day is used.

Parameter	Mandatory	Type	Description
start_date	No	String	Time when the query starts. UTC time in the format of YYYY-MM-DD, for example, 2020-04-23. If this parameter is not specified, data of the last day is read by default.
end_date	No	String	Time when the query ends. UTC time in the format of YYYY-MM-DD, for example, 2020-04-23.

Request Parameters

Table 5-59 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-60 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-61 Response body parameters

Parameter	Type	Description
quality	Array of RtcHistoryQualityTimeValue objects	Timestamp and indicator value list at the corresponding time

Table 5-62 RtcHistoryQualityTimeValue

Parameter	Type	Description
date	String	Sampling time. The format must comply with the ISO 8601 standard (UTC time). The format is YYYY-MM-DD.
join_success_rate	Double	Success rate of joining a room. The value 1 indicates that the success rate is 100%.
join_success_in5secs_rate	Double	Success rate of joining a room within 5 seconds. The value 1 indicates that the success rate is 100%.
video_freeze_rate	Double	Video freeze rate. The value 1 indicates that the freeze rate is 100%.
audio_freeze_rate	Double	Audio freeze rate. The value 1 indicates that the freeze rate is 100%.
first_video_recv_time	Long	Time required for receiving the first video frame, in milliseconds.
first_audio_recv_time	Long	Time required for receiving the first audio frame, in milliseconds.
pull_stream_success_rate	Double	Success rate of stream pulling. The value 1 indicates that the success rate is 100%.
push_stream_success_rate	Double	Success rate of stream pushing. The value 1 indicates that the success rate is 100%.
video_upstream_excellent_trans_rate	Double	Uplink high-quality transmission rate of videos on the client. The value 1 indicates that the transmission rate is 100%.

Parameter	Type	Description
audio_upstream_excellent_trans_rate	Double	Uplink high-quality transmission rate of audios on the client. The value 1 indicates that the transmission rate is 100%.
video_excellent_trans_rate	Double	E2E high-quality video transmission rate. The value 1 indicates that the transmission rate is 100%.
audio_excellent_trans_rate	Double	E2E high-quality audio transmission rate. The value 1 indicates that the transmission rate is 100%.
video_trans_delay	Double	E2E video network latency, in milliseconds. The value is the median of the network latency of all users of the current day.
audio_trans_delay	Double	E2E audio network latency, in milliseconds. The value is the median of the network latency of all users of the current day.

Status code: 400

Table 5-63 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/{project_id}/rtc/history/quality?  
app=5fa682b34a974f7ad24d223b&metric=VideoFreezeRate,AudioTransDelay&start_date=2020-04-23&end_date=2020-04-26
```

Example Responses

Status code: 200

This status code is returned if the request succeeds.

```
{  
  "quality": [ {  
    "date": "2020-06-04",  
    "join_success_rate": 0.99  
  } ]  
}
```

Status code: 400

This status code is returned if the request fails.

```
{  
    "error_code": "DATA.100011001",  
    "error_msg": "Required String parameter 'app' is not present"  
}
```

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.10 Querying User Call Indicators

Function

This API is used to query the call quality indicators of a user.

Data of the last five days can be queried. The value of mid cannot be null. When real-time data is queried, the interval between the start time and end time cannot exceed 24 hours. Cross-day query is supported for query data of a single user.

URI

GET /v1/{project_id}/rtc/client/qos/details

Table 5-64 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the project ID, see Obtaining a Project ID .

Table 5-65 Query Parameters

Parameter	Mandatory	Type	Description
domain	No	String	Domain name.
app_id	Yes	String	Application ID.
room_id	Yes	String	Room ID.

Parameter	Mandatory	Type	Description
user_id	No	String	Queries the user who sends streams.
peer_id	No	String	Queries the ID of the user who receives streams.
stream_id	No	String	Stream ID
direction	No	String	Data direction, which can be uplink or downlink.

Parameter	Mandatory	Type	Description
mid	Yes	Array	<p>Indicators to be queried. If this parameter is set to all, all indicators are returned. Use commas (,) to separate multiple indicators.</p> <ul style="list-style-type: none">• appcpu: CPU usage of a device app• syscpu: CPU usage of the device system• abit: audio bit rate on the device, in kbit/s• vbit: video bit rate on the device, in kbit/s• dbit: presentation bit rate on the device, in kbit/s• vfps: video frame rate on the device, in FPS• dfps: presentation frame rate on the device, in FPS• vblock: video freeze rate on the device (Video freeze is counted when the freeze duration reaches 600 ms.)• dblock: presentation freeze rate on the device (Presentation freeze is counted when the freeze duration reaches 600 ms.)• aloss: audio packet loss rate on the device• vloss: video packet loss rate on the device• dloss: presentation packet loss rate on the device• vwidth: video resolution width on the device• vheight: video resolution height on the device• dwidth: presentation resolution width on the device• dheight: presentation resolution height on the device

Parameter	Mandatory	Type	Description
			<ul style="list-style-type: none">• ajitter: audio jitter rate on the device• artt: audio latency on the device• vjitter: video jitter rate on the device• vrtt: video latency on the device• djitter: presentation jitter rate on the device• drtt: presentation latency on the device
start_time	Yes	String	Time when the query starts. UTC time in the format of yyyy-mm-ddThh:mm:ssZ, for example, 2020-04-23T06:00:00Z.
end_time	Yes	String	Time when the query ends. UTC time in the format of yyyy-mm-ddThh:mm:ssZ, for example, 2020-04-23T07:00:00Z.
time_type	No	String	Query time type. stime indicates the database dotting time. If this parameter is not specified, the default value ctime is used.
limit	No	Integer	Query result limits.
offset	No	Integer	Query offset.

Request Parameters

Table 5-66 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token. This parameter is mandatory when token authentication is used. The token can be obtained by calling the IAM API used to obtain a user token. The value of X-Subject-Token in the response header is the user token.
Authorization	No	String	Authentication information. This parameter is mandatory when AK/SK-based authentication is used.
X-Sdk-Date	No	String	Time when the request is sent. This parameter is mandatory when AK/SK-based authentication is used.
X-Project-Id	No	String	Project ID, which is the same as that used in the URI. This parameter is mandatory when AK/SK-based authentication is used.

Response Parameters

Status code: 200

Table 5-67 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique ID of the request.

Table 5-68 Response body parameters

Parameter	Type	Description
room_id	String	Room ID.

Parameter	Type	Description
data	Array of QosQualityData objects	QoS data.

Table 5-69 QosQualityData

Parameter	Type	Description
uid	String	User ID.
peerid	String	Peer user ID. The value 0 indicates local uplink data.
mid	String	Indicator ID.
data	Array of TimeFloatValueData objects	Timestamp and indicator value list at the corresponding time

Table 5-70 TimeFloatValueData

Parameter	Type	Description
time	String	Sampling time. The format must comply with the ISO 8601 standard (UTC time). The format is YYYY-MM-DDThh:mm:ssZ.
value	Float	Timestamp and indicator list at the corresponding time.

Status code: 400**Table 5-71** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/{project_id}/rtc/client/qos/details?  
app_id=5fa682b34a974f7ad24d223b&room_id=6951a79e9f811ebbd2ac58d7ac82553&mid=appcpu&start_time=2020-04-23T06:00:00Z&end_time=2020-04-23T07:00:00Z
```

Example Responses

Status code: 200

This status code is returned if the request succeeds.

```
{  
    "room_id": "73594089618272256",  
    "data": [ {  
        "uid": "30617",  
        "peerid": "30617",  
        "mid": "ajitter",  
        "data": [ {  
            "time": "2022-06-04T06:06:00Z",  
            "value": 433422  
        }, {  
            "time": "2022-06-04T06:00:05Z",  
            "value": 433422  
        } ]  
    } ]  
}
```

Status code: 400

This status code is returned if the request fails.

```
{  
    "error_code": "DATA.100011001",  
    "error_msg": "Required String parameter 'app_id' is not present"  
}
```

Status Codes

Status Code	Description
200	This status code is returned if the request succeeds.
400	This status code is returned if the request fails.

Error Codes

See [Error Codes](#).

5.11 Queries abnormal user experience events.

Function

Queries call exception details of a specified application.

The maximum query time span is one day.

URI

GET /v1/rtc/data/abnormal-events

Table 5-72 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	App ID
room_id	No	String	Room ID
uid	No	String	User ID
start_time	No	String	Start time of the query (UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z). If this parameter is not specified, the data of the last hour is read by default.
end_time	No	String	End time of the query (UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T07:00:00Z). If this parameter is not specified, the current time is used by default.
limit	No	Integer	Number of results. The default value is 10.
offset	No	Integer	Query offset. The default value is 0.

Request Parameters

Table 5-73 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token, which is mandatory for token authentication. You can obtain the token by calling the IAM API (value of X-Subject-Token in the response header).

Response Parameters

Status code: 200

Table 5-74 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique identifier of the request

Table 5-75 Response body parameters

Parameter	Type	Description
total	Integer	Total number of exceptions
events	Array of AbnormalEvent objects	List of abnormal experience events

Table 5-76 AbnormalEvent

Parameter	Type	Description
time	String	Sampling time. The date format complies with the ISO 8601 standard and the UTC time is used. The format is YYYY-MM-DDThh:mm:ssZ.
uid	String	ID of the user with an exception
room_id	String	ID of the room with an exception
stage	String	Abnormal phase <ul style="list-style-type: none">• join_room: joining a room• communication: The call is in progress.
location	String	Event occurrence location <ul style="list-style-type: none">• local: The event occurs on the local client.• remote: The event occurs at the remote end.
peer_uid	String	If the exception occurs at the remote end, peerid is the remote user ID. If the exception occurs at the local end, peerid is an empty string.
abnormal_type	Integer	Exception type <ul style="list-style-type: none">• 1: It takes a long time to enter a room (longer than 5s).• 2: video frame freezing• 3: audio intermittence

Parameter	Type	Description
abnormal_type_desc	String	<p>The exception type description corresponds to the exception type and supports internationalization. The options are as follows:</p> <ul style="list-style-type: none">• It takes a long time to enter a room (longer than 5s). Video freezing Audio freezing

Parameter	Type	Description
abnormal_factor	Integer	<p>Abnormal factors</p> <p>When the exception type is 1, the value range of the exception factor is as follows:</p> <ul style="list-style-type: none">• 1: The link fails to be established.• 2: The room is not idle.• 3: The server is abnormal.• 4: The server returns 503.• 5: Authentication failed.• 6: Authentication reattempt• 7: Clock synchronization fails.• 8: The URL is incorrect.• 9: An internal exception occurs on the terminal.• 90000004: The response to the signaling sent by the SDK for joining a room times out.• 90100009: The web system does not receive the configuration information delivered by the MSP.• 90100008: The WebSocket link fails to be established.• 10000001: exception information returned by the server• 31000003: exception information returned by the server• 32000030: exception information returned by the server• 15: SDP setting exception in the browser. <p>When the exception type is 2 or 3, the options are as follows:</p> <ul style="list-style-type: none">• 1: The system CPU usage is high.• 2: The CPU usage of the app is high.• 3: uplink audio network delay• 4: uplink audio network jitter• 5: uplink video network delay• 6: uplink video network jitter• 7: downlink audio network delay• 8: downlink audio network jitter• 9: downlink video network delay• 10: downlink video network jitter• 11: uplink audio packet loss

Parameter	Type	Description
		<ul style="list-style-type: none">● 12: uplink video packet loss● 13: downlink audio packet loss● 14: downlink video packet loss● 15: No sound is heard in the downlink audio.● 16: others● 17: The peer user is offline.● 18: The peer user has no code stream.● 19: no frame rate of the peer user● 20: There is no downlink code stream on the local server.● 21: no frame rate on the downlink of the local server

Parameter	Type	Description
abnormal_factor_desc	String	<p>Exception factor description, which supports internationalization.</p> <p>When the exception type is 1, the exception factor description corresponds to the exception factor. The options are as follows:</p> <ul style="list-style-type: none">• Link setup failure• The room is not idle.• Server exception• The server returns 503. -Authentication failed• Authentication reattempt• Time synchronization failure.• Incorrect URL.• An internal error occurs on the terminal.• The response to the signaling sent by the SDK for joining a room times out.• The web system does not receive the configuration information delivered by the MSP.• The WebSocket link fails to be established.• Exception information returned by the server.• Exception information returned by the server.• Exception information returned by the server.• An exception occurred when setting the SDP in the browser. <p>When the exception type is 2 or 3, the exception factor description corresponds to the exception factor. The options are as follows:</p> <ul style="list-style-type: none">• Heavy system CPU usage• Heavy app CPU usage• Uplink audio latency• Uplink audio jitter• Uplink video latency• Uplink video jitter• Downlink audio latency• Downlink audio jitter• Downlink video latency• Downlink video jitter• Uplink audio packet loss

Parameter	Type	Description
		<ul style="list-style-type: none">• Uplink video packet loss• Downlink audio packet loss• Downlink video packet loss• No sound is heard in the downlink audio.Others• The peer user is offline.• The peer user has no code stream.• No frame rate of the peer user• There is no downlink code stream on the local server.• Downlink No Frame Rate of Local Server <p>In other cases, the exception factor is described as follows: Others</p>

Status code: 400**Table 5-77** Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique identifier of the request

Table 5-78 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/rtc/data/abnormal-events?  
app=5f963b4c89ae1628c2568001&room_id=3b48d9db05cc11ecb1e78fe304a40b8f&start_time=2021-08-25T  
16:00:00Z&end_time=2021-08-25T18:00:00Z
```

Example Responses

Status code: 200

OK.

```
{  
  "total" : 2,  
  "events" : [ {  
    "time" : "2021-08-25T17:45:00Z",
```

```
"uid" : "3d00ea7405cc11eca3b919d9aaa81457",
"room_id" : "3b48d9db05cc11ecb1e78fe304a40b8f",
"stage" : "communication",
"location" : "remote",
"peer_uid" : "3cc0863505cc11eca3b9cb30b1856de8",
"abnormal_type" : 3,
"abnormal_type_desc" : "Audio freezing",
"abnormal_factor" : 13,
"abnormal_factor_desc" : "Downlink audio packet loss"
}, {
"time" : "2021-08-25T17:45:00Z",
"uid" : "3d00ea7405cc11eca3b919d9aaa81457",
"room_id" : "3b48d9db05cc11ecb1e78fe304a40b8f",
"stage" : "communication",
"location" : "remote",
"peer_uid" : "3cc0863505cc11eca3b9cb30b1856de8",
"abnormal_type" : 2,
"abnormal_type_desc" : "Video freezing",
"abnormal_factor" : 14,
"abnormal_factor_desc" : "Downlink video packet loss"
} ]
}
```

Status code: 400

Query failed.

```
{
"error_code" : "DATA.100011001",
"error_msg" : "Required String parameter 'app' is not present"
}
```

Status Codes

Status Code	Description
200	OK.
400	Query failed.

Error Codes

See [Error Codes](#).

5.12 Queries the distribution of users with abnormal events.

Function

Queries the distribution of call exception details of a specified app in a specified period.

The maximum query time span is one day.

URI

GET /v1/rtc/data/abnormal-event/dimension

Table 5-79 Query Parameters

Parameter	Mandatory	Type	Description
app	Yes	String	App ID
room_id	No	String	Room ID
dimension	No	String	Group type. Two types can be specified at the same time. <ul style="list-style-type: none">• abnormal_type: exception type• abnormal_factor: abnormal factor
start_time	No	String	Start time of the query (UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T06:00:00Z). If this parameter is not specified, the data of the last hour is read by default.
end_time	No	String	End time of the query (UTC time in the format of YYYY-MM-DDThh:mm:ssZ, for example, 2020-04-23T07:00:00Z). If this parameter is not specified, the current time is used by default.

Request Parameters

Table 5-80 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token, which is mandatory for token authentication. You can obtain the token by calling the IAM API (value of X-Subject-Token in the response header).

Response Parameters

Status code: 200

Table 5-81 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique identifier of the request

Table 5-82 Response body parameters

Parameter	Type	Description
dimensions	Array of AbnormalEventDimensionValue objects	List of abnormal experience events

Table 5-83 AbnormalEventDimensionValue

Parameter	Type	Description
abnormal_type	Integer	Type of an exception: <ul style="list-style-type: none">• 1: It takes a long time to enter a room (longer than 5s).• 2: video freezing• 3: audio freezing
abnormal_type_desc	String	The exception type description corresponds to the exception type and supports internationalization. The options are as follows: <ul style="list-style-type: none">• It takes a long time to enter a room (longer than 5s). Video freezing Audio freezing

Parameter	Type	Description
abnormal_factor	Integer	<p>Abnormal factors</p> <p>When the exception type is 1, the value range of the exception factor is as follows:</p> <ul style="list-style-type: none">• 1: The link fails to be established.• 2: The room is not idle.• 3: The server is abnormal.• 4: The server returns 503.• 5: Authentication failed.• 6: Authentication reattempt• 7: Clock synchronization fails.• 8: The URL is incorrect.• 9: An internal exception occurs on the terminal.• 90000004: The response to the signaling sent by the SDK for joining a room times out.• 90100009: The web system does not receive the configuration information delivered by the MSP.• 90100008: The WebSocket link fails to be established.• 10000001: exception information returned by the server• 31000003: exception information returned by the server• 32000030: exception information returned by the server• 15: SDP setting exception in the browser. <p>When the exception type is 2 or 3, the options are as follows:</p> <ul style="list-style-type: none">• 1: The system CPU usage is high.• 2: The CPU usage of the app is high.• 3: uplink audio delay• 4: uplink audio jitter• 5: uplink video delay• 6: uplink video jitter• 7: downlink audio delay• 8: downlink audio jitter• 9: downlink video delay• 10: downlink video jitter• 11: uplink audio packet loss

Parameter	Type	Description
		<ul style="list-style-type: none">● 12: Uplink video packet loss● 13: downlink audio packet loss● 14: downlink video packet loss● 15: No sound is heard in the downlink audio.● 16: others● 17: The peer user is offline.● 18: The peer user has no code stream.● 19: no frame rate of the peer user● 20: There is no downlink code stream on the local server.● 21: no frame rate on the downlink of the local server

Parameter	Type	Description
abnormal_factor_desc	String	<p>Exception factor description, which supports internationalization.</p> <p>When the exception type is 1, the exception factor description corresponds to the exception factor. The options are as follows:</p> <ul style="list-style-type: none">• Link setup failure• The room is not idle.• Server exception• The server returns 503.• Authentication failed• Authentication reattempt• Time synchronization failure.• Incorrect URL• An internal error occurs on the terminal.• The response to the signaling sent by the SDK for joining a room times out.• The web system does not receive the configuration information delivered by the MSP.• The WebSocket link fails to be established.• Exception information returned by the server.• Exception information returned by the server.• Exception information returned by the server.• An exception occurred when setting the SDP in the browser. <p>When the exception type is 2 or 3, the exception factor description corresponds to the exception factor. The options are as follows:</p> <ul style="list-style-type: none">• Heavy system CPU usage• Heavy app CPU usage• Uplink audio latency• Uplink audio jitter• Uplink video latency• Uplink video jitter• Downlink audio latency• Downlink audio jitter• Downlink video latency• Downlink video jitter• Uplink audio packet loss

Parameter	Type	Description
		<ul style="list-style-type: none">● Uplink video packet loss● Downlink audio packet loss● Downlink video packet loss● No sound is heard in the downlink audio.Others● The peer user is offline.● The peer user has no code stream.● No frame rate of the peer user● There is no downlink code stream on the local server.● Downlink No Frame Rate of Local Server <p>In other cases, the exception factor is described as Others.</p>
user_count	Long	Number of users affected by an exception

Status code: 400

Table 5-84 Response header parameters

Parameter	Type	Description
X-Request-Id	String	Unique identifier of the request

Table 5-85 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Example Requests

```
GET /v1/rtc/data/abnormal-event/dimension?  
app=5f963b4c89ae1628c2568001&room_id=3b48d9db05cc11ecb1e78fe304a40b8f&start_time=2021-08-25T  
16:00:00Z&end_time=2021-08-25T18:00:00Z
```

Example Responses

Status code: 200

OK.

```
{  
  "dimensions" : [ {
```

```
"abnormal_type" : 2,  
"abnormal_type_desc" : "Video freezing",  
"abnormal_factor" : 14,  
"abnormal_factor_desc" : "Downlink video packet loss",  
"user_count" : 1  
}, {  
"abnormal_type" : 3,  
"abnormal_type_desc" : "Audio freezing",  
"abnormal_factor" : 13,  
"abnormal_factor_desc" : "Downlink audio packet loss",  
"user_count" : 1  
}  
}]
```

Status code: 400

Query failed.

```
{  
"error_code" : "DATA.100011001",  
"error_msg" : "Required String parameter 'app' is not present"  
}
```

Status Codes

Status Code	Description
200	OK.
400	Query failed.

Error Codes

See [Error Codes](#).

6 Appendix

[Status Codes](#)

[Error Codes](#)

[Obtaining a Project ID](#)

[Obtaining an Account ID](#)

[Abbreviations for Provinces](#)

[Receiving a Recording Event Callback Notification](#)

6.1 Status Codes

Table 6-1 lists the status codes that may be returned when you call SparkRTC APIs.

Table 6-1 Status codes

Status Code	Description
200 OK	The request has succeeded.
201 Created	The request has been fulfilled and resulted in a new resource being created.
202 Accepted	The request has been accepted for processing, but the processing has not been completed.
204 No Content	The request has been fulfilled, but the HTTP response does not contain a response body.
400 Bad Request	The request could not be understood by the server. The client should not repeat the request without modifications.

Status Code	Description
401 Unauthorized	The authentication information provided by the client is incorrect or invalid.
403 Forbidden	The server understood the request, but is refusing to fulfill it. The client should not repeat the request without modifications.
404 Not Found	The requested resource could not be found. The client should not repeat the request without modifications.
405 Method Not Allowed	The method specified in the request is not supported for the requested resource. The client should not repeat the request without modifications.
406 Not Acceptable	The server could not fulfill the request according to the content characteristics of the request.
407 Proxy Authentication Required	This code is similar to 401 (Unauthorized), but indicates that the client must first authenticate itself with the proxy.
408 Request Timeout	The client did not produce a request within the time that the server was prepared to wait. The client may repeat the request without modifications at any later time.
409 Conflict	The request could not be completed due to a conflict with the current state of the resource. This status code indicates that the resource that the client is attempting to create already exists, or that the request has failed to be processed because of the update of the conflict request.
500 Internal Server Error	The server is able to receive the request but unable to understand it.
501 Not Implemented	The server does not support the functionality required to fulfill the request.
502 Bad Gateway	The server, while acting as a gateway or proxy, received an invalid response from the upstream server it accessed in attempting to fulfill the request.

Status Code	Description
503 Service Unavailable	The server is currently unable to handle the request. The client should not repeat the request without modifications.
504 Gateway Timeout	A gateway timeout error occurred.

6.2 Error Codes

If an error code starting with APIGW is returned after you call an API, rectify the fault by referring to the instructions provided in [API Gateway Error Codes](#).

Status Code	Error Codes	Error Message	Description	Solution
400	RTC.00001001	OperationUnauthorized: get DomainID fail please check X-Auth-Token or AK/SK	The domainID cannot be parsed in the token received by SparkRTC, so the tenant identity cannot be confirmed.	Check whether the account used for calling the API is correct. For example, an incorrect token is used.
400	RTC.00001002	MalformedRequestBody: json parsing failed	Incorrect request body (JSON) parsing	Refer to the API document and check whether the parameters are correctly configured.
400	RTC.00001003	InvalidParameterValue	Parameter verification error	Refer to the API document and check whether the parameters are correctly configured.
400	RTC.00001004	InvalidParameterCombination	Incorrect field combination	Refer to the API document and check whether the parameters are correctly configured.

Status Code	Error Codes	Error Message	Description	Solution
400	RTC.00001005	MissingParameter	The parameter is not carried.	Refer to the API document and check whether the parameters are correctly configured.
400	RTC.00001006	JobRunning: job exists and is not over	The task is ongoing. The external job_uniq_id is duplicate.	Wait until the task is complete.
400	RTC.00001007	JobExceed	The number of tasks exceeds the upper limit.	Submit a service ticket to increase the maximum number of tasks.
400	RTC.00001009	JobDone: task canceled or completed	The task has been canceled or completed.	Check whether the parameter is correct.
400	RTC.00001010	LayoutTemplateNotExist: layout template not exist under your app	The combined template does not exist under the app ID.	Check whether the layout template ID is correct.
400	RTC.00001012	UnsupportRegion: rtc does not provide services in the region	The value-added services of SparkRTC are not available in this region.	Enter a correct region.
400	RTC.00001013	RuleForbiddenDelete: rule is associated with backup rule	The recording rule has been associated with a backup rule and cannot be deleted.	Submit a service ticket to disassociate the backup rule.
400	RTC.00001016	AppDeactivation: app is stopped	The application has been stopped.	Check whether the SparkRTC service is in arrears.

Status Code	Error Codes	Error Message	Description	Solution
400	RTC.00001017	AppsExceed: app num exceed	The number of applications that can be created has reached the upper limit (20 by default).	Submit a service ticket to increase the maximum number of applications.
400	RTC.00001018	UrlUnavaiable: callback url is unavailable	The URL is unreachable, such as the callback URL set by the tenant.	Enter the correct callback URL.
400	RTC.00001019	RecordRuleExist: record rule of the app exists	The recording rule already exists.	Delete related recording rules before performing subsequent operations.
400	RTC.00001020	AppExist: app exists	The application name already exists.	The app name already exists under the account. Change the app name to create an app.
400	RTC.00001021	NoPermission: policy doesn't allow action to be performed	You do not have the permission for calling this API.	Check whether the account for generating authentication information has the permission for accessing the API.
400	RTC.00001022	job is not initialized	The task is not initialized, and the operation cannot be performed.	Wait until the task is initialized.
404	RTC.00001008	JobNotExist: job does not exist	The task does not exist.	Check whether the parameter is correct.

Status Code	Error Codes	Error Message	Description	Solution
404	RTC.00001011	RecordRuleNotExist: record rule not exist under your app	The recording rule does not exist under the app ID.	Check whether the parameter is correct.
404	RTC.00001014	BucketNotExist: bucket does not exist	The bucket does not exist.	Check whether the parameter is correct.
404	RTC.00001015	AppNotExist: app does not exist under your account	The app ID does not exist under the account.	Check whether the account used for calling the API is correct. For example, an incorrect token is used.
500	RTC.00002001	InternalError. GeneratorIDError	The ID generation component is faulty.	Submit a service ticket and contact O&M personnel.
500	RTC.00002002	InternalError. DbErr	Fault of database operation	Submit a service ticket and contact O&M personnel.
500	RTC.00002003	InternalError. Transcode4xxError	Input fault of the media processing component	Submit a service ticket and contact O&M personnel.
500	RTC.00002004	InternalError. Transcode5xxError	Internal fault of the media processing component	Submit a service ticket and contact O&M personnel.
500	RTC.00002005	InternalError. Live4xxError	Input fault of the recording component	Submit a service ticket and contact O&M personnel.
500	RTC.00002006	InternalError. Live5xxError	Internal fault of the recording component	Submit a service ticket and contact O&M personnel.

6.3 Obtaining a Project ID

A project ID is required for some URLs when an API is called. You can obtain a project ID using either of the following methods:

- **Obtaining a Project ID from the Management Console**
- **Obtaining a Project ID by Calling an API**


Obtaining a Project ID from the Management Console

Step 1 Log in to the console.

Step 2 Point to the username and choose **My Credentials** from the drop-down list.

Step 3 On the **API Credentials** page, obtain the project ID.

Figure 6-1 Obtaining a project ID

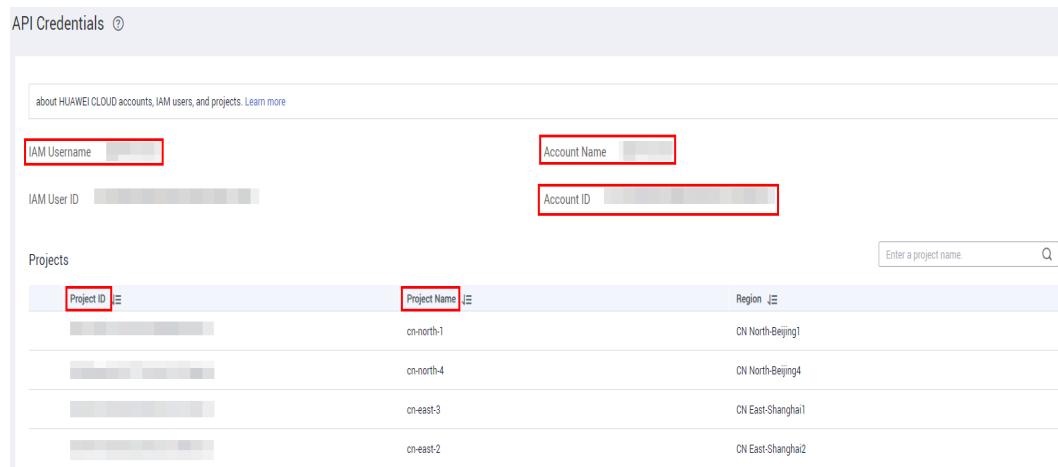

----End

Obtaining a Project ID by Calling an API

You can obtain a project ID by calling the API for **querying project information**.

The API for obtaining a project ID is **GET https://*{Endpoint}*/v3/projects/**. *{Endpoint}* indicates the endpoint of IAM, which can be obtained from **Endpoints**. For details about API authentication, see **Authentication**.

The following is an example response. The value of **id** under **projects** is the project ID.

```
{  
    "projects": [  
        {  
            "domain_id": "65382450e8f64ac0870cd180d14e684b",  
            "is_domain": false,  
            "parent_id": "65382450e8f64ac0870cd180d14e684b",  
            "name": "region01",  
            "description": "",  
            "links": {  
                "next": null,  
                "previous": null,  
                "self": "https://www.example.com/v3/projects/a4a5d4098fb4474fa22cd05f897d6b99"  
            },  
            "id": "a4a5d4098fb4474fa22cd05f897d6b99",  
            "enabled": true  
        }  
    ]  
}
```


```
"links": {  
    "next": null,  
    "previous": null,  
    "self": "https://www.example.com/v3/projects"  
}
```

6.4 Obtaining an Account ID

An account ID is required for some URLs when an API is called. To obtain an account ID, perform the following operations:

- Step 1** Log in to the console.
- Step 2** Point to the username and choose **My Credentials** from the drop-down list.
- Step 3** On the **API Credentials** page, obtain the account ID.

Figure 6-2 Obtaining an account ID

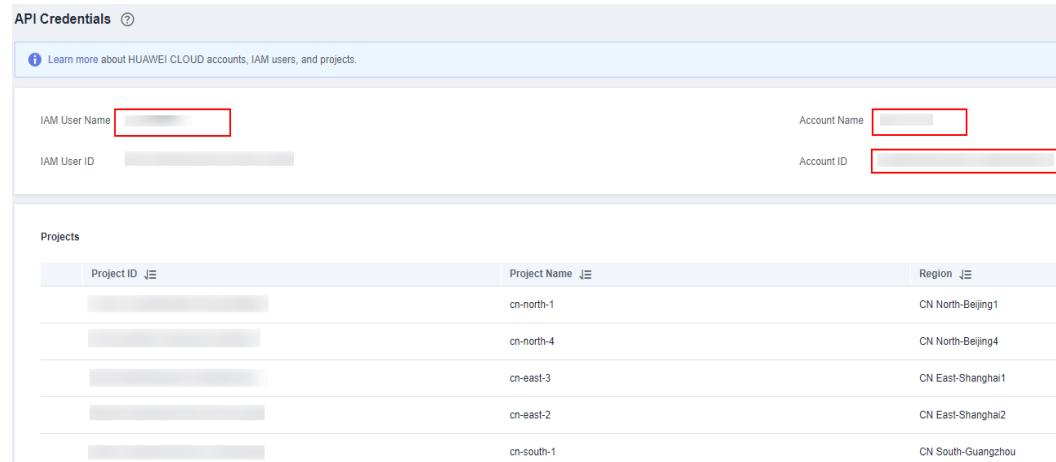

----End

6.5 Abbreviations for Provinces

Table 6-2 Abbreviations

Province	Abbreviation
Others	OT
Beijing	BJ
Tianjin	TJ
Chongqing	CQ
Shanghai	SH
Guangdong	GD

Province	Abbreviation
Hainan	HI
Guangxi	GX
Yunnan	YN
Shanxi	SX
Hebei	HE
Inner Mongolia	NM
Ningxia	NX
Liaoning	LN
Jilin	JL
Heilongjiang	HL
Jiangsu	JS
Zhejiang	ZJ
Jiangxi	JX
Shandong	SD
Fujian	FJ
Anhui	AH
Sichuan	SC
Tibet	XZ
Shannxi	SN
Qinghai	QH
Xinjiang	XJ
Gansu	GS
Guizhou	GZ
Hubei	HB
Hunan	HN
Henan	HA
Hong Kong	HK
Macao	MO
Taiwan	TW

6.6 Receiving a Recording Event Callback Notification

When SparkRTC calls back an API provided by a user, the following information is attached:

Table 6-3 Request body parameter description

Parameter	Mandatory	Data Type	Description
job_id	No	String	Job ID, which can be used to modify, view, and stop a recording job.
stream_name	No	String	Stream name
app_id	No	String	Application ID
room_id	No	String	Room ID
event_type	No	String	Notification event type: <ul style="list-style-type: none">• RECORD_NEW_FILE_STAR: The recording module starts to create a file.• RECORD_FILE_COMPLETE: The recording module completes file generation.• CLOUD_RECORD_SERVER_OVER: The cloud-based recording job ends.
record_format	No	String	Recording format. The options are as follows: <ul style="list-style-type: none">• HLS• MP4
download_url	No	String	Download address of OBS where the recording file is stored. The address cannot be used for content playback. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .
record_duration	No	Long	Duration of a recording, in seconds. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .

Parameter	Mandatory	Data Type	Description
width	No	Integer	Width of a recording. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .
height	No	Integer	Height of a recording. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .
start_time	No	String	UTC time when the recording starts. The format is YYYY-MM-DDThh:mm:ssZ. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .
end_time	No	String	UTC time when the recording ends. The format is YYYY-MM-DDThh:mm:ssZ. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .
obs_location	No	String	OBS region where the file is stored. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .
obs_bucket	No	String	OBS bucket where the file is stored. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .
obs_object	No	String	Full path of the OBS bucket where the file is stored. This parameter is needed when event_type is set to RECORD_FILE_COMPLETE .
detail_message	No	String	Status description

7 Change History

Table 7-1 Change history

Release Date	Description
2022-09-30	This issue is the first official release.