
ModelArts

FAQs

Issue 01

Date 2025-09-08



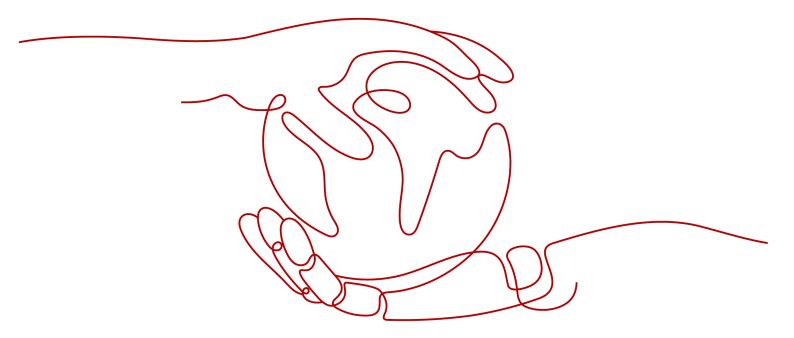

Copyright © Huawei Cloud Computing Technologies Co., Ltd. 2025. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

Trademarks and Permissions

HUAWEI and other Huawei trademarks are the property of Huawei Technologies Co., Ltd. All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei Cloud and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Cloud Computing Technologies Co., Ltd.

Address: Huawei Cloud Data Center Jiaoxinggong Road

Qianzhong Avenue Gui'an New District Gui Zhou 550029

People's Republic of China

Website: https://www.huaweicloud.com/intl/en-us/

i

Contents

1 General Issues	1
1.1 What Is ModelArts?	1
1.2 What Are the Relationships Between ModelArts and Other Services?	1
1.3 What Are the Differences Between ModelArts and DLS?	2
1.4 How Do I Obtain an Access Key?	2
1.5 How Do I Upload Data to OBS?	2
1.6 What Do I Do If the System Displays a Message Indicating that the AK/SK Pair Is Unavailable?	3
1.7 What Do I Do If a Message Indicating Insufficient Permissions Is Displayed When I Use ModelArts	
1.8 How Do I Use ModelArts to Train Models Based on Structured Data?	6
1.9 What Are Regions and AZs?	6
1.10 How Do I View All Files Stored in OBS on ModelArts?	8
1.11 Where Are Datasets of ModelArts Stored in a Container?	8
1.12 What Are the Functions of ModelArts Training and Inference?	8
1.13 How Do I View an Account ID and IAM User ID?	8
1.14 Can Al-assisted Identification of ModelArts Identify a Specific Label?	9
1.15 How Does ModelArts Use Tags to Manage Resources by Group?	9
1.16 Why Is the Job Still Queued When Resources Are Sufficient?	11
2 Billing	12
2.1 How Do I View the ModelArts Jobs Being Billed?	12
2.2 How Do I View ModelArts Expenditure Details?	13
2.3 Will I Be Charged for Uploading Datasets to ModelArts?	13
2.4 What Should I Do to Avoid Unnecessary Billing After I Label Datasets and Exit?	14
2.5 How Do I Stop Billing for a ModelArts ExeML Project?	14
2.6 How Do I Stop Billing If I Do Not Use ModelArts?	
2.7 How Are Training Jobs Billed?	
2.8 Why Does Billing Continue After All Projects Are Deleted?	15
3 Data Management (Old Version)	17
3.1 Are There Size Limits for Images to be Uploaded?	17
3.2 What Do I Do If Images in a Dataset Cannot Be Displayed?	17
3.3 How Do I Integrate Multiple Object Detection Datasets into One Dataset?	18
3.4 What Do I Do If Importing a Dataset Failed?	
3.5 Can a Table Dataset Be Labeled?	19

3.6 What Do I Do to Import Locally Labeled Data to ModelArts?	19
3.7 Why Does Data Fail to Be Imported Using the Manifest File?	19
3.8 Where Are Labeling Results Stored?	20
3.9 How Do I Download Labeling Results to a Local PC?	21
3.10 Why Cannot Team Members Receive Emails for a Team Labeling Task?	21
3.11 Can Two Accounts Concurrently Label One Dataset?	22
3.12 Can I Delete an Annotator from a Labeling Team with a Labeling Task Assigned? What Is the Imponther the Cannot Be Deleted, Can I Separate the Annotator's Labeling Result?	
3.13 How Do I Define a Hard Example in Data Labeling? Which Samples Are Identified as Hard Examples?	
3.14 Can I Add Multiple Labeling Boxes to an Object Detection Dataset Image?	22
3.15 How Do I Merge Two Datasets?	22
3.16 Does Auto Labeling Support Polygons?	23
3.17 What Do the Options for Accepting a Team Labeling Task Mean?	23
3.18 Why Are Images Displayed in Different Angles Under the Same Account?	23
3.19 Do I Need to Train Data Again If New Data Is Added After Auto Labeling Is Complete?	24
3.20 Why Does the System Display a Message Indicating My Label Fails to Save on ModelArts?	24
3.21 Can One Label By Identified Among Multiple Labels?	25
3.22 Why Are Newly Added Images Not Automatically Labeled After Data Amplification Is Enabled?	25
3.23 Why Cannot Videos in a Video Dataset Be Displayed or Played?	25
3.24 Why All the Labeled Samples Stored in an OBS Bucket Are Displayed as Unlabeled in ModelArts After the Data Source Is Synchronized?	25
3.25 How Do I Use Soft-NMS to Reduce Bounding Box Overlapping?	25
3.26 Why ModelArts Image Labels Are Lost?	25
3.27 How Do I Add Images to a Validation or Training Dataset?	26
3.28 Can I Customize Labels for an Object Detection Dataset?	26
3.29 What ModelArts Data Management Can Be Used for?	27
3.30 Will My Old-Version Datasets Be Cleared After the Old Version Is Discontinued? The existing datasets and the ones newly created in the old version will be retained after the old version is	20
discontinued	
3.32 How Do I View the Size of a Dataset?	
3.33 How Do I View Labeling Details of a New Dataset?	
3.34 How Do I Export Labeled Data?	
3.35 Why Cannot I Find My Newly Created Dataset?	
3.36 What Do I Do If the Database Quota Is Incorrect?	
3.37 How Do I Split a Dataset?	
3.38 How Do I Delete a Dataset Image?	
3.39 Why Is There No Sample in the ModelArts Dataset Downloaded from AI Gallery and Then an OB Bucket?	3S
4 Notebook (New Version)	. 33
4.1 Constraints	33
4.1.1 Is sudo Privilege Escalation Supported?	33

4.1.2 Does ModelArts Support apt-get?	33
4.1.3 Is the Keras Engine Supported?	33
4.1.4 Does ModelArts Support the Caffe Engine?	34
4.1.5 Can I Install MoXing in a Local Environment?	34
4.1.6 Can Notebook Instances Be Remotely Logged In?	34
4.2 Data Upload or Download	34
4.2.1 How Do I Upload a File from a Notebook Instance to OBS or Download a File from OBS to a Notebook Instance?	34
4.2.2 How Do I Upload Local Files to a Notebook Instance?	36
4.2.3 How Do I Import Large Files to a Notebook Instance?	36
4.2.4 Where Will the Data Be Uploaded to?	36
4.2.5 How Do I Download Files from a Notebook Instance to a Local Computer?	37
4.2.6 How Do I Copy Data from Development Environment Notebook A to Notebook B?	37
4.2.7 What Can I Do If a File Fails to Be Uploaded to a Notebook Instance?	37
4.2.8 Failed to View the Local Mount Point of a Dynamically Mounted OBS Parallel File System in JupyterLab of a Notebook Instance	38
4.3 Data Storage	39
4.3.1 How Do I Rename an OBS File?	39
4.3.2 Do Files in /cache Still Exist After a Notebook Instance is Stopped or Restarted? How Do I Avoid Restart?	
4.3.3 How Do I Use the pandas Library to Process Data in OBS Buckets?	40
4.3.4 How Do I Access the OBS Bucket of Another Account from a Notebook Instance?	40
4.4 Environment Configurations	40
4.4.1 How Do I Check the CUDA Version Used by a Notebook Instance?	40
4.4.2 How Do I Enable the Terminal Function in DevEnviron of ModelArts?	41
4.4.3 How Do I Install External Libraries in a Notebook Instance?	41
4.4.4 How Do I Obtain the External IP Address of My Local PC?	42
4.4.5 How Can I Resolve Abnormal Font Display on a ModelArts Notebook Accessed from iOS?	42
4.4.6 Is There a Proxy for Notebook? How Do I Disable It?	44
4.4.7 Adding a Custom IPython Kernel in a Notebook Instance	44
4.5 Notebook Instances	46
4.5.1 What Do I Do If I Cannot Access My Notebook Instance?	46
4.5.2 What Should I Do When the System Displays an Error Message Indicating that No Space Left Af Run the pip install Command?	
4.5.3 What Do I Do If "Read timed out" Is Displayed After I Run pip install?	48
4.5.4 What Do I Do If the Code Can Be Run But Cannot Be Saved, and the Error Message "save error" Displayed?	
4.5.5 When the SSH Tool Is Used to Connect to a Notebook Instance, Server Processes Are Cleared, buthe GPU Usage Is Still 100%	
4.6 Code Execution	49
4.6.1 What Do I Do If a Notebook Instance Won't Run My Code?	49
4.6.2 Why Does the Instance Break Down When dead kernel Is Displayed During Training Code Runni	_
4.6.3 What Do I Do If cudaCheckError Occurs During Training?	50

4.6.4 What Should I Do If DevEnviron Prompts Insufficient Space?	50
4.6.5 Why Does the Notebook Instance Break Down When opency.imshow Is Used?	51
4.6.6 Why Cannot the Path of a Text File Generated in Windows OS Be Found In a Notebook Instance?	
4.6.7 What Do I Do If Files Fail to Be Saved in JupyterLab?	
4.7 Failures to Access the Development Environment Through VS Code	
4.7.1 What Do I Do If the VS Code Window Is Not Displayed?	
4.7.2 What Do I Do If a Remote Connection Failed After VS Code Is Opened?	
4.7.3 What Do I Do If I Failed to Access the Development Environment Through VS Code?	
4.7.4 What Do I Do If Error Message "Could not establish connection to xxx" Is Displayed During a Remote Connection?	
4.7.5 What Do I Do If the Connection to a Remote Development Environment Remains in "Setting up SSH Host xxx: Downloading VS Code Server locally" State for More Than 10 Minutes?	
4.7.6 What Do I Do If the Connection to a Remote Development Environment Remains in the State of "Setting up SSH Host xxx: Downloading VS Code Server locally" for More Than 10 Minutes?	
4.7.7 What Do I Do If the Connection to a Remote Development Environment Remains in the State of 'ModelArts Remote Connect: Connecting to instance xxx" for More Than 10 Minutes?	61
4.7.8 What Do I Do If a Remote Connection Is in the Retry State?	62
4.7.9 What Do I Do If Error Message "The VS Code Server failed to start" Is Displayed?	64
4.7.10 What Do I Do If Error Message "Permissions for 'x:/xxx.pem' are too open" Is Displayed?	65
4.7.11 What Do I Do If Error Message "Bad owner or permissions on C:\Users\Administrator/.ssh/config' or "Connection permission denied (publickey)" Is Displayed?	
4.7.12 What Do I Do If Error Message "ssh: connect to host xxx.pem port xxxxx: Connection refused" Is Displayed?	68
4.7.13 What Do I Do If Error Message "ssh: connect to host ModelArts-xxx port xxx: Connection timed out" Is Displayed?	68
4.7.14 What Do I Do If Error Message "Load key "C:/Users/xx/test1/xxx.pem": invalid format" Is Displayed?	69
4.7.15 What Do I Do If Error Message "An SSH installation couldn't be found" or "Could not establish connection to instance xxx: 'ssh'" Is Displayed?	69
4.7.16 What Do I Do If Error Message "no such identity: C:/Users/xx /test.pem: No such file or directory" is Displayed?	
4.7.17 What Do I Do If Error Message "Host key verification failed" or "Port forwarding is disabled" Is Displayed?	72
4.7.18 What Do I Do If Error Message "Failed to install the VS Code Server" or "tar: Error is not recoverable: exiting now" Is Displayed?	74
4.7.19 What Do I Do If Error Message "XHR failed" Is Displayed When a Remote Notebook Instance Is Accessed Through VS Code?	74
4.7.20 What Do I Do for an Automatically Disconnected VS Code Connection If No Operation Is Performed for a Long Time?	75
4.7.21 What Do I Do If It Takes a Long Time to Set Up a Remote Connection After VS Code Is Automatically Upgraded?	77
4.7.22 What Do I Do If Error Message "Connection reset" Is Displayed During an SSH Connection?	78
4.7.23 What Can I Do If a Notebook Instance Is Frequently Disconnected or Stuck After I Use MobaXterito Connect to the Notebook Instance in SSH Mode?	
4.7.24 What Do I Do If Error Message "Missing GLIBC, Missing required dependencies" Is Displayed Whe	

4.7.25 What Do I Do If an Error Message Is Displayed Indicating That ms-vscode-remote.remot-sdh Is	
Uninstalled Due To a Reported Issue When Using VSCode-huawei?	
4.8 Using Custom Images in Notebook4.8 User Under a Different Master Account to Create a	81
Notebook Instance?	81
4.9 Others	
4.9.1 How Do I Use Multiple Ascend Cards for Debugging in a Notebook Instance?	
4.9.2 Why Is the Training Speed Similar When Different Notebook Flavors Are Used?	
4.9.3 How Do I Perform Incremental Training When Using MoXing?	
4.9.4 How Do I View GPU Usage on the Notebook?	
4.9.5 How Can I Obtain GPU Usage Through Code?	87
4.9.6 Which Real-Time Performance Indicators of an Ascend Chip Can I View?	89
4.9.7 What Are the Relationships Between Files Stored in JupyterLab, Terminal, and OBS?	89
4.9.8 How Do I Use the Datasets Created on ModelArts in a Notebook Instance?	89
4.9.9 pip and Common Commands	90
4.9.10 What Are Sizes of the /cache Directories for Different Notebook Specifications in DevEnviron?	90
4.9.11 What Is the Impact of Resource Overcommitment on Notebook Instances?	91
4.9.12 Error Message "Permission denied" Is Displayed When the tensorboard Command Is Used to O a Log File in a Notebook Instance	
5 Training Jobs	.93
5.1 Functional Consulting	93
5.1.1 What Are the Solutions to Underfitting?	93
5.1.2 What Are the Precautions for Switching Training Jobs from the Old Version to the New Version?.	94
5.1.3 How Do I Obtain a Trained ModelArts Model?	96
5.1.4 What Is TensorBoard Used for in Model Visualization Jobs?	96
5.1.5 How Do I Obtain RANK_TABLE_FILE on ModelArts for Distributed Training?	96
5.1.6 How Do I Obtain the CUDA and cuDNN Versions of a Custom Image?	96
5.1.7 How Do I Obtain a MoXing Installation File?	97
5.1.8 In a Multi-Node Training, the TensorFlow PS Node Functioning as a Server Will Be Continuously Suspended. How Does ModelArts Determine Whether the Training Is Complete? Which Node Is a	
Worker?5.1.9 How Do I Install MoXing for a Custom Image of a Training Job?	
5.1.9 How Do I firstall Moxing for a Custoff image of a fraining Job:	
5.2.1 How Do I Configure the Input and Output Data for Training Models on ModelArts?	
5.2.2 How Do I Improve Training Efficiency While Reducing Interaction with OBS?	
5.2.3 Why the Data Read Efficiency Is Low When a Large Number of Data Files Are Read During Training?	
5.2.4 How Do I Define Path Variables When Using MoXing?	
5.3 Compiling the Training Code	
5.3.1 How Do I Create a Training Job When a Dependency Package Is Referenced by the Model to Be	100
Trained?	. 100
5.3.2 What Is the Common File Path for Training Jobs?	. 101
5.3.3 How Do I Install a Library That C++ Depends on?	.101
5.3.4 How Do I Check Whether a Folder Copy Is Complete During Job Training?	102

5.3.5 How Do I Load Some Well Trained Parameters During Job Training?	102	
5.3.6 How Do I Obtain Training Job Parameters from the Boot File of the Training Job?	102	
5.3.7 Why Can't I Use os.system ('cd xxx') to Access the Corresponding Folder During Job Training?	103	
5.3.8 How Do I Invoke a Shell Script in a Training Job to Execute the .sh File?	103	
5.3.6 How Do I Obtain Training Job Parameters from the Boot File of the Training Job?		
	105	
5.4.3 Is the /cache Directory of a Training Job Secure?	105	
5.4.4 Why Is a Training Job Always Queuing?	105	
5.5 Managing Training Job Versions	107	
5.5.1 Does a Training Job Support Scheduled or Periodic Calling?	107	
5.6 Viewing Job Details	107	
5.6.1 How Do I Check Resource Usage of a Training Job?	107	
5.6.2 How Do I Access the Background of a Training Job?	107	
	107	
	108	
6 Deployment	109	
6.1 Model Management		
6.1.1 Importing Models		
6.1.1.1 How Do I Import the .h5 Model of Keras to ModelArts?	109	
6.1.1.2 How Do I Edit the Installation Package Dependency Parameters in a Model Configuration File When Importing a Model?		
6.1.1.3 How Do I Change the Default Port to Create a Real-Time Service Using a Custom Image?	111	
6.1.1.4 Does ModelArts Support Multi-Model Import?	112	
6.1.1.5 Restrictions on the Size of an Image for Importing an Al Application	112	
6.2 Service Deployment	112	
6.2.1 Functional Consulting	112	
6.2.1.1 What Types of Services Can Models Be Deployed as on ModelArts?	113	
6.2.1.2 What Are the Differences Between Real-Time Services and Batch Services?		
6.2.1.3 What Is the Maximum Size of a Prediction Request Body?		
6.2.1.4 How Do I Select Compute Node Specifications for Deploying a Service?		
6.2.1.5 What Is the CUDA Version for Deploying a Service on GPUs?		
6.2.2 Real-Time Services	114	

FAQs Contents

6.2.2.1 What Do I Do If a Conflict Occurs in the Python Dependency Package of a Custom Prediction Script When I Deploy a Real-Time Service?	. 114
6.2.2.2 What Is the Format of a Real-Time Service API?	. 115
6.2.2.3 Why Did My Service Deployment Fail with Proper Deployment Timeout Configured?	. 115
7 API/SDK	116
7.1 Can ModelArts APIs or SDKs Be Used to Download Models to a Local PC?	.116
7.2 What Installation Environments Do ModelArts SDKs Support?	.116
7.3 Does ModelArts Use the OBS API to Access OBS Files over an Intranet or the Internet?	.116
7.4 How Do I Obtain a Job Resource Usage Curve After I Submit a Training Job by Calling an API?	.117
7.5 How Do I View the Old-Version Dedicated Resource Pool List Using the SDK?	. 117
8 Using PyCharm Toolkit	118
8.1 What Should I Do If an Error Occurs During Toolkit Installation?	
8.2 What Should I Do If an Error Occurs When I Edit a Credential in PyCharm Toolkit?	. 118
8.3 Why Cannot I Start Training?	. 120
8.4 What Should I Do If Error "xxx isn't existed in train_version" Occurs When a Training Job Is Submitted?	. 121
8.5 What Should I Do If Error "Invalid OBS path" Occurs When a Training Job Is Submitted?	.122
8.6 What Should I Do If Error "NoSuchKey" Occurs When PyCharm Toolkit Is Used to Submit a Trainin Job?	
8.7 What Should I Do If an Error Occurs During Service Deployment?	
8.8 How Do I View Error Logs of PyCharm Toolkit?	.123
8.9 How Do I Use PyCharm ToolKit to Create Multiple Jobs for Simultaneous Training?	
8.10 What Should I Do If "Error occurs when accessing to OBS" Is Displayed When PyCharm ToolKit Is Used?	

1 General Issues

1.1 What Is ModelArts?

ModelArts is a one-stop AI development platform geared toward developers and data scientists of all skill levels. It enables you to rapidly build, train, and deploy models anywhere (from the cloud to the edge), and manage full-lifecycle AI workflows. ModelArts accelerates AI development and fosters AI innovation with key capabilities, including data preprocessing and auto labeling, distributed training, automated model building, and one-click workflow executing.

The one-stop ModelArts platform covers all stages of AI development, including data processing, AI application creation, and model training and deployment. The underlying layer of ModelArts supports various heterogeneous computing resources. You can flexibly select and use the resources without having to consider the underlying technologies. In addition, ModelArts supports popular open-source AI development frameworks such as TensorFlow. Developers can also use self-developed algorithm frameworks to match their usage habits.

ModelArts aims to achieve simple, convenient AI development.

1.2 What Are the Relationships Between ModelArts and Other Services?

OBS

ModelArts uses Object Storage Service (OBS) to securely and reliably store data and models at low costs. For more details, see *Object Storage Service Console Operation Guide*.

CCE

ModelArts uses Cloud Container Engine (CCE) to deploy models as real-time services. CCE enables high concurrency and provides elastic scaling. For more information about CCE, see Cloud Container Engine User Guide.

FAQs 1 General Issues

SWR

To use an AI framework that is not supported by ModelArts, use Software Repository for Container (SWR) to customize an image and import the image to ModelArts for training or inference. For details about SWR, see .

Cloud Eye

ModelArts uses Cloud Eye to monitor online services and model loads in real time and send alarms and notifications automatically. For details about Cloud Eye, see *Cloud Eye User Guide*.

CTS

ModelArts uses Cloud Trace Service (CTS) to record operations for later query, audit, and backtrack operations. For details about CTS, see *Cloud Trace Service User Guide*.

1.3 What Are the Differences Between ModelArts and DLS?

Deep Learning Service (DLS) is a one-stop deep learning platform based on the high-performance computing capabilities of HUAWEI CLOUD. With various optimized neural network models, DLS allows you to easily implement model training and evaluation with the flexibility of on-demand scheduling.

However, DLS supports only the deep learning technologies, while ModelArts integrates both the deep learning and machine learning technologies. In addition, ModelArts is a one-stop AI development platform, which manages the AI development lifecycle from data labeling, algorithm development, to model training and deployment. To be specific, ModelArts contains and supports the functions and features of DLS. Currently, DLS is terminated on HUAWEI CLOUD. The functions related to deep learning can be directly used in ModelArts. If you are a DLS user, you can also migrate the data in DLS to ModelArts.

1.4 How Do I Obtain an Access Key?

Obtaining an Access Key

- Log in to the console, enter the My Credentials page, and choose Access Keys > Create Access Key.
- 2. In the **Create Access Key** dialog box that is displayed, use the login password for verification.
- 3. Click **OK**, open the **credentials.csv** file, and save the key file as prompted. The access key file is saved in the default downloads folder of the browser. Then, the access key (**Access Key Id** and **Secret Access Key**) is obtained.

1.5 How Do I Upload Data to OBS?

Before using ModelArts to develop AI models, data needs to be uploaded to an OBS bucket. You can log in to the OBS console to create an OBS bucket, create a

folder in it, and upload data. For details about how to upload data, see *Object Storage Service User Guide*.

1.6 What Do I Do If the System Displays a Message Indicating that the AK/SK Pair Is Unavailable?

Issue Analysis

An AK and SK form a key pair required for accessing OBS. Each SK corresponds to a specific AK, and each AK corresponds to a specific user. If the system displays a message indicating that the AK/SK pair is unavailable, it is possible that the account is in arrears or the AK/SK pair is incorrect.

Solution

- 1. Use the current account to log in to the OBS console and check whether the current account can access OBS.
 - If the account can access OBS, rectify the fault by referring to 2.
 - If the account cannot access OBS, contact technical support.
- 2. If yes, .
 - If not, replace the AK/SK with those created using the current account.
 For details, see Access Keys" Obtaining an Access Key".

1.7 What Do I Do If a Message Indicating Insufficient Permissions Is Displayed When I Use ModelArts?

If a message indicating insufficient permissions is displayed when you use ModelArts, perform the operations described in this section to grant permissions for related services as needed.

The permissions to use ModelArts depend on OBS authorization. Therefore, ModelArts users require OBS system permissions as well.

- For details about how to grant a user full permissions for OBS and common operations permissions for ModelArts, see Configuring Common Operations Permissions.
- For details about how to manage user permissions on OBS and ModelArts in a refined manner and configure custom policies, see Creating a Custom Policy for ModelArts.

Configuring Common Operations Permissions

To use ModelArts basic functions, assign the **ModelArts CommonOperations** permission on project-level services to users. Since ModelArts depends on OBS permissions, assign the **OBS Administrator** permission on global services to users.

The procedure is as follows:

Step 1 Create a user group.

Log in to the IAM console and choose **User Groups** > **Create User Group**. Enter a user group name, and click **OK**.

Step 2 Configure permissions for the user group.

In the user group list, locate the user group created in step 1, click **Authorize**, and perform the following operations.

1. Assign the **ModelArts CommonOperations** permission on project-level services to the user group and click **OK**.

∩ NOTE

The permission takes effect only in assigned regions. Assign permissions in all regions if the permission is required in all regions.

- 2. Assign the **OBS Administrator** permission on global services to the user group and click **OK**.
- **Step 3** Create a user on the IAM console and add the user to the user group created in step 1.
- **Step 4** In the authorized region, perform the following operations:
 - Choose Service List > ModelArts. Choose Dedicated Resource Pools. On the page that is displayed, select a resource pool type and click Create. You should not be able to create a new resource pool.
 - Choose any other service in Service List. (Assume that the current policy contains only ModelArts CommonOperations.) If a message appears indicating that you have insufficient permissions to access the service, the ModelArts CommonOperations policy has already taken effect.
 - Choose Service List > ModelArts. On the ModelArts console, choose Data
 Management > Datasets > Create Dataset. You should be able to access the
 corresponding OBS path.

----End

Creating a Custom Policy for ModelArts

In addition to the default system policies of ModelArts, you can create custom policies, which can address OBS permissions as well.

You can create custom policies using either the visual editor or JSON views. This section describes how to use a JSON view to create a custom policy to grant permissions required to use development environments and the minimum permissions required by ModelArts to access OBS.

□ NOTE

A custom policy can contain actions for multiple services that are accessible globally or only for region-specific projects.

ModelArts is a project-level service, but OBS is a global service, so you need to create separate policies for the two services and then apply these policies to the users.

1. Create a custom policy for minimizing permissions for OBS that ModelArts depends on.

Log in to the IAM console, choose **Permissions** > **Policies/Roles**, and click **Create Custom Policy**. Configure the parameters as follows:

- Policy Name: Choose a custom policy name.
- Policy View: JSON
- Policy Content: Follow the instructions in Example Custom Policies of OBS.
- 2. Create a custom policy for the permissions to use ModelArts development environments. Configure the parameters as follows:
 - **Policy Name**: Choose a custom policy name.
 - Policy View: JSON
 - Policy Content: Follow the instructions in Example Custom Policies for Using the ModelArts Development Environment. For the actions that can be added for custom policies, see ModelArts API Reference > "Permissions Policies and Supported Actions" > "Introduction".
- 3. After creating a user group on the IAM console, grant the custom policy created in 1 to the user group.
- 4. Create a user on the IAM console and add the user to the user group created in 3.
- 5. In the authorized region, perform the following operations:
 - Choose Service List > ModelArts. On the ModelArts console, choose
 Data Management > Datasets. If you cannot create a dataset, the permissions (for using the development environment) granted only to ModelArts users have taken effect.
 - Choose Service List > ModelArts. On the ModelArts console, choose
 DevEnviron > Notebook and click Create. If you can access the OBS path specified in Storage, the OBS permissions have taken effect.

Example Custom Policies of OBS

The permissions to use ModelArts require OBS authorization. The following example shows the minimum OBS required, including the permissions for OBS buckets and objects. After being granted the minimum permissions for OBS, users can access OBS from ModelArts without restrictions.

```
"Version": "1.1",
"Statement": [
     "Action": [
        "obs:bucket:ListAllMybuckets",
        "obs:bucket:HeadBucket".
        "obs:bucket:ListBucket",
        "obs:bucket:GetBucketLocation",
        "obs:object:GetObject",
        "obs:object:GetObjectVersion",
        "obs:object:PutObject",
        "obs:object:DeleteObject"
        "obs:object:DeleteObjectVersion",
        "obs:object:ListMultipartUploadParts",
        "obs:object:AbortMultipartUpload",
        "obs:object:GetObjectAcl",
        "obs:object:GetObjectVersionAcl",
        "obs:bucket:PutBucketAcl",
        "obs:object:PutObjectAcl"
      "Effect": "Allow"
```

```
]
}
```

Example Custom Policies for Using the ModelArts Development Environment

```
{
    "Version": "1.1",
    "Statement": [

    {
        "Effect": "Allow",
        "Action": [
            "modelarts:notebook:list",
            "modelarts:notebook:create" ,
            "modelarts:notebook:get" ,
            "modelarts:notebook:update" ,
            "modelarts:notebook:delete" ,
            "modelarts:notebook:action" ,
            "modelarts:notebook:access"
        ]
    }
    }
}
```

1.8 How Do I Use ModelArts to Train Models Based on Structured Data?

For more advanced users, ModelArts provides the notebook creation function of DevEnviron for code development. It allows the users to create training tasks with large volumes of data in training jobs and use the engines such as Scikit_Learn, XGBoost, or Spark_MLlib in the development and training processes.

1.9 What Are Regions and AZs?


Concept

A region and availability zone (AZ) identify the location of a data center. You can create resources in a specific region and AZ.

- Regions are divided based on geographical location and network latency.
 Public services, such as Elastic Cloud Server (ECS), Elastic Volume Service (EVS), Object Storage Service (OBS), Virtual Private Cloud (VPC), Elastic IP (EIP), and Image Management Service (IMS), are shared within the same region. Regions are classified into universal regions and dedicated regions. A universal region provides universal cloud services for common tenants. A dedicated region provides specific services for specific tenants.
- An AZ contains one or more physical data centers. Each AZ has independent cooling, fire extinguishing, moisture-proof, and electricity facilities. Within an AZ, computing, network, storage, and other resources are logically divided into multiple clusters. AZs within a region are interconnected using highspeed optical fibers to support cross-AZ high-availability systems.

Figure 1-1 shows the relationship between regions and AZs.

Figure 1-1 Regions and AZs

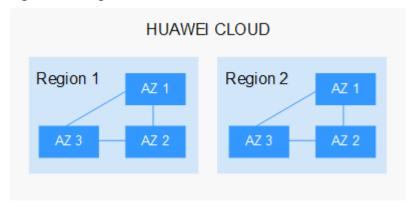

HUAWEI CLOUD provides services in many regions around the world. Select a region and AZ based on requirements. For more information, see .

Selecting a Region

When selecting a region, consider the following factors:

Location

It is recommended that you select the closest region for low network latency and quick access. Regions within the Chinese mainland provide the same infrastructure, BGP network quality, as well as resource operations and configurations. Therefore, if your target users are on the Chinese mainland, you do not need to consider the network latency differences when selecting a region.

- If your target users are in Asia Pacific (excluding the Chinese mainland), select the CN-Hong Kong, AP-Bangkok, or AP-Singapore region.
- If your target users are in Africa, select the **AF-Johannesburg** region.
- If your target users are in Europe, select the **EU-Paris** region.
- If your target users are in Latin America, select the LA-Santiago region.

□ NOTE

The LA-Santiago region is located in Chile.

Resource price

Resource prices may vary in different regions. For details, see .

Selecting an AZ

When deploying resources, consider your applications' requirements on disaster recovery (DR) and network latency.

- For high DR capability, deploy resources in different AZs within the same region.
- For lower network latency, deploy resources in the same AZ.

1 General Issues

Regions and Endpoints

Before you use an API to call resources, specify its region and endpoint. For more details, see .

1.10 How Do I View All Files Stored in OBS on ModelArts?

To view all files stored in OBS when using notebook instances or training jobs, use either of the following methods:

- OBS console
 - Log in to OBS console using the current account, and search for the OBS buckets, folders, and files.
- You can use an API to check whether a given directory exists. In an existing notebook instance or after creating a new notebook instance, run the following command to check whether the directory exists: import moxing as mox

mox.file.list_directory('obs://bucket_name', recursive=True)

If there are a large number of files, wait until the final file path is displayed.

1.11 Where Are Datasets of ModelArts Stored in a Container?

Datasets of ModelArts and data in specific data storage locations are stored in OBS.

1.12 What Are the Functions of ModelArts Training and Inference?

ModelArts training includes ExeML, training management, and dedicated resource pools (for development/training).

ModelArts inference includes AI application management and deployment.

1.13 How Do I View an Account ID and IAM User ID?


- 1. Use your IAM account to log in to Huawei Cloud.
- 2. In the upper right corner of the page, click **Console**. The HUAWEI CLOUD management console is displayed.

Figure 1-2 Console




3. Hover the cursor over the account name in the upper right corner of the console and choose **My Credentials** from the drop-down list. The **API Credentials** page is displayed.

Figure 1-3 My Credentials

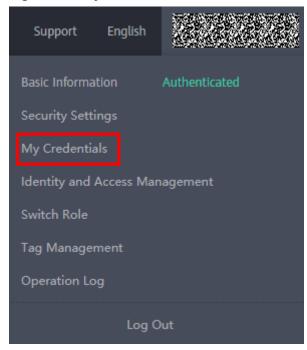

4. On the **API Credentials** page, obtain the IAM username, user ID, account name, and account ID.

Figure 1-4 Obtaining the credentials



1.14 Can AI-assisted Identification of ModelArts Identify a Specific Label?

After a model with multiple labels is trained and deployed as a real-time service, all the labels are identified. If only one type of label needs to be identified, train a model dedicated for identifying the label. To speed up the label identification, select a high flavor for deploying the model.

1.15 How Does ModelArts Use Tags to Manage Resources by Group?

ModelArts can work with Tag Management Service (TMS). When creating resource-consuming tasks in ModelArts, for example, training jobs, configure tags for these tasks so that ModelArts can use tags to manage resources by group.

ModelArts allows you to configure tags when you create training jobs, notebook instances, or real-time inference services.

FAQs 1 General Issues

Operation Process

- 1. Step 1 Create Predefined Tags on TMS
- 2. Step 2 Add a Tag to a ModelArts Task
- 3. Step 3 Obtain ModelArts Resource Usage by Resource Type in TMS

Step 1 Create Predefined Tags on TMS

Log in to the TMS console and create tags on the **Predefined Tags** page. The created tags are global and can be used in all Huawei Cloud regions.

Step 2 Add a Tag to a ModelArts Task

When creating a notebook instance, training job, or real-time inference services in ModelArts, configure a tag for the task.

- Add a tag to a ModelArts notebook instance.
 Add a tag when you create a notebook instance. Alternatively, after creating a
 - notebook instance, add a tag on the **Tags** tab on the instance details page.
- Add a tag to a ModelArts training job.
 Add a tag when you create a training job. Alternatively, after creating a training job, add a tag on the Tags tab on the job details page.
- Add a tag to a ModelArts real-time service.
 Add a tag when you create a real-time service. Alternatively, after creating a real-time service, add a tag on the Tags tab on the service details page.

Figure 1-5 Adding a tag



NOTE

When adding a tag to a ModelArts task, you can create new tags by specifying the keys and values of the new tags. The tags created here are available only to the current project.

Step 3 Obtain ModelArts Resource Usage by Resource Type in TMS

Log in to the TMS console. On the **Resources Tag** page, view resource tasks in specified regions based on resource types and tags.

- Region: one or more Huawei Cloud regions. For details, see What Are Regions and AZs?.
- Resource Type: Table 1-1 lists the resource types that can be viewed on ModelArts.

• **Resource Tag**: If no tag is specified, all resources are displayed, regardless of whether the resources are configured with tags. One or multiple tags can be selected to obtain resource usage.

Table 1-1 Resource types that can be viewed on ModelArts

Resource Type	Description				
ModelArts-Notebook	Notebook instances in ModelArts DevEnviron				
ModelArts-TrainingJob	ModelArts training jobs				
ModelArts-RealtimeService	ModelArts real-time inference services				
ModelArts-ResourcePool	ModelArts dedicated resource pools				

■ NOTE

If your organization has configured tag policies for ModelArts, add tags to resources based on the policies. If a tag does not comply with the tag policies, resource creation may fail. Contact your organization administrator to learn more about tag policies.

1.16 Why Is the Job Still Queued When Resources Are Sufficient?

- If a public resource pool is used, the resources may be used by other users. Please wait or find solutions in Why Is a Training Job Always Queuing?.
- If a dedicated resource pool is used, perform the following operations:
 - a. Check whether other jobs (including inference jobs, training jobs, and development environment jobs) are running in the dedicated resource pool.
 - On the **Dashboard** page, you can go to the details page of the running jobs or instances to check whether the dedicated resource pool is used. You can stop them based on your needs to release resources.
 - b. Click the dedicated resource pool to go to the details page and view the job list.
 - If other jobs are waiting in the queue, the new job must also join the queue.
 - c. Check whether resources are fragmented.
 - For example, the cluster has two nodes, and there are four idle cards on each node. However, your job requires eight cards on one node. In this case, the idle resources cannot be allocated to your job.

 $\mathbf{2}$ Billing

2.1 How Do I View the ModelArts Jobs Being Billed?

Log in to the ModelArts management console. In the navigation pane on the left, click **Dashboard** and view the jobs that are being billed. Go to the management page and stop them based on site requirements. For example, if a notebook instance is being billed, choose **Development Workspace** > **Notebook**, and stop the running notebook instance.

Figure 2-1 Viewing jobs that are being billed



The following items will be billed when you use ModelArts:

- ExeML: ExeML is billed when it is running. After using ExeML, stop it and the training jobs and services created for running ExeML. Additionally, clear the data stored in OBS.
- Notebook instances:
 - Running notebook instances are billed. To stop billing a notebook instance, stop or delete it. If EVS is used for storage, clear the data stored in EVS.
 - You will be billed for a paid flavor when you try CodeLab. To stop billing the flavor, stop the notebook instance on the JupyterLab page.
- Training jobs: Running training job are billed. To stop billing a training job, stop it. Additionally, clear the data stored in OBS.
- Deployed services: If a model is deployed as a real-time service, the service will be billed. To stop the billing, stop the deployed service. Additionally, clear the data stored in OBS.
- Dedicated resource pools: If you have purchased a dedicated resource pool in ModelArts for AI development and use this resource pool for running ExeML jobs, notebook instances, training jobs, and deployed services, the compute

resources used in these operations will be billed via the dedicated resource pool. A pay-per-use dedicated resource pool is billed continuously since it has been created, so delete it if you do not use it.



In addition to the billing items displayed on the **Dashboard** page of ModelArts, OBS and EVS storage will be separately billed if they are used.

- To stop billing the OBS resources, go to the OBS management console and clear the data in OBS.
- To stop billing the EVS storage, go to the ModelArts management console and delete the notebook instances with EVS storage. To stop billing the EVS resources, go to the EVS management console and clear the data in EVS.


2.2 How Do I View ModelArts Expenditure Details?

In **Billing Center**, the expenditure details of ModelArts are displayed on an hourly basis. You can switch to the **Expenditure Details** page to view the fees consumed for each job.

Procedure:

- 1. In **Billing Center**, choose **Billing** > **Expenditure Items**. On the **Expenditure Items** page, click the order or transaction number of a record in the list to view its expenditure details.
- On the Expenditure Details page, the resource usage and fees in the order are displayed. Select display options and data period to view expenditure details.

Figure 2-2 Expenditure details



2.3 Will I Be Charged for Uploading Datasets to ModelArts?

You are not charged for dataset management and labeling in ModelArts. However, datasets are stored in OBS, and you will be billed for the storage on OBS. For details, see and create OBS buckets to store data used by ModelArts.

2.4 What Should I Do to Avoid Unnecessary Billing After I Label Datasets and Exit?

Labeling datasets is free of charge. However, OBS bills you for the storage space used for storing the datasets. You are advised to go to the OBS management console and delete the stored data and OBS buckets to stop billing.

2.5 How Do I Stop Billing for a ModelArts ExeML Project?

- For ExeML jobs created using a **public resource pool**:
 - Log in to the ModelArts management console. In the ExeML job list, delete the target ExeML job. In the training job list, stop the training jobs created for running the ExeML job. In the real-time service list, stop the services created for running the ExeML job. After these operations are complete, the billing is stopped.
 - Log in to the OBS management console, access your OBS bucket, and delete the data stored in the OBS bucket. After these operations are complete, the billing is stopped.
- For ExeML jobs created using a **dedicated resource pool**:
 - Log in to the ModelArts management console. In the ExeML job list, delete the target ExeML job. In the training job list, stop the training jobs created for running the ExeML job. In the real-time service list, stop the services created for running the ExeML job. In the resource pool list, delete the dedicated resource pool that is running the target ExeML job. After these operations are complete, the billing is stopped.
 - Log in to the OBS management console, access your OBS bucket, and delete the data stored in the OBS bucket. After these operations are complete, the billing is stopped.

2.6 How Do I Stop Billing If I Do Not Use ModelArts?

The cost of AI development in ModelArts mainly includes the storage fee and resource fee. If ModelArts is no longer used, stop or delete the services running in ModelArts and delete the data stored in OBS and EVS.

Clearing Storage Data

ModelArts data is stored in OBS. To stop storage billing, switch to the OBS console and delete the data and directories.

Clearing Resources

To stop resource billing, check running jobs in ModelArts, and stop or delete the jobs.

Procedure

Log in to the ModelArts console. In the navigation pane, choose **Dashboard**. On the **Dashboard** area, view the jobs that are being billed. Then, stop the jobs as needed.

Figure 2-3 Viewing jobs that are being billed



- In the navigation pane of the ModelArts console, choose **ExeML** and check whether there are any running projects. If so, click **Delete** in the **Operation** column. Then, the billing will be stopped accordingly.
- In the navigation pane of the ModelArts console, choose **Development** Workspace > Notebook and check whether there are running notebook
 instances. If so, click **Stop** in the **Operation** column. Then, the billing will be
 stopped accordingly. Check whether there are notebook instances using EVS
 storage. If so, stop and delete the notebook instances. Then, the EVS billing
 will be stopped accordingly.
- In the navigation pane of the ModelArts console, choose Model Training >
 Training Jobs, and check whether there are running jobs. If so, click Stop in
 the Operation column. Then, the billing will be stopped accordingly.
- In the navigation pane of the ModelArts console, choose Service Deployment
 Real-Time Services and check whether there are running jobs. If so, click
 Stop in the Operation column. Then, the billing will be stopped accordingly.
- In the navigation pane of the ModelArts console, choose Service Deployment
 Batch Services and check whether there are running jobs. If so, click Stop in the Operation column. Then, the billing will be stopped accordingly.

2.7 How Are Training Jobs Billed?

- If you use a public resource pool, you are charged based on the selected flavor, number of nodes, and running duration. The billing rule is as follows: Unit price of the flavor x Number of nodes x Running duration (accurate to seconds).
- If you use dedicated resource pool, training jobs are not billed separately. You are charged for the dedicated resource pool.

2.8 Why Does Billing Continue After All Projects Are Deleted?

Even if ExeML projects, notebook instances, training jobs, or services of ModelArts are stopped, and there is no charging item is displayed on the **Dashboard** page, the account may still be billed for the OBS storage being used.

The possible causes are as follows:

- 1. You have uploaded data to OBS for storage when using ModelArts, and the OBS storage is billed. In this case, go to the OBS management console and delete the data, folders, and OBS buckets that are no longer needed.
- 2. You have selected EVS storage when creating a notebook instance, and the storage is separately billed even after the notebook instance is stopped. In this case, delete the notebook instance.
- 3. You have switched the flavor to a charging one when experiencing CodeLab.

 In this case, go to the CodeLab page and click _____ in the upper right corner to stop the notebook instance.

3 Data Management (Old Version)

3.1 Are There Size Limits for Images to be Uploaded?

For data management, there are limits on the image size when you upload images to the datasets whose labeling type is object detection or image classification. The size of an image cannot exceed 8 MB, and only JPG, JPEG, PNG, and BMP formats are supported.

Note that for ExeML, the size of an image to be uploaded cannot exceed 5 MB.

Solutions:

- Import the images from OBS. Upload images to any OBS directory and import the images from the OBS directory to an existing dataset.
- Use data source synchronization. Upload images to the input directory or its subdirectory of a dataset, and click **Synchronize Data Source** on the dataset details page to add new images. Note that synchronizing a data source will delete the files deleted from OBS from the dataset. Exercise caution when performing this operation.
- Create a dataset. Upload images to any OBS directory. You can directly use the image directory as the input directory to create the dataset.

3.2 What Do I Do If Images in a Dataset Cannot Be Displayed?

Symptom

Images in a created dataset cannot be displayed during labeling, and they cannot be viewed by clicking them. Alternatively, the system displays a message indicating that an error occurred in image loading.

Possible Cause

• The local network may be faulty. As a result, OBS cannot be accessed and images cannot be loaded.


FAQs

- You are not allowed to access the target OBS bucket.
- The OBS bucket or file may be encrypted.
- The OBS storage class does not allow the parallel file system to process images. Therefore, the thumbnails cannot be displayed.

Solution

1. The following uses Google Chrome as an example. Press **F12** to open the browser console, locate the image, and copy the image URL.

Figure 3-1 Obtaining the image URL

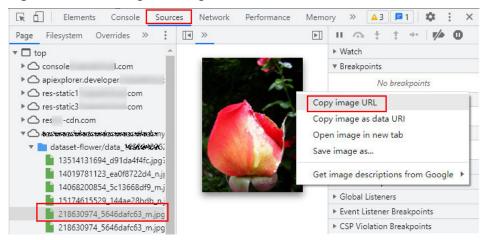

- 2. Enter the URL in a new browser. The "Your Connection Is Not Private" message is displayed. Click **Advanced** on the page and choose **Proceed to <link> (unsafe)** to go to the target website.
- 3. After the image is successfully accessed, return to the ModelArts console to access the dataset. The image is displayed.

3.3 How Do I Integrate Multiple Object Detection Datasets into One Dataset?

Create a parent directory in an OBS bucket, in the directory add the same number of folders as that of datasets, export one dataset to one folder, and use the parent directory to create a dataset.

Log in to the ModelArts management console and choose **Data Management** > **Datasets**. Click the target dataset to switch to its **Dashboard** page. Then, click **Export** in the upper right corner of the page to export the dataset to a folder in the OBS parent directory.

3.4 What Do I Do If Importing a Dataset Failed?

The possible cause is that the storage class of the target OBS bucket is incorrect. In this case, select a bucket of the standard storage class to import data.

3.5 Can a Table Dataset Be Labeled?

Table datasets cannot be labeled. They are suitable for processing structured data such as tables. Table files are in CSV format. You can preview up to 100 data records in a table.

3.6 What Do I Do to Import Locally Labeled Data to ModelArts?

ModelArts allows you to import data by importing datasets. Locally labeled data can be imported from an OBS directory or the manifest file. After the import, you can label the data again or modify the labels in ModelArts Data Management.

3.7 Why Does Data Fail to Be Imported Using the Manifest File?

Symptom

Failed to use the manifest file of the published dataset to import data again.

Possible Cause

Data has been changed in the OBS directory of the published dataset, for example, images have been deleted. Therefore, the manifest file is inconsistent with data in the OBS directory. As a result, an error occurs when the manifest file is used to import data again.

Solution

• Method 1 (recommended): Publish a new version of the dataset again and use the new manifest file to import data.

 Method 2: Modify the manifest file on your local PC, search for data changes in the OBS directory, and modify the manifest file accordingly. Ensure that the manifest file is consistent with data in the OBS directory, and then import data using the new manifest file.

3.8 Where Are Labeling Results Stored?

The ModelArts console provides data visualization capabilities, which allows you to view detailed data and labeling information on the console. To learn more about the path for storing labeling results, see the following description.

Background

When creating a dataset in ModelArts, set both **Input Dataset Path** and **Output Dataset Path** to OBS.


- Input Dataset Path: OBS path where the raw data is stored.
- Output Dataset Path: Under this path, directories are generated based on the dataset version after data is labeled in ModelArts and datasets are published. The manifest files (containing data and labeling information) used in ModelArts are also stored in this path. For details about the files, see .

Procedure

- 1. Log in to the ModelArts console and choose **Data Management** > **Datasets**.
- 2. Select your desired dataset and click the triangle icon on the left of the dataset name to expand the dataset details. You can obtain the OBS path set for **Output Dataset Path**.

Before obtaining labeling results, ensure that at least one dataset version is available.

Figure 3-2 Dataset details



3. Log in to the OBS console and locate the directory of the corresponding dataset version from the OBS path obtained in 2 to obtain the labeling result of the dataset.

Figure 3-3 Obtaining the labeling result

3.9 How Do I Download Labeling Results to a Local PC?

After being published, the labeling information and data in ModelArts datasets are stored as manifest files in the OBS path set for **Output Dataset Path**.

To obtain the OBS path, do as follows:

- Log in to the ModelArts management console and choose Data Management > Datasets.
- Locate the target dataset and click the triangle icon on the left of the dataset name to expand the dataset details. You can obtain the OBS path set for Output Dataset Path.
- 3. Log in to the OBS management console and locate the version directory from the obtained OBS path to obtain the labeling result of the dataset.

To download the labeling results to a local PC, go to the OBS path where the manifest files are stored and click **Download**.

Figure 3-4 Downloading labeling results



3.10 Why Cannot Team Members Receive Emails for a Team Labeling Task?

The possible causes are as follows:

- All dataset data has been labeled. An email can be sent to team members only if there is unlabeled data in the dataset when the team labeling task is created.
- Team members receive emails for team labeling tasks. No email will be sent when you create a labeling team or add members to a labeling team.
- Your email address has not been configured or has been incorrectly configured. For details about how to configure an email address, see .

Team members' email addresses are blocked.

3.11 Can Two Accounts Concurrently Label One Dataset?

Multiple accounts (annotators) are allowed to concurrently label one dataset. However, if multiple annotators concurrently label one image, only the labeling of the last annotator will be used as the labeling result. It is a good practice to label one image by multiple annotators in turn and save the labeling result of each annotator promptly.

3.12 Can I Delete an Annotator from a Labeling Team with a Labeling Task Assigned? What Is the Impact on the Labeling Result After Deletion? If the Annotator Cannot Be Deleted, Can I Separate the Annotator's Labeling Result?

No annotator cannot be deleted from a labeling team with labeling tasks assigned.

The labeling result of an annotator can be synchronized to the overall labeling result only after the annotator's labeling is approved, and the labeling result cannot be filtered.

3.13 How Do I Define a Hard Example in Data Labeling? Which Samples Are Identified as Hard Examples?

Hard examples are samples that are difficult to identify. Only image classification and object detection support hard examples.

3.14 Can I Add Multiple Labeling Boxes to an Object Detection Dataset Image?

Yes

For an object detection dataset, you can add multiple labeling boxes and labels to an image during labeling. Note that the labeling boxes cannot extend beyond the image boundary.

3.15 How Do I Merge Two Datasets?

Datasets cannot be merged.

However, you can perform the following operations to merge the data of two datasets into one dataset.

For example, to merge datasets A and B, do the following:


- Publish datasets A and B.
- 2. Obtain the manifest files of the two datasets from the OBS path set for **Output Dataset Path**.
- 3. Create empty dataset C and select an empty OBS folder for **Input Dataset Path**.
- 4. Import the manifest files of datasets A and B to dataset C.

 After the import is complete, data in datasets A and B is merged into dataset C. To use the merged dataset, publish dataset C.

3.16 Does Auto Labeling Support Polygons?

No. Polygons cannot be used in auto labeling. Only rectangles can be used in auto labeling. If a sample is labeled using other bounding boxes, the sample will not be trained.

3.17 What Do the Options for Accepting a Team Labeling Task Mean?



- All passed: All items, including the rejected ones will pass the review.
- All rejects: All items, including the ones that have passed the review will be rejected. In this case, the passed items must be labeled and reviewed again in the next acceptance.
- All remaining items pass: The rejected items are still rejected, and the remaining items will automatically pass the review.
- All remaining items rejects: The selected items that have passed the review do not need to be labeled. All the selected items that have been rejected and the items that have not been selected must be labeled again for acceptance.

3.18 Why Are Images Displayed in Different Angles Under the Same Account?

There are rotation angles of certain images, and the rules of processing such images vary depending on browsers. The following figures show compatibility with browsers.

• L indicates the latest version. L3 indicates the latest three stable browser versions when the product is released.

- If your browser is of an earlier version, the page display will be adversely affected, and the system will prompt you to upgrade your browser.
- If your browser is not compatible with the management console, the system will advise you to upgrade your browser or install a desired browser.

3.19 Do I Need to Train Data Again If New Data Is Added After Auto Labeling Is Complete?

After auto labeling is complete, confirm the labeled data. If you add new data before confirming the labeled data, all unlabeled data will be automatically labeled again. If you add new data after confirming the labeled data, the data must be trained again.

3.20 Why Does the System Display a Message Indicating My Label Fails to Save on ModelArts?

Symptom

Take the Google Chrome browser as an example. When an image is labeled for the first time, the system displays a message in the upper right corner, indicating that the label fails to save. But when the same image is labeled the second time, a message is displayed, indicating that the label is saved. This issue occurs occasionally. When this issue occurs, the request status is **(failed)net::ERR_**ADDRESS_**IN_USE**, which is obtained by pressing **F12** on the Google Chrome browser and clicking **Network**.



Possible Cause

The local network is faulty, for example, the network is unstable, or the network configuration is incorrect.

Solution

- 1. Use a stable network and try again.
- 2. Initialize the network configuration. To do so, open Command Prompt as an administrator and execute the **netsh winsock reset** command. Once the initialization is complete, restart your computer and log in to the data labeling platform again.

3.21 Can One Label By Identified Among Multiple Labels?

After a model is trained with multiple labels and deployed as a real-time service, all the labels are identified. If only one type of label needs to be identified, train a model dedicated for identifying the label. To speed up the label identification, select a high flavor for deploying the model.

3.22 Why Are Newly Added Images Not Automatically Labeled After Data Amplification Is Enabled?

After data amplification is enabled, images newly added in image classification datasets cannot be automatically labeled, but those added in object detection datasets can be.

3.23 Why Cannot Videos in a Video Dataset Be Displayed or Played?

If the issue occurs, check the video format. Only MP4 videos can be displayed and played.

3.24 Why All the Labeled Samples Stored in an OBS Bucket Are Displayed as Unlabeled in ModelArts After the Data Source Is Synchronized?

This issue occurs if automatic encryption is enabled in the OBS bucket. To resolve this issue, create an OBS bucket and upload data to it, or disable bucket encryption and upload data to it again.

3.25 How Do I Use Soft-NMS to Reduce Bounding Box Overlapping?

YOLOv3 algorithms subscribed to in AI Gallery can use Soft-NMS to reduce overlapped bounding boxes. No official information has been released to show that YOLOv5 algorithms support this function. Use this function in custom algorithms.

3.26 Why ModelArts Image Labels Are Lost?

The default labeling job is deleted. As a result, the labels are deleted.

3.27 How Do I Add Images to a Validation or Training Dataset?

You are not allowed to manually add images to a training or validation dataset, but can only set a training and validation ratio. Then, the system randomly allocates the images to the training and validation datasets based on the ratio.

Setting a Training and Validation Ratio

When you publish a dataset, only the dataset of the image classification, object detection, text classification, or sound classification type supports data splitting.

By default, data splitting is disabled. After this function is enabled, set a training and validation ratio.


Enter a value ranging from 0 to 1 for the training set ratio. After the training set ratio is set, the validation set ratio is determined. The sum of the training set ratio and the validation set ratio is 1.

The training set ratio is the ratio of sample data used for model training. The validation set ratio is the ratio of the sample data used for model validation. The training and validation ratios affect the performance of training templates.

3.28 Can I Customize Labels for an Object Detection Dataset?

Yes. You can add custom labels to the label set of an object detection dataset by modifying the dataset.

Figure 3-5 Modify Dataset

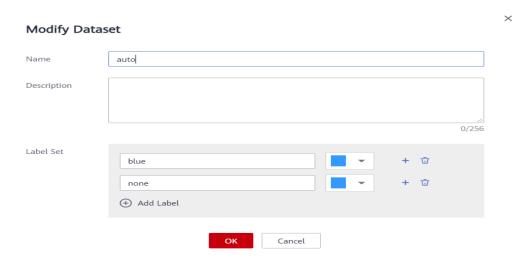

3.29 What ModelArts Data Management Can Be Used for?

The functions provided ModelArts data management vary depending on the type of the dataset.

Data set Type	Label ing Type	Creat ing a Datas et	Impo rting Data	Expo rting Data	Publi shing a Datas et	Modi fying a Data set	Mana ging Datas et Versi ons	Auto Grou ping	Data Featu re Engin eerin g
Files	Imag e classif icatio n	Supp orted	Supp orted	Supp orted	Suppo rted	Supp orted	Supp orted	Supp orted	Supp orted
	Objec t detec tion	Supp orted	Supp orted	Supp orted	Suppo rted	Supp orted	Supp orted	Supp orted	Supp orted
	lmag e segm entati on	Supp orted	Supp orted	Supp orted	Suppo rted	Supp orted	Supp orted	Supp orted	N/A
	Soun d classif icatio n	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Speec h labeli ng	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Speec h parag raph labeli ng	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Text classif icatio n	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A

Data set Type	Label ing Type	Creat ing a Datas et	Impo rting Data	Expo rting Data	Publi shing a Datas et	Modi fying a Data set	Mana ging Datas et Versi ons	Auto Grou ping	Data Featu re Engin eerin g
	Name d entity recog nition	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Text triplet	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Video s	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Free forma t	Supp orted	N/A	Supp orted	Suppo rted	Supp orted	Supp orted	N/A	N/A
Table s	Table s	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A

3.30 Will My Old-Version Datasets Be Cleared After the Old Version Is Discontinued? The existing datasets and the ones newly created in the old version will be retained after the old version is discontinued.


The new version is compatible with the old version. However, the datasets created in the new version cannot be displayed in the dataset list of the old version.

3.31 Why Is My New Dataset Version Unavailable in Versions?

The version list can be zoomed in or out. Zoom out the page before searching.

Click the name of the target dataset to go to the dataset overview page. Then, zoom out the **Versions** page.

Datasets / Dashboard(dataset-animal-swt)

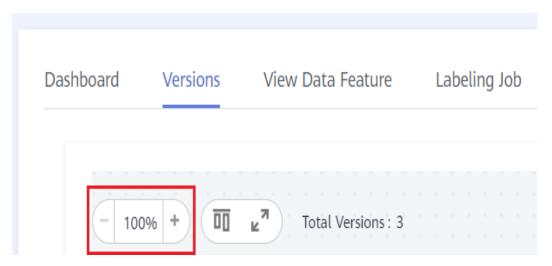

3.32 How Do I View the Size of a Dataset?

Only the number of samples in a dataset is collected in data management. There is no entrance to view the dataset size.

3.33 How Do I View Labeling Details of a New Dataset?

- Log in to the ModelArts management console and choose Data Management > Datasets from the navigation pane on the left.
- 2. Locate the target dataset by name and click its name. The **Dashboard** tab page is displayed.
- 3. On the **Dashboard** tab page, click **View Details** in the **Labeling Information** area.



3.34 How Do I Export Labeled Data?

Only datasets of image classification, object detection, and image segmentation types can be exported.


 For image classification datasets, only the label files in TXT format can be exported.

- For object detection datasets, only XML label files in Pascal VOC format can be exported.
- For image segmentation datasets, only XML label files in Pascal VOC format and mask images can be exported.

For other types of datasets, use to publish the datasets.

3.35 Why Cannot I Find My Newly Created Dataset?

The datasets of the new version are not displayed on the dataset page of the old version. To view the datasets of the new version, switch to the dataset page of the new version.

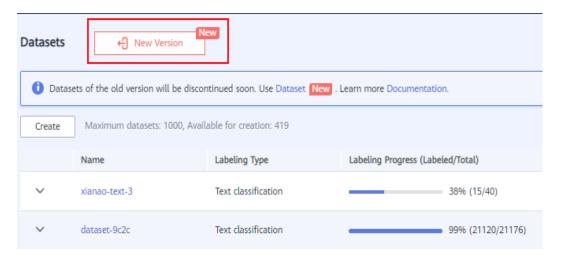

3.36 What Do I Do If the Database Quota Is Incorrect?

The quota for the datasets of both the old and new versions is 100. On the dataset page of the new version, all created datasets are displayed. However, the dataset page of the old version does not display the new-version datasets. Go to the dataset page of the new version to view the datasets.

3.37 How Do I Split a Dataset?

When you publish a dataset, only the dataset of the image classification, object detection, text classification, or sound classification type supports data splitting.

By default, data splitting is disabled. After this function is enabled, set the training and validation ratios.

Enter a value ranging from 0 to 1 for the training set ratio. After the training set ratio is set, the validation set ratio is determined. The sum of the training set ratio and the validation set ratio is 1.

The training set ratio is the ratio of sample data used for model training. The validation set ratio is the ratio of the sample data used for model validation. The training and validation ratios affect the performance of training templates.

3.38 How Do I Delete a Dataset Image?

- Log in to the ModelArts management console. In the navigation pane, choose Data Management > Label Data. The data labeling list is displayed. Click the dataset from which you want to delete images. The labeling details page is displayed.
- 2. On the All statuses, Unlabeled, or Labeled tab page, select the images to be

deleted or click **Select Images on Current Page**, and click to delete them. In the displayed dialog box, select or deselect **Delete the source files** from **OBS** as required. After confirmation, click **Yes** to delete the images. If a tick is displayed in the upper left corner of an image, the image is

selected. If no image is selected on the page, $\overline{\Box}$ is unavailable.

Figure 3-6 Deleting a dataset image



3.39 Why Is There No Sample in the ModelArts Dataset Downloaded from AI Gallery and Then an OBS Bucket?

Check the format of the data downloaded from AI Gallery. For example, compressed packages and Excel files will be ignored. The following table lists the supported formats.

Data set Type	Label ing Type	Creat ing a Datas et	Impo rting Data	Expo rting Data	Publi shing a Datas et	Modi fying a Data set	Mana ging Datas et Versi ons	Auto Grou ping	Data Featu re Engin eerin g
Files	Imag e classif icatio n	Supp orted	Supp orted	Supp orted	Suppo rted	Supp orted	Supp orted	Supp orted	Supp orted
	Objec t detec tion	Supp orted	Supp orted	Supp orted	Suppo rted	Supp orted	Supp orted	Supp orted	Supp orted

Data set Type	Label ing Type	Creat ing a Datas et	Impo rting Data	Expo rting Data	Publi shing a Datas et	Modi fying a Data set	Mana ging Datas et Versi ons	Auto Grou ping	Data Featu re Engin eerin g
	lmag e segm entati on	Supp orted	Supp orted	Supp orted	Suppo rted	Supp orted	Supp orted	Supp orted	N/A
	Soun d classif icatio n	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Speec h labeli ng	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Speec h parag raph labeli ng	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Text classif icatio n	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Name d entity recog nition	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Text triplet	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Video s	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A
	Free forma t	Supp orted	N/A	Supp orted	Suppo rted	Supp orted	Supp orted	N/A	N/A
Table s	Table s	Supp orted	Supp orted	N/A	Suppo rted	Supp orted	Supp orted	N/A	N/A

FAQs

4.1 Constraints

4.1.1 Is sudo Privilege Escalation Supported?

For security purposes, notebook instances do not support sudo privilege escalation.

4.1.2 Does ModelArts Support apt-get?

Terminal in ModelArts DevEnviron does not support **apt-get**. You can use a **custom image** to support it.

4.1.3 Is the Keras Engine Supported?

Notebook instances in **DevEnviron** support the Keras engine. The Keras engine is not supported in job training and model deployment (inference).

Keras is an advanced neural network API written in Python. It is capable of running on top of TensorFlow, CNTK, or Theano. Notebook instances in **DevEnviron** support **tf.keras**.

How Do I View Keras Versions?

- 1. On the ModelArts management console, create a notebook instance with image **TensorFlow-1.13** or **TensorFlow-1.15**.
- 2. Access the notebook instance. In JupyterLab, run **!pip list** to view Keras versions.

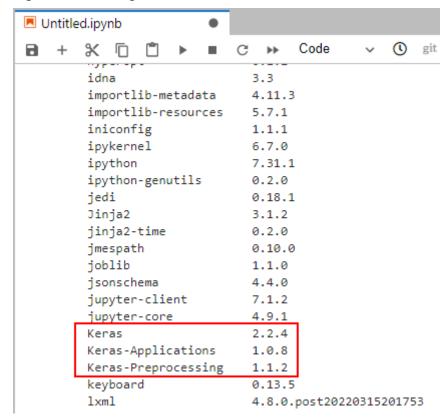


Figure 4-1 Viewing Keras versions

4.1.4 Does ModelArts Support the Caffe Engine?

The Python 2 environment of ModelArts supports Caffe, but the Python 3 environment does not support it.

4.1.5 Can I Install MoXing in a Local Environment?

No. MoXing can be used only on ModelArts.

4.1.6 Can Notebook Instances Be Remotely Logged In?

The notebook instances of the new version can be remotely logged in. To do so, enable remote SSH when you create the notebook instances. Remotely log in to a notebook instance from a local IDE through or .

4.2 Data Upload or Download

4.2.1 How Do I Upload a File from a Notebook Instance to OBS or Download a File from OBS to a Notebook Instance?

In a notebook instance, you can call the ModelArts MoXing API or SDK to exchange data with OBS for uploading a file to OBS or downloading a file from OBS to the notebook instance.

Figure 4-2 Uploading or downloading a file

Method 1: Using MoXing to Upload and Download a File

Developed by the ModelArts team, MoXing is a distributed training acceleration framework built on open-source deep learning engines such as TensorFlow and PyTorch. MoXing makes model coding easier and more efficient.

MoXing provides a set of file object APIs for reading and writing OBS files.

Sample code:

Download the OBS folder **sub_dir_0** from OBS to a notebook instance.

mox.file.copy_parallel('obs://bucket_name/sub_dir_0', '/home/ma-user/work/sub_dir_0')

Download the OBS file **obs_file.txt** from OBS to a notebook instance.

mox.file.copy('obs://bucket_name/obs_file.txt', '/home/ma-user/work/obs_file.txt')

Upload the OBS folder **sub_dir_0** from a notebook instance to OBS.

mox.file.copy_parallel('/home/ma-user/work/sub_dir_0', 'obs://bucket_name/sub_dir_0')

Method 2: Using SDK to Upload and Download a File

Call the ModelArts SDK for downloading a file from OBS.

mox.file.copy('/home/ma-user/work/obs_file.txt', 'obs://bucket_name/obs_file.txt')

Upload the OBS file obs_file.txt from a notebook instance to OBS.

Sample code: Download **file1.txt** from OBS to **/home/ma-user/work/** in the notebook instance. All the bucket name, folder name, and file name are customizable.

from modelarts.session import Session session = Session() session.obs.download_file(src_obs_file="obs://bucket-name/dir1/file1.txt", dst_local_dir="/home/ma-user/work/")

Call the ModelArts SDK for downloading a folder from OBS.

Sample code: Download **dir1** from OBS to **/home/ma-user/work/** in the notebook instance. The bucket name and folder name are customizable.

from modelarts.session import Session session = Session() session.obs.download_dir(src_obs_dir="obs://bucket-name/dir1/", dst_local_dir="/home/ma-user/work/")

Call the ModelArts SDK for uploading a file to OBS.

Sample code: Upload **file1.txt** in the notebook instance to OBS bucket **obs://bucket-name/dir1/**. All the bucket name, folder name, and file name are customizable.

from modelarts.session import Session session = Session() session.obs.upload_file(src_local_file='/home/ma-user/work/file1.txt', dst_obs_dir='obs://bucket-name/dir1/')

Call the ModelArts SDK for uploading a folder to OBS.

Sample code: Upload /work/ in the notebook instance to obs://bucket-name/dir1/work/ of bucket-name. The bucket name and folder name are customizable.

from modelarts.session import Session session = Session() session.obs.upload_dir(src_local_dir='/home/ma-user/work/', dst_obs_dir='obs://bucket-name/dir1/')

4.2.2 How Do I Upload Local Files to a Notebook Instance?

For details about how to upload files to JupyterLab in notebook, see **Uploading** Files to JupyterLab.

4.2.3 How Do I Import Large Files to a Notebook Instance?

• Large files (files larger than 100 MB)

Use OBS to upload large files. To do so, use OBS Browser to upload a local file to an OBS bucket and use ModelArts SDK to download the file from OBS to a notebook instance.

For details about how to use ModelArts SDK or MoXing to download files from OBS, see How Do I Upload a File from a Notebook Instance to OBS or Download a File from OBS to a Notebook Instance?

Folders

Compress a folder into a package and upload the package in the same way as uploading a large file. After the package is uploaded to a notebook instance, decompress it on the **Terminal** page.

unzip xxx.zip # Directly decompress the package in the path where the package is stored.

For more details, search for the decompression command in mainstream search engines.

4.2.4 Where Will the Data Be Uploaded to?

Data may be stored in OBS or EVS, depending on which kind of storage you have configured for your Notebook instances:

OBS

After you click **upload**, the data is directly uploaded to the target OBS path specified when the notebook instance was created.

EVS

After you click **upload**, the data is uploaded to the instance container, that is, the **~/work** directory on the **Terminal** page.

4.2.5 How Do I Download Files from a Notebook Instance to a Local Computer?

For details about how to download files from JupyterLab in notebook, see **Downloading a File from JupyterLab to a Local Path**.

4.2.6 How Do I Copy Data from Development Environment Notebook A to Notebook B?

Data cannot be directly copied from notebook A to notebook B. To copy data, do as follows:

- 1. Upload the data of notebook A to OBS.
- 2. Download data from OBS to notebook B.


For details about how to upload and download files, see **How Do I Upload a File** from a Notebook Instance to OBS or Download a File from OBS to a Notebook Instance?

4.2.7 What Can I Do If a File Fails to Be Uploaded to a Notebook Instance?

Symptom

- The file upload process is fast but unsuccessful.
- When a file is uploaded to a notebook instance, the uploading is consistently
 in progress on the GUI. When a file is uploaded through MoXing, an error
 occurred. When an OBS file is uploaded, no bucket is displayed, and the
 message "Obtaining data" is displayed.
- When you click to upload files on the JupyterLab page, "Failed to obtain data" is displayed.

Figure 4-3 OBS file upload

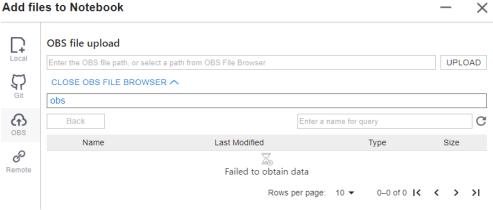

When you check the notebook log (usually **notebook-<date>.log** in / **home/ma-user/log/**), the error message **List objects failed, obs_client resp:**

{'status' : 403, 'reason' : 'Forbidden' , 'errorCode' : 'AccessDenied' is displayed.

Possible Cause

The first symptom is because that the size of a file is limited when it is uploaded through the intranet.

The possible causes of other symptoms are as follows:

- OBS access is not authorized.
- You do not have the permission to access the OBS bucket or file.
- The OBS bucket has been deleted.

Solution

• Check agency authorization.

Go to the **Global Configuration** page and check whether you have the OBS access permission. If you do not, see "Configuring Access Authorization (Global Configuration)".

- Check whether you have the permission to access the OBS bucket.

 Go to the OBS console, access the target bucket, and check if there is an error showing that you do not have the access permission.
- Go to the OBS console and check whether the OBS bucket exists.

4.2.8 Failed to View the Local Mount Point of a Dynamically Mounted OBS Parallel File System in JupyterLab of a Notebook Instance

Symptom

When an OBS parallel file system is dynamically mounted to a notebook instance, the local mount directory is /data/demo-yf/, which, however, is not displayed in the navigation pane on the left of JupyterLab.

Figure 4-4 Local mount directory



Edit Git Tabs View Run Kernel Settings Help [G 48 Q Filter files by name Name Last Modified .modelarts a day ago lost+found a day ago

Figure 4-5 JupyterLab of notebook

Possible Causes

The local mount directory is the **demo-yf** folder created in the **~/data** directory of the notebook container. However, the default path of the navigation pane on the left of JupyterLab is the **~/work** directory, which means that **/data** and **/work** are of the same level. As a result, the directory cannot be displayed in JupyterLab.

After Terminal is opened, the default directory is **~work**. Run the following commands to go to the **~data** directory and view the local mount directory:

```
(PyTorch-1.8) [ma-user work]$cd
(PyTorch-1.8) [ma-user data]$ls

(PyTorch-1.8) [ma-user work]$cd
  (PyTorch-1.8) [ma-user work]$cd
  (PyTorch-1.8) [ma-user ~]$cd /data
  (PyTorch-1.8) [ma-user data]$ls
  demo-vf
```

4.3 Data Storage

4.3.1 How Do I Rename an OBS File?

OBS files cannot be renamed on the OBS console. To rename an OBS file, call a MoXing API in an existing or newly created notebook instance.

The following shows an example:

```
Rename obs_file.txt to obs_file_2.txt.
import moxing as mox
mox.file.rename('obs://bucket_name/obs_file.txt', 'obs://bucket_name/obs_file_2.txt')
```

4.3.2 Do Files in /cache Still Exist After a Notebook Instance is Stopped or Restarted? How Do I Avoid a Restart?

Temporary files are stored in the **/cache** directory and will not be saved after the notebook instance is stopped or restarted. Data stored in the **/home/ma-user/**

work directory will be retained after the notebook instance is stopped or restarted.

To avoid a restart, do not execute heavy-load training jobs that consume large amounts of resources in the development environment.

4.3.3 How Do I Use the pandas Library to Process Data in OBS Buckets?

- **Step 1** Download data from OBS to a notebook instance. For details, see **Downloading a File from JupyterLab to a Local Path**.
- **Step 2** Process pandas data by following the instructions provided in *pandas User Guide*.

----End

4.3.4 How Do I Access the OBS Bucket of Another Account from a Notebook Instance?

To access OBS files of another account from a notebook instance, you must have read and write permissions on the target OBS bucket.

Contact the OBS bucket creator to grant read and write permissions on the current HUAWEI CLOUD account's OBS bucket by referring to . If your account is an IAM account or in other scenarios, see section "Configuration Cases in Typical Permission Control Scenarios" in for instructions about how to grant OBS bucket permissions.

After obtaining read and write permissions on the OBS bucket, you can use the MoXing API in your notebook instance to access the OBS bucket and read data.

4.4 Environment Configurations

4.4.1 How Do I Check the CUDA Version Used by a Notebook Instance?

Run the following command to view the CUDA version of the target notebook instance:

ll /usr/local | grep cuda

The following shows an example.


Figure 4-6 Checking the CUDA version in the current environment

In the preceding example, the CUDA version is 10.2.

4.4.2 How Do I Enable the Terminal Function in DevEnviron of ModelArts?

- Log in to the ModelArts management console, and choose **Development** Workspace > Notebook.
- 2. Create a notebook instance. When the instance is running, click **Open** in the **Operation** column. The **JupyterLab** page is displayed.
- 3. Choose **File** > **New** > **Terminal**. The **Terminal** page is displayed.

Figure 4-7 Going to the Terminal page



4.4.3 How Do I Install External Libraries in a Notebook Instance?

Multiple environments such as Jupyter and Python have been integrated into ModelArts notebook to support many frameworks, including TensorFlow, MindSpore, PyTorch, and Spark. You can use **pip install** to install external libraries in Jupyter Notebook or on the **Terminal** page.

Installing External Libraries in Jupyter Notebook

You can use JupyterLab to install Shapely in the **TensorFlow-1.8** environment.

- 1. Open a notebook instance and access the **Launcher** page.
- 2. In the **Notebook** area, click **TensorFlow-1.8** and create an IPYNB file.
- 3. In the new notebook instance, enter the following command in the code input bar:

!pip install Shapely

Installing External Libraries on the Terminal Page

You can use **pip** to install external libraries in the **TensorFlow-1.8** environment on the **Terminal** page. For example, to install Shapely:

- 1. Open a notebook instance and access the **Launcher** page.
- 2. In the **Other** area, click **Terminal** and create a terminal file.
- 3. Enter the following commands in the code input box to obtain the kernel of the current environment and activate the Python environment on which the installation depends:

cat /home/ma-user/README source /home/ma-user/anaconda3/bin/activate TensorFlow-1.8

□ NOTE

To install TensorFlow in another Python environment, replace **TensorFlow-1.8** in the command with the target engine.

Figure 4-8 Activating the environment

4. Run the following command in the code input box to install Shapely: pip install Shapely

4.4.4 How Do I Obtain the External IP Address of My Local PC?

Search for "IP address lookup" in a mainstream search engine.

Figure 4-9 IP address lookup

WhatIsMyIP.com® » Tools » IP Address Lookup

IP Address Lookup



4.4.5 How Can I Resolve Abnormal Font Display on a ModelArts Notebook Accessed from iOS?

Symptom

When a ModelArts notebook is accessed from iOS, the font is displayed abnormally.


Solution

Set fontFamily of Terminal to Menlo.


Procedure

- **Step 1** Log in to the ModelArts management console, and choose **Development Workspace > Notebook**.
- **Step 2** Locate the row containing the target notebook instance and click **Open** in the **Operation** column. The **JupyterLab** page is displayed.

Step 3 On the **JupyterLab** page, choose **Settings > Advanced Settings Editor**. The **Settings** tab page is displayed.

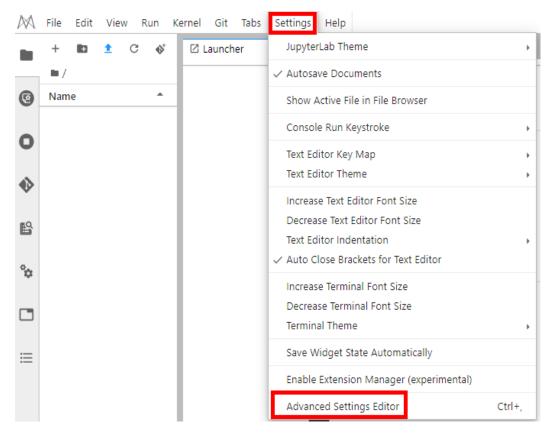

Step 4 Choose **Terminal** in the navigation pane on the left and set **fontFamily** to **Menlo**.

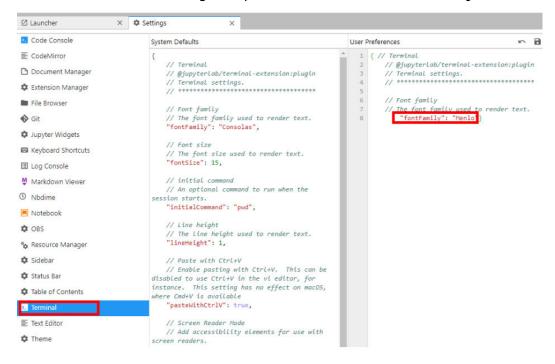

----End

4.4.6 Is There a Proxy for Notebook? How Do I Disable It?

There is a proxy for Notebook.

Run the **env|grep proxy** command to obtain the notebook proxy.

Run the **unset https proxy unset http proxy** command to disable the proxy.

4.4.7 Adding a Custom IPython Kernel in a Notebook Instance

Scenarios

If the default engine environment in notebook does not meet your needs, you can create a conda environment to set up your own environment as required. This section uses python3.6.5 and tensorflow1.2.0 as an example to describe how to set up an IPython kernel.

Procedure

1. Create a conda environment.

Run the command below on the notebook terminal. In the command, **my-env** indicates a customizable virtual environment name. For details about conda parameters, see the **conda official website**.

```
conda create --quiet --yes -n my-env python=3.6.5
```

After the creation, run the **conda info --envs** command to view existing virtual environments, where you can see the **my-env** virtual environment.

2. Access the conda environment.

source /home/ma-user/anaconda3/bin/activate /home/ma-user/anaconda3/envs/my-env

3. Install the following dependency packages in my env:

```
pip install jupyter
pip install jupyter_core==5.3.0
pip install jupyter_client==8.2.0
pip install ipython==8.10.0
pip install ipykernel==6.23.1
```

4. Add the virtual environment as an IPython kernel.

The value of **--name** can be customized.

```
python3 -m ipykernel install --user --name "my-py3-tensorflow-env"
```

After the command is executed, the following information is displayed:

(my-env) sh-4.4\$python3 -m ipykernel install --user --name "my-py3-tensorflow-env" Installed kernelspec my-py3-tensorflow-env in /home/ma-user/.local/share/jupyter/kernels/my-py3-tensorflow-env

Customize the environment variables of the virtual environment kernel.

Run the cat /home/ma-user/.local/share/jupyter/kernels/my-py3-tensorflow-env/kernel.json command to view the default configuration.

```
{
"argv": [
```

FAQs


"language": "python"

Add content in the **env** field as needed. For reference, see the following configuration. **PATH** indicates the path to the Python package of the virtual environment.

```
{
"argv": [
   "/home/ma-user/anaconda3/envs/my-env/bin/python3",
   "-m",
   "ipykernel_launcher",
   "-f",
   "{connection_file}"
],
   "display_name": "my-py3-tensorflow-env",
   "language": "python",
   "env": {
        "PATH": "/home/ma-user/anaconda3/envs/my-env/bin:/opt/conda/bin:/usr/local/sbin:/usr/local/sbin:/usr/sbin:/sbin:/sbin:/bin:/home/ma-user/modelarts/ma-cli/bin",
        "http_proxy": "http://proxy-notebook.modelarts-dev-proxy.com:8083",
        "https_proxy": "http://proxy-notebook.modelarts-dev-proxy.com:8083",
        "HTTP_PROXY": "http://proxy-notebook.modelarts-dev-proxy.com:8083",
        "HTTPS_PROXY": "http://proxy-notebook.modelarts-dev-proxy.com:8083",
        "HTTPS_PROXY": "http://proxy-notebook.modelarts-dev-proxy.com:8083",
        "FTP_PROXY": "http://proxy-notebook.modelarts-dev-proxy.com:8083",
        "http://proxy-notebook.modelarts-dev-proxy.com:8083",
        "htt
```

6. Access the IPython kernel of the virtual environment.

Refresh the JupyterLab page. The custom virtual environment kernel is displayed.

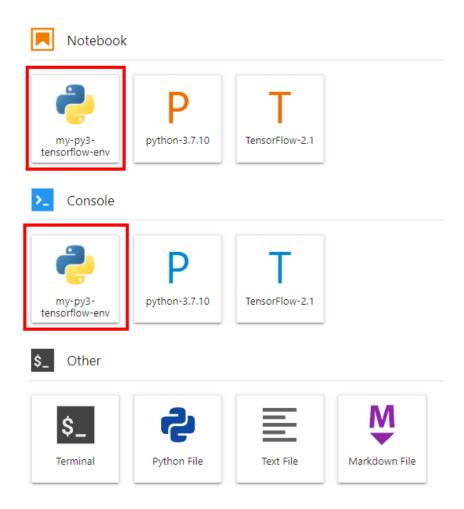

Click my-py3-tensorflow-env to verify that the current environment is used.



7. Clear the environment.

Delete the IPython kernel of the virtual environment.

jupyter kernelspec uninstall my-py3-tensorflow-env

Delete the virtual environment.

conda env remove -n my-env

4.5 Notebook Instances

4.5.1 What Do I Do If I Cannot Access My Notebook Instance?

Troubleshoot the issue based on error code.

A Black Screen Is Displayed When a Notebook Instance Is Opened

A black screen is displayed after a notebook instance is opened, which is caused by a proxy issue. Change the proxy to rectify the fault.

A Blank Page Is Displayed When a Notebook Instance Is Opened

- If a blank page is displayed after a notebook instance is opened, clear the browser cache and open the notebook instance again.
- Check whether the ad filtering component is installed for the browser. If yes, disable the component.

Error 404

If this error is reported when an IAM user creates an instance, the IAM user does not have the permissions to access the corresponding storage location (OBS bucket).

Solution

- 1. Log in to the OBS console using the primary account and grant access permissions for the OBS bucket to the IAM user.
- 2. After the IAM user obtains the permissions, log in to the ModelArts console, delete the instance, and use the OBS path to create a notebook instance.

Error 503


If this error is reported, it is possible that the instance is consuming too many resources. If this is the case, stop the instance and restart it.

Error 500

Notebook JupyterLab cannot be opened, and error 500 is reported. The possible cause is that the disk space in the **work** directory is used up. In this case, identify the fault cause and clear the disk by referring to .

Error "This site can't be reached"

After a notebook instance is created, click **Open** in the **Operation** column. The error message shown in the following figure is displayed.

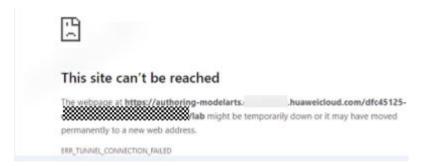

To solve the problem, copy the domain name of the page, add it to the **Do not** use proxy server for addresses beginning with text box, and save the settings.

4.5.2 What Should I Do When the System Displays an Error Message Indicating that No Space Left After I Run the pip install Command?

Symptom

In the notebook instance, error message "No Space left..." is displayed after the **pip install** command is run.

Solution

You are advised to run the **pip install --no-cache** ** command instead of the **pip install** ** command. Adding the **--no-cache** parameter can solve such problem.

4.5.3 What Do I Do If "Read timed out" Is Displayed After I Run pip install?

Symptom

After I run **pip install** in a notebook instance, the system displays error message "ReadTimeoutError..." or "Read timed out...".

```
sh-4.3$pip install torch=1.7.0 torchwision==0.8.0 torchaudio==0.7.0 matplotlib pyyaml tqdm sklearn h5py tensorboard pandas Looking in indexes: http://pip-notebook.modelarts.com:8888/repository/pypi/simple/
Collecting torch=1.7.0

WARNING: Retrying (Retry(total=4, connect=None, read=None, redirect=None, status=None) after connection broken by 'ReadTimeou terror' "HTTPConnectionFool (host='pip-notebook.modelarts.com', port=8888): Read timed out (read timeout=15)")': /repository/pypi/packages/torch/1.7.0/torch-1.7.0-cp37-cp37m-manylinuxl x86 64.whl

WARNING: Retrying (Retry(total=3, connect=None, read=None, redirect=None, status=None) after connection broken by 'ReadTimeou terror("HTTPConnectionPool (host='pip-notebook.modelarts.com', port=8888): Read timed out. (read timeout=15)")': /repository/pypi/packages/torch/1.7.0/torch-1.7.0-cp37-cp37m-manylinuxl x86 64.whl

WARNING: Retrying (Retry(total=2, connect=None, read=None, redirect=None, status=None)) after connection broken by 'ReadTimeou terror("HTTPConnectionPool (host='pip-notebook.modelarts.com', port=8888): Read timed out. (read timeout=15)")': /repository/pypi/packages/torch/1.7.0/torch-1.7.0-cp37-cp37m-manylinuxl_x86 64.whl

**OcsRoR: Operation cancelled by user
WARNING: You are using pip version 21.0.1; however, version 21.1.2 is available.
You should consider upgrading via the '/opt/conda/bin/python -m pip install --upgrade pip' command.
```

Solution

Run pip install --upgrade pip and then pip install.

4.5.4 What Do I Do If the Code Can Be Run But Cannot Be Saved, and the Error Message "save error" Is Displayed?

If the notebook instance can run the code but cannot save it, the error message "save error" is displayed when you save the file. In most cases, this error is caused by a security policy of Web Application Firewall (WAF).

On the current page, some characters in your input or output of the code are intercepted because they are considered to be a security risk. Submit a service ticket and contact customer service to check and handle the problem.

4.5.5 When the SSH Tool Is Used to Connect to a Notebook Instance, Server Processes Are Cleared, but the GPU Usage Is Still 100%

This fault occurs because code execution is suspended and the GPU memory is not released. Alternatively, the program is cleared due to memory overflow during code execution. In this case, you need to release the GPU memory and restart the instance. To avoid unsaved code caused by the end of processes, you are advised to periodically save the code to an OBS bucket or the ./work directory of the container.


4.6 Code Execution

4.6.1 What Do I Do If a Notebook Instance Won't Run My Code?

If a notebook instance fails to execute code, you can locate and rectify the fault as follows:

If a cell's execution is suspended or takes too long but you can still interact
with the notebook page, click the button in the red box shown below. This will
stop the execution of all cells and retain all variable spaces in the notebook
instance.

Figure 4-10 Stopping all cells



- 2. If the notebook page does not respond, close the notebook page and the ModelArts console. Then, open the ModelArts console and access the notebook instance again. The notebook instance retains all the variable spaces that exist when the notebook instance is unavailable.
- 3. If the notebook instance still cannot be used, access the **Notebook** page on the ModelArts console and stop the notebook instance. After the notebook instance is stopped, click **Start** to restart the notebook instance and open it.

The instance will have preserved all the spaces for the variables that were unable to run.

4.6.2 Why Does the Instance Break Down When dead kernel Is Displayed During Training Code Running?

The notebook instance breaks down during training code running due to insufficient memory caused by large data volume or excessive training layers.

After this error occurs, the system automatically restarts the notebook instance to fix the instance breakdown. In this case, only the breakdown is fixed. If you run the training code again, the failure will still occur. To solve the problem of insufficient memory, you are advised to create a new notebook instance and use a resource pool of higher specifications, such as a dedicated resource pool, to run the training code. An existing notebook instance that has been successfully created cannot be scaled up using resources with higher specifications.

4.6.3 What Do I Do If cudaCheckError Occurs During Training?

Symptom

The following error occurs when the training code is executed in a notebook:

cudaCheckError() failed: no kernel image is available for execution on the device

Possible Cause

Parameters **arch** and **code** in **setup.py** have not been set to match the GPU compute power.

Solution

For GP Vnt1 GPUs, the GPU computing power is **-gencode arch=compute_70,code=[sm_70,compute_70]**. Set the compilation parameters in **setup.py** accordingly.

4.6.4 What Should I Do If DevEnviron Prompts Insufficient Space?

If space is insufficient, use notebook instances of the EVS type.

Upload code and data to an OBS bucket for the original notebook instance by referring to How Do I Upload a File from a Notebook Instance to OBS or Download a File from OBS to a Notebook Instance? Then, create a notebook instance of the EVS type, and download files from OBS to the new notebook instance.

4.6.5 Why Does the Notebook Instance Break Down When opency.imshow Is Used?

Symptom

When opency.imshow is used in a notebook instance, the notebook instance breaks down.

Possible Causes

The cv2.imshow function in OpenCV malfunctions in a client/server environment such as Jupyter. However, Matplotlib does not have this problem.

Solution

Display images by referring to the following example. Note that OpenCV displays BGR images while Matplotlib displays RGB images.

Python:

from matplotlib import pyplot as plt import cv2 img = cv2.imread('Image path') plt.imshow(cv2.cvtColor(img, cv2.COLOR_BGR2RGB)) plt.title('my picture') plt show()

4.6.6 Why Cannot the Path of a Text File Generated in Windows OS Be Found In a Notebook Instance?

Symptom

When a text file generated in Windows is used in a notebook instance, the text content cannot be read and an error message may be displayed indicating that the path cannot be found.

Possible Causes

The notebook instance runs Linux and its line feed format (CRLF) differs from that (LF) in Windows.

Solution

Convert the file format to Linux in your notebook instance.

Shell:

dos2unix File name

4.6.7 What Do I Do If Files Fail to Be Saved in JupyterLab?

Symptom

When a file is saved in JupyterLab, an error message is displayed.

Failed to fetch



Possible Cause

- A third-party plug-in has been installed on the browser, and the proxy intercepts the request. As a result, the file cannot be saved.
- The runtime file in the notebook is too large.
- You have stayed on the Jupyter page for too long.
- There is a network error. Check whether a network proxy is connected.

Solution

- Disable the plug-in and save the file again.
- Reduce the file size.
- Open the Jupyter page again.
- Check the network.

4.7 Failures to Access the Development Environment Through VS Code

4.7.1 What Do I Do If the VS Code Window Is Not Displayed?

Possible Cause

VS Code is not installed or the installed version is outdated.

Solution

Download and install VS Code. (Windows users click **Windows**. Users of other operating systems click **another OS**.) After the installation, click **refresh** to complete the connection.



4.7.2 What Do I Do If a Remote Connection Failed After VS Code Is Opened?

NOTICE


If your local PC runs Linux, see possible cause 2.

Possible Cause 1

Automatically installing the VS Code plug-in failed.

Solution 1


Method 1: Verify that the VS Code network is accessible. Search for **ModelArts** in the VS Code marketplace. If the following information is displayed, a network error occurred. In this case, switch to another proxy or use another network.

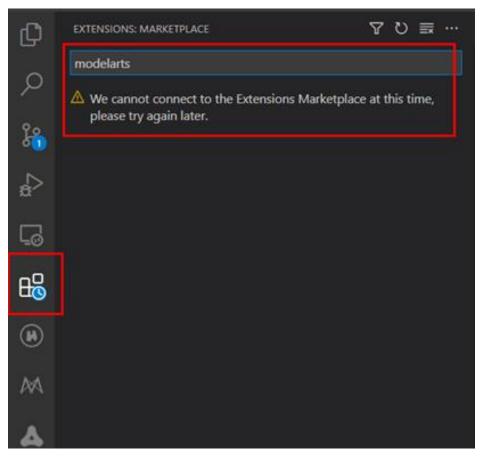

Search for the plug-in again. If the following information is displayed, the network is normal. Then, switch back to the ModelArts console and try to access VS Code again.




Method 2: If the error message shown in the following figure is displayed, the VS Code version is outdated. Upgrade the VS Code to 1.57.1 or the latest version.



Possible Cause 2

The local PC runs Linux, and VS Code is installed as user **root**. When you access VS Code, the information "It is not recommended to run Code as root user" is displayed.


```
root@ecs-
                          /VSCode# sudo dpkg -i code 1.67.2-1652812855 amd64.deb
Selecting previously unselected package code.
(Reading database ... 199224 files and directories currently installed.)
Preparing to unpack code_1.67.2-1652812855_amd64.deb ...
Unpacking code (1.67.2-1652812855)
Setting up code (1.67.2-1652812855)
Processing triggers for gnome-menus (3.13.3-11ubuntul.1) ...
Processing triggers for desktop-file-utils (0.23-1ubuntu3.18.04.2) ...
Processing triggers for mime-support (3.60ubuntul) ...
Processing triggers for shared-mime-info (1.9-2) ...
root@ecs-
ed. If this was intended, please add the argument `--no-sandbox` and specify an
alternate user data directory using the `--user-data-dir` argument.
root@ecs-dctest:/dongcong/VSCode# code .
You are trying to start Visual Studio Code as a super user which isn't recommend
    If this was intended, please add the argument
                                                       --no-sandbox
```

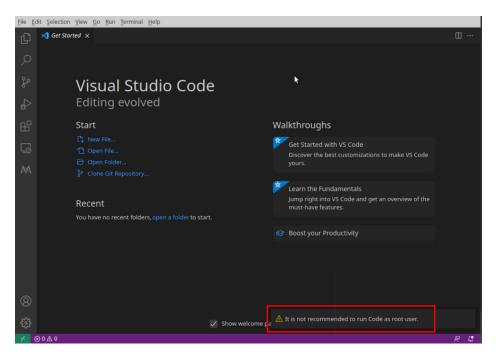

Solution 2

Install VS Code as a non-**root** user, return to the ModelArts management console, and click **Access VS Code**.


```
:~/VSCode$ sudo dpkg -i code_1.67.2-1652812855_amd64.deb
[sudo] password for dc:
(Reading database ... 200705 files and directories currently installed.)
Preparing to unpack code_1.67.2-1652812855_amd64.deb ...
Unpacking code (1.67.2-1652812855) over (1.67.2-1652812855) ...
Setting up code (1.67.2-1652812855) ...
Processing triggers for gnome-menus (3.13.3-11ubuntu1.1) ...
Processing triggers for desktop-file-utils (0.23-1ubuntu3.18.04.2) ...
Processing triggers for mime-support (3.60ubuntu1) ...
Processing triggers for shared-mime-info (1.9-2) ...
::~/VSCode$ code
```

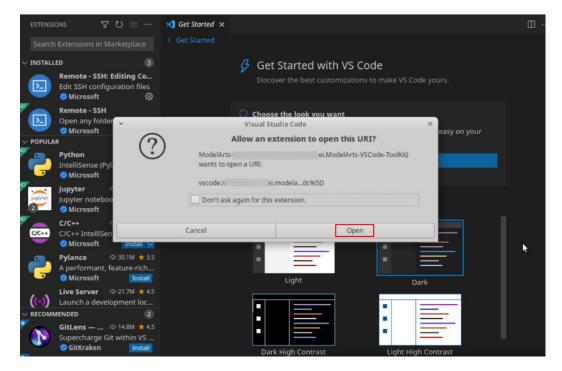

4.7.3 What Do I Do If I Failed to Access the Development Environment Through VS Code?

If the VS Code fails to connect to the development environment, perform the following steps:

Step 1 Check whether the plug-in package is of the latest version. Search for the plug-in in extensions and check whether it needs to be upgraded.

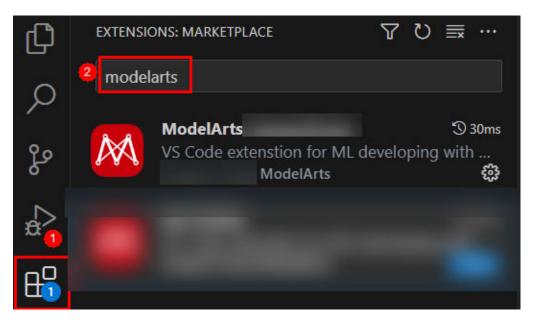


- **Step 2** Check whether the instance is running. If yes, go to the next step.
- **Step 3** Run the following command in VS Code's Terminal to connect to the remote development environment:

ssh -tt -o StrictHostKeyChecking=no -i \${IdentityFile} \${User}@\${HostName} -p \${Port}


Parameters:

- IdentityFile: path to the local key
- User: username, for example, ma-user
- HostName: IP address
- Port: port number

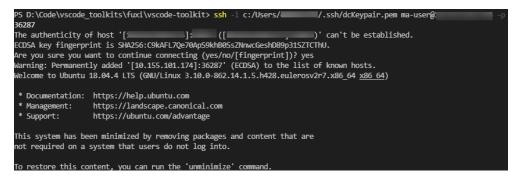

If the connection is successful, go to the next step.

Step 4 Check whether the configuration is correct. If yes, go to the next step. Check the **config** file.




ForwardAgent yes

- **Step 5** Check the key file. You are advised to save the key file in **C:\Users\xx.ssh** and ensure that the file does not contain Chinese characters.
- **Step 6** If the fault persists, rectify it by referring to the FAQs in **follow-up sections**.

----End

4.7.4 What Do I Do If Error Message "Could not establish connection to xxx" Is Displayed During a Remote Connection?

Symptom

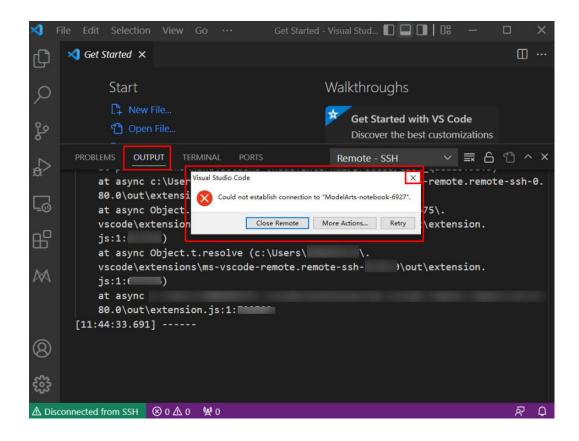

Possible Cause


Establishing a remote SSH connection to an instance through VS Code failed.

Solution

Close the displayed dialog box, view the error information in **OUTPUT**, and rectify the fault by referring to the troubleshooting methods provided in the following sections.

4.7.5 What Do I Do If the Connection to a Remote Development Environment Remains in "Setting up SSH Host xxx: Downloading VS Code Server locally" State for More Than 10 Minutes?

Symptom

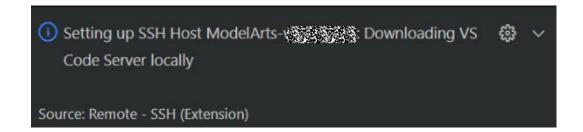


Possible Cause

The local network is faulty. As a result, it takes a long time to automatically install the VS Code server remotely.

Solution

Manually install the VS Code server.

Step 1 Obtain the VS Code commit ID.

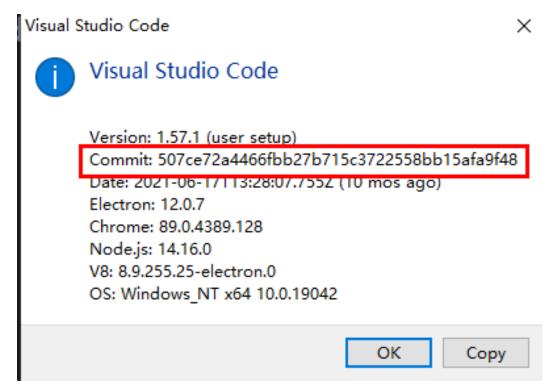

Step 2 Download the VS Code server package of the required version. Select Arm or x86 based on the CPU architecture of the development environment.


◯ NOTE

Replace *\${commitID}* in the following link with the commit ID obtained in **Step 1**.

- For Arm, download vscode-server-linux-arm64.tar.gz.
 https://update.code.visualstudio.com/commit:\${commitID}/server-linux-arm64/stable
- For x86, download vscode-server-linux-x64.tar.gz.
 https://update.code.visualstudio.com/commit:\${commitID}/server-linux-x64/stable

Step 3 Access the remote environment.

Switch to **Terminal** in VS Code.

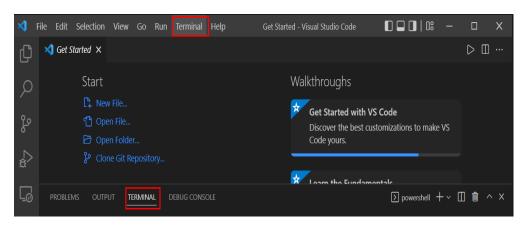

Run the following command in VS Code Terminal to access the remote development environment:

ssh -tt -o StrictHostKeyChecking=no -i \${IdentityFile} \${User}@\${HostName} -p \${Port}

Parameters:

- IdentityFile: Path to the local key
- User: Username, for example, ma-user
- HostName: IP address
- Port: Port number



Step 4 Manually install the VS Code server.

Run the following commands on the VS Code terminal to clear the residual data (replace *\${commitID}}* in the commands with the commit ID obtained in **Step 1**):

rm -rf /home/ma-user/.vscode-server/bin/\${commitID}/* mkdir -p /home/ma-user/.vscode-server/bin/\${commitID}

Upload the VS Code server package to the development environment.

exit
scp -i xxx.pem -P 31205 Local path to the VS Code server package ma-user@xxx:/home/ma-user/.vscodeserver/bin
ssh -tt -o StrictHostKeyChecking=no -i \${IdentityFile} \${User}@\${HostName} -p \${Port}

Parameters:

- IdentityFile: Path to the local key

- User: Username, for example, ma-user

- HostName: IP address

- Port: Port number

Take Arm as an example. Decompress the VS Code server package to **\$HOME/.vscode-server/bin**. Replace *\${commitID}* in the command with the commit ID obtained in **Step 1**.


```
cd /home/ma-user/.vscode-server/bin
tar -zxf vscode-server-linux-arm64.tar.gz
mv vscode-server-linux-arm64/* ${commitID}
```

Step 5 Establish the remote connection again.

----End

4.7.6 What Do I Do If the Connection to a Remote Development Environment Remains in the State of "Setting up SSH Host xxx: Downloading VS Code Server locally" for More Than 10 Minutes?

Symptom

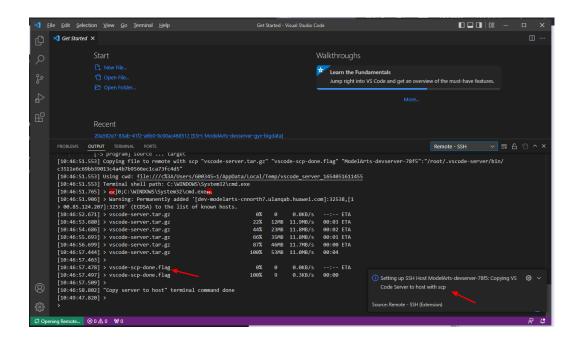

Possible Cause


Logs show that **vscode-scp-done.flag** has been uploaded locally, but it is not received on the remote end.

Solution

Close all VS Code windows, return to the ModelArts management console, and click **Access VS Code**.

4.7.7 What Do I Do If the Connection to a Remote Development Environment Remains in the State of "ModelArts Remote Connect: Connecting to instance xxx..." for More Than 10 Minutes?

Symptom




Solution

Click **Cancel**, return to the ModelArts management console, and click **Access VS Code**.

4.7.8 What Do I Do If a Remote Connection Is in the Retry State?

Symptom

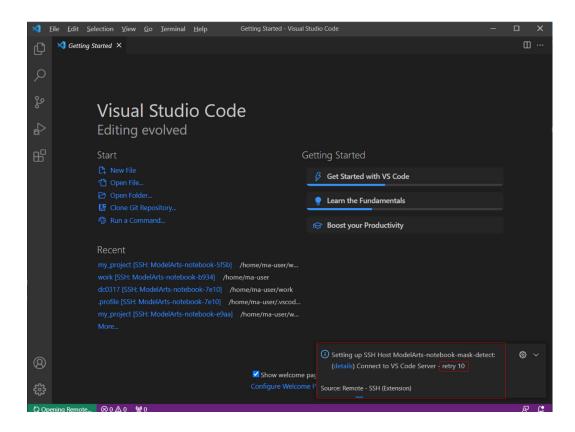

Possible Cause

Downloading the VS Code server failed before, leading to residual data. As a result, new download cannot be performed.

Solution

Method 1 (performed locally): Open the command panel (Ctrl+Shift+P for Windows and Cmd+Shift+P for macOS), search for Kill VS Code Server on Host, and locate the affected instance, which will be automatically cleared. Then, establish the connection again.

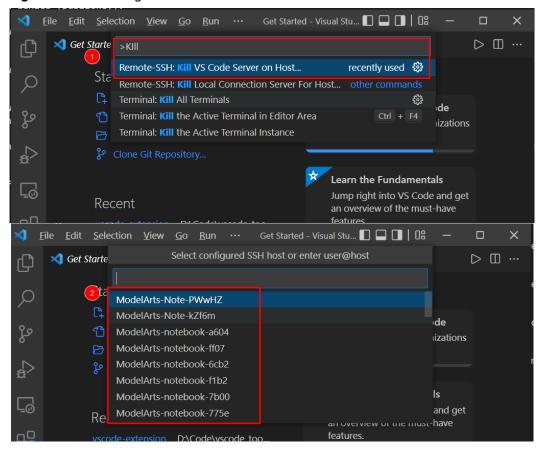


Figure 4-11 Clearing the affected instance

Method 2 (performed remotely): Delete the files that are being used in / home/ma-user/.vscode-server/bin/ on the VS Code terminal. Then, establish the connection again.

 $ssh -tt -o \ StrictHostKeyChecking=no -i \ \{IdentityFile\} \ \{User\}@\{HostName\} -p \ \{Port\} rm -rf /home/ma-user/.vscode-server/bin/$

Parameters:

- IdentityFile: Path to the local key

- User: Username, for example, ma-user

- HostName: IP address


- Port: Port number

■ NOTE

The preceding methods can also be used to resolve issues related to the VS Code server.


4.7.9 What Do I Do If Error Message "The VS Code Server failed to start" Is Displayed?

Symptom

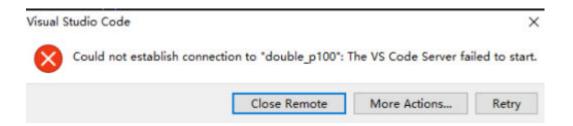

Solution

Step 1 Check whether the VS Code version is 1.65.0 or later. If so, check the Remote-SSH version. If the version is earlier than 0.76.1, upgrade Remote-SSH.

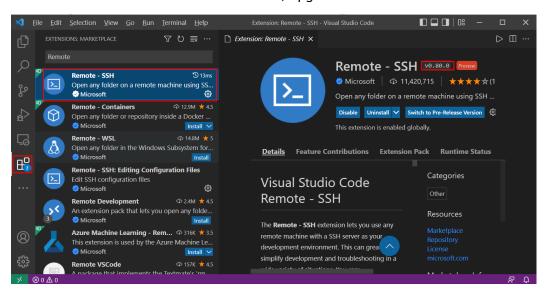

Step 2 Open the command panel (**Ctrl+Shift+P** for Windows and **Cmd+Shift+P** for macOS), search for **Kill VS Code Server on Host**, and locate the affected instance, which will be automatically cleared. Then, establish the connection again.

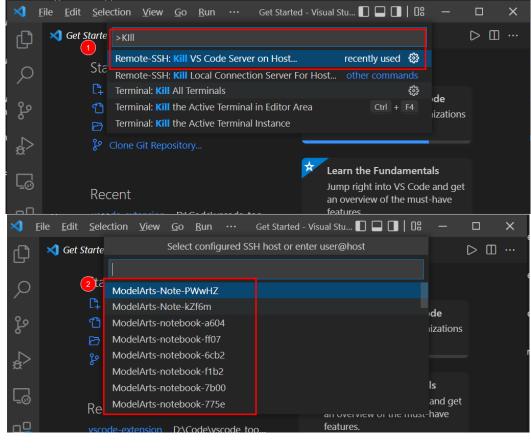


Figure 4-12 Clearing the affected instance

----End

4.7.10 What Do I Do If Error Message "Permissions for 'x:/ xxx.pem' are too open" Is Displayed?

Symptom

```
[15:39:18.228] Running script with connection command: ssh -T -D 5915 "ModelArts-notebook-2fd7" bash
[15:39:18.231] Terminal shell path: C:\windows\System32\cmd.exe
[15:39:18.460] > 02]0;C:\windows\System32\cmd.exe
[15:39:18.460] Got some output, clearing connection timeout
[15:39:18.601] > Warning: Permanently added '[dev-modelarts
                                                                             .com]:30648,[1
 00.85.124.207]:30648' (RSA) to the list of known hosts.
[15:39:18.730] >
[15:39:18.739] > @
                         WARNING: UNPROTECTED PRIVATE KEY FILE!
 It is required that your private key files are NOT accessible by others.
 This private key will be ignored.
 Load key "D:/mariafor.pem": bad permissions
  ma-user@dev-modelarts-
                                          mi.com: Permission denied (publickey)
```

Possible Cause

Possible cause 1: The key file is not stored in the specified path. For details, see the **security restrictions** or **VS Code document**. Resolve this issue by referring to solution 1.

Possible cause 2: For macOS or Linux, the permission on the key file or the folder where the key is stored may be incorrect. Resolve this issue by referring to solution 2.

Solution

Solution 1:

Place the key file in a specified path or its sub-path:

Windows: C:\Users\{{user}}}

macOS or Linux: Users/{{user}}

Solution 2:

Check the file and folder permissions.

Local SSH file and folder permissions

macOS / Linux:

On your local machine, make sure the following permissions are set:

Folder / File	Permissions
.ssh in your user folder	chmod 700 ~/.ssh
.ssh/config in your user folder	chmod 600 ~/.ssh/config
.ssh/id_rsa.pub in your user folder	chmod 600 ~/.ssh/id_rsa.pub
Any other key file	chmod 600 /path/to/key/file

Windows:

The specific expected permissions can vary depending on the exact SSH implementation you are using. We recommend using the out of box Windows 10 OpenSSH Client.

In this case, make sure that all of the files in the .ssh folder for your remote user on the SSH host is owned by you and no other user has permissions to access it. See the Windows OpenSSH wiki for details.

For all other clients, consult your client's documentation for what the implementation expects.

4.7.11 What Do I Do If Error Message "Bad owner or permissions on C:\Users\Administrator/.ssh/config" or "Connection permission denied (publickey)" Is Displayed?

Symptom

The following error message is displayed: "Bad owner or permissions on C:\Users \Administrator/.ssh/config" or "Connection permission denied (publickey). Please

make sure the key file is correctly selected and the file permission is correct. You can view the instance keypair information on ModelArts console."

Possible Causes

The permission to the SSH folder has been granted to other users, not only to the current Windows user, or the current user does not have the permission. In these cases, you only need to modify the permission.

Solution

 Find the SSH folder, which is typically located in C:\Users, for example, C:\Users\xxx.

The file name in C:\Users must be the same as the Windows login username.

- 2. Right-click the folder and choose **Properties**. Then, click the **Security** tab.
- Click Advanced. In the displayed window, click Disable inheritance. Then, in the Block Inheritance dialog box, click Remove all inherited permissions from this object. In this case, all users will be deleted.
- 4. Add an owner. In the same window, click Add. In the displayed window, click Select a principal next to Principal. In the displayed Select User, Computer, Service Account, or Group dialog box, click Advanced, enter the username, and click Find Now. Then, the search results will be displayed. Select your account and click OK to close all windows.

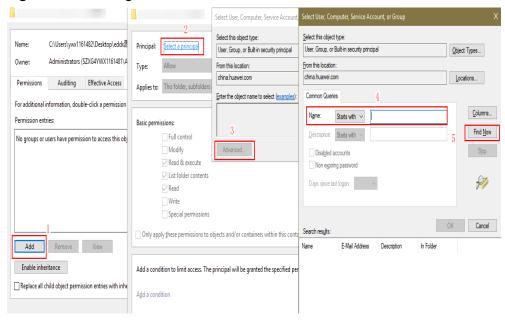


Figure 4-13 Adding an owner

5. Close and open VS Code again and try to remotely access the SSH host. Ensure that the target key is stored in the SSH folder.

4.7.12 What Do I Do If Error Message "ssh: connect to host xxx.pem port xxxxx: Connection refused" Is Displayed?

Symptom

```
[16:42:24.876] Running script with connection command: ssh -T -D 7616 "ModelArts-notebook-2fd7" bash [16:42:24.878] Terminal shell path: C:\windows\System32\cmd.exe [16:42:25.894] > mx]8;C:\windows\System32\cmd.exe [16:42:25.894] | Got some output, clearing connection timeout | Some
```

Possible Cause

The target instance is not running.

Solution

Log in to the ModelArts management console and check the status of the instance. If the instance is stopped, start it. If the instance is in other states, such as **Error**, stop and then start it. After the instance status changes to **Running**, establish the remote connection again.

4.7.13 What Do I Do If Error Message "ssh: connect to host ModelArts-xxx port xxx: Connection timed out" Is Displayed?

Symptom

```
[15:00:31.447] Running script with connection command: ssh -T -D 11839

"ModelArts- " bash

[15:00:31.449] Terminal shell path: C:\windows\System32\cmd.exe

[15:00:31.681] > ssc]0;C:\windows\System32\cmd.exe

[15:00:31.681] Got some output, clearing connection timeout

[15:00:52.731] > ssh: connect to host ModelArts-
```

Possible Cause

Possible cause 1: The whitelisted IP addresses configured for the instance are different from the ones used in the local network.

Change the whitelist so that the whitelisted IP addresses are the same as those used in the local network or disable the whitelist.

Possible cause 2: The local network is inaccessible.

Solution: Check the local network and network restrictions.

4.7.14 What Do I Do If Error Message "Load key "C:/Users/xx/test1/xxx.pem": invalid format" Is Displayed?

Symptom

Possible Cause

The content or format of the key file is incorrect.


Solution

Use the correct key file for remote access. If there is no correct key file locally or the file is damaged, perform the following operations:

- Log in to the console, search for DEW. On the DEW console, choose Key Pair Service and click Account Key Pairs. Then, view and download the correct key file.
- 2. If the key cannot be downloaded and the originally downloaded key was lost, create a new development environment instance and a new key file.


4.7.15 What Do I Do If Error Message "An SSH installation couldn't be found" or "Could not establish connection to instance xxx: 'ssh' ..." Is Displayed?

Symptom



Or

FAQs

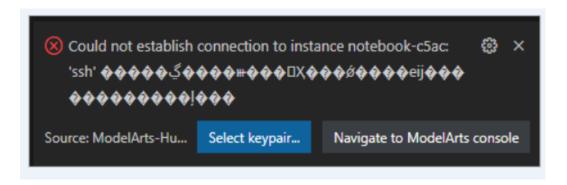

When VS Code attempts to access a notebook instance, the system always prompts you to select a certificate, and the message, excepting the title, consists of garbled characters. After the certificate is selected, the system still does not respond and the connection failed.

Possible Cause

OpenSSH is not installed in the current environment or is not installed in the default path. For details, see the **VS Code document**.

Solution

If OpenSSH is not installed in the current environment, download and install
it.

Installing a supported SSH client

os	Instructions	
Windows 10 1803+ / Server 2016/2019 1803+	Install the Windows OpenSSH Client.	
Earlier Windows	Install Git for Windows.	
macOS	Comes pre-installed.	
Debian/Ubuntu	Run sudo apt-get install openssh-client	
RHEL / Fedora / CentOS	Run sudo yum install openssh-clients	

VS Code will look for the ssh command in the PATH. Failing that, on Windows it will attempt to find ssh.exe in the default Git for Windows install path. You can also specifically tell VS Code where to find the SSH client by adding the remote.SSH.path property to settings.json.

If OpenSSH fails to be installed, manually **download the OpenSSH installation package** and perform the following operations:

- **Step 1** Download the .zip package and decompress it into **C:\Windows\System32**.
- **Step 2** In **C:\Windows\System32\OpenSSH-xx**, open CMD as the administrator and run the following command:

powershell.exe -ExecutionPolicy Bypass -File install-sshd.ps1

Step 3 Add **C:\Program Files\OpenSSH-xx** (in which the SSH executable .exe file is stored) to environment system variables.

FAQs

```
C:\windows\system32>ssh
usage: ssh [-46AaCfGgKkMNnqsTtVvXxYy] [-B bind_interface]
[-b bind_address] [-c cipher_spec] [-D [bind_address:]port]
[-E log_file] [-e escape_char] [-F configfile] [-I pkcsl1]
[-i identity_file] [-J [user@]host[:port]] [-L address]
[-1 login_name] [-m mac_spec] [-O ctl_cmd] [-o option] [-p port]
[-Q query_option] [-R address] [-S ctl_path] [-W host:port]
[-w local_tun[:remote_tun]] destination [command]
```

Step 5 Enable port 22 (default OpenSSH port) on the firewall and run the following command in Command Prompt:

netsh advfirewall firewall add rule name=sshd dir=in action=allow protocol=TCP localport=22

Step 6 Run the following command to start OpenSSH:

Start-Service sshd

----End

• If OpenSSH is not installed in the default path, open the command panel (Ctrl+Shift+P for Windows and Cmd+Shift+P for macOS).

Search for Open settings.



Add remote.SSH.path to settings.json, for example, "remote.SSH.path": "Installation path of the local OpenSSH".

4.7.16 What Do I Do If Error Message "no such identity: C:/ Users/xx /test.pem: No such file or directory" Is Displayed?

Symptom

```
| PROBLEMS OUTPUT TERMINAL PORTS | 17:55:48.396 | Running script with connection command: "C:\Windows\System32\Open55H\ssh.exe" -T -D 63262 "ModelArts-notebook-" bash | 17:55:48.397 | Terminal shell path: C:\Windows\System32\cmd.exe | 17:55:48.670 | oscip;C:\Windows\System32\cmd.exe | 17:55:48.670 | oscip;C:\Windows\System32\cmd.exe | 17:55:48.671 | Got some output, clearing connection timeout | 17:55:48.821 | oscip;C:\Windows\System32\cmd.exe | uawei.com | 17:55:48.821 | oscip;C:\Windows\System32\cmd.exe | uawei.com | uawei.com | 17:55:48.965 | oscip;C:\Windows\System32\cmd.exe | uawei.com | uawei.com | uawei.com | 17:55:48.965 | oscip;C:\Windows\System32\cmd.exe | uawei.com | uawei.
```

Possible Cause


The key file is not in the path, or the name of the key file in the path has been changed.

Solution


Select the key path again.

4.7.17 What Do I Do If Error Message "Host key verification failed" or "Port forwarding is disabled" Is Displayed?

Symptom

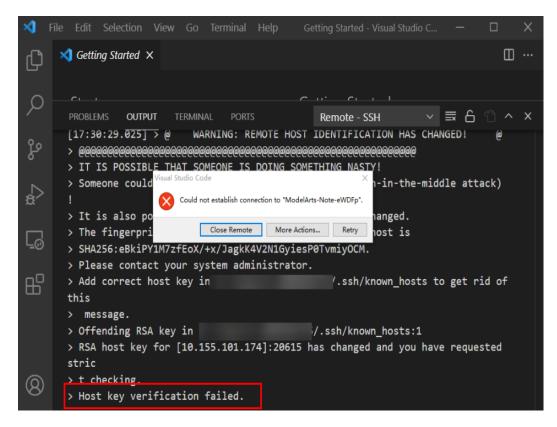

Or

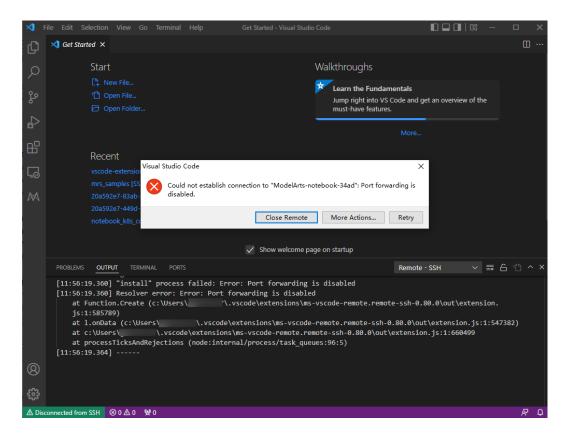

Possible Cause

After the notebook instance is restarted, its public key changes. The alarm is generated when OpenSSH detected the key change.

Solution

 Add -o StrictHostKeyChecking=no for remote access through the CLI in VS Code.

ssh -tt -o StrictHostKeyChecking=no -i \${IdentityFile} \${User}@\${HostName} -p \${Port}

Parameters:


- IdentityFile: path to the local key
- User: username, for example, ma-user
- HostName: IP address
- Port: port number
- Add StrictHostKeyChecking no and UserKnownHostsFile=/dev/null to the local ssh config file for manual configuration of remote access in VS Code.

Host xxx
HostName x.x.x.x # IP address
Port 22522
User ma-user
IdentityFile C:/Users/my.pem
StrictHostKeyChecking no
UserKnownHostsFile=/dev/null
ForwardAgent yes

Note that SSH logins will be insecure after the preceding parameters are added because the **known_hosts** file will be ignored during the logins.

4.7.18 What Do I Do If Error Message "Failed to install the VS Code Server" or "tar: Error is not recoverable: exiting now" Is Displayed?

Symptom

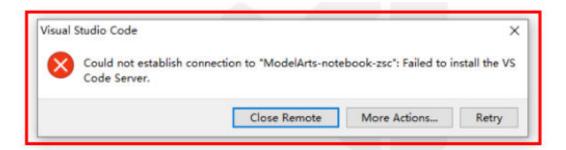

Or

```
[17:53:24.382] > vscode-scp-done.flag
                                                                                   0.2KB/s 00:00
[17:53:24.756] > Found flag and server on host
[17:53:24.765] > d3aeabcaa9c5%%2%%
> tar --version:
[17:53:24.789] > tar (GNU tar) 1.30
> Copyright (C) 2017 Free Software Foundation, Inc.
> License GPLv3+: GNU GPL version 3 or later <a href="https://gnu.org/licenses/gpl.html">https://gnu.org/licenses/gpl.html</a>.
\boldsymbol{\succ} This is free software: you are free to change and redistribute it.
> There is NO WARRANTY, to the extent permitted by law.
> Written by John Gilmore and Jay Fenlason.
[17:53:24.796] > tar: This does not look like a tar archive
> gzip: stdin: unexpected end of file
> tar: Child returned status 1
> tar: Error is not recoverable: exiting now
[17:53:24.804] >
> ERROR: tar exited with non-0 exit code: 0
> Already attempted local download, failing
> d3aeabcaa9c5: start
> exitCode==37==
```

Possible Cause

The disk space of /home/ma-user/work is insufficient.

Solution

Delete unnecessary files in /home/ma-user/work.

4.7.19 What Do I Do If Error Message "XHR failed" Is Displayed When a Remote Notebook Instance Is Accessed Through VS Code?

Possible Cause

The network of the environment may be faulty.

Solution

Rectify the fault by referring to Troubleshooting Failed XHR.

4.7.20 What Do I Do for an Automatically Disconnected VS Code Connection If No Operation Is Performed for a Long Time?

Symptom

After an SSH connection is set up through VS Code, no operation is performed for a long time and the window retains open. When the connection is used again, it is found that the connection is disconnected and no error message is displayed. The following figure shows the reconnection information.



According to VS Code Remote-SSH logs, the connection was disconnected about two hours after the setup.

```
> [21:32:39.136] Got some output, clearing connection timeout [21:48:58.055] > Properly connected [21:49:12.060] > [22:40:58.740] > Disconnected [23:32:49.341] > Connection reset by 139.159.152.36 port 32528
```

Possible Cause

After SSH interaction stops for a period of time, the firewall disconnects idle connections (http://bluebiu.com/blog/linux-ssh-session-alive.html). The default SSH configuration does not lead to a proactive disconnection upon timeout. Since the instance runs stably on the backend, set up the connection again to resolve this issue.

Solution

To retain connections if no operation is performed for a long time, configure periodic message sending through SSH. In this way, the connection will not become idle on the firewall.

• Configure the client as needed. If the client is not configured, no heartbeat packet will be sent to the server by default.

Figure 4-14 Opening the VS Code SSH configuration file Select SSH configuration file to update RE... SSH Targets V


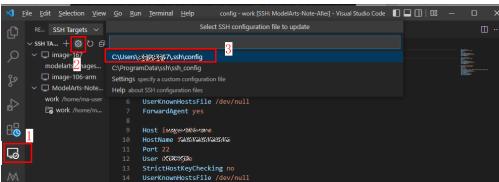


Figure 4-15 Adding configurations

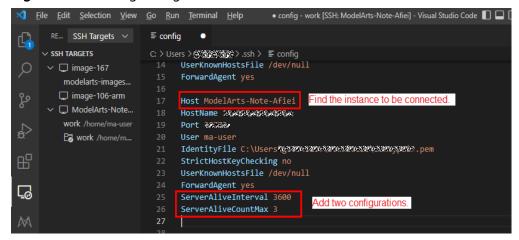

The configuration is as follows:

Host ModelArts-xx

ServerAliveInterval 3600 # Add this configuration in the unit of second, indicating that the client will actively send a heartbeat packet to the server every hour.

ServerAliveCountMax 3 # Add this configuration, indicating that if the server does not respond after the heartbeat packet is sent for three times, the connection will be disconnected.

For example, if the firewall is configured to disconnect a connection if the connection is idle for two hours, set **ServerAliveInterval** to a value less than two hours (for example, one hour) on the client to prevent the firewall from disconnecting the connection.

Configure the server in /home/ma-user/.ssh/etc/sshd_config. (Notebook has been configured, and 24 hours is longer than the time configured on the firewall for disconnecting connections. This configuration does not need to be manually modified. It is only used to help understand the SSH configuration.)

```
/modelarts/authoring(MindSpore) [ma-user work]$cat /home/ma-user/.ssh/etc/sshd_config | grep Client
ClientAliveInterval 1440m
ClientAliveCountMax 3
```


The preceding configuration shows that the server actively sends a heartbeat packet to the client every 24 hours, and the connection will be disconnected if the client does not respond after the heartbeat packet is sent for three times.

For details, see https://unix.stackexchange.com/guestions/3026/what-dooptions-serveraliveinterval-and-clientaliveinterval-in-sshd-config-d.

• If a connection must be consistently retained, it is a good practice to write logs in a separate log file and run the script on the backend. For example: nohup train.sh > output.log 2>&1 & tail -f output.log

4.7.21 What Do I Do If It Takes a Long Time to Set Up a Remote Connection After VS Code Is Automatically Upgraded?

Symptom

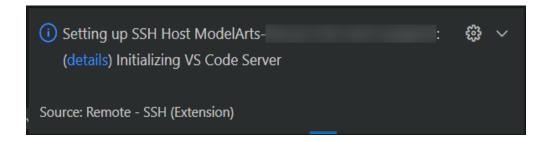


Possible Cause

VS Code is automatically upgraded. As a result, download the new VS Code server to set up a new connection.

Solution

Disable automatic VS Code upgrade. To do so, click **Settings** in the lower left corner, search for **Update: Mode**, and set it to **none**.

Figure 4-16 Settings

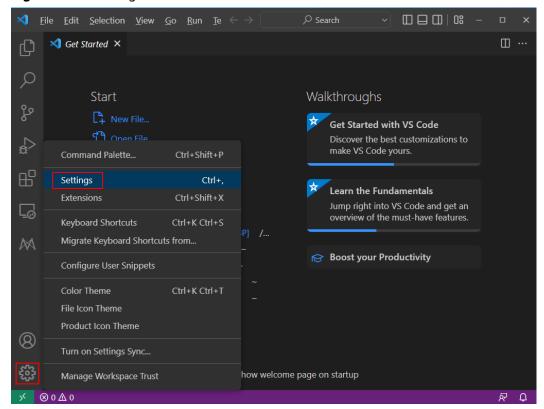

Settings - Visual Studio Co... 📗 🔲 📗 ★ Get Started **≡** Settings **台 田 …** 3 Settings Found 🗮 🎖 Update: Mode Turn on Settings Sync User وړ ✓ Application (3) 않 | Update: Mode Update (3) Configure whether you receive automatic updates. Requires a restart after change. The updates are fetched from a Microsoft online service. 船 none none start default otes are fetched from a default Disable updates

Figure 4-17 Setting the update mode to none

4.7.22 What Do I Do If Error Message "Connection reset" Is Displayed During an SSH Connection?

Symptom

```
C:\Users\c \.ssh>ssh -tt -o StrictHostKeyChecking=no -i KeyPair-___.pem ma-user@dev-modelarts
om -p 30
kex_exchange_identification: read: Connection reset
```

Possible Causes

The user network is restricted. For example, SSH is disabled by default on some enterprise networks.

Solution

Apply for the SSH permission.

4.7.23 What Can I Do If a Notebook Instance Is Frequently Disconnected or Stuck After I Use MobaXterm to Connect to the Notebook Instance in SSH Mode?

Symptom

After MobaXterm is connected to a development environment, it is disconnected after a period of time.


Possible Cause

When MobaXterm is configured, **SSH keepalive** is not selected or **Stop server after** of MobaXterm Professional is set to a value that is too small.

Solution


Step 1 Open MobaXterm and click **Settings** on the menu bar.

Figure 4-18 Settings

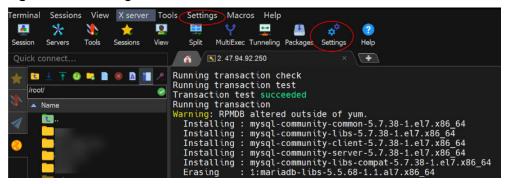

Step 2 On the MobaXterm configuration page, click the **SSH** tab and select **SSH keepalive**.

Figure 4-19 Selecting SSH keepalive

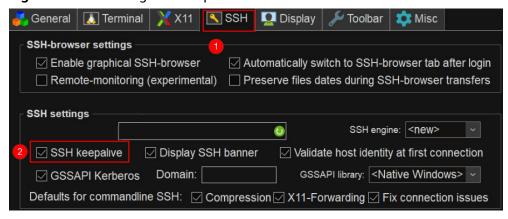

□ NOTE

If MobaXterm Professional is used, go to step 3.

Step 3 Change the default value **360 seconds** to **3600 seconds** or a larger value for **Stop server after**.

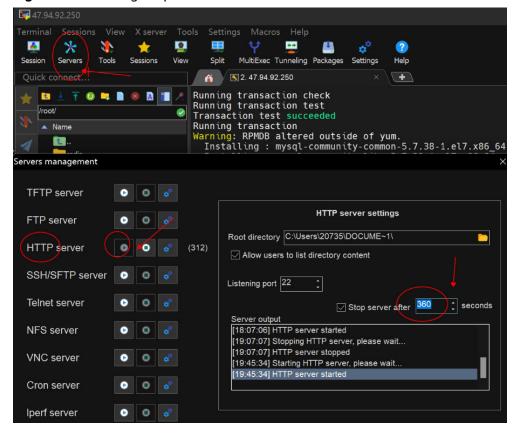


Figure 4-20 Setting Stop server after

----End

4.7.24 What Do I Do If Error Message "Missing GLIBC, Missing required dependencies" Is Displayed When I Access the Development Environment Through VS Code?

Symptom

You encounter the error message below when you access the development environment through VS Code.

Warning: Missing GLIBC >= 2.28! from /lib/x86_64-linux-gnu/libc-2.27.so Error: Missing required dependencies. Please refer to our FAQ https://aka.ms/vscode-remote/faq/old-linux for additional information.

Possible Causes

You are using VS Code 1.86.

Solution

Use VS Code 1.85. Download URL: https://code.visualstudio.com/updates/v1_85.

4.7.25 What Do I Do If an Error Message Is Displayed Indicating That ms-vscode-remote.remot-sdh Is Uninstalled Due To a Reported Issue When Using VSCode-huawei?

Symptom

You encounter this error message when using VS Code.

Possible Causes

You can use Remote SSH only in open-source VS Code.

Solution

Use open-source VS Code.

4.8 Using Custom Images in Notebook

4.8.1 How Do I Use the Image Customized by a User Under a Different Master Account to Create a Notebook Instance?


Two users belong to different master accounts. If user A needs to use user B's custom image to create a notebook instance, user B needs to share the image with user A. Then user A pulls the shared image and registers it before using it in the notebook instance. The procedure is as follows:

Operations performed by user B:

- 1. Log in to the SWR console and choose **My Images**.
- 2. Click the name of the image to be shared to access its details page.
- 3. On the **Sharing** tab, click **Share Image**. In the displayed dialog box, set required parameters such as the account and click **OK**.

Operations performed by user A:

- 1. Log in to the SWR console, choose **My Images** > **Shared Images**, view the image shared by user B, and click the image name to go to its details page.
- 2. Pull the image shared by user B as your own image by following the instructions provided on the **Pull/Push** tab.

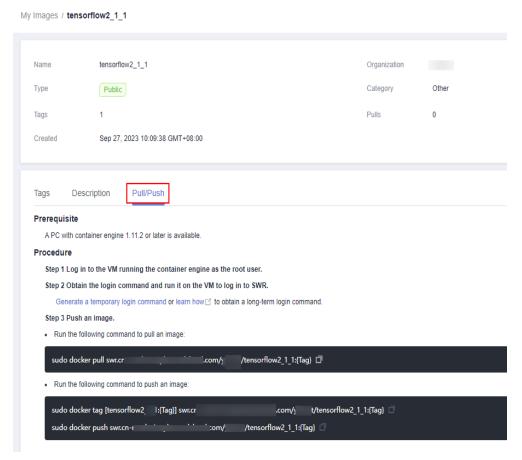

3. Log in to the ModelArts console, select the pulled image and register it. After the registration is successful, you can use the image on the **Notebook** page.

4.9 Others

4.9.1 How Do I Use Multiple Ascend Cards for Debugging in a Notebook Instance?

An Ascend multi-card training job runs in multi-process, multi-card mode. The number of cards is equal to the number of Python processes. The Ascend underlayer reads the environment variable **RANK_TABLE_FILE**, which has been configured in the development environment, without requiring manual configuration. For example, to run a job on eight cards, the code is as follows:

```
export RANK_SIZE=8
current_exec_path=$(pwd)
echo 'start training'
for((i=0;i<=$RANK_SIZE-1;i++));
do
echo 'start rank '$i
mkdir ${current_exec_path}/device$i
cd ${current_exec_path}/device$i
echo $i
export RANK_ID=$i
dev=`expr $i + 0`
echo $dev
```

```
export DEVICE_ID=$dev
python train.py > train.log 2>&1 &
done
```

Set the environment variable **DEVICE_ID** in **train.py**.

```
devid = int(os.getenv('DEVICE_ID'))
context.set context(mode=context.GRAPH MODE, device target="Ascend", device id=devid)
```

4.9.2 Why Is the Training Speed Similar When Different Notebook Flavors Are Used?

If your training job is single-process in code, the training speed is basically the same no matter when the notebook flavor of 8 vCPUs and 64 GB of memory or the flavor of 72 vCPUs and 512 GB of memory is used. For example, if your training job uses 2 vCPUs and 4 GB of memory, the training speed is similar no matter when you use the notebook flavor of 4 vCPUs and 8 GB of memory or the flavor of 8 vCPUs and 64 GB of memory.

If your training job is multi-process in code, the training speed backed by the notebook flavor of 72 vCPUs and 512 GB of memory is higher than that backed by the notebook flavor of 8 vCPUs and 64 GB of memory.

4.9.3 How Do I Perform Incremental Training When Using MoXing?

If you are not satisfied with training results when using MoXing to build a model, you can perform incremental training after modifying some data and label information.

Adding Incremental Training Parameters to mox.run

After modifying labeling data or datasets, you can modify the **log_dir** parameter in and add the **checkpoint_path** parameter to **mox.run**. Set **log_dir** to a new directory and **checkpoint_path** to the output path of the previous training results. If the output path is an OBS directory, set the path to a value starting with **obs://**.

If labels are changed for label data, perform operations in **If Labels Are Changed** before running **mox.run**.

If Labels Are Changed

If the labels in a dataset have changed, execute the following statement. The statement must be executed before running **mox.run**.

In the statement, the **logits** variable indicates classification layer weights in different networks, and different parameters are configured. Set this parameter to the corresponding keyword.

```
mox.set_flag('checkpoint_exclude_patterns', 'logits')
```

If the built-in network of MoXing is used, the corresponding keyword needs to be obtained by calling the following API. In this example, the **Resnet_v1_50** keyword is the value of **logits**.

```
import moxing.tensorflow as mox
model_meta = mox.get_model_meta(mox.NetworkKeys.RESNET_V1_50)
logits_pattern = model_meta.default_logits_pattern
print(logits_pattern)
```

You can also obtain a list of networks supported by MoXing by calling the following API:

```
import moxing.tensorflow as mox print(help(mox.NetworkKeys))
```

The following information is displayed:

```
Help on class NetworkKeys in module
moxing.tensorflow.nets.nets_factory:
class NetworkKevs(builtins.object)
 Data descriptors defined here:
    dictionary for instance variables (if defined)
    list of weak references to the object (if defined)
  Data and other attributes defined here:
  ALEXNET_V2 = 'alexnet_v2'
  CIFARNET = 'cifarnet'
  INCEPTION_RESNET_V2 = 'inception_resnet_v2'
  INCEPTION_V1 = 'inception_v1'
  INCEPTION_V2 = 'inception_v2'
  INCEPTION_V3 = 'inception_v3'
  INCEPTION_V4 = 'inception_v4'
  LENET = 'lenet'
  MOBILENET_V1 = 'mobilenet_v1'
  MOBILENET_V1_025 = 'mobilenet_v1_025'
  MOBILENET_V1_050 = 'mobilenet_v1_050'
  MOBILENET_V1_075 = 'mobilenet_v1_075'
  MOBILENET_V2 = 'mobilenet_v2'
  MOBILENET_V2_035 = 'mobilenet_v2_035'
  MOBILENET_V2_140 = 'mobilenet_v2_140'
```

XCEPTION_71 = 'xception_71'

4.9.4 How Do I View GPU Usage on the Notebook?


If you select GPU when creating a notebook instance, perform the following operations to view GPU usage:

- Log in to the ModelArts management console, and choose **Development** Workspace > Notebook.
- 2. In the **Operation** column of the target notebook instance in the notebook list, click **Open** to go to the **Jupyter** page.
- 3. On the **Files** tab page of the **Jupyter** page, click **New** and select **Terminal**. The **Terminal** page is displayed.
- 4. Run the following command to view GPU usage:
- 5. Check which processes in the current notebook instance use GPUs.

Method 1:

python /modelarts/tools/gpu_processes.py

The following figure shows the case that the current process is using GPUs.

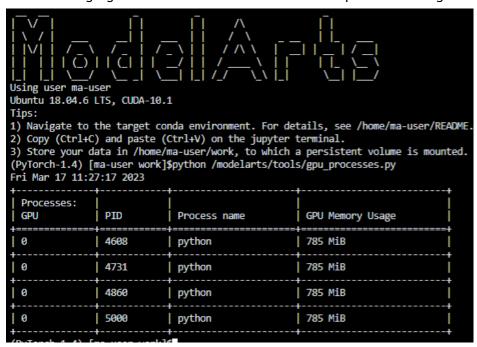

The following figure shows the case that the current process is not using GPUs.

```
(PyTorch-1.4) [ma-user work]$python /modelarts/tools/gpu_processes.py
There is no GPU specification in the current environment, failing to get the GPU_UUIDS.
(PyTorch-1.4) [ma-user work]$
```

Method 2:

Open /resource_info/gpu_usage.json and view the processes that are using GPUs.

If no process is using GPUs, the file may be unavailable or empty.

4.9.5 How Can I Obtain GPU Usage Through Code?

Run the shell or python command to obtain the GPU usage.

Using the shell Command

Run the nvidia-smi command.

This operation relies on CUDA NVCC.

```
watch -n 1 nvidia-smi
 Every 1.0s: nvidia-smi
 Mon Oct 25 15:20:11 2021
  NVIDIA-SMI 440.33.01 Driver Version: 440.33.01 CUDA Version: 10.2
  -----
  GPU Name Persistence-M Bus-Id Disp.A | Volatile Uncorr. ECC
  Fan Temp Perf Pwr:Usage/Cap| Memory-Usage | GPU-Util Compute M.
  0 Tesla V100-SXM2... On | 00000000:5F:00.0 Off |
 | N/A 31C P0 43W / 300W | 0MiB / 32510MiB |
                                         0% Default
 1 Tesla V100-SXM2... On | 00000000:B5:00.0 Off | 0 | N/A 34C P0 44W / 300W | 0MiB / 32510MiB | 0% Default
 Processes:
 GPU PID Type Process name
                                             Usage
 No running processes found
```

2. Run the **gpustat** command.

```
pip install gpustat
gpustat -cp -i
notebook-6a654129-698e-4635-b6be-67aedbdd4c54 Mon Oct 25 15:19:11 2021 440.33.01
[0] Tesla V100-SXM2-32GB | 31'C, 0 % | 0 / 32510 MB |
[1] Tesla V100-SXM2-32GB | 34'C, 0 % | 0 / 32510 MB |
```

To stop the command execution, press Ctrl+C.

Using the python Command

Run the nvidia-ml-py3 command (commonly used).

```
!pip install nvidia-ml-py3
import nvidia_smi
nvidia_smi.nvmllnit()
deviceCount = nvidia_smi.nvmlDeviceGetCount()
for i in range(deviceCount):
    handle = nvidia_smi.nvmlDeviceGetHandleByIndex(i)
    util = nvidia_smi.nvmlDeviceGetUtilizationRates(handle)
    mem = nvidia_smi.nvmlDeviceGetMemoryInfo(handle)
    print(f"|Device {i}| Mem Free: {mem.free/1024**2:5.2f}MB / {mem.total/1024**2:5.2f}MB | gpu-util: {util.gpu:3.1%} | gpu-mem: {util.memory:3.1%} |")

Output:
    |Device 0 | Mem Free: 32510.44MB / 32510.50MB | gpu-util: 0.0% | gpu-mem: 0.0% |
    |Device 1 | Mem Free: 32510.44MB / 32510.50MB | gpu-util: 0.0% | gpu-mem: 0.0% |
```

Run the nvidia_smi, wapper, and prettytable commands.

Use the decorator to obtain the GPU usage in real time during model training.

```
def gputil_decorator(func):
  def wrapper(*args, **kwargs):
     import nvidia_smi
     import prettytable as pt
     try:
        table = pt.PrettyTable(['Devices','Mem Free','GPU-util','GPU-mem'])
        nvidia_smi.nvmllnit()
        deviceCount = nvidia smi.nvmlDeviceGetCount()
        for i in range(deviceCount):
          handle = nvidia_smi.nvmlDeviceGetHandleByIndex(i)
          res = nvidia_smi.nvmlDeviceGetUtilizationRates(handle)
          mem = nvidia_smi.nvmlDeviceGetMemoryInfo(handle)
          table.add_row([i, f"{mem.free/1024**2:5.2f}MB/{mem.total/1024**2:5.2f}MB",
f"{res.gpu:3.1%}", f"{res.memory:3.1%}"])
     except nvidia_smi.NVMLError as error:
        print(error)
     print(table)
     return func(*args, **kwargs)
  return wrapper
```

3. Run the **pynvml** command.

Run **nvidia-ml-py3** to directly obtain the nvml c-lib library, without using **nvidia-smi**. Therefore, this command is recommended.

```
from pynvml import *
nvmllnit()
handle = nvmlDeviceGetHandleByIndex(0)
info = nvmlDeviceGetMemoryInfo(handle)
print("Total memory:", info.total)
print("Free memory:", info.free)
print("Used memory:", info.used)
```

```
Output:
Total memory: 34089730048
Free memory: 34089664512
Used memory: 65536
```

4. Run the **gputil** command.

!pip install gputil import GPUtil as GPU GPU.showUtilization()

Output:

```
| ID | GPU | MEM |
------
| 0 | 0% | 25% |
| 1 | 0% | 0% |
```

```
import GPUtil as GPU
GPUs = GPU.getGPUs()
for gpu in GPUs:
    print("GPU RAM Free: {0:.0f}MB | Used: {1:.0f}MB | Util {2:3.0f}% | Total
{3:.0f}MB".format(gpu.memoryFree, gpu.memoryUsed, gpu.memoryUtil*100, gpu.memoryTotal))
```

When using a deep learning framework such as PyTorch or TensorFlow, you can also use the APIs provided by the framework for query.

4.9.6 Which Real-Time Performance Indicators of an Ascend Chip Can I View?

The real-time performance indicator that can be viewed is **npu-smi**, which is similar to **nvidia-smi** of a GPU chip.

4.9.7 What Are the Relationships Between Files Stored in JupyterLab, Terminal, and OBS?

- Files stored in JupyterLab are the same as those in the work directory on the Terminal page. That is, the files are created on your notebook instances or synchronized from OBS.
- Notebook instances with OBS storage mounted can synchronize files from OBS to JupyterLab using the JupyterLab upload and download functions. The files on the **Terminal** page are the same as those in JupyterLab.
- Notebook instances with EVS storage mounted can read files from OBS to JupyterLab using the MoXing API or SDKs. The files on the **Terminal** page are the same as those in JupyterLab.

4.9.8 How Do I Use the Datasets Created on ModelArts in a Notebook Instance?

Datasets created on ModelArts are stored in OBS. To use these datasets in a notebook instance, download them from OBS to the notebook instance.

For details, see How Do I Upload a File from a Notebook Instance to OBS or Download a File from OBS to a Notebook Instance?

4.9.9 pip and Common Commands

pip is a common Python package management tool. It allows you to search for, download, install, and uninstall Python packages.

Common pip commands:

pip --help # Obtain help information. pip install SomePackage==XXXX # Install a specified version. pip install SomePackage # Install the latest version. pip uninstall SomePackage # Uninstall a software version.

For other commands, run the pip --help command.

4.9.10 What Are Sizes of the /cache Directories for Different Notebook Specifications in DevEnviron?

When creating a notebook instance, you can select resources based on the data volume.

ModelArts mounts disks to **/cache**. You can use this directory to store temporary files. The **/cache** directory shares resources with the code directory. The directory size varies depending on resource specifications.

No disks can be mounted to /cache for CPUs. When only one GPU or Ascend card is used, the /cache directory size is limited to 500 GB. If multiple GPUs or Ascend cards are used, the /cache directory size is limited to 3 TB and calculated using the following formula: /cache directory size = Number of cards x 500 GB. For details, see Table 4-1.

Table 4-1	/cache di	rectory sizes	for different	notehook	specifications
Iable T-I	/caciic ui	ILLLUI V SIZLS	IOI UIIICICIIL	HOLLDOOK	3DCCIIICALIOII3

Specification	/cache Directory Size
GPU, 0.25 cards	500 GB x 0.25
GPU, 0.5 cards	500 GB x 0.5
GPU, 1 card	500 GB
GPU, dual cards	500 GB x 2
GPU, four cards	500 GB x 4
GPU, eight cards	3 TB
Ascend, single card	500 GB
Ascend, dual cards	500 GB x 2
Ascend, four cards	500 GB x 4
Ascend, eight cards	3 TB
СРИ	N/A

4.9.11 What Is the Impact of Resource Overcommitment on Notebook Instances?

Notebook overcommitment refers to the sharing of GPUs and memory within a node. To fully utilize resources, they are overcommitted in dedicated pools.

Example: A dedicated pool has one CPU node with 8 vCPUs and 64 GB memory. If you create a notebook instance with 2 vCPUs and 8 GB memory, a maximum of 6.67 notebook instances (8 vCPUs/(2 vCPUs x 0.6)) can be started due to overcommitment with an overcommitment ratio of 0.6. In this case, at least 1.2 vCPUs are required for starting the notebook instance, and a maximum of 2 vCPUs are used for running the notebook instance. Similarly, at least 4.8 GB memory is required, and a maximum of 8 GB memory is used for running the notebook instance.

Instances may be forcibly terminated due to overcommitment. For example, if six instances with 2 vCPUs are started on an 8 vCPUs node and the CPU usage of one instance exceeds the upper limit (8 vCPUs) of the node, Kubernetes forcibly terminates the instance that uses the most resources.

Do not overcommit resources as it may result in instance restart.

4.9.12 Error Message "Permission denied" Is Displayed When the tensorboard Command Is Used to Open a Log File in a Notebook Instance

Symptom

When the **tensorboard** --logdir ./ command is executed on the terminal of a notebook instance, the error message "[Errno 13] Permission denied..." is displayed.

```
(PyTorch-1.8) [ma-user work]$tensorboard --logdir ./
//bame/ma-user/anaconda3/envs/PyTorch-1.8/lib/python3.7/site-packages/requests/_init__py:104: RequestsDependencyWarning: urllib3 (1.26.12) or chardet (5.1.0)/charset_normalizer of version!
RequestsDependencyWarning)
TensorDand 2.1.1 at http://localhost:0060/ (Press CTRL+C to quit)
Exception installation not found - running with reduced feature set.
Serving TensorDand 2.1.1 at http://localhost:0060/ (Press CTRL+C to quit)
Exception in thread Reloader:
Traceback (most recent call last):
File 'home/ma-user/anaconda3/envs/PyTorch-1.8/lib/python3.7/threading.py", line 926, in _bootstrap_inner
self.runcy
self.runcy
self.runcy
self.runcy
file 'home/ma-user/anaconda3/envs/PyTorch-1.8/lib/python3.7/site-packages/tensorboard/backerd/application.py", line 586, in _reload
multiplexer_dadawars-modisor/envs/PyTorch-1.8/lib/python3.7/site-packages/tensorboard/backerd/event_processing/plugin_event_multiplexer.py", line 199, in AddRunsFromDirectory
for subdir in io wrapper_GettogdirSubdirectories(path):
File 'home/ma-user/anaconda3/envs/PyTorch-1.8/lib/python3.7/site-packages/tensorboard/backerd/event_processing/so_mrapper.py", line 200, in _genexpr>
subdir
File 'home/ma-user/anaconda3/envs/PyTorch-1.8/lib/python3.7/site-packages/tensorboard/backerd/event_processing/so_mrapper.py", line 199, in AddRunsFromDirectory
for dir path, _, filenames in tf.io_gfile.walk(top, topdown-True)
File 'home/ma-user/anaconda3/envs/PyTorch-1.8/lib/python3.7/site-packages/tensorboard/backerd/event_processing/so_mrapper.py", line 687, in walk
for sublites in walk[cjoinds.subdir_topdom, oneror-noneroror):
File 'home/ma-user/anaconda3/envs/PyTorch-1.8/lib/python3.7/site-packages/tensorboard/compat/tensorflow_stub/io/gfile.py", line 687, in walk
for sublites in walk[cjoinds.subdir_topdom, oneror-noneroror):
File 'home/ma-user/anaconda3/envs/PyTorch-1.8/lib/python3.7/site-packages/tensorboard/compat/tensorflow_stub/io/gfile.py", line 687, in walk
for sublites in walk[cjoinds.subdir_topdom, oneror-non
```

Possible Causes

The current directory contains files on which you do not have permission.

Solution

Create a folder (for example, **tb_logs**), place the TensorBoard log file (for example, **tb.events**) in this folder, and run the tensorboard command. The following is an example command:

```
mkdir -p ./tb_logs
mv tb.events ./tb_logs
tensorboard --logdir ./tb_logs
```

```
(Op/orch-1.8) law-user work[sk[ir -p th_logs
(Op/orch-1.8) law-user/work[sk[ir -p th_logs
(Op/orch-1.8) law-use
```

5 Training Jobs

5.1 Functional Consulting

5.1.1 What Are the Solutions to Underfitting?

- 1. Increasing model complexity
 - For an algorithm, add more high-order items to the regression model, improve the depth of the decision tree, or increase the number of hidden layers and hidden units of the neural network to increase model complexity.
 - Discard the original algorithm and use a more complex algorithm or model. For example, use a neural network to replace the linear regression, and use the random forest to replace the decision tree.
- 2. Adding more features to make input data more expressive
 - Feature mining is critical. In particular, a small set of highly expressive features can often be more effective than a larger set of less expressive ones.
 - Feature quality is the focus.
 - To explore highly expressive features, you must have an in-depth understanding of data and application scenarios, which depends on experience.
- 3. Adjusting parameters and hyperparameters
 - Neural network: learning rate, learning attenuation rate, number of hidden layers, number of units in a hidden layer, β1 and β2 parameters in the Adam optimization algorithm, and batch_size
 - Other algorithms: number of trees in the random forest, number of clusters in k-means, and regularization parameter λ
- 4. Adding training data, which is of little effect
 Underfitting is usually caused by weak model learning capabilities. Adding data cannot significantly increase the training performance.
- 5. Reducing regularization constraints

FAQs 5 Training Jobs

Regularization aims to prevent model overfitting. If a model is underfitting instead of overfitting, reduce the regularization parameter λ or directly remove the regularization item.

5.1.2 What Are the Precautions for Switching Training Jobs from the Old Version to the New Version?

The differences between the new version and the old version lie in:

- Differences in Training Job Creation
- Differences in Training Code Adaptation
- Differences in Built-in Training Engines

Differences in Training Job Creation

- In earlier versions, you can create a training job using **Algorithm Management**, **Frequently-used**, and **Custom**.
- In the new version, you can create a training job using Custom algorithmor
 My algorithm.

This allows you to select algorithms by category.

- The saved algorithms in **Algorithm Management** in the old version are in **My** algorithm in the new version.
- The **Frequently-used** in the old version is the **Custom algorithm** in the new version. Select **Preset image** for **Boot Mode** when you create jobs using the new version.
- The **Custom** in the old version is the **Custom algorithm** in the new version. Select **Custom image** for **Boot Mode** when you create jobs using the new version.

Differences in Training Code Adaptation

In the old version, you are required to configure data input and output as follows:

In the new version, you only need to configure training input and output. In the code, **arg.data_url** and **arg.train_url** are used as local paths. For details, see Developing a Custom Script.

```
# Parse CLI parameters.
import argparse
parser = argparse.ArgumentParser(description='MindSpore Lenet Example')
parser.add_argument('--data_url', type=str, default="./Data",
```

```
help='path where the dataset is saved')

parser.add_argument('--train_url', type=str, default="./Model", help='if is test, must provide\
    path where the trained ckpt file')

args = parser.parse_args()
```

The downloaded code does not need to be set. Use **data_url** and **train_url** for data training and output. # Download data to your local container. In the code, **local_data_path** specifies the training input path. #mox.file.copy_parallel(args.data_url, local_data_path)

Differences in Built-in Training Engines

- In the new version, MoXing 2.0.0 or later is installed by default for built-in training engines.
- In the new version, Python 3.7 or later is used for built-in training engines.
- In the new image, the default home directory has been changed from /home/ work to /home/ma-user. Check whether the training code contains hard coding of /home/work.
- Built-in training engines are different between the old and new versions.
 Commonly used built-in training engines have been upgraded in the new version.

To use a training engine in the old version, switch to the old version. **Table 5-1** lists the differences between the built-in training engines in the old and new versions.

Table 5-1 Differences between the built-in training engines in the old and new versions

Runtime Environment	Built-in Training Engine and Version	Old Versio n	New Version
TensorFlow	TensorFlow-1.8.0	√	х
	TensorFlow-1.13.1	√	Coming soon
	TensorFlow-2.1.0	√	√
MXNet	MXNet-1.2.1	√	х
Caffe	Caffe-1.0.0	√	х
Spark MLlib	Spark-2.3.2	√	х
Ray	Ray-0.7.4	√	х
XGBoost with scikit- learn	XGBoost-0.80- Sklearn-0.18.1	√	х
PyTorch	PyTorch-1.0.0	√	х
	PyTorch-1.3.0	√	х
	PyTorch-1.4.0	√	х

<sup>...
#</sup> Upload the local container data to the OBS path.
#mox.file.copy_parallel(local_output_path, args.train_url)

Runtime Environment	Built-in Training Engine and Version	Old Versio n	New Version
	PyTorch-1.8.0	х	√
MPI	MindSpore-1.3.0	х	√
Horovod	Horovod_0.20.0- TensorFlow_2.1.0	х	√
	horovod_0.22.1- pytorch_1.8.0	х	√
MindSpore-GPU	MindSpore-1.1.0	√	х
	MindSpore-1.2.0	√	х

5.1.3 How Do I Obtain a Trained ModelArts Model?

Models generated using ModelArts ExeML can be deployed only on ModelArts and cannot be downloaded to your local PC.

Models trained using a custom or subscription algorithm are stored in specified OBS paths for you to download.

5.1.4 What Is TensorBoard Used for in Model Visualization Jobs?

Visualization jobs are powered by TensorBoard. For details about TensorBoard functions, see the **TensorBoard official website**.

5.1.5 How Do I Obtain RANK_TABLE_FILE on ModelArts for Distributed Training?

ModelArts automatically provides the **RANK_TABLE_FILE** file for you. Obtain the file location through environment variables.

 Open the notebook terminal and run the following command to view RANK TABLE FILE:

env | grep RANK

 In a training job, add the following code to the first line of the training startup script to print the value of RANK_TABLE_FILE: os.system('env | grep RANK')

5.1.6 How Do I Obtain the CUDA and cuDNN Versions of a Custom Image?

Obtain a CUDA version:

cat /usr/local/cuda/version.txt

Obtain a cuDNN version:

cat /usr/local/cuda/include/cudnn.h | grep CUDNN_MAJOR -A 2

5.1.7 How Do I Obtain a MoXing Installation File?

MoXing installation files cannot be downloaded or installed by users. The MoXing installation package is preset in ModelArts notebook and training job images, and can be directly used.

5.1.8 In a Multi-Node Training, the TensorFlow PS Node Functioning as a Server Will Be Continuously Suspended. How Does ModelArts Determine Whether the Training Is Complete? Which Node Is a Worker?

In a TensorFlow-powered distributed training, the PS task and worker task are started. The worker task is a key task. ModelArts will use a process exit code of the worker task to determine whether the training job is complete.

A task name will be used to determine which node is a worker. A Volcano job is issued for training, which contains a PS task and a worker task. The startup commands of the two tasks are different. The hyperparameter **task_name** will be automatically generated, which is **ps** for the PS task and **worker** for the worker task.

5.1.9 How Do I Install MoXing for a Custom Image of a Training Job?

To prevent automatic installation of MoXing from affecting the package environment in the custom image, manually install MoXing for the custom image. The MoXing installation package is stored in the /home/ma-user/modelarts/package/ directory after the job is started. Before using MoXing, run the following code to install it:

import os os.system("pip install /home/ma-user/modelarts/package/moxing_framework-*.whl")

∩ NOTE

This case applies only to the training environment.

5.2 Reading Data During Training

5.2.1 How Do I Configure the Input and Output Data for Training Models on ModelArts?

ModelArts allows you to upload a custom algorithm for creating training jobs. **Create the algorithm** and upload it to an OBS bucket. **Creating an Algorithm** For details about how to create a training job, see **Creating a Training Job**.

Parsing Input and Output Paths

When a ModelArts model reads data stored in OBS or outputs data to a specified OBS path, perform the following operations to configure the input and output data:

1. Parse the input and output paths in the training code. The following method is recommended:

After the parameters are parsed, use **data_url** and **train_url** to replace the paths to the data source and the data output, respectively.

- 2. When using a preset image to create an algorithm, set the defined input and output parameters based on the code parameters in 1.
 - Training data is a must for algorithm development. You are advised to set the input parameter name to data_url, indicating the input data source.
 You can also customize code parameters based on the algorithm code in 1.
 - After model training is complete, the trained model and the output information must be stored in an OBS path. By default, **Output** specifies the model output and the code path parameter is **train_url**. You can also customize the output path parameters based on the algorithm code in 1.
- 3. When creating a training job, configure the input and output paths.

 Select an OBS path or dataset path as the training input, and an OBS path for the output.

5.2.2 How Do I Improve Training Efficiency While Reducing Interaction with OBS?

Scenario Description

When you use ModelArts for custom deep learning training, training data is typically stored in OBS. If the volume of training data is large (for example, greater than 200 GB), a GPU resource pool is required, and the training efficiency is low.

To improve training efficiency while reducing interaction with OBS, perform the following operations for optimization.

Optimization Principles

For the GPU resource pool provided by ModelArts, 500 GB NVMe SSDs are attached to each training node for free. The SSDs are attached to the /cache directory. The lifecycle of data in the /cache directory is the same as that of a training job. After the training job is complete, all content in the /cache directory is cleared to release space for the next training job. Therefore, you can copy data

from OBS to the /cache directory during training so that data can be read from the /cache directory until the training is finished. After the training is complete, content in the /cache directory will be automatically cleared.

Optimization Methods

TensorFlow code is used as an example.

The following is code before optimization:

```
...

tf.flags.DEFINE_string('data_url', ", 'dataset directory.')

FLAGS = tf.flags.FLAGS

mnist = input_data.read_data_sets(FLAGS.data_url, one_hot=True)
```

The following is an example of the optimized code. Data is copied to the **/cache** directory.

```
...

tf.flags.DEFINE_string('data_url', ", 'dataset directory.')

FLAGS = tf.flags.FLAGS

import moxing as mox

TMP_CACHE_PATH = '/cache/data'

mox.file.copy_parallel('FLAGS.data_url', TMP_CACHE_PATH)

mnist = input_data.read_data_sets(TMP_CACHE_PATH, one_hot=True)
```

5.2.3 Why the Data Read Efficiency Is Low When a Large Number of Data Files Are Read During Training?

If a dataset contains a large number of data files (massive small files) and data is stored in OBS, files need to be repeatedly read from OBS during training. As a result, the training process is waiting for reading files, resulting in low read efficiency.

Solution

- 1. Compress the massive small files into a package on your local PC, for example, a .zip package.
- 2. Upload the package to OBS.
- 3. During training, directly download this package from OBS to the /cache directory of your local PC. Perform this operation only once.

For example, you can use mox.file.copy_parallel to download the .zip package to the **/cache** directory, decompress the package, and then read files for training.

```
...

tf.flags.DEFINE_string('<obs_file_path>/data.zip', '', 'dataset directory.')

FLAGS = tf.flags.FLAGS
import os
import moxing as mox

TMP_CACHE_PATH = '/cache/data'
mox.file.copy_parallel('FLAGS.data_url', TMP_CACHE_PATH)

zip_data_path = os.path.join(TMP_CACHE_PATH, '*.zip')
unzip_data_path = os.path.join(TEMP_CACHE_PATH, 'unzip')

# You can also decompress .zip Python packages.
os.system('unzip '+ zip_data_path + ' -d ' + unzip_data_path)
mnist = input_data.read_data_sets(unzip_data_path, one_hot=True)
```

5.2.4 How Do I Define Path Variables When Using MoXing?

Symptom

mox.file.copy_parallel(src_obs_dir=input_storage,'obs://dyyolov8/yolov5_test/yolov5-7.0/datasets'),

How do I define an OBS path as a variable in the **mox** function?

Solution

The following is an example of defining a variable:

input_storage = './test.py'
import moxing as mox
mox.file.copy_parallel(input_storage,'obs://dyyolov8/yolov5_test/yolov5-7.0/datasets')

5.3 Compiling the Training Code

5.3.1 How Do I Create a Training Job When a Dependency Package Is Referenced by the Model to Be Trained?

ModelArts allows you to install third-party dependency packages for model training. After the **pip-requirements.txt** file is stored in the training code directory, the system runs the command below to install the specified Python packages before the training boot file is executed.

pip install -r pip-requirements.txt

Only training jobs created using a preset image can reference dependency packages for model training.

◯ NOTE

Any one of the following file names can be used. This section uses **pip-requirements.txt** as an example.

- pip-requirement.txt
- pip-requirements.txt
- requirement.txt
- requirements.txt
- For details about the code directory, see Storing the Installation File in the Code Directory.
- For details about the specifications of pip-requirements.txt, see Installation File Specifications.

Storing the Installation File in the Code Directory

- If you use My algorithm to create a training job, you can store related files in the configured Code Directory when creating an algorithm. The Boot Mode of the algorithm must be Preset image.
- If you use Custom algorithm to create a training job, you can store related files in the configured Code Directory. The Boot Mode must be Preset image.

FAQs 5 Training Jobs

Before creating a training job, upload related files to OBS. For details about the file packaging requirements, see **Installation File Specifications**.

Installation File Specifications

The installation file varies depending on the dependency package type.

WHL packages

If the training background does not support the download of open source installation packages or use of user-compiled WHL packages, the system cannot automatically download and install the package. In this case, place the WHL package in the code directory, create a file named **pip-requirements.txt**, and specify the name of the WHL package in the file. The dependency package must be a .whl file.

Take for example, an OBS path specified by **Code Dir** that contains model files, the **.whl** file, and the **pip-requirements.txt** file. The code directory structure would be as follows:

```
|---OBS path to the model boot file
|---model.py #Model boot file
|---XXX.whl #Dependency package. If multiple dependencies are required, place multiple
dependency packages here.
|---pip-requirements.txt #Defined configuration file, which specifies the name of the dependency
package
```

The following shows the content of the **pip-requirements.txt** file:

```
numpy-1.15.4-cp36-cp36m-manylinux1_x86_64.whl tensorflow-1.8.0-cp36-cp36m-manylinux1_x86_64.whl
```

5.3.2 What Is the Common File Path for Training Jobs?

The path to the training environment and the code directory in the container are generally obtained using the environment variable \${MA_JOB_DIR}, which is / home/ma-user/modelarts/user-job-dir.

5.3.3 How Do I Install a Library That C++ Depends on?

A third-party library may be used during job training. The following uses C++ as an example to describe how to install a third-party library.

- 1. Download source code to a local PC and upload it to OBS. .
- 2. Use MoXing to copy the source code uploaded to OBS to a notebook instance in the development environment.

The following is a code example for copying data to a notebook instance in a development environment running on an EVS:

```
import moxing as mox
mox.file.make_dirs('/home/ma-user/work/data')
mox.file.copy_parallel('obs://bucket-name/data', '/home/ma-user/work/data')
```

- 3. On the **Files** tab page of the **Jupyter** page, click **New** and select **Terminal**. Run the following command to go to the target path, and check whether the source code has been downloaded, that is, whether the **data** file exists.
- 4. Compile code in **Terminal** based on service requirements.
- 5. Use MoXing to copy the compilation results to OBS. The following is a code example.

import moxing as mox mox.file.make_dirs('/home/ma-user/work/data') mox.file.copy_parallel('/home/ma-user/work/data', 'obs://bucket-name/file)

6. During training, use MoXing to copy the compilation result from OBS to the container. The following is a code example.

import moxing as mox mox.file.make_dirs('/cache/data') mox.file.copy_parallel('obs://bucket-name/data', '/cache/data')

5.3.4 How Do I Check Whether a Folder Copy Is Complete During Job Training?

In the script for training job boot file, run the following commands to obtain the sizes of the copied folders and the folders to be copied. Then determine whether folder copy is complete based on the command output.

import moxing as mox
mox.file.get_size('obs://bucket_name/obs_file',recursive=True)

get_size indicates the size of the file or folder to be obtained. **recursive=True** indicates that the type is folder. **True** indicates that the type is folder, and **False** indicates that the type is file.

If the command output is consistent, the folder copy is complete. If the command output is inconsistent, the folder copy is not complete.

5.3.5 How Do I Load Some Well Trained Parameters During Job Training?

During job training, some parameters need to be loaded from a pre-trained model to initialize the current model. You can use the following methods to load the parameters:

- View all parameters by using the following code. from moxing.tensorflow.utils.hyper_param_flags import mox_flags print(mox_flags.get_help())
- Specify the parameters to be restored during model loading.
 checkpoint_include_patterns is the parameter that needs to be restored, and checkpoint_exclude_patterns is the parameter that does not need to be restored.

checkpoint_include_patterns: Variables names patterns to include when restoring checkpoint. Such as: conv2d/weights.

- checkpoint_exclude_patterns: Variables names patterns to include when restoring checkpoint. Such as: conv2d/weights.
- 3. Specify a list of parameters to be trained. **trainable_include_patterns** is a list of parameters that need to be trained, and **trainable_exclude_patterns** is a list of parameters that do not need to be trained.
 - --trainable_exclude_patterns: Variables names patterns to exclude for trainable variables. Such as: conv1,conv2.
 - --trainable_include_patterns: Variables names patterns to include for trainable variables. Such as: logits.

5.3.6 How Do I Obtain Training Job Parameters from the Boot File of the Training Job?

Training job parameters can be automatically generated in the background or you can enter them manually. To obtain training job parameters:

- When creating a training job, enter the name of Input (generally set to data_url) and specify a data path to the training input, and enter the name of Output (generally set to train_url) and specify a data path to the training output.
- 2. After the training job is executed, you can click the job name in the training job list to view its details. You can obtain the parameter input mode from logs, as shown in Figure 5-1.

Figure 5-1 Viewing logs

```
[ModelArts Service Log]modelarts-pipe: will create log file /tmp/log/trainjob-4bac.log

* Restarting DNS forwarder and DHCP server dnsmasq
...done.
[Modelarts Service Log]user: uid=1101(work) gid=1101(work) groups=1101(work)
[Modelarts Service Log]ppd: /home/work
[Modelarts Service Log]app_url: s3://donotdel-modelarts-test/AI/code/PyTorch/
[Modelarts Service Log]boot_file: PyTorch/PyTorch.py
[Modelarts Service Log]log_url: /tmp/log/trainjob-4bac.log
[Modelarts Service Log]command: PyTorch/PyTorch.py --data_url=s3://donotdel-modelarts-test/AI/data/PyTorch/ --init_method=tcp://job1f00a54e-job-trainjob-4bac-0:6666 --test=test --train_url=s3://donotdel-modelarts-test/out/
```

3. To obtain the values of **train_url**, **data_url**, and **test** during training, add the following code to the boot file of the training job:

```
import argparse
parser = argparse.ArgumentParser()
parser.add_argument('--data_url', type=str, default=None, help='test')
parser.add_argument('--train_url', type=str, default=None, help='test')
parser.add_argument('--test', type=str, default=None, help='test')
```

5.3.7 Why Can't I Use os.system ('cd xxx') to Access the Corresponding Folder During Job Training?

If you cannot access the corresponding folder by using **os.system('cd xxx')** in the boot script of the training job, you are advised to use the following method:

```
import os
os.chdir('/home/work/user-job-dir/xxx')
```

5.3.8 How Do I Invoke a Shell Script in a Training Job to Execute the .sh File?

ModelArts enables you to invoke a shell script, and you can use Python to invoke .sh. The procedure is as follows:

- Upload the .sh script to an OBS bucket. For example, upload the .sh script to / bucket-name/code/test.sh.
- Create the .py file on a local PC, for example, test.py. The background automatically downloads the code directory to the /home/work/user-job-dir/ directory of the container. Therefore, you can invoke the .sh file in the test.py boot file as follows:

```
import os
os.system('bash /home/work/user-job-dir/code/test.sh')
```

- 3. Upload **test.py** to OBS. Then the file storage path is **/bucket-name/code/test.py**.
- 4. When creating a training job, set the code directory to **/bucket-name/code/**, and the boot file directory to **/bucket-name/code/test.py**.

After the training job is created, you can use Python to invoke the **.sh** file.

5.3.9 How Do I Obtain the Dependency File Path to be Used in Training Code?

Since locally developed code must be uploaded to the ModelArts backend, you may set an invalid dependency file path. A recommended general solution to this problem is that you to use the OS API to obtain the absolute path of the dependency files.

The following shows an example of obtaining the path of dependency files in other folders using the OS API.

File directory structure:

project_root #Root directory of code
bootfile.py #Boot file
otherfileDirectory #Directory of dependency files
botherfile.py #Dependency files

Add the following code to the boot file to obtain the path (**otherfile_path**) of dependency files:

import os current_path = os.path.dirname(os.path.realpath(__file__)) # Obtain the path of the boot file **bootfile.py**. project_root = os.path.dirname(current_path) # Obtain the root directory of the project using the path of the boot file, which is the code directory set on ModelArts console. otherfile_path = os.path.join(project_root, "otherfileDirectory", "otherfile.py") # Obtain the path of the dependency files using the root directory of the project.

5.3.10 What Is the File Path If a File in the model Directory Is Referenced in a Custom Python Package?

To obtain the actual path to a file in a container, use Python.

os.getcwd() # Obtain the current work directory (absolute path) of the file. os.path.realpath(_ file __) # Obtain the absolute path of the file.

You can also use other methods of obtaining a file path through the search engine and use the obtained path to read and write the file.

5.4 Creating a Training Job

5.4.1 What Can I Do If the Message "Object directory size/ quantity exceeds the limit" Is Displayed When I Create a Training Job?

Issue Analysis

The code directory for creating a training job has limits on the size and number of files.

Solution

Delete the files except the code from the code directory or save the files in other directories. Ensure that the size of the code directory does not exceed 128 MB and the number of files does not exceed 4,096.

5.4.2 What Are Sizes of the /cache Directories for Different Resource Specifications in the Training Environment?

When creating a training job, you can select resources based on the size of the training job.

ModelArts mounts a disk to /cache. You can use this directory to store temporary files. The /cache directory shares resources with the code directory. The directory has different capacities for different resource specifications.

□ NOTE

- The eviction policy of Kubernetes disks is 90%. Therefore, the effective size of a disk is 90% of the **cache** directory capacity.
- The local disks of BMSs are physical disks that have a fixed capacity. If you need to store a large amount of data, you can use SFS, which provides scalable storage.
- GPU resources

Table 5-2 Capacities of the cache directories for GPU resources

GPU Specifications	cache Directory Capacity
GP Vnt1	800 GB
8*GP Vnt1	3 TB
GP Pnt1	800 GB

CPU resources

Table 5-3 Capacities of the cache directories for CPU resources

CPU Specifications	cache Directory Capacity
2 vCPUs 8 GiB	50 GB
8 vCPUs 32 GiB	50 GB

5.4.3 Is the /cache Directory of a Training Job Secure?

The program of a ModelArts training job runs in a container. The address of a directory to which the container is mounted is unique, and can be accessed only by the running container. Therefore, the **/cache** directory of the training job is secure.

5.4.4 Why Is a Training Job Always Queuing?

If the training job is always queuing, the selected resources are limited in the resource pool, and the job needs to be queued. In this case, wait for resources. To speed up resource obtaining, do as follows:

1. If you use a public resource pool:

Resources in a public resource pool are limited. During peak hours, resources may be insufficient if service traffic is heavy. Try to take the following measures:

- If a free flavor was used, change it to a charged one. Few resources are provided for free flavors, leading to a high queuing probability.
- The less number of cards in the selected flavor leads to the lower queuing probability. For example, the probability of queuing when selecting a 1-card flavor is much less than that of queuing when selecting an 8-card flavor.
- Switch to another region.
- If resources will be used for a long term, purchase a dedicated resource pool.
- 2. If you use a dedicated resource pool:
 - If there are multiple available dedicated resource pools, switch to an idle one.
 - Release resources in the current resource pool, for example, stop notebook instances that are not used for a long time.
 - Submit a training job during off-peak hours.
 - Contact the account administrator of the resource pool to expand the resource pool based on the usage.

Helpful link: Why Is the Job Still Queued When Resources Are Sufficient?

5.4.5 What Determines the Hyperparameter Directory (/work or /ma-user) When Creating a Training Job?

Symptom

The hyperparameter directory for the input and output parameters varies between **/work** and **/ma-user** when creating a training job.

Figure 5-2 /ma-user directory




Figure 5-3 /work directory




Solution

The directory varies depending on the selected algorithm for the training job.

• If the selected algorithm is created using an old-version image, the hyperparameter directory of the input and output parameters is /work.

Figure 5-4 Creating an algorithm



• If the selected algorithm is not created using an old-version image, the hyperparameter directory of the input and output parameters is /ma-user.

5.5 Managing Training Job Versions

5.5.1 Does a Training Job Support Scheduled or Periodic Calling?

ModelArts training jobs do not support scheduled or periodic calling. When your job is in the **Running** state, you can call the job based on service requirements.

5.6 Viewing Job Details

5.6.1 How Do I Check Resource Usage of a Training Job?

In the left navigation pane of the ModelArts management console, choose **Training Management > Training Jobs** to go to the **Training Jobs** page. In the training job list, click a job name to view job details. You can view the following metrics on the **Resource Usages** tab page.

- **CPU**: CPU usage (cpuUsage) percentage (Percent)
- **MEM**: Physical memory usage (memUsage) percentage (Percent)
- **GPU**: GPU usage (gpuUtil) percentage (Percent)
- GPU_MEM: GPU memory usage (qpuMemUsage) percentage (Percent)

5.6.2 How Do I Access the Background of a Training Job?

ModelArts does not support access to the background of a training job.

5.6.3 Is There Any Conflict When Models of Two Training Jobs Are Saved in the Same Directory of a Container?

Storage directories of ModelArts training jobs do not affect each other. Environments are isolated from each other, and data of other jobs cannot be viewed.

5.6.4 Only Three Valid Digits Are Retained in a Training Output Log. Can the Value of loss Be Changed?

In a training job, only three valid digits are retained in a training output log. When the value of **loss** is too small, the value is displayed as **0.000**. Log content is as follows:

INFO:tensorflow:global_step/sec: 0.382191
INFO:tensorflow:step: 81600(global step: 81600) sample/sec: 12.098 loss: 0.000
INFO:tensorflow:global_step/sec: 0.382876
INFO:tensorflow:step: 81700(global step: 81700) sample/sec: 12.298 loss: 0.000

Currently, the value of **loss** cannot be changed. You can multiply the value of **loss** by 1000 to avoid this problem.

5.6.5 Can a Trained Model Be Downloaded or Migrated to Another Account? How Do I Obtain the Download Path?

You can download a model trained by a training job and upload the downloaded model to OBS in the region corresponding to the target account.

Obtaining a Model Download Path

- Log in to the ModelArts console. In the left navigation pane, choose Training Management > Training Jobs. The Training Jobs page is displayed.
- 2. In the training job list, click a job name to view job details.
- 3. Obtain the **Output Path** on the left, which is the download path of the trained model.

Migrating a Model to Another Account

Use either of the following methods to migrate a trained model to another account:

- Download the trained model and then upload it to the OBS bucket in the region corresponding to the target account.
- Configure a policy for the folder or bucket where the model is stored to authorize other accounts to perform read and write operations. For details, see "Creating a Custom Bucket Policy (Visual Editor)" in OBS documentation.

6 Deployment

6.1 Model Management

6.1.1 Importing Models

6.1.1.1 How Do I Import the .h5 Model of Keras to ModelArts?

ModelArts does not support the import of models in .h5 format. You can convert the models in .h5 format of Keras to the TensorFlow format and then import the models to ModelArts.

For details about how to convert the Keras format to the TensorFlow format, see the **Keras official website**.

6.1.1.2 How Do I Edit the Installation Package Dependency Parameters in a Model Configuration File When Importing a Model?

Symptom

When importing a model from OBS or a container image, edit a model configuration file. The model configuration file describes the model usage, computing framework, precision, inference code dependency package, and model API. The configuration file must be in JSON format. **dependencies** in the model configuration file specifies the dependencies required for configuring the model inference code. This parameter requires the package name, installation method, and version constraints. For details, see The following section describes how to edit **dependencies** in the model configuration file during model import.

Solution

The installation packages must be installed in sequence. For example, before installing **mmcv-full**, install **Cython**, **pytest-runner**, and **pytest**. In the configuration file, **Cython**, **pytest-runner**, and **pytest** are ahead of **mmcv-full**.

Example:

```
"dependencies": [
  "installer": "pip",
  "packages": [
     {
        "package_name": "Cython"
     },
{
        "package_name": "pytest-runner"
     },
     {
        "package_name": "pytest"
        "restraint": "ATLEAST",
        "package_version": "5.0.0", 
"package_name": "Pillow"
        "restraint": "ATLEAST",
        "package_version": "1.4.0",
         "package_name": "torch"
        "restraint": "ATLEAST",
        "package_version": "1.19.1",
        "package_name": "numpy"
        "package_name": "mmcv-full"
```

If installing **mmcv-full** failed, the possible cause is that GCC was not installed in the base image, leading to a compilation failure. In this case, use the wheel package on premises to install **mmcv-full**.

Example:

```
"dependencies": [
  "installer": "pip",
  "packages": [
     {
        "package_name": "Cython"
     },
{
        "package_name": "pytest-runner"
     },
{
        "package_name": "pytest"
     },
        "restraint": "ATLEAST",
        "package_version": "5.0.0",
        "package_name": "Pillow"
        "restraint": "ATLEAST",
        "package_version": "1.4.0",
"package_name": "torch"
        "restraint": "ATLEAST",
        "package_version": "1.19.1",
        "package_name": "numpy"
```

FAQs

```
"package_name": "mmcv_full-1.3.9-cp37-cp37m-manylinux1_x86_64.whl"
   ]
  }
1
```

dependencies in the model configuration file supports multiple dependency structure arrays in list format.

```
Example:
```

```
"dependencies": [
  "installer": "pip",
  "packages": [
        "package_name": "Cython"
     },
     {
        "package_name": "pytest-runner"
     },
{
        "package_name": "pytest"
     },
     {
        "package_name": "mmcv_full-1.3.9-cp37-cp37m-manylinux1_x86_64.whl"
  "installer": "pip",
  "packages": [
       "restraint": "ATLEAST",
        "package_version": "5.0.0",
        "package_name": "Pillow"
     },
        "restraint": "ATLEAST",
        "package_version": "1.4.0",
        "package_name": "torch"
        "restraint": "ATLEAST",
        "package_version": "1.19.1",
        "package_name": "numpy"
   ]
```

6.1.1.3 How Do I Change the Default Port to Create a Real-Time Service **Using a Custom Image?**


A port number (for example, 8443) has been specified in a model configuration file. If you do not specify a port (default port 8080 will be used then) or specify another port during AI application creation, deploying the AI application as a service will fail. In this case, set the port number to 8443 in the AI application to resolve this issue.

To change the default port, do as follows:

Log in to the ModelArts management console. In the navigation pane, choose Al Application Management > Al Applications.

- 2. Click **Create**. On the page for creating an Al application, set **Meta Model Source** to **Container image** and select a custom image.
- 3. Configure the container API and port number. Ensure that the port number is the same as that specified in the model configuration file.

Figure 6-1 Changing the port

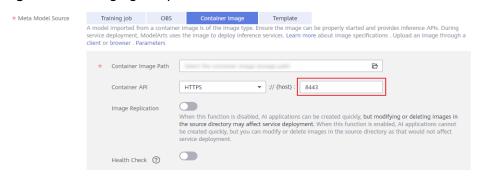

- 4. After the configuration, click **Create now**. Wait until the AI application runs properly.
- 5. Deploy the AI application as a real-time service again.

6.1.1.4 Does ModelArts Support Multi-Model Import?

Importing a model package from OBS to ModelArts applies to single-model scenarios. If multiple models are required, you are advised to import custom images from SWR to create AI applications and deploy services. For details about how to create a custom image, see Creating a Custom Image and Using It to Create an AI Application.

6.1.1.5 Restrictions on the Size of an Image for Importing an AI Application

ModelArts uses containers for deploying services. There are size limitations during container runtime. If the size of your model file, custom file, or system file exceeds the container engine space, a message will be displayed, indicating that the image space is insufficient.

The maximum container engine space in a public resource pool is 50 GB, and that for a dedicated resource pool is 50 GB by default. You can set the container engine space for a dedicated resource pool when you create it, which does not increase costs.

If the AI application is imported from OBS or a training job, the total size of the base image, model files, code, data files, and software packages cannot exceed the limit.

If the AI application is imported from a custom image, the total size of the decompressed image and image dependencies cannot exceed the limit.

6.2 Service Deployment

6.2.1 Functional Consulting

FAQs

6.2.1.1 What Types of Services Can Models Be Deployed as on ModelArts?

Models can be deployed as real-time services or batch services.

6.2.1.2 What Are the Differences Between Real-Time Services and Batch Services?

Real-Time Services

Models are deployed as web services. You can access the services through the management console or APIs.

Batch Services

A batch service performs inference on batch data and automatically stops after data processing is completed.

A batch service processes batch data at a time. A real-time service provides APIs for you to call.

6.2.1.3 What Is the Maximum Size of a Prediction Request Body?

After a service is deployed and running, you can send an inference request to the service. The requested content can be text, images, voice, or videos, depending on the model of the service.

If you use the inference request address (URL of APIG) displayed on the **Usage Guides** tab of the service details page for prediction, the maximum size of the request body is 12 MB. If the request body is oversized, the request will be intercepted.

If you perform the prediction on the **Prediction** tab of the service details page, the size of the request body cannot exceed 8 MB. The size limit varies between the two tab pages because they use different network links.

Ensure that the size of a request body does not exceed the upper limit. If there are high-concurrency and heavy-traffic inference requests, submit a service ticket to professional service support.

6.2.1.4 How Do I Select Compute Node Specifications for Deploying a Service?

Before deploying a service, specify node specifications. The node specifications displayed on the GUI are calculated by ModelArts based on the target AI application and the node specifications available in the resource pool. You can select the specifications provided by ModelArts or customize the specifications (supported only in dedicated resource pools).

Selecting compute node specifications based on the resources required by your AI application. For example, if an AI application requires 3 CPUs and 10 GB of memory, select compute node specifications higher than 3 CPUs and 10 GB of memory. This ensures that the service can be successfully deployed and run properly.

Figure 6-2 Compute node specifications



When using compute node specifications, pay attention to the following:

Permission control

Permissions on general-purpose compute node specifications, for example, **modelarts.vm.cpu.2u** are not controlled. You can select the specifications as long as there are idle resources in the resource pool. For some special specifications, contact the system administrator to request for permissions.


Unavailable public resource pool specifications

Resources in a public resource pool are limited. If a specification is in gray, resources of the current specification have been used up. In this case, select other specifications or create your own dedicated resource pool.

Custom specifications

You can customize resource specifications only when a dedicated resource pool is used. Specifications cannot be customized in public resource pools.

Figure 6-3 Custom specifications



6.2.1.5 What Is the CUDA Version for Deploying a Service on GPUs?

CUDA 10.2 is supported by default. If a later version is required, submit a service ticket to apply for technical support.

6.2.2 Real-Time Services

6.2.2.1 What Do I Do If a Conflict Occurs in the Python Dependency Package of a Custom Prediction Script When I Deploy a Real-Time Service?

Before importing a model, save the inference code and configuration file in the model folder. When coding with Python, import custom packages in relative import (Python import) mode.

If there are packages with duplicate names in the ModelArts inference framework code and they are imported not in relative import mode, a conflict will occur, leading to a service deployment or prediction failure.

6.2.2.2 What Is the Format of a Real-Time Service API?

After an AI application is deployed as a real-time service, you can use the API for inference.


The format of an API is as follows:

https://Domain name/Version/infer/service ID

Example:

https://6ac81cdfac4f4a30be95xxxbb682.apig.xxx.xxx.com/v1/infers/468d146d-278a-4ca2-8830-0b6fb37d3b72

Figure 6-4 API

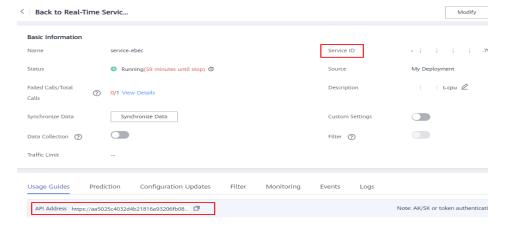

6.2.2.3 Why Did My Service Deployment Fail with Proper Deployment Timeout Configured?

A model can properly start after a service is deployed. The startup status of a model can be detected through a health check.

Check whether a service is deployed using a health check API for custom images. When creating an AI application, configure a health check delay to ensure the initialization of containers.

It is a good practice to configure a proper health check delay for service deployment.

API/SDK

7.1 Can ModelArts APIs or SDKs Be Used to Download Models to a Local PC?

ModelArts APIs or SDKs cannot be used to download models to a local PC. However, the output models of training jobs are stored in OBS. You can use OBS APIs or SDKs to download the models.

7.2 What Installation Environments Do ModelArts SDKs Support?

ModelArts SDKs can run in notebook or local environments. However, the supported environments vary depending on architectures. For details, see **Table 7-1**.

Table 7-1 SUK INSTALLATION ENVIRONMENT	le 7-1 SDK insta	llation env	ironment
--	------------------	-------------	----------

Development Environment	Architecture	Supported
Notebook	Arm	Yes
	x86	Yes
Local environment	Arm	No
	x86	Yes

7.3 Does ModelArts Use the OBS API to Access OBS Files over an Intranet or the Internet?

In the same region, ModelArts uses the OBS API to access files stored in OBS over an intranet and does not consume public network traffic.

If you download data from OBS through the Internet, you will be charged for the OBS public network traffic.

7.4 How Do I Obtain a Job Resource Usage Curve After I Submit a Training Job by Calling an API?

After submitting a training job by calling an API, log in to the ModelArts console, choose **Training Management** > **Training Jobs**, and click the name or ID of the target training job to go to its details page. In the **Resource Usages** area, view the resource usage curve of the job.

7.5 How Do I View the Old-Version Dedicated Resource Pool List Using the SDK?

You can view the old-version dedicated resource pool list by referring to the following code:

from modelarts.session import Session from modelarts.estimator import Estimator algo_info = Estimator(modelarts_session=Session()).get_job_pool_list()print(algo_info)


8 Using PyCharm Toolkit

8.1 What Should I Do If an Error Occurs During Toolkit Installation?

Symptom

The following error message is displayed during Toolkit installation.

Figure 8-1 Error



Solution

This issue occurs because the plug-in version is inconsistent with the PyCharm version. You need to obtain the plug-in of the same version as the PyCharm version, that is, version 2019.2 or later.


8.2 What Should I Do If an Error Occurs When I Edit a Credential in PyCharm Toolkit?

Symptom

When you edit a credential in PyCharm Toolkit, the message "Validate Credential error" is displayed.



Or



Possible Causes

- Possible cause 1: Information such as the region is incorrectly configured.
- Possible cause 2: The hosts file is not configured or is incorrectly configured.
- Possible cause 3: The network proxy settings are incorrect.
- Possible cause 4: The AK/SK is incorrect.
- Possible cause 5: The computer time is incorrectly set.

Solution


1. Information such as the region is incorrectly configured.

Correctly configure the region, projects, and endpoint. For details, see **Configuring a Local IDE Accessed Using PyCharm Toolkit**.

For example, if the endpoint is incorrect, the authentication fails.

Incorrect example: The endpoint is preceded by https.

Figure 8-2 Configuring PyCharm Toolkit

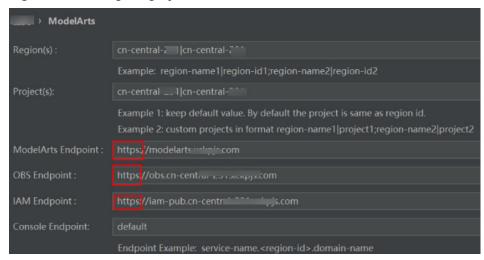

2. The hosts file is not configured or is incorrectly configured.


Configure the domain names and IP addresses in the hosts file on the local PC.

3. Network proxy settings are incorrect.

If the network requires proxy settings, check whether the proxy settings are correct. You can also use the mobile hotspot to test.

Check whether the proxy settings are correct.

Figure 8-3 PyCharm network proxy settings

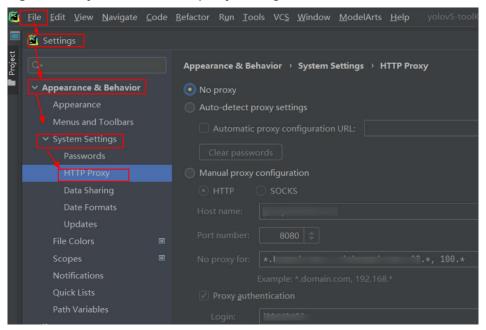

4. The AK/SK is incorrect.

Obtained correct AK/SK and try again. For details, see **How Do I Obtain an Access Key?**


5. The computer time is incorrectly set.

Set the computer time to the correct time.

8.3 Why Cannot I Start Training?

If code that does not belong to the used project is selected in a boot script, training cannot be started. The following figure shows error information. You are advised to add the boot script to the project or open the project where the boot script is located, and then start the training job.

Figure 8-4 Error



8.4 What Should I Do If Error "xxx isn't existed in train_version" Occurs When a Training Job Is Submitted?

Symptom

Error "xxx isn't existed in train_version" occurs when a training job is submitted. See the following figure.

Figure 8-5 Error "xxx isn't existed in train_version"

```
Begin to check training configuration.

Begin to upload training code.

No modified code to upload.

Begin to get training job pre version.

Http Response Code : 400

{"is_success":false,"error_code":"ModelArts.0102","error_message":"193526 isn't existed in train_version."}

ModelArts Training is Finished.
```

Possible Causes

The preceding error occurs because the user logs in to the ModelArts management console and deletes the training job after submitting the training job using PyCharm Toolkit.

PyCharm Toolkit records the training job IDs of ModelArts on the cloud. If you manually delete the job on the ModelArts management console, a message is displayed indicating that the job with the ID cannot be found when you submit the job locally.

Solution

If you have deleted a job on the ModelArts management console, you also need to delete the local configuration from Toolkit. To delete the local configuration, click **Edit Training Configuration**, find the job name, click the minus sign in the upper right corner, and confirm the deletion.

Figure 8-6 Deleting the local configuration



In the displayed confirmation dialog box, confirm the information and click **Yes** to delete the configuration. After the deletion, you can create a training job configuration and submit the training job.

FAQs

8.5 What Should I Do If Error "Invalid OBS path" Occurs When a Training Job Is Submitted?

When a training job is running, the "Invalid OBS path" error is reported.

Figure 8-7 "Invalid OBS path" error

To locate the fault, perform the following operations:

- If you are using ModelArts for the first time, log in to the ModelArts management console and complete access authorization configuration. The agency authorization mode is recommended. After the global configuration is complete, submit the job again.
- Check whether the configured Data Path in OBS exists and whether data files
 exist in the directory. If the directory does not exist, create a directory on OBS
 and upload the training data to the directory.

8.6 What Should I Do If Error "NoSuchKey" Occurs When PyCharm Toolkit Is Used to Submit a Training Job?

Symptom

When PyCharm Toolkit is used to submit a training job, an error is reported. The log is as follows.

```
Q Aa AN .* ^
    trace=False, type='common', verbose=False)
134 [ModelArts Service Log]2023-07-03 15:16:21,914 - file_io.py[line:703] - WARNING: Retry=9, Wait=0.1, Timestamp=1688368581.9141176
135 [ModelArts Service Log]2023-07-03 15:16:22,035 - file_io.py[line:703] - WARNING: Retry=8, Wait=0.2, Timestamp=1688368582.0354207
136 [ModelArts Service Log]2023-07-03 15:16:22,265 - file_io.py[line:703] - WARNING: Retry=7, Wait=0.4, Timestamp=1688368582.2653368
137 [ModelArts Service Log]2023-07-03 15:16:22,702 - file_io.py[line:703] - WARNING: Retry=6, Wait=0.8, Timestamp=1688368582.7021663
138 [ModelArts Service Log]2023-07-03 15:16:23,521 - file_io.py[line:703] - WARNING: Retry=5, Wait=1.6, Timestamp=1688368583.5216513
139 [ModelArts Service Log]2023-07-03 15:16:25,142 - file_io.py[line:703] - WARNING: Retry=4, Wait=3.2, Timestamp=1688368585.1427376
140 [ModelArts Service Log]2023-07-03 15:16:28,364 - file_io.py[line:703] - WARNING: Retry=3, Wait=6.4, Timestamp=1688368588.3648236
141 [ModelArts Service Log]2023-07-03 15:16:34,786 - file_io.py[line:703] - WARNING: Retry=2, Wait=12.8, Timestamp=1688368594.786392
142 [ModelArts Service Log]2023-07-03 15:16:47,623 - file_io.py[line:703] - WARNING: Retry=1, Wait=25.6, Timestamp=1688368607.6239572
143 [ModelArts Service Log]2023-07-03 15:17:13,250 - file_io.py[line:718] - ERROR: Failed to call:
        func=<bound method ObsClient.getObject of <moxing.framework.file.src.obs.client.ObsClient object at 0x7fbbc8ebda58>>
        args=('test-dwj', 'lbk/tookit_test_code/MA-new-modelarts_test-07-03-15-15-159/code/modelarts_test')
        kwargs={loadStreamInMemory:False, cache:False, }
147 [ModelArts Service Log]2023-07-03 15:17:13,250 - file_io.py[line:725] - ERROR:
        stat:404
      errorCode:NoSuchKey
149
        errorMessage:The specified key does not exist.
     reason:Not Found
151
154 [ModelArts Service Log]2023-07-03 15:17:13,250 - modelarts-downloader.py[line:106] - ERROR: modelarts-downloader.py: Download directory failed: [Errno
     {'status': 404, 'reason': 'Not Found', 'errorCode': 'NoSuchKey', 'errorMessage': 'The specified key does not exist.', 'body': None, 'requestId':
    '000001891A9C71799013208C235593F7', 'hostId': 'y2VDvug8y5dfKW63cUD0y7TZaW]yypRbahxYPuG+dCsmICCoxXGD71Ha2aX+Br14', 'header': [('date', 'Mon, 03 Jul 2023 07:16:47 GMT'), ('content-type', 'application/xml'), ('content-length', '369'), ('connection', 'close'), ('x-reserved', 'amazon, aws and amazon web
    services are trademarks or registered trademarks of Amazon Technologies, Inc'), ('request-id', '000001891A9C71799013208C235593F7'), ('id-2',
    '32AAAQAAEAABAAAQAAEAABAAAQAAEAABCS7oHSobM+ol93AcUtW6YGYS+g/mmfiP')]}] file or directory or bucket not found.
```

FAQs


Possible Causes

The image version is too old and incompatible with the training job.

Solution

When using PyCharm Toolkit to submit a training job, select a frequently-used engine version supported by the training job. For details about the supported versions, see AI engines supported by training jobs. Do not select PyTorch-1.0.0, PyTorch-1.3.0, or PyTorch-1.4.0.

Figure 8-8 Selecting an AI engine supported by the training job

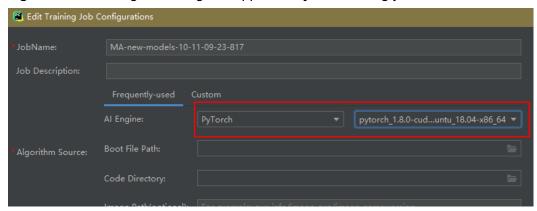

8.7 What Should I Do If an Error Occurs During Service Deployment?

Before deploying a model as a service, edit the configuration file and inference code based on the trained model.

If the **confi.json** configuration file or the **customize_service.py** inference code is missing in the model storage path, an error is displayed, as shown in the following figure.

Solutions:

Write the configuration file and inference code, and save them to the OBS directory where the model to be deployed resides. For details, see .

Figure 8-9 Error



8.8 How Do I View Error Logs of PyCharm Toolkit?

The error logs of PyCharm Toolkit are recorded in the **idea.log** file of PyCharm. For example, in the Windows operating system, the path of the **idea.log** file is **C:\Users\xxx\.ldeaIC2019.2\system\log\idea.log**.

Search for modelarts in the log file to view all logs related to PyCharm Toolkit.

8.9 How Do I Use PyCharm ToolKit to Create Multiple Jobs for Simultaneous Training?

PyCharm ToolKit supports only one job at a time. To run another job, you must manually stop the current one.

8.10 What Should I Do If "Error occurs when accessing to OBS" Is Displayed When PyCharm ToolKit Is Used?

Symptom

The PyCharm ToolKit log showed "Error occurs when accessing to OBS".

Possible Causes

You do not have OBS permissions.

Solution

Check whether you have the OBS permissions.

- Step 1 Log in to the ModelArts console, choose Data Management > Datasets, and click Create. You have the OBS permissions if you can access the OBS path. If you do not have the OBS permissions, go to Configure the OBS permis... to configure the OBS permissions.
- **Step 2** Configure the OBS permissions.

----End