

Distributed Cache Service

Data Migration Guide

Issue 01
Date 2024-12-10



Copyright © Huawei Cloud Computing Technologies Co., Ltd. 2024. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are the property of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei Cloud and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Cloud Computing Technologies Co., Ltd.

Address: Huawei Cloud Data Center Jiaoxinggong Road
Qianzhong Avenue
Gui'an New District
Gui Zhou 550029
People's Republic of China

Website: <https://www.huaweicloud.com/intl/en-us/>

Contents

1 Getting Started with Redis and Reading and Writing Data Using Web CLI.....	1
2 Common Practices.....	5

1 Getting Started with Redis and Reading and Writing Data Using Web CLI

This section takes the example of creating a single-node Distributed Cache Service (DCS) Redis 5.0 instance, connecting to it, and performing data read and write operations on the DCS console to get you quickly started with DCS.

There are three steps to get started with DCS:

1. **Preparations**

Before creating a Redis instance, an authenticated Huawei Cloud account with balance, users with required permissions, and a set of VPC and subnet should be prepared.

2. **Creating a DCS Redis Instance**

When creating a Redis instance, you can customize it with the required type and specifications, and configure a VPC and a subnet.

3. **Accessing a Redis Instance and Reading and Writing Data**

Access Redis instances and run Redis commands to read and write data on a client compatible with Redis or using Web CLI on the DCS console.

Preparations

1. **Register a Huawei Cloud account and authenticate it.**

If you already have one, go to **2**. If you do not have one, do as follows:

- a. Log in to the [Huawei Cloud official website](#), and click **Register**.
- b. Complete the registration as prompted. For details, see [Signing up for a HUAWEI ID and Enabling Huawei Cloud Services](#).

Your personal information page is displayed after the registration completes.

- c. Complete real-name authentication for individual or enterprise users by referring to [Real-Name Authentication](#).

2. **Add DCS permissions.**

Before creating a Redis instance and its dependencies, specific permissions are required. For details about how to add user permissions, see [Creating a User and Granting DCS Permissions](#).

3. Create a VPC and a subnet.

A DCS instance runs in a virtual private cloud (VPC) and has a subnet. Prepare a VPC and a subnet before creating a DCS instance. For more information, see [Creating a VPC](#). If you already have an available VPC and subnet, use them.

NOTE

- The VPC must be created in the same region as your DCS Redis instance.
- In VPC and subnet creation, retain the default settings unless otherwise specified.

Creating a DCS Redis Instance

Step 1 Go to the [Buy DCS Instance](#) page.

Step 2 Select **Custom**.

Step 3 Configure the instance. For details, see [Table 1-1](#).

Table 1-1 Configuring an instance

Parameter	Description
Billing Mode	Select Pay-per-use .
Region	Retain the default setting.
Project	Retain the default setting.
Cache Engine	This example uses Redis .
Edition	This example uses Basic .
CPU Architecture	This example uses x86 .
Version	Select 5.0 in this operation.
Instance Type	Select Single-node in this operation. Single-node Redis instances use single nodes, do not persist data, and cost low. They are applicable in development and testing.
AZ	Each region contains multiple AZs. This example retains the default AZ.
Instance Specification	Select 1 GB in this operation.
VPC	Select the VPC in Preparations .
Subnet	Select the subnet in Preparations .
IPv4 Address	Auto and Manual are available. In this example, select Auto .
Port	Custom. The default port 6379 will be used when unspecified. In this example, use 6379.

Parameter	Description
Security Group	Skip it.
Instance Name	By default, a random name is generated. Retain it.
Enterprise Project	An enterprise project manages cloud resources by gathering relevant ones together. The default option default is available. If you cannot select a required enterprise project, see Why Can't I Select the Required Enterprise Project When Creating a DCS Instance?
Password Protected	Select Yes and enter Password and Confirm Password .
(Optional) Advanced Settings	In this example, you can skip these settings.
Quantity	One instance will be created by default, and you can buy up to 100 DCS instances at a time.

Step 4 Check the estimated price in the lower left corner of the page. You can click **Pricing details** to learn more.

Step 5 Click **Next**.

Step 6 Confirm the instance settings, and click **Submit**.

The instance has been created successfully if it is in the **Running** state.

Step 7 After the task is successfully submitted, the **Cache Manager** page is displayed. When the new instance is in the **Running** state, the instance is created successfully.

----End

Accessing a Redis Instance and Reading and Writing Data


This section takes the example of accessing a DCS Redis instance by using Web CLI on the console.

NOTE

To access a DCS Redis instance on a compatible client, see [Accessing Redis on a Client](#).

Step 1 In the navigation pane, choose **Cache Manager**. In the **Operation** column of the instance, choose **More** > **Connect to Redis**, as shown in the following figure.

Figure 1-1 Accessing Web CLI

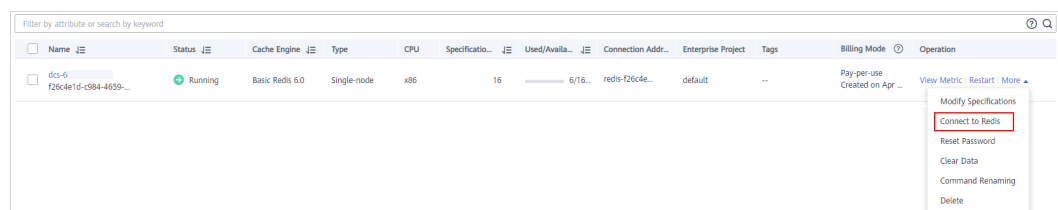


Step 2 Enter the password set in instance creation and go to Web CLI.

 **NOTE**

- If no operation is performed for more than 5 minutes, the connection times out. You need to enter the password to access the instance again.
- You do not need to enter a password for accessing a password-free DCS Redis instance.

Step 3 Single-node instances support multiple databases (multi-DB). Select "Database 0" here.

Figure 1-2 Selecting a database

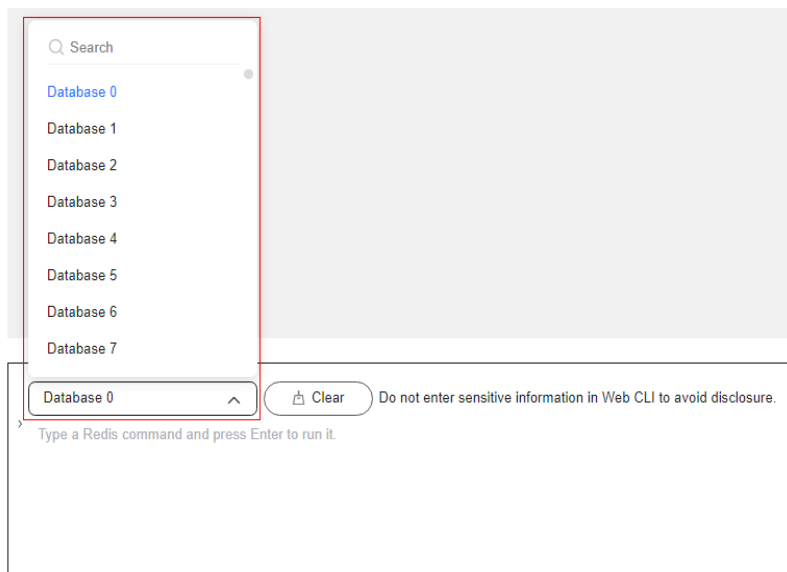

Step 4 Enter Redis commands in the input box. For example, run the **SET** command to write a data name **KEY_NAME** and data value **VALUE**, and press **Enter**. The data is written when "OK" is returned. Write another **ABC** data of **123** again.

```
> SET KEY_NAME VALUE
OK
> SET ABC 123
OK
```

Step 5 Run the **GET** command to read the written data.

```
> GET KEY_NAME
VALUE
> GET ABC
123
```

----End

Related Information

- For details about related concepts of DCS, see [Basic Concepts](#).
- For details about the supported commands in DCS, see [Command Compatibility](#).
- For details about DCS monitoring metrics, see [DCS Metrics](#) and [Configuring Alarm Rules for Critical Metrics](#).
- For suggestions on using DCS instances, see [Suggestions on Using Redis](#).

2 Common Practices

This section describes common practices of DCS to help you better use it.

Practice	Description
Serializing Access to Frequently Accessed Resources	In Internet scenarios such as seckill, the system needs multiple machines to run concurrently to handle traffic burst. If two users' requests arrive at the same time but on two different machines. Although the two requests can be handled spontaneously, an inventory oversold or disordered access problem may still occur. This is because a machine has a unique lock and a machine's lock only takes effect on threads in the Java VM where the machine runs. To serialize access to resources, you can use DCS Redis instances for distributed locking.
Merging Game Servers with DCS	Merging game servers takes place when large-scale online games start a new server (zone) or merge old and new servers. During this process, game developers must consider how to synchronize data among different servers. With the pub/sub message queuing mechanism of DCS for Redis, data changes can be published to Redis channels. Other game servers can subscribe to the channels to receive messages of changes. This practice describes how to synchronize servers using Redis.