

02_Deploy_Getting Started_Public Cloud & Partner Cloud-Copy

02_Deploy_Getting Started_Public Cloud & Partner Cloud-Copy

Issue 01
Date 2025-05-23



Copyright © Huawei Cloud Computing Technologies Co., Ltd. 2025. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are the property of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei Cloud and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Cloud Computing Technologies Co., Ltd.

Address: Huawei Cloud Data Center Jiaoxinggong Road
Qianzhong Avenue
Gui'an New District
Gui Zhou 550029
People's Republic of China

Website: <https://www.huaweicloud.com/intl/en-us/>

Contents

**1 Creating a Tomcat Application Using CodeArts Deploy and Deploying It on an
ECS..... 1**

1 Creating a Tomcat Application Using CodeArts Deploy and Deploying It on an ECS

CodeArts Deploy provides users with visualized, automatic, and rich deployment actions, helping them establish a standard deployment process, reducing deployment costs, and enhancing release efficiency.

This section uses **Deploy a Tomcat Application** as an example to describe how to deploy a Tomcat application on a host. The following describes how to quickly deploy an application.

Prerequisites

- A project is available. If there is no project, [Project Managers: Creating and Configuring Projects](#).
- You have permissions to create applications. For details, see [Editing Permissions](#).
- The related software package has been compiled.
- There are two options in the **Select Deployment Source** action: **Artifact** and **Build task**. In this example, **Artifact** is selected. Therefore, prepare a compiled software package in advance. If you select **Build task**, you do not need to prepare the software package.
- You have an ECS.

Creating a Host Cluster and Adding Hosts to It

Step 1 Go to the CodeArts homepage and click the target project name to access the project.

Step 2 Go to the **Basic Resources** page.

- Choose **Settings > General > Basic Resources**. The **Host Clusters** page is displayed by default.
- Choose **CICD > Deploy**. Click **Basic Resources**. The **Host Clusters** page is displayed by default.

Step 3 Create a host cluster and add hosts to it.

1. Click **Create Host Cluster**, enter the following information, and click **Save**.

Table 1-1 Parameters for creating a host cluster


Parameter	Mandatory	Description
Cluster Name	Yes	Enter a custom name. Enter 3 to 128 characters. Use digits, letters, hyphens (-), underscores (_), and periods (.).
OS	Yes	Select Linux or Windows based on the OS of the host to be added. In this example, select Linux .
Host Connection Mode	Yes	If the target host cannot connect to the public network, you need to select a host bound with an EIP as the proxy host to connect CodeArts Deploy to the target host. Direct Connection: Select a host bound with an EIP as the target host to connect to CodeArts. Proxy: Select a host bound with an EIP as the proxy host to connect to CodeArts.
Execution Resource Pool	Yes	A resource pool is a collection of physical environments where commands are executed during software package deployment. In this scenario, select Official .
Description	No	Enter a description. Enter 0 to 500 characters.

- (The following uses a Linux-based target host as an example.) Click **Add Host**, select **Adding IP** for **Add Hosts by**, enter the following information, and click **OK**.

Table 1-2 Parameters of the target host (Linux)

Parameter	Mandatory	Description
Host Name	Yes	Enter a custom name. Enter 3 to 128 characters. Use digits, letters, hyphens (-), underscores (_), and periods (.).
IP	Yes	Enter the private or public IP address of the target host.
OS	Yes	Keep the default value because it is the OS of your host cluster.

Parameter	Mandatory	Description
Authorization	Yes	Select a Password or Key for authentication as required. <ul style="list-style-type: none">– Password: The Username and Password are displayed on the page. Take ECS as an example. You need to enter the ECS username and password.– Key: The Username and Key are displayed on the page. For details about how to generate and obtain a key, see Obtaining the Linux Key.
SSH Port	Yes	Port 22 is recommended. Custom ports are supported. Correct port format: 1-65535 .

3. Click  in the **Operation** column of a host to start the connectivity verification for the host.

For details about connectivity verification, see [Hosts](#).

----End

Creating an Application

Step 1 Choose **CICD > Deploy**.

Step 2 Create an application.

1. Click **Create Application**. On the **Basic Information** page that is displayed, modify the basic information such as **Name**, **Description**, and **Execution Resource Pool** as required.
2. After editing the basic application information, click **Next**. The deployment template selection page is displayed.

Select **Deploying a Tomcat Application** and click **OK**.

----End

Creating an Environment and Importing Hosts

Create a deployment environment and import hosts from the host cluster.

Step 1 Click the **Environment Management** tab.

Step 2 Create an environment.

1. Click **Create Environment**, set the following parameters, and click **Save**.

Parameter	Mandatory	Description
Environment	Yes	Enter a user-defined environment name. Enter 3 to 128 characters. Use digits, letters, hyphens (-), underscores (_), and periods (.).
Resource Type	Yes	You can choose Host based on the environment requirements.
OS	Yes	Choose Linux or Windows as the operating system for the host.
Description	No	Enter a description of the environment. Max. 500 characters.

- Click **Import Host**. The system automatically filters all clusters that meet the requirements of the current environment. Select a target host cluster and import a host to the environment in either of the following ways:

Import separately: Click  in the **Operation** column of a host to import the host to the environment.

Import in batches: Select multiple hosts and click **Import**.

If you import a target host bound to a proxy host, the proxy host will be imported to the environment automatically.

- (Optional) After the host is imported, click  on the page to verify the connectivity.

----End

Configuring Deployment Actions and Deploying the Application

The following describes the initialization procedure and parameters of the Tomcat application deployment template. For details, see [Deployment Actions](#).

Step 1 Configure deployment actions.

Switch to the **Deployment Actions** tab and click **Edit** to set parameters.

- Install JDK

Table 1-3 Parameters for installing JDK

Parameter	Mandatory	Description
Action Name	Yes	Customized action name displayed in the deployment actions. Enter 1 to 128 characters. Do not start or end with a space. Use letters, digits, spaces, and these special characters: -_!@#%&*()~

Parameter	Mandatory	Description
Environment	Yes	Select a host cluster as the deployment object.
JDK Version	Yes	JDK version.
Installation Path	Yes	Installation path of JDK.
Action Control	No	You can configure whether to enable this setting. <ul style="list-style-type: none"> – Keep running on failure: whether to continue the task even if this action fails. – Execute this action with the sudo permission: whether to use the sudo permission to deploy this action.

2. Install Tomcat

Table 1-4 Parameters for installing Tomcat

Parameter	Mandatory	Description
Action Name	Yes	Customized action name displayed in the deployment actions Enter 1 to 128 characters. Do not start or end with a space. Use letters, digits, spaces, and these special characters: -_;;./()
Environment	Yes	Select a host cluster as the deployment object.
Tomcat Version	Yes	Version of Tomcat to be installed.
Installation Path	Yes	Installation path of Tomcat.
HTTP Port	Yes	Default port: 8080
AJP Port	Yes	Default port: 8009
Service Shutdown Port	Yes	Default port: 8005

Parameter	Mandatory	Description
Action Control	No	You can configure whether to enable this setting. <ul style="list-style-type: none">– Keep running on failure: whether to continue the task even if this action fails.– Execute this action with the sudo permission: whether to use the sudo permission to deploy this action.

3. Stop Tomcat

Table 1-5 Parameters for stopping Tomcat

Parameter	Mandatory	Description
Action Name	Yes	Customized action name displayed in the deployment actions. Enter 1 to 128 characters. Do not start or end with a space. Use letters, digits, spaces, and these special characters: -_!;:./()
Environment	Yes	Select a host cluster as the deployment object.
Operation	Yes	Set parameters for Stop Service .
Absolute Path	Yes	Absolute path of the Tomcat service.
Action Control	No	Whether to enable this action. <ul style="list-style-type: none">– Keep running on failure: whether to continue the task even if this action fails.– Execute this action with the sudo permission: whether to use the sudo permission to deploy this action.

4. Select a deployment source

Table 1-6 Parameters for selecting a deployment source

Parameter	Mandatory	Description
Action Name	Yes	Customized action name displayed in the deployment actions. Enter 1 to 128 characters. Do not start or end with a space. Use letters, digits, spaces, and these special characters: -_.,:./()
Source	Yes	Two types are available: Artifact and Build task .
Environment	Yes	Select a host cluster as the deployment object.
Software Package	Yes	Select an existing software package in Artifact or upload a software package or file from your local PC. (The software package or file uploaded can be reused.) package_url indicates the path of the software package in CodeArts Artifact.
Download Path	Yes	Where the downloaded software package is stored.
Action Control	No	Whether to enable this action. <ul style="list-style-type: none"> Keep running on failure: whether to continue the task even if this action fails. Execute this action with the sudo permission: whether to use the sudo permission to deploy this action.

In this example, **Artifact** is selected as the deployment source. If you select **Build task**, see [Selecting a Deployment Source](#) in the *User Guide*.

5. Start Tomcat

Table 1-7 Parameters for starting Tomcat

Parameter	Mandatory	Description
Action Name	Yes	Customized action name displayed in the deployment actions. Enter 1 to 128 characters. Do not start or end with a space. Use letters, digits, spaces, and these special characters: -_.,:./()

Parameter	Mandatory	Description
Environment	Yes	Select a host cluster as the deployment object.
Operation	Yes	Set parameters for Start Service .
Absolute Path	Yes	Absolute path of the Tomcat service.
HTTP Port	Yes	HTTP port of the Tomcat service.
AJP Port	Yes	AJP port of the Tomcat service.
Service Shutdown Port	Yes	Shutdown port monitored by the Tomcat service.
Waiting Time	Yes	Set the waiting time. After the waiting time ends, check whether the monitoring service is started successfully. You can adjust the time based on the actual time required for starting the service. If the time is improper, the detection fails. Enter a time (0–300s)
Action Control	No	Whether to enable this action. <ul style="list-style-type: none"> – Keep running on failure: whether to continue the task even if this action fails. – Execute this action with the sudo permission: whether to use the sudo permission to deploy this action.

6. Health test through URLs

Table 1-8 Parameters for health test through URLs

Parameter	Mandatory	Description
Action Name	Yes	Customized action name displayed in the deployment actions. Enter 1 to 128 characters. Do not start or end with a space. Use letters, digits, spaces, and these special characters: -_./()
Environment	Yes	Select a host cluster as the deployment object.
Retries	Yes	The number of times you want the system to retry the health test before the test is considered failed.


Parameter	Mandatory	Description
Interval (s)	Yes	Interval between two retries, in seconds (0–60).
Test Path	Yes	Path of the service to be tested. You can add multiple paths.
Action Control	No	Whether to enable this action. Keep running on failure: whether to continue the task even if this action fails.

After the **Health Test Through URLs** parameter is set, all parameters are completed. For more details about application configuration, see [Managing Parameters](#).

Step 2 Deploy an application.

After setting the preceding parameters, click **Save & Deploy** to deploy an application.


- Application deployed.

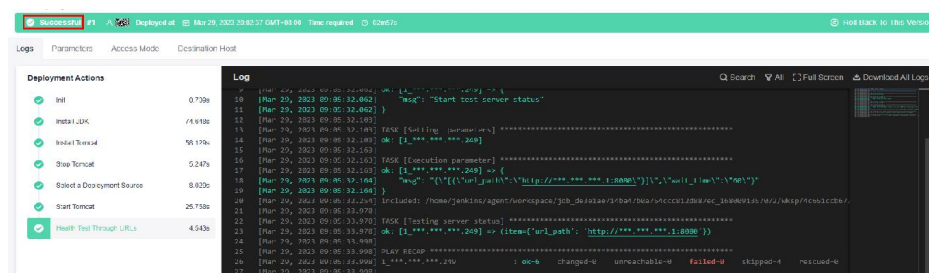

- If an application fails to be deployed, perform the following steps to locate the fault:


a. View the automatic matching solution.

If the deployment fails, click **View Solution** under deployment actions to go to the corresponding help center page.

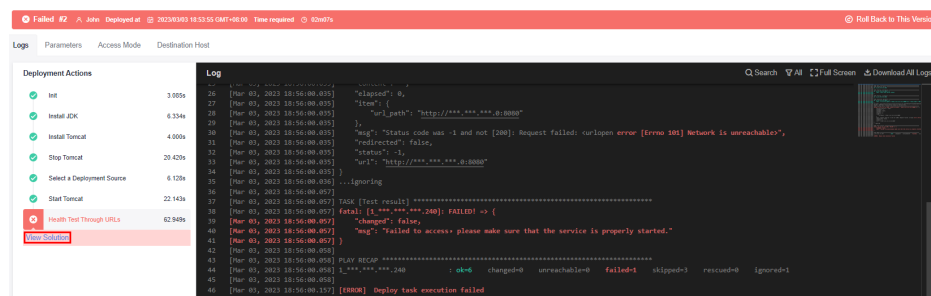

b. Search for a solution manually.

If the issue persists, paste the error information (content in the red box) to the search box of the help center and manually search for the solution.

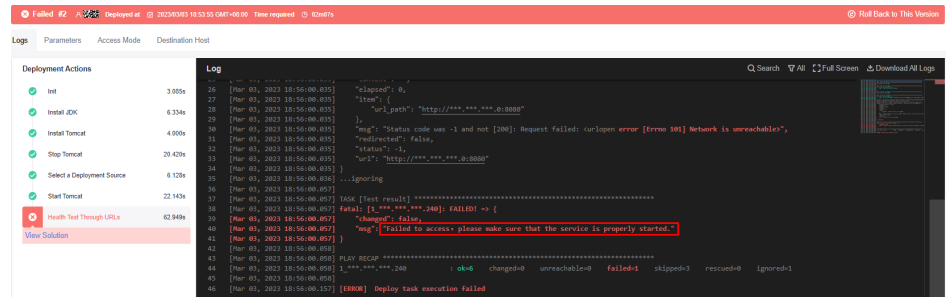

----End

For more information, see .