

EventGrid

Getting Started

Issue 01
Date 2025-09-05



Copyright © Huawei Cloud Computing Technologies Co., Ltd. 2025. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are the property of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei Cloud and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Cloud Computing Technologies Co., Ltd.

Address: Huawei Cloud Data Center Jiaoxinggong Road
Qianzhong Avenue
Gui'an New District
Gui Zhou 550029
People's Republic of China

Website: <https://www.huaweicloud.com/intl/en-us/>

Contents

1 Enabling EG and Authorizing Permissions.....1

2 Sending a Huawei Cloud Service Event.....3

3 Sending a Custom Event..... 9

4 Common Practices..... 15

1 Enabling EG and Authorizing Permissions

Before using EventGrid (EG), ensure that:

1. You have [registered a HUAWEI ID and enabled Huawei Cloud services](#).
2. Your account has permission to use EG. For details about how to grant and bind account permissions, see [Creating a User and Granting Permissions](#).

If you use an IAM user account, contact the Huawei Cloud account administrator to authorize you to use the EG service.

To perform operations related to event sending, configure the following permissions as instructed in [Permissions Management](#).

Table 1-1 EG permissions

Role/Policy Name	Description	Type	Dependency
EG FullAccess	Full permissions for EG	System-defined policy	N/A
EG Publisher	Permissions for publishing events	System-defined policy	N/A
EG ReadOnlyAccess	Read-only permissions for EG	System-defined policy	N/A
EG CommonAccess	General permissions for EG.	System-defined policy	N/A


Table 1-2 Additional permission parameters

Configuration	Permission
Event Target: EventGrid (EG), Simple Message Notification (SMN), FunctionGraph (function computing), custom endpoint or message source	iam:permissions:grantRoleToAgencyOnProject
	iam:agencies:listAgencies
	iam:roles:listRoles
	iam:agencies:getAgency
	iam:agencies:createAgency
	iam:permissions:listRolesForAgency
	iam:permissions:listRolesForAgencyOnProject
	iam:permissions:listRolesForAgencyOnDomain

Logging In to the EG Console

Step 1 Log in to the EG console.

Figure 1-1 EG console

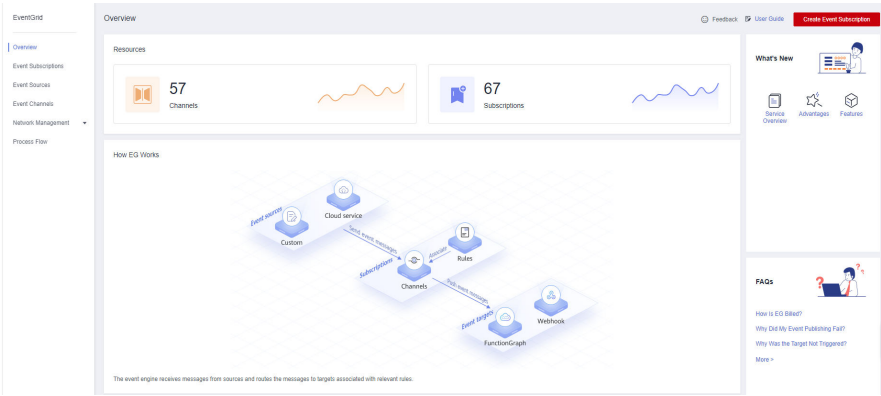

----End

2 Sending a Huawei Cloud Service Event

This section describes how to send a Huawei Cloud service event.

Huawei Cloud Object Storage Service (OBS) sends the generated cloud service events to EG. The EG service filters and converts the events based on the filter rule, and triggers the event target (a function in FunctionGraph).

Prerequisites

- You have completed the operations in [Enabling EG and Authorizing Permissions](#).
- You have obtained the permission to access OBS and FunctionGraph.

Step 1: Create an Event Target (Create a Function)

Step 1 Log in to the FunctionGraph console.

Step 2 Choose **Functions > Function List** in the navigation pane.

Step 3 Click **Create Function**.

Step 4 Set function parameters, as shown in [Figure 2-1](#). For details about the function parameters, see [Creating a Function](#).

- **Function Type:** Select **Event Function**.
- **Region:** Select the region as required.
- **Function Name:** Enter **test**.
- **Agency:** Select **Use no agency**.
- **Runtime:** Select **Python 2.7**.

Figure 2-1 Creating a function

Basic Information

* Function Type

Event Function HTTP Function

* Region

▼

Regions are geographic areas isolated from each other. Resources are region-specific and cannot be used across regions through internal network connections. For low network latency and quick resource access, select the nearest region.

* Function Name

Enter a function name.

Enter 1 to 60 characters, starting with a letter and ending with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.

Agency ?

Use no agency ▼ C Create Agency

* Enterprise Project ?

default ▼ C View Enterprise Project

Runtime ?

Python 2.7 ▼

Step 5 Click **Create**.

Step 6 On the **Code** tab page of the function details page, enter the following code and click **Deploy**.

```
# -*- coding:utf-8 -*-
import json
def handler(event, context):
    print(json.dumps(event))
    return {
        "statusCode": 200,
        "isBase64Encoded": False,
        "body": json.dumps(event),
        "headers": {
            "Content-Type": "application/json"
        }
    }
```

----End

Step 2: Create an Event Subscription

Subscriptions bind event sources, channels, and targets. Events of sources are routed to targets based on specified rules.

Step 1 Log in to the EG console.

Step 2 In the navigation pane, choose **Event Subscriptions**.

Step 3 Click **Create Event Subscription**.

Step 4 Click  next to the default subscription name.

Step 5 Enter **OfficialEvent** in **Subscription Name**, and click **OK**.

Step 6 Configure an event source.

1. Click **Event Source**, and set event source parameters as shown in [Figure 2-2](#).
 - **Provider:** Select Cloud services.
 - **Event Source:** Select **Object Storage Service (OBS)**.
 - **Filter Rule:** Use the default rule.

Figure 2-2 Setting event source parameters

Event Source

Event Source

* Event Source

Object Storage Service (OBS) ▼

Event Type

--Select-- ▼

Event Example

[Expand](#)

* Filter Rule ⓘ

[Learn how to configure a filter rule.](#)

```
1 {
2   "source": [
3     {
4       "op": "StringIn",
5       "values": [
6         "HC.OBS"
7       ]
8     }
9   ]
10 }
```

2. Click **OK**.

Step 7 Configure an event target.

1. Click **Event Target**, and set event target parameters as shown in [Figure 2-3](#).
 - **Provider:** Select Cloud services.
 - **Event Target:** Select **FunctionGraph (function computing)**.
 - **Function:** Select **test** (created in [Step 1](#)).
 - **Version:** Select **latest**.
 - **Agency:** Select or create an agency named **EG_TARGET_AGENCY**. For details about the permissions of the agency, see [Authorization](#).
 - **Transform Type:** Select **Pass-through**.

Figure 2-3 Setting event target parameters

The screenshot shows the 'Event Target' configuration page. At the top, there's a green circular icon with a white 'E' and the text 'Event Target'. Below this, the 'Provider' section has two buttons: 'Cloud services' (highlighted with a blue border) and 'Custom'. The 'Event Target' section contains a dropdown menu set to 'FunctionGraph (function computing)'. Below that, a red asterisk indicates a required field for 'Function', with a dropdown menu currently showing '--Select--'. The 'Version/Alias' section has two radio buttons: 'Version' (selected) and 'Alias'. Below this, another red asterisk indicates a required field for 'Version', with a dropdown menu showing '--Select--'. The 'Alias' section has a dropdown menu showing '--Select--'. The 'Execute' section has two buttons: 'Asynchronously' (highlighted in blue) and 'Synchronously', followed by a help icon. Below this, a red asterisk indicates a required field for 'Agency', with a dropdown menu showing '--Select--' and a 'Create Agency' link. The 'Rule' section has a red asterisk indicating a required field for 'Transform Type', with three buttons: 'Pass-through' (highlighted in blue), 'Variables', and 'Constants', followed by a help icon. At the bottom, a note states 'Route all content of events to the target.'

2. Click **OK**.

Step 8 Click **Save**.

----End

Step 3: Generate an OBS Event (Create an OBS Bucket)

Step 1 Log in to the OBS console.

Step 2 Click **Create Bucket**.

Step 3 Set bucket parameters, as shown in [Figure 2-4](#). For details about these parameters, see [Creating a Bucket](#).

- **Region:** The value must be the same as the region of the EG service.
- **Bucket Name:** Enter **eg-test**.
- **Default Storage Class:** Select **Standard**.

- **Bucket Policy:** Select **Private**.
- **Default Encryption:** Leave it unselected.
- **Direct Reading:** Select **Disable**.
- **Enterprise Project:** Select **default**.

Figure 2-4 Creating a bucket

Create Bucket

Replicate Existing Settings [Select Bucket](#)

Only the following bucket configurations can be replicated: region, data redundancy, storage class, bucket policy, default encryption, direct reading, enterprise project, and tags.

Region

Regions are geographic areas isolated from each other. Resources are region-specific and cannot be used across regions through internal network connections. For low network latency and quick resource access, select the nearest region. Once a bucket is created, the region cannot be changed.

Bucket Name

ⓘ Cannot be the same as that of the current user's existing buckets. ⓘ Cannot be the same as that of any other user's existing buckets. ⓘ Cannot be edited after creation.

Data Redundancy Policy **Multi-AZ storage** Single-AZ storage ⓘ This setting can't be changed after the bucket is created. Multi-AZ storage is more expensive, but offers a higher availability. [Pricing details](#)

✔ Data is stored in multiple AZs in the same region, improving availability.

Default Storage Class

Standard	Infrequent Access	Archive	Deep Archive
High performance, reliability, and availability	High reliability, low cost, and few access	For data accessed once a year	For data accessed once every few years
☒ Multi-AZ ☐ Single-AZ ☐ Image	☒ Multi-AZ ☐ Single-AZ ☐ Image	☐ Single-AZ	☐ Single-AZ

If you do not specify a storage class during object upload, any objects you upload inherit this default storage class.

Bucket Policy **Private** Public Read Public Read and Write Replicate Bucket Policy

Only the bucket owner has full control over the bucket.

Direct Reading **Enable** **Disable**

With direct reading disabled, you must restore Archive objects before downloading them. Restoring and downloading objects are billable actions. [Pricing details](#)

Step 4 Click **Create Now** and create a bucket as prompted.

----End

Step 4: View Results


Step 1 Log in to the FunctionGraph console.

Step 2 Choose **Functions > Function List** in the navigation pane.

Step 3 Click the **test** function to go to the function details page.

Step 4 On the **Metrics** tab page, view the number of invocations and running duration.

Figure 2-5 Viewing metrics

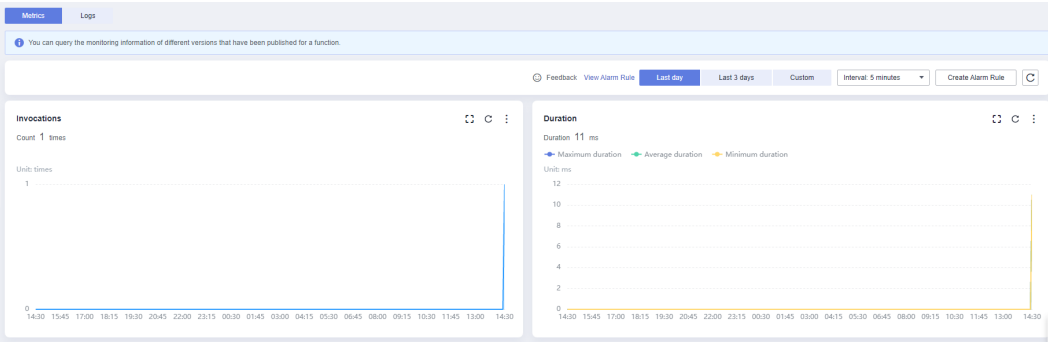

----End

3 Sending a Custom Event

This section describes how to send a custom event.

The custom events generated by custom event sources are sent to EG. The EG service filters and converts the custom events based on the filter rule, and triggers the event target (a function in FunctionGraph).

Prerequisites

- You have completed the operations in [Enabling EG and Authorizing Permissions](#).
- You have obtained the permission to access FunctionGraph.

Step 1: Create a Custom Channel

Step 1 Log in to the EG console.

Step 2 In the navigation pane, choose **Event Channels**.

Step 3 Click **Create Event Channel**.

Step 4 Enter **channel** in **Name**, and click **OK**.

View the created channel in the **Custom** area, and record the channel ID.

Figure 3-1 Event channel ID

Custom ?

Name

channel

224692a3 -dcdd3e291984

----End

Step 2: Create an Event Source

Step 1 Log in to the EG console.

Step 2 In the navigation pane, choose **Event Bus > Event Sources**.

Step 3 Click **Create Event Source** in the upper right corner.

Step 4 Set event source parameters, as shown in [Figure 3-2](#).

- **Type:** Select a value from the drop-down list.
- **Name:** Enter **egsdk-source**.
- **Description:** Enter a description.

Figure 3-2 Create a source for the custom event

Create Event Source

* Type

* Name

Description

Step 5 Click **OK**.

View this event source on the **Custom** tab.

----End

Step 3: Create an Event Target (Create a Function)

Step 1 Log in to the FunctionGraph console.

Step 2 Choose **Functions > Function List** in the navigation pane.

Step 3 Click **Create Function**.

Step 4 Set function parameters, as shown in [Figure 3-3](#). For details about the function parameters, see [Creating a Function](#).

- **Function Type:** Select **Event Function**.
- **Region:** Select the region as required.
- **Function Name:** Enter **test**.
- **Agency:** Select **Use no agency**.
- **Runtime:** Select **Python 2.7**.

Figure 3-3 Creating a function

Basic Information

* Function Type

Event Function HTTP Function

* Region

Regions are geographic areas isolated from each other. Resources are region-specific and cannot be used across regions through internal network connections. For low network latency and quick resource access, select the nearest region.

* Function Name

Enter a function name.

Enter 1 to 60 characters, starting with a letter and ending with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.

Agency ?

Use no agency Create Agency

* Enterprise Project ?

default View Enterprise Project

Runtime ?

Python 2.7

Step 5 Click **Create**.

Step 6 On the **Code** tab page of the function details page, enter the following code and click **Deploy**.

```
# -*- coding:utf-8 -*-
import json
def handler (event, context):
    print(json.dumps(event))
    return {
        "statusCode": 200,
        "isBase64Encoded": False,
        "body": json.dumps(event),
        "headers": {
            "Content-Type": "application/json"
        }
    }
```

----End

Step 4: Create an Event Subscription

Subscriptions bind event sources, channels, and targets. Events of sources are routed to targets based on specified rules.

Step 1 Log in to the EG console.

Step 2 In the navigation pane, choose **Event Subscriptions**.

Step 3 Click **Create Event Subscription**.

Step 4 Click  next to the default subscription name.

Step 5 Enter **CustomEvent** in **Subscription Name**, and click **OK**.

Step 6 Configure an event source.

1. Click **Event Source**, and set event source parameters as shown in [Figure 3-4](#).

Table 3-1 Custom event source parameters

Parameter	Description
Channel	Select an existing custom event channel.
Event Source	Enter or select a custom event source that has been associated with the selected custom event channel.
Filter Rule	Enter an event filter rule. Only events that match these filter rules will be routed to the associated targets.

Filter Rule: Retain the default value and record the value of **values**, for example, **egsdk-source** in [Figure 3-4](#).

Figure 3-4 Setting event source parameters

Event Source

Provider

Cloud services Custom

Event Source

* Channel

--Select-- Create Event Channel

* Event Source

Enter an event source name.

* Filter Rule ?

[Learn how to configure a filter rule.](#)

```
1 {}
```

2. Click **OK**.

Step 7 Configure an event target.

1. Click **Event Target**, and set event target parameters as shown in [Figure 3-5](#).
 - **Provider:** Select Cloud services.

- **Event Target:** Select **FunctionGraph (function computing)**.
- **Function:** Select **test** (created in [Step 3](#)).
- **Version:** Select **latest**.
- **Agency:** Select the created agency.
- **Transform Type:** Select **Pass-through**.

Figure 3-5 Setting event target parameters

The screenshot shows the 'Event Target' configuration page. At the top, there's a green circular icon with a plus sign and the text 'Event Target'. Below this, the 'Provider' section has two tabs: 'Cloud services' (selected, with a red border) and 'Custom'. The 'Event Target' section contains several fields: a red asterisk followed by 'Event Target' and a dropdown menu showing 'FunctionGraph (function computing)'; a red asterisk followed by 'Function' and a dropdown menu showing '--Select--'; a 'Version/Alias' section with radio buttons for 'Version' (selected) and 'Alias'; a red asterisk followed by 'Version' and a dropdown menu showing '--Select--'; an 'Alias' field with a dropdown menu showing '--Select--'; an 'Execute' section with two buttons: 'Asynchronously' (highlighted in blue) and 'Synchronously'; and a red asterisk followed by 'Agency' and a dropdown menu showing '--Select--'. To the right of the 'Agency' dropdown is a magnifying glass icon and a link that says 'Create Agency'.

2. Click **OK**.

Step 8 Click **Save**.

----End

Step 5: Send a Custom Event

Step 1 Configure a custom event. For details, see [CloudEvents SDK](#).

Modify the following parameters in the sample code for publishing an event:

- **NAME:** IAM username.
- **PASSWORD:** IAM user password.

- **DOMAIN_NAME**: Account name.
- **IAM_ENDPOINT**: IAM endpoint. For details, see "Regions and Endpoints".
- **PROJECT_ID**: The project ID. Obtain it by referring to [API Credentials](#).
- **CHANNEL_ID**: Change the value to the channel ID recorded in [Step 1](#).
- **ENDPOINT**: EG [endpoint](#).
- **SOURCE**: Event source name. Change it to the value of **values** in **Filter** recorded in [Step 4: Create an Event Subscription](#).

★ Filter Rule ? Learn how to configure a filter rule.

```
1 {
2   "source": [
3     {
4       "op": "StringIn",
5       "values": [
6         "egsdk-source"
7       ]
8     }
9   ]
10 }
```

- **TIME**: Time when the event is generated.
- **DATA**: Event content that complies with the [CloudEvents 1.0](#) specifications. Modify this parameter based on service requirements.

Step 2 Run the main function to publish the event.

----End

Step 6: View Results


Step 1 Log in to the FunctionGraph console.

Step 2 Choose **Functions > Function List** in the navigation pane.

Step 3 Click the **test** function to go to the function details page.

Step 4 On the **Metrics** tab page, view the number of invocations and running duration.

Figure 3-6 Viewing metrics

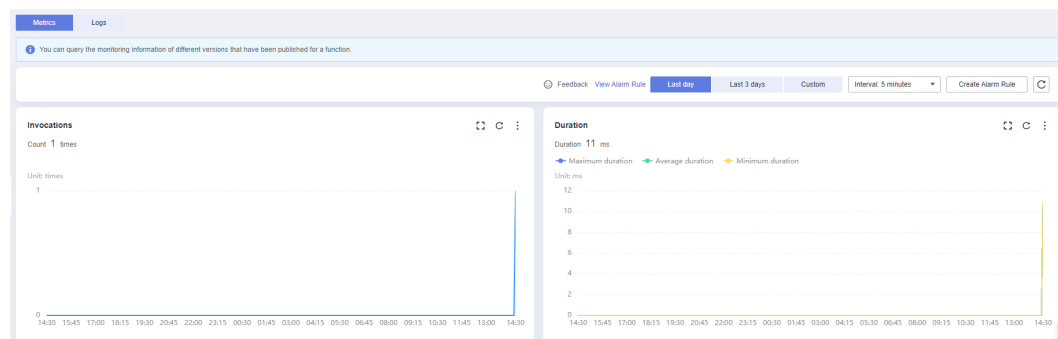

----End

4 Common Practices

After purchasing EG, you can centrally access it through both Huawei Cloud services and custom or SaaS applications, and build a loosely coupled architecture that is distributed and event-driven to flexibly route your events via CloudEvents.

This section describes common practices of EG to help you better use it.

Table 4-1 Common practices

Practice	Description
Routing OBS Application Service Messages to DMS for Kafka.	Route application service events of OBS to DMS for Kafka.