

Cloud Trace Service

API Reference

Issue 01
Date 2023-09-28



Copyright © Huawei Cloud Computing Technologies Co., Ltd. 2023. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are the property of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei Cloud and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Cloud Computing Technologies Co., Ltd.

Address: Huawei Cloud Data Center Jiaoxinggong Road
 Qianzhong Avenue
 Gui'an New District
 Gui Zhou 550029
 People's Republic of China

Website: <https://www.huaweicloud.com/intl/en-us/>

Contents

1 Before You Start.....	1
1.1 Overview.....	1
1.2 API Calling.....	1
1.3 Endpoints.....	1
1.4 Constraints.....	1
1.5 Concepts.....	1
1.6 API Versions.....	3
2 API Overview.....	4
3 Calling APIs.....	5
3.1 Making an API Request.....	5
3.2 Authentication.....	9
3.3 Response.....	10
4 Getting Started.....	12
5 Examples.....	14
5.1 Example 1: Creating a Management Tracker.....	14
5.2 Example 2: Querying a Tracker List.....	15
5.3 Example 3: Querying Management Traces.....	16
6 V3 APIs (Recommended).....	18
6.1 Key Event Notification Management.....	18
6.1.1 Creating a Key Event Notification.....	18
6.1.2 Modifying a Key Event Notification.....	26
6.1.3 Deleting a Key Event Notification.....	35
6.1.4 Querying a Key Event Notification.....	37
6.2 Trace Management.....	44
6.2.1 Querying a Trace List.....	44
6.3 Tracker Management.....	52
6.3.1 Creating a Tracker.....	52
6.3.2 Modifying a Tracker.....	63
6.3.3 Querying a Tracker.....	70
6.3.4 Deleting a Tracker.....	78
6.4 Other APIs.....	80

6.4.1 Querying the Tracker Quota of a Tenant.....	81
6.4.2 Querying All Operations on a Cloud Service.....	84
6.4.3 Querying the Audit Log Operator List.....	87
6.4.4 Checking Whether Data Can Be Transferred to the Configured OBS Bucket.....	90
6.4.5 Querying the Resources Involved in the Traces.....	95
6.5 Tag Management.....	98
6.5.1 Adding CTS Resource Tags in Batches.....	98
6.5.2 Deleting CTS Resource Tags in Batches.....	101
7 Out-of-Date APIs.....	105
7.1 API Version Management.....	105
7.1.1 Querying All API Versions.....	105
7.1.2 Querying a Specific API Version.....	107
7.2 Trace Management.....	110
7.2.1 Querying Traces (v1.0).....	110
7.2.2 Querying Traces (v2.0).....	116
7.3 Tracker Management.....	122
7.3.1 Creating a Tracker.....	123
7.3.2 Querying a Tracker.....	128
7.3.3 Deleting a Tracker.....	131
7.3.4 Modifying a Tracker.....	133
8 Permissions Policies and Supported Actions.....	137
9 Appendix.....	142
9.1 Error Codes.....	142
9.2 Obtaining an Account ID and Project ID.....	146
A Change History.....	148

1

Before You Start

1.1 Overview

Cloud Trace Service (CTS) is a log audit service designed to strengthen cloud security. It allows you to collect, store, and query resource operation records. You can use these records to perform security analysis, track resource changes, audit compliance, and locate faults.

You can use APIs introduced in this document to perform operations on CTS, such as creating and deleting a tracker. Before calling an API, ensure that you are familiar with related concepts and functions of CTS.

1.2 API Calling

CTS supports Representational State Transfer (REST) APIs, allowing you to call APIs using HTTPS. For details about API calling, see [Calling APIs](#).

1.3 Endpoints

An endpoint is the **request address** for calling an API. Endpoints vary depending on services and regions. For the endpoints of CTS, see [Regions and Endpoints](#).

1.4 Constraints

- A maximum of 100 data trackers and 1 management tracker can be created in an account. The quotas cannot be modified.
- For more constraints, see API description.

1.5 Concepts

- Account

An account is created upon successful registration. The account has full access permissions for all of its cloud services and resources. It can be used to reset

user passwords and grant user permissions. The account is a payment entity and should not be used directly to perform routine management. For security purposes, create Identity and Access Management (IAM) users and grant them permissions for routine management.

- User

An IAM user is created by an account in IAM to use cloud services. Each IAM user has its own identity credentials (password and access keys).

The account name, username, and password will be required for API authentication.

- Region

Regions are divided based on geographical location and network latency. Public services, such as Elastic Cloud Server (ECS), Elastic Volume Service (EVS), Object Storage Service (OBS), Virtual Private Cloud (VPC), Elastic IP (EIP), and Image Management Service (IMS), are shared within the same region. Regions are classified into universal regions and dedicated regions. A universal region provides universal cloud services for common tenants. A dedicated region provides specific services for specific tenants.

For details, see [Region and AZ](#).


- AZ

An AZ comprises one or multiple physical data centers equipped with independent ventilation, fire, water, and electricity facilities. Computing, network, storage, and other resources in an AZ are logically divided into multiple clusters. AZs within a region are interconnected using high-speed optical fibers to allow you to build cross-AZ high-availability systems.

- Project

A project corresponds to a region. Projects group and isolate resources (including compute, storage, and network resources) across physical regions. Users can be granted permissions in a default project to access all resources in the region associated with the project. If you need more refined access control, create subprojects under a default project and create resources in subprojects. Then you can assign users the permissions required to access only the resources in the specific subprojects.

Figure 1-1 Project isolation model

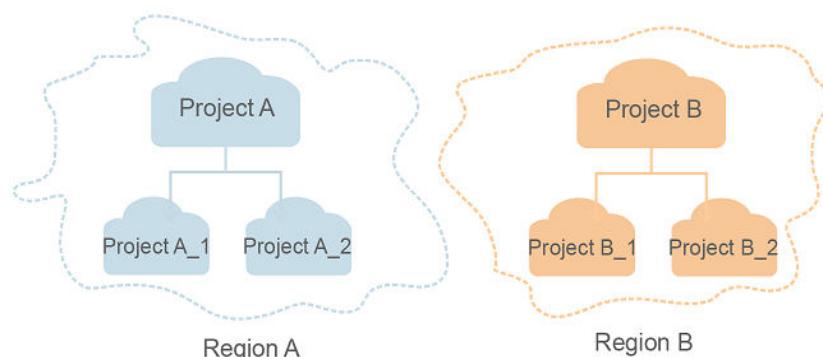

- Enterprise project

Enterprise projects group and manage resources across regions. Resources in enterprise projects are logically isolated from each other. An enterprise project

can contain resources of multiple regions, and resources can be added to or removed from enterprise projects.

For details about enterprise projects and how to obtain enterprise project IDs, see [Enterprise Management User Guide](#).

1.6 API Versions

It is recommended that you use the V3 APIs, which are more powerful and easy to use. The V1 APIs will be brought offline soon.

2 API Overview

With the extension APIs provided by CTS, you can use all CTS functions, such as querying API versions and the trace list, or creating a tracker.

Table 2-1 lists CTS APIs.

Table 2-1 CTS APIs

Subtype	Description
API versions	API for querying versions of all or specified CTS APIs
Trackers	APIs for creating, modifying, querying, and deleting a tracker
Traces	API for querying traces recorded in the last seven days
Key event notifications	APIs for creating, modifying, querying, and deleting a key event notification

3 Calling APIs

3.1 Making an API Request

This section describes the structure of a REST API request, and uses the IAM API for [obtaining a user token](#) as an example to demonstrate how to call an API. The obtained token can then be used to authenticate the calling of other APIs.

Request URI

A request URI is in the following format:

{URI-scheme} :// {Endpoint} / {resource-path} ? {query-string}

Although a request URI is included in the request header, most programming languages or frameworks require the request URI to be transmitted separately.

- **URI-scheme:**
Protocol used to transmit requests. All APIs use **HTTPS**.
- **Endpoint:**
Domain name or IP address of the server bearing the REST service. The endpoint varies between services in different regions. It can be obtained from [Regions and Endpoints](#).
- **resource-path:**
Access path of an API for performing a specified operation. Obtain the path from the URI of an API. For example, the **resource-path** of the API used to obtain a user token is **/v3/auth/tokens**.
- **query-string:**
Query parameter, which is optional. Ensure that a question mark (?) is included before each query parameter that is in the format of "**Parameter name=Parameter value**". For example, **?limit=10** indicates that a maximum of 10 data records will be displayed.

NOTE

To simplify the URI display, each API is provided only with a **resource-path** and a request method. The **URI-scheme** of all APIs is **HTTPS**, and the endpoints of all APIs in the same region are identical.

Request Methods

The HTTP protocol defines the following request methods that can be used to send a request to the server:

- **GET**: requests a server to return specified resources.
- **PUT**: requests a server to update specified resources.
- **POST**: requests a server to add resources or perform special operations.
- **DELETE**: requests a server to delete specified resources, for example, objects.
- **HEAD**: same as GET except that the server must return only the response header.
- **PATCH**: requests a server to update a part of a specified resource. If the resource does not exist, a new resource will be created.

For example, in the case of the API used to obtain a user token, the request method is **POST**. The request is as follows:

```
POST https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/tokens
```

Request Header

You can also add additional header fields to a request, such as the fields required by a specified URI or HTTP method. For example, to request for the authentication information, add **Content-Type**, which specifies the request body type.

Table 3-1 lists the common request header fields.

Table 3-1 Common request header fields

Parameter	Description	Mandatory	Example Value
Host	Specifies the server domain name and port number of the resources being requested. The value can be obtained from the URL of the service API. The value is in the format of <i>Hostname:Port number</i> . If the port number is not specified, the default port is used. The default port number for https is 443 .	No This field is mandatory for AK/SK authentication.	code.test.com or code.test.com:443

Parameter	Description	Mandatory	Example Value
Content-Type	Specifies the type (or format) of the message body. The default value application/json is recommended. Other values of this field will be provided for specific APIs if any.	Yes	application/json
Content-Length	Specifies the length of the request body. The unit is byte.	No	3495
X-Project-Id	Specifies the project ID. Obtain it by referring to Obtaining an Account ID and Project ID .	No This field is mandatory for requests that use AK/SK authentication in the Dedicated Cloud (DeC) scenario or multi-project scenario.	e9993fc787d94b6c886cb aa340f9c0f4
X-Auth-Token	Specifies a user token. It is a response to the API for obtaining a user token . This API is the only one that does not require authentication. After the request is processed, the value of X-Subject-Token in the response header is the token value.	No This field is mandatory for token authentication.	The following is part of an example token: MIIPAgYJKoZIhvcNAQc-Co...ggg1BBIINPXsidG9rZ

NOTE

In addition to supporting token-based authentication, APIs also support authentication using access key ID/secret access key (AK/SK). During AK/SK-based authentication, an SDK is used to sign a request, and the **Authorization** (signature information) and **X-Sdk-Date** (time when the request is sent) header fields are automatically added to the request.

For details, see "AK/SK-based Authentication" in [Authentication](#).

The API used to [obtain a user token](#) does not require authentication. Therefore, only the **Content-Type** field needs to be added to requests for calling the API. An example of such requests is as follows:

```
POST https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/tokens
Content-Type: application/json
```

Request Body (Optional)

This part is optional. A request body transfer information other than the request header and is often sent in a structured format (for example, JSON or XML) defined by the **Content-Type** header field.

A request body varies between APIs. Some APIs do not require the request body, such as the APIs requested using the GET and DELETE methods.

In the case of the API used to [obtain a user token](#), the request parameters and parameter description can be obtained from the API request. The following provides an example request with a body included. Replace **username**, **domainname**, ********* (login password), and **xxxxxxxxxxxxxxx** (project name) with the actual values. Obtain a project name from [Regions and Endpoints](#).

NOTE

The **scope** parameter specifies where a token takes effect. In the following example, the token takes effect only for the resources in a specified project. For more information about this API, see [Obtaining a User Token](#).

```
POST https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/tokens
Content-Type: application/json
```

```
{
  "auth": {
    "identity": {
      "methods": [
        "password"
      ],
      "password": {
        "user": {
          "name": "username",
          "password": "*****",
          "domain": {
            "name": "domainname"
          }
        }
      }
    },
    "scope": {
      "project": {
        "name": "xxxxxxxxxxxxxxx"
      }
    }
  }
}
```

If all data required for the API request is available, you can send the request to call an API through [curl](#), [Postman](#), or coding. In the response to the API used to obtain a user token, **x-subject-token** is the desired user token. This token can then be used to authenticate the calling of other APIs.

3.2 Authentication

You can use either of the following authentication methods when calling APIs:

- Token-based authentication: Requests are authenticated using a token.
- AK/SK-based authentication: Requests are authenticated by encrypting the request body using an AK/SK pair. AK/SK-based authentication is recommended because it is more secure than token-based authentication.

Token-based Authentication



The validity period of a token is 24 hours. When using a token for authentication, cache it to prevent frequently calling the IAM API used to obtain a user token.

A token specifies temporary permissions in a computer system. During API authentication using a token, the token is added to requests to get permissions for calling the API.

You can obtain a token by calling the API used for [obtaining a user token](#). When you call the API, set **auth.scope** in the request body to **project**.

```
{  
  "auth": {  
    "identity": {  
      "methods": [  
        "password"  
      ],  
      "password": {  
        "user": {  
          "name": "username",  
          "password": "*****",  
          "domain": {  
            "name": "domainname"  
          }  
        }  
      }  
    },  
    "scope": {  
      "project": {  
        "name": "xxxxxxx"  
      }  
    }  
  }  
}
```

After a token is obtained, the **X-Auth-Token** header field must be added to requests to specify the token when calling other APIs. For example, if the token is **ABCDEFJ....**, **X-Auth-Token: ABCDEFJ....** can be added to a request as follows:

```
POST https://iam.ap-southeast-1.myhuaweicloud.com/v3/auth/projects  
Content-Type: application/json  
X-Auth-Token: ABCDEFJ....
```

AK/SK-based Authentication

NOTE

AK/SK-based authentication supports API requests with a body not larger than 12 MB. For API requests with a larger body, token-based authentication is recommended.

In AK/SK-based authentication, AK/SK is used to sign requests and the signature is then added to the requests for authentication.

- AK: access key ID, which is a unique identifier used in conjunction with a secret access key to sign requests cryptographically.
- SK: secret access key used in conjunction with an AK to sign requests cryptographically. It identifies a request sender and prevents the request from being modified.

In AK/SK-based authentication, you can use an AK/SK pair to sign requests based on the signature algorithm or use the signing SDK to sign requests.

NOTICE

The signing SDK is only used for signing requests and is different from the SDKs provided by services.

3.3 Response

Status Code

After sending a request, you will receive a response, including a status code, response header, and response body.

A status code is a group of digits, ranging from 1xx to 5xx. It indicates the status of a request.

For example, if status code **201** is returned for calling the API used to obtain a user token, the request is successful.

Response Header

Similar to a request, a response also has a header, for example, **Content-type**.

Figure 3-1 shows the response header fields for the API used to obtain a user token. The **x-subject-token** header field is the desired user token. This token can then be used to authenticate the calling of other APIs.

Figure 3-1 Header fields of the response to the request for obtaining a user token

```
connection → keep-alive
content-type → application/json
date → Tue, 12 Feb 2019 06:52:13 GMT
server → Web Server
strict-transport-security → max-age=31536000; includeSubdomains;
transfer-encoding → chunked
via → proxy A
x-content-type-options → nosniff
x-download-options → noopener
x-frame-options → SAMEORIGIN
x-iam-trace-id → 218d45ab-d674-4995-af3a-2d0255ba41b5
x-subject-token
→ MIIXQVJKoZlhvcNAQcCoIYTjCCGEoCAQEExDTALBglghkgBZQMEAqEwgharBgkqhkiG9w0BBwGgg hacBIIWmHsidG9rZW4iOnsiZXhwaXJlc19hdCI6ljlwMTktMDItMTNUMDfj3KUs6YgKnpVNRbW2eZ5eb78SZOkqjACgkIqO1wi4JlGzrp d18LGXK5bxldfq4lqHCYb8P4NaY0NYejcAgzJVeFIYtLWT1GSO0zxKZmlQHQj82H8qHdg lZO9fuEbL5dMhdavj+33wElxHRC9187o+k9-j+CMZSEB7bUGd5Uj6eRASX1jipPEGA270g1Fr uoL6jqglFkNPQuFSOU8+uSttVwRtNfsC+qTp22Rkd5MCqFGQ8LcuUxC3a+9CMBnOintWW7oeRUvHvpxk8pxiX1wTEboXRzT6MUbpvGw-oPNFYxJECKn oH3Rozv0vN--n5d6Nb xg ==
x-xss-protection → 1; mode=block;
```

Response Body (Optional)

The body of a response is often returned in structured format as specified in the **Content-type** header field. The response body transfers content except the response header.

The following is part of the response body for the API used to obtain a user token.

```
{
  "token": {
    "expires_at": "2019-02-13T06:52:13.855000Z",
    "methods": [
      "password"
    ],
    "catalog": [
      {
        "endpoints": [
          {
            "region_id": "az-01",
            ....

```

If an error occurs during API calling, an error code and a message will be displayed. The following shows an error response body.

```
{
  "error_msg": "The format of message is error",
  "error_code": "AS.0001"
}
```

In the response body, **error_code** is an error code, and **error_msg** provides information about the error.

4 Getting Started

This section describes how to create a tracker by calling APIs.

NOTE

The token obtained from IAM is valid for only 24 hours. If you want to use the same token for authentication, you can cache it to avoid frequent calling of the IAM API.

Involved APIs

For token-based authentication, you must obtain a token and add **X-Auth-Token** to the request header when calling an API.

- IAM API used to obtain a token
- CTS API used to create a tracker

Procedure

1. Obtain a token by referring to [Authentication](#).
2. Send **POST /v1.0/ {project_id} /tracker**.
3. Add **Content-Type** and **X-Auth-Token** to the request header.
4. Set parameters in the request body as follows:

```
POST /v1.0/{project_id}/tracker
{
    "bucket_name": "obs-f1da", //Name of an Object Storage Service (OBS) bucket to which traces will
    be transferred. This parameter is mandatory and its value is a string.
    "is_support_trace_files_encryption": true, //Whether trace files will be encrypted during transfer. This
    parameter is optional and its value is of boolean type.
    "kms_id": "13a4207c-7abe-4b68-8510-16b84c3b5504", //ID of the key for trace file encryption.
    When is_support_trace_files_encryption is set to true, this parameter is mandatory.
    "is_obs_created": true, //Whether a new OBS bucket will be created. This parameter is optional and
    its value is of boolean type.
    "file_prefix_name": "y08Q", //File name prefix to mark trace files that need to be stored in OBS.
    This parameter is optional and its value is a string.
    "log_file_validate": {
        "is_support_validate": true //Whether trace files will be verified. This parameter is optional and its
        value is of boolean type.
    }
}
```

If the request is successful, information about the created tracker is returned.

```
{
    "bucket_name": "obs-f1da",
```

```
"file_prefix_name": "yO8Q",
"is_obs_created": true,
"is_support_trace_files_encryption": true,
"kms_id": "13a4207c-7abe-4b68-8510-16b84c3b5504",
"log_file_validate": {
    "is_support_validate": true
},
"tracker_name": "system", //Tracker name
"status": "enabled" //Tracker status
}
```

If the request fails, an error code and error message are returned. For details, see [Error Codes](#).

5 Examples

5.1 Example 1: Creating a Management Tracker

Introduction

This section describes how to create a management tracker for an OBS bucket which is used for log transfer.

Other Involved APIs

Listing Buckets: The name of the OBS bucket to which traces will be transferred is required for creating a management tracker. Call this API to list all the OBS buckets you have created to obtain the name.

Creating a Management Tracker

- URI:

POST /v3/{project_id}/tracker

- Example request:

POST https://{{cts_endpoint}}/v3/{project_id}/tracker

Obtain the value of {{cts_endpoint}} from [Regions and Endpoints](#).

Body:

```
{  
  "tracker_type": "system",  
  "tracker_name": "system",  
  "obs_info": {  
    "is_obs_created": false,  
    "bucket_name": "test_tracker",  
    "file_prefix_name": "yO8Q"  
  }  
}
```

- Example response:

```
{  
  "id": "2e6fa9b8-8c6e-456d-b5d3-77be97xxxx",  
  "create_time": 1587958482923,  
  "domain_id": "aexxxxxxxxx4d4fb4bxxxxxxxx791fbf",  
  "obs_info": {  
    "bucket_name": "test_tracker",  
  }  
}
```

```
        "file_prefix_name": "yO8Q"
    },
    "project_id": "bb1xxxxxxxxx4f498cbxxxxxx35634",
    "tracker_name": "system",
    "tracker_type": "system",
    "status": "enabled"
}
```

5.2 Example 2: Querying a Tracker List

Introduction

This section describes how to query all trackers of an account.

Other Involved APIs

None

Querying a Tracker List

- URI:
`GET /v3/{project_id}/trackers`
- Example request:
`GET https://{{cts_endpoint}}/v3/{project_id}/trackers`
Obtain the value of `{cts_endpoint}` from [Regions and Endpoints](#).
- Example response:

```
{
    "trackers": [
        {
            "is_support_trace_files_encryption": true,
            "create_time": 1589886034121,
            "streamId": "4a1ef2b6-d79a-4dc6-90f0-48151cd5491b",
            "kms_id": "7dbbb3fa-93e4-4528-bc7b-9beb794b0229",
            "group_id": "26fa12ac-75f7-42ed-8118-ab9f2263042f",
            "is_support_validate": false,
            "obs_info": {
                "is_obs_created": false,
                "bucket_name": "",
                "is_authorized_bucket": false,
                "file_prefix_name": "",
                "bucket.lifecycle": 0
            },
            "lts": {
                "log_group_name": "CTS",
                "is_lts_enabled": true,
                "log_topic_name": "system-trace"
            },
            "tracker_type": "system",
            "domain_id": "2306579dc99f4c8690b14b68e734fc9",
            "project_id": "24edf66e79d04187acb99a463e610764",
            "tracker_name": "system",
            "id": "ebf8d1c3-762b-4ce3-b316-6b1aa32f8be3",
            "status": "enabled"
        },
        {
            "domain_id": "2306579dc99f4c8690b14b68e734fc9",
            "is_support_trace_files_encryption": false,
            "obs_info": {
                "is_obs_created": false,
                "bucket_name": ""
            }
        }
    ]
}
```

```
        "is_authorized_bucket": false,
        "file_prefix_name": "",
        "bucket.lifecycle": 0
    },
    "create_time": 1589276171198,
    "project_id": "24edf66e79d04187acb99a463e610764",
    "data_bucket": {
        "data_event": [
            "READ",
            "WRITE"
        ],
        "search_enabled": false,
        "data_bucket_name": "cctest0423"
    },
    "tracker_name": "sdsd",
    "is_support_validate": false,
    "lts": {
        "log_group_name": "CTS",
        "is_lts_enabled": false,
        "log_topic_name": "sdsd"
    },
    "id": "c9a3961d-3aa0-4e60-8e63-dd4ce7f1a88a",
    "status": "enabled",
    "tracker_type": "data"
}
]
```

5.3 Example 3: Querying Management Traces

Introduction

This section describes how to query all management traces of an account in the last hour.

Other Involved APIs

None

Querying Management Traces

- URI:
`GET /v3/{project_id}/traces`
- Example request:
`GET https://{{cts_endpoint}}/v3/{project_id} /traces?trace_type=system`
Obtain the value of `{cts_endpoint}` from [Regions and Endpoints](#).
- Example response:

```
{
    "meta_data": {
        "count": 2,
        "marker": "e001ccb8-bc09-11e6-b2cc-2640a43cc6e8"
    },
    "traces": [ {
        "time": 1472148708232,
        "user": {
            "name": "xxx",
            "domain": {
                "name": "xxx",
                "id": "ded649d814464428ba89d04d7955c93e"
            }
        }
    }
]
```

```
        },
        "response" : {
            "code" : "VPC.0514",
            "message" : "Update port fail."
        },
        "code" : 200,
        "service_type" : "VPC",
        "resource_type" : "eip",
        "resource_name" : "192.144.163.1",
        "resource_id" : "d502809d-0d1d-41ce-9690-784282142ccc",
        "trace_name" : "deleteEip",
        "trace_rating" : "warning",
        "trace_type" : "ConsoleAction",
        "api_version" : "2.0",
        "record_time" : 1481066128032,
        "trace_id" : "e001ccb9-bc09-11e6-b00b-4b2a61338db6"
    }, {
        "time" : 1472148708232,
        "user" : {
            "name" : "xxx",
            "domain" : {
                "name" : "xxx",
                "id" : "ded649d814464428ba89d04d7955c93e"
            }
        },
        "response" : {
            "code" : "VPC.0514",
            "message" : "Update port fail."
        },
        "code" : 200,
        "service_type" : "VPC",
        "resource_type" : "eip",
        "resource_name" : "192.144.163.1",
        "resource_id" : "d502809d-0d1d-41ce-9690-784282142ccc",
        "trace_name" : "deleteEip",
        "trace_rating" : "warning",
        "trace_type" : "ConsoleAction",
        "api_version" : "2.0",
        "record_time" : 1481066128032,
        "trace_id" : "e001ccb8-bc09-11e6-b2cc-2640a43cc6e8"
    } ]
}
```

6 V3 APIs (Recommended)

6.1 Key Event Notification Management

6.1.1 Creating a Key Event Notification

Function

SMS, email, or HTTP/HTTPS notifications can be sent through pre-configured SMN topics to subscribers when key operations occur. This helps you detect high-risk operations promptly. Notifications can also be used as triggers for specific operations or to connect to your own audit system.

URI

POST /v3/{project_id}/notifications

Table 6-1 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see "Appendix" > "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .

Request Parameters

Table 6-2 Request body parameters

Parameter	Mandatory	Type	Description
notification_name	Yes	String	Notification name.
operation_type	Yes	String	Operation type. Possible options include complete and customized . If you choose complete , you do not need to specify operations and notify_user_list , and notifications will be sent when any supported operations occur on any of the connected cloud services. If you choose customized , notifications will be sent when operations defined in operations occur. Enumerated values: <ul style="list-style-type: none">• complete• customized
operations	No	Array of Operations objects	Operation list.
notify_user_list	No	Array of NotificationUsers objects	List of users whose operations will trigger notifications. Currently, up to 50 users in 10 user groups can be configured.
topic_id	No	String	Topic URN or function URN. To obtain the topic_urn , call the SMN API for querying topics. Example URN: urn:smn:regionId:f96188c7ccaf4ffba0c9aa149ab2bd57:test_topic_v2 To obtain the function URN, call the FunctionGraph API for querying functions. Example URN: urn:fss:xxxxxxxxx:7aad83af3e8d42e99ac194e8419e2c9b:function:default:test
filter	No	Filter object	Advanced filter of key event notifications.

Table 6-3 Operations

Parameter	Mandatory	Type	Description
service_type	Yes	String	Cloud service. The value must be the acronym of a cloud service that has been connected with CTS. It is a word composed of uppercase letters. For cloud services that can be connected with CTS, see section "Supported Services and Operations" in <i>Cloud Trace Service User Guide</i> .
resource_type	Yes	String	Resource type.
trace_names	Yes	Array of strings	Trace name.

Table 6-4 NotificationUsers

Parameter	Mandatory	Type	Description
user_group	Yes	String	IAM user group.
user_list	Yes	Array of strings	IAM user.

Table 6-5 Filter

Parameter	Mandatory	Type	Description
condition	Yes	String	<p>Relationship between conditions.</p> <ul style="list-style-type: none">• AND (default value) indicates that a rule takes effect after all filtering criteria are met.• OR indicates that a rule takes effect when one of the filtering criteria is met. <p>Enumerated values:</p> <ul style="list-style-type: none">• AND (default value)• OR
is_support_filter	Yes	Boolean	Whether to enable the advanced filter.

Parameter	Mandatory	Type	Description
rule	Yes	Array of strings	Advanced filter criteria rule. Example: **key** != **value**. The format is *field* *rule* *value*. - Field options: **api_version**, **code**, **trace_rating**, **trace_type**, **resource_id**, and **resource_name**. - Rule: **!=** or **==**. - Value: **api_version**: **^^(a-zA-Z0-9_-.){1,64}\$\$; **code**: 1-256 characters; **trace_rating** enumeration: **normal**, **warning**, **incident**; **trace_type** enumeration: **ConsoleAction**, **ApiCall**, **SystemAction**; **resource_id**: 1-350 characters; **resource_name**: 1-256 characters.

Response Parameters

Status code: 201

Table 6-6 Response body parameters

Parameter	Type	Description
notification_name	String	Notification name.
operation_type	String	Operation type, which is complete or customized . <ul style="list-style-type: none">• complete: Notifications will be sent through SMN for all operations recorded by CTS.• customized: Notifications will be sent through SMN for specified operations performed on specified cloud services. Enumerated values: <ul style="list-style-type: none">• customized• complete
operations	Array of Operations objects	Operation list.

Parameter	Type	Description
notify_user_list	Array of NotificationUsers objects	List of users whose operations will trigger notifications. Currently, up to 50 users in 10 user groups can be configured.
status	String	Notification status, which is enabled or disabled . <ul style="list-style-type: none"> • disabled: Key event notification is disabled. • enabled: Key event notification is enabled. Enumerated values: <ul style="list-style-type: none"> • enabled • disabled
topic_id	String	Unique resource ID of an SMN topic. You can obtain the ID by querying the topic list.
notification_id	String	Unique notification ID.
notification_type	String	Notification type. - smn : Simple Message Notification (SMN). - fun : FunctionGraph. <ul style="list-style-type: none"> • smn • fun
project_id	String	Project ID.
create_time	Long	Time when a notification rule was created.
filter	Filter object	Advanced filter of key event notifications.

Table 6-7 Operations

Parameter	Type	Description
service_type	String	Cloud service. The value must be the acronym of a cloud service that has been connected with CTS. It is a word composed of uppercase letters. For cloud services that can be connected with CTS, see section "Supported Services and Operations" in <i>Cloud Trace Service User Guide</i> .
resource_type	String	Resource type.
trace_names	Array of strings	Trace name.

Table 6-8 NotificationUsers

Parameter	Type	Description
user_group	String	IAM user group.
user_list	Array of strings	IAM user.

Table 6-9 Filter

Parameter	Type	Description
condition	String	<p>Relationship between conditions.</p> <ul style="list-style-type: none">• AND (default value) indicates that a rule takes effect after all filtering criteria are met.• OR indicates that a rule takes effect when one of the filtering criteria is met. <p>Enumerated values:</p> <ul style="list-style-type: none">• AND (default value)• OR
is_support_filter	Boolean	Whether to enable the advanced filter.
rule	Array of strings	Advanced filter criteria rule. Example: **key** != **value**. The format is *field* *rule* *value*. - Field options: **api_version**, **code**, **trace_rating**, **trace_type**, **resource_id**, and **resource_name**. - Rule: **!=** or **==**. - Value: **api_version**: **^^(a-zA-Z0-9_-){1,64}\$\$**; **code**: 1-256 characters; **trace_rating** enumeration: **normal**, **warning**, **incident**; **trace_type** enumeration: **ConsoleAction**, **ApiCall**, **SystemAction**; **resource_id**: 1-350 characters; **resource_name**: 1-256 characters.

Status code: 400**Table 6-10** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401

Table 6-11 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403

Table 6-12 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404

Table 6-13 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500

Table 6-14 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503

Table 6-15 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .

Parameter	Type	Description
error_msg	String	Error message.

Example Requests

- Creating a custom key event notification

```
POST https://{endpoint}/v3/{project_id}/notifications

{
  "notification_name" : "keyOperate_info_cfwy",
  "operation_type" : "customized",
  "filter" : {
    "is_support_filter" : true,
    "rule" : [ "code != 200", "api_version = v1.0", "trace_rating = normal", "trace_type != ApiCall",
    "resource_id = xxx", "resource_name = xxx" ],
    "condition" : "OR"
  },
  "operations" : [ {
    "service_type" : "CTS",
    "resource_type" : "tracker",
    "trace_names" : [ "createTracker", "deleteTracker" ]
  }, {
    "service_type" : "CTS",
    "resource_type" : "notification",
    "trace_names" : [ "deleteNotification", "updateNotification" ]
  }, {
    "service_type" : "AOM",
    "resource_type" : "pe",
    "trace_names" : [ "deletePolicyGroup", "updatePolicyGroup", "createPolicyGroup" ]
  },
  "notify_user_list" : [ {
    "user_group" : "admin",
    "user_list" : [ "test1", "test2" ]
  }, {
    "user_group" : "CTS view",
    "user_list" : [ "test3", "test4" ]
  }],
  "topic_id" : "urn:smn:{regionid}:24edf66e79d04187acb99a463e610764:test"
}
```

- Creating a complete key event notification

```
POST https://{endpoint}/v3/{project_id}/notifications

{
  "notification_name" : "test",
  "filter" : {
    "is_support_filter" : true,
    "rule" : [ "code != 200", "api_version = v1.0", "trace_rating = normal", "trace_type != ApiCall",
    "resource_id = xxx", "resource_name = xxx" ],
    "condition" : "OR"
  },
  "operation_type" : "complete",
  "topic_id" : "urn:smn:{regionid}:24edf66e79d04187acb99a463e610764:test"
}
```

Example Responses

Status code: 201

The creation is successful.

```
{ "create_time" : 1634001495876,
  "notification_id" : "cda8fd83-d08c-46f0-b914-1453a6a85c00",
```

```
"notification_name" : "keyOperate_info_cfwy",
"notification_type" : "smn",
"notify_user_list" : [ {
    "user_group" : "admin",
    "user_list" : [ "test1", "test2" ]
}, {
    "user_group" : "CTS view",
    "user_list" : [ "test3", "test4" ]
} ],
"operation_type" : "customized",
"operations" : [ {
    "resource_type" : "tracker",
    "service_type" : "CTS",
    "trace_names" : [ "createTracker", "deleteTracker" ]
}, {
    "resource_type" : "notification",
    "service_type" : "CTS",
    "trace_names" : [ "deleteNotification", "updateNotification" ]
}, {
    "resource_type" : "pe",
    "service_type" : "AOM",
    "trace_names" : [ "deletePolicyGroup", "updatePolicyGroup", "createPolicyGroup" ]
}],
"project_id" : "24edf66e79d04187acb99a463e610764",
"status" : "enabled",
"topic_id" : "urn:smn:{regionid}:24edf66e79d04187acb99a463e610764:test"
}
```

Status Codes

Status Code	Description
201	The creation is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The server failed to find the requested resource or some key event notifications failed to be deleted.
500	The server has received the request but encountered an internal error, or the tracker deletion failed.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.1.2 Modifying a Key Event Notification

Function

This API is used to modify a key event notification. The notification ID carried in the request must be valid.

URI

PUT /v3/{project_id}/notifications

Table 6-16 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see "Appendix" > "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .

Request Parameters

Table 6-17 Request body parameters

Parameter	Mandatory	Type	Description
notification_name	Yes	String	Notification name.
operation_type	Yes	String	Operation type. Possible options include complete and customized . If you choose complete , notifications will be sent when any supported operation occurs on any of the connected cloud services. If you choose customized , notifications will be sent when operations defined in operations occur. Enumerated values: <ul style="list-style-type: none">• customized• complete
operations	No	Array of Operations objects	Operation list.
notify_user_list	No	Array of NotificationUsers objects	List of users whose operations will trigger notifications. Currently, up to 50 users in 10 user groups can be configured.

Parameter	Mandatory	Type	Description
status	Yes	String	<p>Notification status. Possible options include enabled and disabled.</p> <p>Enumerated values:</p> <ul style="list-style-type: none">• enabled• disabled
topic_id	No	String	<p>Topic URN or function URN. This parameter is mandatory when status is set to enabled. To obtain the topic_urn, call the SMN API for querying topics. Example URN: urn:smn:regionId:f96188c7ccaf4ffba0c9aa149ab2bd57:test_topic_v2 To obtain the function URN, call the FunctionGraph API for querying functions. Example URN: urn:fss:xxxxxxxxx:7aad83af3e8d42e99ac194e8419e2c9b:function:default:test</p>
notification_id	Yes	String	Notification ID.
filter	No	Filter object	Advanced filter of key event notifications.

Table 6-18 Operations

Parameter	Mandatory	Type	Description
service_type	Yes	String	Cloud service. The value must be the acronym of a cloud service that has been connected with CTS. It is a word composed of uppercase letters. For cloud services that can be connected with CTS, see section "Supported Services and Operations" in <i>Cloud Trace Service User Guide</i> .
resource_type	Yes	String	Resource type.
trace_names	Yes	Array of strings	Trace name.

Table 6-19 NotificationUsers

Parameter	Mandatory	Type	Description
user_group	Yes	String	IAM user group.
user_list	Yes	Array of strings	IAM user.

Table 6-20 Filter

Parameter	Mandatory	Type	Description
condition	Yes	String	<p>Relationship between conditions.</p> <ul style="list-style-type: none">• AND (default value) indicates that a rule takes effect after all filtering criteria are met.• OR indicates that a rule takes effect when one of the filtering criteria is met. <p>Enumerated values:</p> <ul style="list-style-type: none">• AND (default value)• OR
is_support_filter	Yes	Boolean	Whether to enable the advanced filter.
rule	Yes	Array of strings	Advanced filter criteria rule. Example: key != value . The format is <i>field rule value</i> . - Field options: api_version , code , trace_rating , trace_type , resource_id , and resource_name . - Rule: != or =. - Value: api_version : ^(a-zA-Z0-9_-){1,64}\$; code : 1-256 characters; trace_rating enumeration: normal , warning , incident ; trace_type enumeration: ConsoleAction , ApiCall , SystemAction ; resource_id : 1-350 characters; resource_name : 1-256 characters.

Response Parameters

Status code: 200

Table 6-21 Response body parameters

Parameter	Type	Description
notification_name	String	Notification name.
operation_type	String	Operation type. Possible options include complete and customized . If you choose complete , notifications will be sent when any supported operation occurs on any of the connected cloud services. If you choose customized , notifications will be sent when operations defined in operations occur. Enumerated values: <ul style="list-style-type: none">• customized• complete
operations	Array of Operations objects	Operation list.
notify_user_list	Array of NotificationUsers objects	List of users whose operations will trigger notifications. Currently, up to 50 users in 10 user groups can be configured.
status	String	Notification status. Possible options include enabled and disabled . Enumerated values: <ul style="list-style-type: none">• enabled• disabled
topic_id	String	Topic URN or function URN. To obtain the topic_urn , call the SMN API for querying topics. Example URN: urn:smn:regionId:f96188c7ccaf4ffba0c9aa149ab2bd57:test_topic_v2 To obtain the function URN, call the FunctionGraph API for querying functions. Example URN: urn:fss:xxxxxxxxx:7aad83af3e8d42e99ac194e8419e2c9b:function:default:test
notification_id	String	Unique notification ID.
notification_type	String	Notification type identified based on topic_id . Possible options include SMN (smn) and FunctionGraph (fun). Enumerated values: <ul style="list-style-type: none">• smn• fun
project_id	String	Project ID.

Parameter	Type	Description
create_time	Long	Timestamp when a notification was created.
filter	Filter object	Advanced filter of key event notifications.

Table 6-22 Operations

Parameter	Type	Description
service_type	String	Cloud service. The value must be the acronym of a cloud service that has been connected with CTS. It is a word composed of uppercase letters. For cloud services that can be connected with CTS, see section "Supported Services and Operations" in <i>Cloud Trace Service User Guide</i> .
resource_type	String	Resource type.
trace_names	Array of strings	Trace name.

Table 6-23 NotificationUsers

Parameter	Type	Description
user_group	String	IAM user group.
user_list	Array of strings	IAM user.

Table 6-24 Filter

Parameter	Type	Description
condition	String	Relationship between conditions. <ul style="list-style-type: none">• AND (default value) indicates that a rule takes effect after all filtering criteria are met.• OR indicates that a rule takes effect when one of the filtering criteria is met. Enumerated values: <ul style="list-style-type: none">• AND (default value)• OR
is_support_filter	Boolean	Whether to enable the advanced filter.

Parameter	Type	Description
rule	Array of strings	Advanced filter criteria rule. Example: key != value . The format is <i>field rule value</i> . - Field options: api_version , code , trace_rating , trace_type , resource_id , and resource_name . - Rule: != or =. - Value: api_version : ^(a-zA-Z0-9_-){1,64}\$; code : 1-256 characters; trace_rating enumeration: normal , warning , incident ; trace_type enumeration: ConsoleAction , ApiCall , SystemAction ; resource_id : 1-350 characters; resource_name : 1-256 characters.

Status code: 400**Table 6-25** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-26** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-27** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404

Table 6-28 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-29** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-30** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Requests

Modify a key event notification.

```
PUT https://[endpoint]/v3/[project_id]/notifications

{
    "notification_id": "6d4a09bb-aa8e-40db-9e87-0d5e203823a8",
    "notification_name": "keyOperate_info_cfwy",
    "operation_type": "customized",
    "operations": [ {
        "service_type": "CTS",
        "resource_type": "tracker",
        "trace_names": [ "createTracker", "deleteTracker" ]
    }, {
        "service_type": "CTS",
        "resource_type": "notification",
        "trace_names": [ "deleteNotification", "updateNotification" ]
    }, {
        "service_type": "AOM",
        "resource_type": "pe",
        "trace_names": [ "deletePolicyGroup", "updatePolicyGroup", "createPolicyGroup" ]
    }],
    "notify_user_list": [ {
        "user_group": "admin",
        "user_list": [ "test", "test1" ]
    }]
}
```

```
        "user_group" : "CTS view",
        "user_list" : [ "test2", "test3" ]
    },
    "status" : "enabled",
    "topic_id" : "urn:smn:{regionid}:24edf66e79d04187acb99a463e610764:foo"
}
```

Example Responses

Status code: 200

The notification is modified.

```
{
    "notification_id" : "6d4a09bb-aa8e-40db-9e87-0d5e203823a8",
    "notification_name" : "keyOperate_info_cfwy",
    "operation_type" : "customized",
    "operations" : [ {
        "service_type" : "CTS",
        "resource_type" : "tracker",
        "trace_names" : [ "createTracker", "deleteTracker" ]
    }, {
        "service_type" : "CTS",
        "resource_type" : "notification",
        "trace_names" : [ "deleteNotification", "updateNotification" ]
    }, {
        "service_type" : "AOM",
        "resource_type" : "pe",
        "trace_names" : [ "deletePolicyGroup", "updatePolicyGroup", "createPolicyGroup" ]
    }],
    "notify_user_list" : [ {
        "user_group" : "admin",
        "user_list" : [ "test", "test1" ]
    }, {
        "user_group" : "CTS view",
        "user_list" : [ "test2", "test3" ]
    }],
    "status" : "enabled",
    "project_id" : "24edf66e79d04187acb99a463e610764",
    "notification_type" : "smn",
    "create_time" : 1634001495876,
    "topic_id" : "urn:smn:{regionid}:24edf66e79d04187acb99a463e610764:foo"
}
```

Status Code

Status code	Description
200	The notification is modified.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The server failed to find the requested resource or some key event notifications failed to be deleted.
500	The server has received the request but encountered an internal error, or the tracker deletion failed.

Status code	Description
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.1.3 Deleting a Key Event Notification

Function

This API is used to delete a key event notification.

URI

DELETE /v3/{project_id}/notifications

Table 6-31 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see "Appendix" > "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .

Table 6-32 Query parameters

Parameter	Mandatory	Type	Description
notification_id	Yes	String	Notification ID. To batch delete notifications, enter multiple notification IDs separated by commas (,), for example, notification_id="xxx1,ccc2" .

Request Parameters

None

Response Parameters

Status code: 400

Table 6-33 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-34** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-35** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404**Table 6-36** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-37** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-38** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Requests

None

Example Responses

None

Status Code

Status Code	Description
204	The deletion is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The server failed to find the requested resource or some key event notifications failed to be deleted.
500	The server has received the request but encountered an internal error, or the tracker deletion failed.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error CodesFor details, see [Error Codes](#).

6.1.4 Querying a Key Event Notification

Function

This API is used to query a key event notification.

URI

GET /v3/{project_id}/notifications/{notification_type}

Table 6-39 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see "Appendix" > "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
notification_type	Yes	String	Notification type. - smn : Simple Message Notification (SMN). - fun : FunctionGraph. Enumerated values: <ul style="list-style-type: none">• smn• fun

Table 6-40 Query parameters

Parameter	Mandatory	Type	Description
notification_name	No	String	Notification name. If this parameter is not specified, all key event notifications configured in the current tenant account are returned.

Request Parameters

None

Response Parameters

Status code: 200

Table 6-41 Response body parameters

Parameter	Type	Description
notifications	Array of Notifications ResponseBody objects	Notification list.

Table 6-42 NotificationsResponseBody

Parameter	Type	Description
notification_name	String	Notification name.
operation_type	String	Operation type. Possible options include complete and customized . If you choose complete , notifications will be sent when any supported operation occurs on any of the connected cloud services. If you choose customized , notifications will be sent when operations defined in operations occur. Enumerated values: <ul style="list-style-type: none">• customized• complete
operations	Array of Operations objects	Operation list.
notify_user_list	Array of NotificationUsers objects	List of users whose operations will trigger notifications. Currently, up to 50 users in 10 user groups can be configured.
status	String	Notification status. Possible options include enabled and disabled . Enumerated values: <ul style="list-style-type: none">• enabled• disabled
topic_id	String	Topic URN or function URN. To obtain the topic_urn , call the SMN API for querying topics. Example URN: urn:smn:regionId:f96188c7ccaf4ffba0c9aa149ab2bd57:test_topic_v2 To obtain the function URN, call the FunctionGraph API for querying functions. Example URN: urn:fss:xxxxxxxxx:7aad83af3e8d42e99ac194e8419e2c9b:function:default:test
notification_id	String	Unique notification ID.
notification_type	String	Notification type identified based on topic_id . Possible options include SMN (smn) and FunctionGraph (fun). Enumerated values: <ul style="list-style-type: none">• smn• fun
project_id	String	Project ID.

Parameter	Type	Description
create_time	Long	Timestamp when a notification was created.
filter	Filter object	Advanced filter of key event notifications.

Table 6-43 Operations

Parameter	Type	Description
service_type	String	Cloud service. The value must be the acronym of a cloud service that has been connected with CTS. It is a word composed of uppercase letters. For cloud services that can be connected with CTS, see section "Supported Services and Operations" in <i>Cloud Trace Service User Guide</i> .
resource_type	String	Resource type.
trace_names	Array of strings	Trace name.

Table 6-44 NotificationUsers

Parameter	Type	Description
user_group	String	IAM user group.
user_list	Array of strings	IAM user.

Table 6-45 Filter

Parameter	Type	Description
condition	String	Relationship between conditions. <ul style="list-style-type: none">• AND (default value) indicates that a rule takes effect after all filtering criteria are met.• OR indicates that a rule takes effect when one of the filtering criteria is met. Enumerated values: <ul style="list-style-type: none">• AND (default value)• OR
is_support_filter	Boolean	Whether to enable the advanced filter.

Parameter	Type	Description
rule	Array of strings	Advanced filter criteria rule. Example: key != value . The format is <i>field rule value</i> . - Field options: api_version , code , trace_rating , trace_type , resource_id , and resource_name . - Rule: != or =. - Value: api_version : ^(a-zA-Z0-9_-){1,64}\$; code : 1-256 characters; trace_rating enumeration: normal , warning , incident ; trace_type enumeration: ConsoleAction , ApiCall , SystemAction ; resource_id : 1-350 characters; resource_name : 1-256 characters.

Status code: 400**Table 6-46** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-47** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-48** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404

Table 6-49 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500

Table 6-50 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503

Table 6-51 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Requests

None

Example Responses

Status code: 200

The query is successful.

```
{  
    "notifications": [ {  
        "create_time": 1633933167385,  
        "notify_user_list": [ {  
            "user_group": "admin",  
            "user_list": [ "test1", "test2" ]  
        }, {  
            "user_group": "CTS view",  
            "user_list": [ "test3", "test4" ]  
        } ],  
        "notification_id": "0b98e1c2-2fd6-4e33-a355-f9e12eaab88a",  
        "notification_name": "test2",  
        "notification_type": "smn",  
        "operation_type": "customized",  
        "operations": [ {  
            "resource_type": "tracker",  
            "start_time": 1633933167385  
        } ]  
    } ]  
}
```

```
        "service_type" : "CTS",
        "trace_names" : [ "createTracker" ]
    }, {
        "resource_type" : "notification",
        "service_type" : "CTS",
        "trace_names" : [ "deleteNotification", "updateNotification" ]
    }, {
        "resource_type" : "pe",
        "service_type" : "AOM",
        "trace_names" : [ "createPolicyGroup", "updatePolicyGroup", "deletePolicyGroup" ]
    },
    "project_id" : "24edf66e79d04187acb99a463e610764",
    "status" : "enabled",
    "topic_id" : "urn:smn:{regionid}:24edf66e79d04187acb99a463e610764:test"
}, {
    "create_time" : 1633924057706,
    "notify_user_list" : [
        {
            "user_group" : "admin",
            "user_list" : [ "test1", "test2" ]
        },
        {
            "user_group" : "CTS view",
            "user_list" : [ "test3", "test4" ]
        }
    ],
    "notification_id" : "6d4a09bb-aa8e-40db-9e87-0d5e203823a8",
    "notification_name" : "test1",
    "notification_type" : "smn",
    "operation_type" : "complete",
    "operations" : [ ],
    "project_id" : "24edf66e79d04187acb99a463e610764",
    "status" : "disabled"
}
]
```

Status Code

Status Code	Description
200	The query is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The server failed to find the requested resource or some key event notifications failed to be deleted.
500	The server has received the request but encountered an internal error, or the tracker deletion failed.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.2 Trace Management

6.2.1 Querying a Trace List

Function

This API is used to query records of operations on resources in the last seven days.

URI

GET /v3/{project_id}/traces

Table 6-52 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .

Table 6-53 Query parameters

Parameter	Mandatory	Type	Description
trace_type	Yes	String	Trace type. The value can be system (management trace) or data (data trace). The default value is system . Enumerated values: <ul style="list-style-type: none">• system• data
limit	No	Integer	Number of traces to query. The default value is 10 and the maximum value is 200 .
from	No	Long	UTC millisecond timestamp of the query start time. The value contains 13 digits and the default value is the timestamp of the last hour. Traces generated after the specified timestamp will be queried. The parameters from and to should be used together.

Parameter	Mandatory	Type	Description
next	No	String	This parameter is used to query traces generated earlier than its specified value. The value can be that of marker in the response. next can be used with from and to . Traces generated in the overlap of the two time ranges specified respectively by next and by from and to will be returned.
to	No	Long	UTC millisecond timestamp of the query end time. The value contains 13 digits and the default value is the timestamp of the current time. Traces generated before the specified timestamp will be queried. The parameters to and from should be used together.
tracker_name	No	String	When trace_type is set to system , the default value system is used. When trace_type is set to data , set this parameter to the name of a data tracker to query the traces recorded by this tracker.
service_type	No	String	Type of a cloud service whose traces are to be queried. The value must be the acronym of a cloud service that has been connected with CTS. It is a word composed of uppercase letters. This parameter is valid only when trace_type is set to system . For cloud services that can be connected with CTS, see section "Supported Services and Operations" in <i>Cloud Trace Service User Guide</i> .
user	No	String	Name of the user whose traces are to be queried. This parameter is valid only when trace_type is set to system .

Parameter	Mandatory	Type	Description
resource_id	No	String	ID of a cloud resource whose traces are to be queried. This parameter is valid only when trace_type is set to system .
resource_name	No	String	Name of a resource whose traces are to be queried. This parameter is valid only when trace_type is set to system . The value can contain uppercase letters.
resource_type	No	String	Type of a resource whose traces are to be queried. This parameter is valid only when trace_type is set to system .
trace_id	No	String	Trace ID. If this parameter is specified, other query criteria will not take effect. This parameter is valid only when trace_type is set to system .
trace_name	No	String	Trace name. This parameter is valid only when trace_type is set to system . The value can contain uppercase letters.
trace_rating	No	String	Trace status. The value can be normal , warning , or incident . This parameter is valid only when trace_type is set to system . Enumerated values: <ul style="list-style-type: none">• normal• warning• incident

Request Parameters

None

Response Parameters

Status code: 200

Table 6-54 Response body parameters

Parameter	Type	Description
traces	Array of Traces objects	List of returned traces.
meta_data	MetaData object	Number of returned traces and the marker.

Table 6-55 Traces

Parameter	Type	Description
resource_id	String	ID of a cloud resource on which the recorded operation was performed.
trace_name	String	Trace name. The value can contain 1 to 64 characters, including letters, digits, hyphens (-), underscores (_), and periods (.). It must start with a letter.
trace_rating	String	Trace status. The value can be normal , warning , or incident . Enumerated values: <ul style="list-style-type: none">• normal• warning• incident
trace_type	String	Trace source. For management traces, the value can be ApiCall , ConsoleAction , or SystemAction . For data traces, the value can be ObsSDK and ObsAPI .
request	String	Request of an operation on resources.
response	String	Response to a user request, that is, the returned information for an operation on resources.
code	String	HTTP status code returned by the associated API.
api_version	String	Version of the API.
message	String	Remarks added by other cloud services to a trace.
record_time	Long	Timestamp when an operation was recorded by CTS.
trace_id	String	Trace ID. The value is the UUID generated by the system.

Parameter	Type	Description
time	Long	Timestamp when a trace was generated.
user	UserInfo object	Information of the user who performed the operation that triggered the trace.
service_type	String	Type of a cloud service whose traces are to be queried. The value must be the acronym of a cloud service that has been connected with CTS. It is a word composed of uppercase letters.
resource_type	String	Type of the resource on which the operation was performed.
source_ip	String	IP address of the tenant who performed the operation that triggered the trace.
resource_name	String	Name of a resource on which the recorded operation was performed.
request_id	String	ID of the recorded request.
location_info	String	Additional information required for fault locating after a request error.
endpoint	String	Endpoint in the details page URL of the cloud resource on which the recorded operation was performed.
resource_url	String	Details page URL (excluding the endpoint) of the cloud resource on which the recorded operation was performed.

Table 6-56 UserInfo

Parameter	Type	Description
id	String	Project ID. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
name	String	Account name.
domain	BaseUser object	Domain information of the user who performed the operation generating the trace.

Table 6-57 BaseUser

Parameter	Type	Description
id	String	Project ID. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
name	String	Account name.

Table 6-58 MetaData

Parameter	Type	Description
count	Integer	Number of returned traces.
marker	String	ID of the last trace in the returned trace list. The value of this parameter can be used as the next value. If the value of marker is null , all traces have been returned.

Status code: 400**Table 6-59** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-60** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403

Table 6-61 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404**Table 6-62** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-63** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-64** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Requests

- **Querying management traces**
GET https://{endpoint}/v3/{project_id}/traces?
limit=11&to=1479095278000&from=1478490478000&trace_name=createTracker&resource_type=tracke
r&service_type=CTS&trace_type=system
- **Querying data traces**
GET https://{endpoint}/v3/{project_id}/traces?
limit=11&to=1479095278000&from=1478490478000&trace_type=data

Example Responses

Status code: 200

The request is successful.

```
{  
    "meta_data": {  
        "count": 2,  
        "marker": "e001ccb8-bc09-11e6-b2cc-2640a43cc6e8"  
    },  
    "traces": [ {  
        "time": 1472148708232,  
        "user": {  
            "name": "xxx",  
            "domain": {  
                "name": "xxx",  
                "id": "ded649d814464428ba89d04d7955c93e"  
            }  
        },  
        "response": {  
            "code": "VPC.0514",  
            "message": "Update port fail."  
        },  
        "code": 200,  
        "service_type": "VPC",  
        "resource_type": "eip",  
        "resource_name": "192.144.163.1",  
        "resource_id": "d502809d-0d1d-41ce-9690-784282142ccc",  
        "trace_name": "deleteEip",  
        "trace_rating": "warning",  
        "trace_type": "ConsoleAction",  
        "api_version": "2.0",  
        "record_time": 1481066128032,  
        "trace_id": "e001ccb9-bc09-11e6-b00b-4b2a61338db6"  
    }, {  
        "time": 1472148708232,  
        "user": {  
            "name": "xxx",  
            "domain": {  
                "name": "xxx",  
                "id": "ded649d814464428ba89d04d7955c93e"  
            }  
        },  
        "response": {  
            "code": "VPC.0514",  
            "message": "Update port fail."  
        },  
        "code": 200,  
        "service_type": "VPC",  
        "resource_type": "eip",  
        "resource_name": "192.144.163.1",  
        "resource_id": "d502809d-0d1d-41ce-9690-784282142ccc",  
        "trace_name": "deleteEip",  
        "trace_rating": "warning",  
        "trace_type": "ConsoleAction",  
        "api_version": "2.0",  
        "record_time": 1481066128032,  
        "trace_id": "e001ccb8-bc09-11e6-b2cc-2640a43cc6e8"  
    } ]  
}
```

Status Code

Status Code	Description
200	The request is successful.
400	The query parameters are abnormal.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested trace does not exist.
500	Failed to complete the request because of an internal service error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.3 Tracker Management

6.3.1 Creating a Tracker

Function

When you enable CTS, a tracker is automatically created to associate with the cloud services you are using and record all operations on the services. A management tracker and multiple data trackers can be created by an account in a region. Traces are retained in the CTS console for seven days. To obtain more operation records, you can enable OBS and deliver operation records to OBS buckets in real time for long-term storage.

URI

POST /v3/{project_id}/tracker

Table 6-65 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see Obtaining an Account ID and Project ID .

Request Parameters

Table 6-66 Request body parameters

Parameter	Mandatory	Type	Description
tracker_type	Yes	String	<p>Tracker type. The value can be system (management tracker), or data (data tracker). Both data and management trackers have the following parameters: is_lts_enabled, obs_info and is_support_validate. Parameters for management trackers: is_support_trace_files_encryption and kms_id. Parameters for data trackers: tracker_name and data_bucket.</p> <p>Enumerated values:</p> <ul style="list-style-type: none">• system• data
tracker_name	Yes	String	Tracker name. When tracker_type is set to system , the default value system is used. When tracker_type is set to data , you need to set this parameter to a tracker name.
is_lts_enabled	No	Boolean	Whether to enable trace analysis.
is_organization_tracker	No	Boolean	Whether to apply the tracker configuration to the organization. This parameter is valid only for the management tracker. If the value is set to true , the audit logs of all members in the ORG organization in the current region will be transferred to the OBS bucket or LTS log stream configured for the management tracker. However, audit logs of other members cannot be viewed on the Trace List page.

Parameter	Mandatory	Type	Description
management_event_selector	No	ManagementEventSelector object	Cloud services whose traces will not be transferred. Currently, the value can only be set to KMS , indicating that the createDatakey traces of KMS will not be transferred.
obs_info	No	TrackerObsInfo object	Configurations of an OBS bucket to which traces will be transferred.
is_support_trace_files_encryption	No	Boolean	Whether trace files are encrypted during transfer to an OBS bucket. This parameter is valid when tracker_type is set to system . This parameter must be used with kms_id .
kms_id	No	String	Key ID used for transferring and encrypting trace files. This key ID is obtained from Key Management Service (KMS). This parameter is valid when tracker_type is set to system . This parameter is mandatory when is_support_trace_files_encryption is set to true .
is_support_validate	No	Boolean	Whether trace file verification is enabled for trace transfer.
data_bucket	No	DataBucket object	Information of an OBS bucket to be tracked. This parameter is valid when tracker_type is set to data .

Table 6-67 ManagementEventSelector

Parameter	Mandatory	Type	Description
exclude_service	No	Array of strings	Cloud services whose traces will not be transferred. Currently, the value can only be set to KMS , indicating that the createDatakey traces of KMS will not be transferred.

Table 6-68 TrackerObsInfo

Parameter	Mandatory	Type	Description
bucket_name	No	String	OBS bucket name. The value contains 3 to 63 characters and must start with a digit or lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.
file_prefix_name	No	String	Prefix of trace files that need to be stored in OBS buckets. The value can contain 0 to 64 characters, including letters, digits, hyphens (-), underscores (_), and periods (.).
is_obs_created	No	Boolean	Whether an OBS bucket is created. If the value is true , an OBS bucket will be created to store trace files. If the value is false , trace files will be stored in an existing OBS bucket.
bucket_lifecycle	No	Integer	Duration that traces are stored in the OBS bucket. This parameter is valid when tracker_type is set to data . Enumerated values: <ul style="list-style-type: none">• 30• 60• 90• 180• 1095
compress_type	No	String	Compression type. The value can be JSON (no compression) or GZIP (compression). The default format is GZIP. Enumerated values: <ul style="list-style-type: none">• gzip• json
is_sort_by_service	No	Boolean	Whether to sort the path by cloud service. If this option is enabled, the cloud service name is added to the transfer file path. The default value is true .

Table 6-69 DataBucket

Parameter	Mandatory	Type	Description
data_bucket_name	No	String	Name of the bucket tracked by a data tracker. <ul style="list-style-type: none">• This parameter is mandatory when the data tracker is enabled or disabled.• This parameter is unavailable for a management tracker.• Once a tracker is created, the bucket that it tracks cannot be changed.
data_event	No	Array of strings	Type of operations tracked by a data tracker. <ul style="list-style-type: none">• This parameter is mandatory when the data tracker is enabled or disabled.• This parameter is unavailable for a management tracker.• READ: read operations of an OBS object; WRITE: write operations of an OBS object. Enumerated values: <ul style="list-style-type: none">• WRITE• READ

Response Parameters

Status code: 201

Table 6-70 Response body parameters

Parameter	Type	Description
id	String	Unique tracker ID.
create_time	Long	Timestamp when the tracker was created.

Parameter	Type	Description
kms_id	String	Key ID used for transferring and encrypting trace files. This key ID is obtained from Key Management Service (KMS). This parameter is mandatory when tracker_type is set to system and is_support_trace_files_encryption is set to true .
is_support_validate	Boolean	Whether to enable trace file verification.
is_organization_tracker	Boolean	Whether to apply the tracker configuration to the organization. This parameter is valid only for the management tracker. If the value is set to true , the audit logs of all members in the ORG organization in the current region will be transferred to the OBS bucket or LTS log stream configured for the management tracker. However, audit logs of other members cannot be viewed on the Trace List page.
management_event_selector	Management EventSelector object	Cloud services whose traces will not be transferred. Currently, the value can only be set to KMS , indicating that the createDatakey traces of KMS will not be transferred.
lts	Lts object	Detail about trace analysis.
tracker_type	String	Tracker type. The value can be system (management tracker), or data (data tracker). Enumerated values: <ul style="list-style-type: none">• system• data
domain_id	String	Account ID. For details, see Obtaining an Account ID and Project ID .
project_id	String	Project ID.
tracker_name	String	Tracker name. The default value is system .
status	String	Tracker status. The value can be enabled , disabled , or error . If the value is set to error , the detail field is required for specifying the source of the error. Enumerated values: <ul style="list-style-type: none">• enabled• disabled

Parameter	Type	Description
detail	String	This parameter is returned only when the tracker status is error . It indicates the cause of the abnormal status, and its value can be bucketPolicyError , noBucket , or arrears .
is_support_trace_files_encryption	Boolean	Whether trace files are encrypted during transfer to an OBS bucket. This parameter must be used with kms_id . This function is supported only when the value of tracker_type is system .
obs_info	ObsInfo object	Information about the bucket to which traces are transferred.
data_bucket	DataBucketQuery object	Information about the bucket tracked by a data tracker. This parameter is valid when tracker_type is set to data .

Table 6-71 ManagementEventSelector

Parameter	Type	Description
exclude_service	Array of strings	Cloud services whose traces will not be transferred. Currently, the value can only be set to KMS , indicating that the createDatakey traces of KMS will not be transferred.

Table 6-72 Lts

Parameter	Type	Description
is_lts_enabled	Boolean	Specifies whether to enable the LTS search function.
log_group_name	String	Name of the log group that CTS creates in LTS.
log_topic_name	String	Specifies the name of the log topic that CTS creates in LTS.

Table 6-73 ObsInfo

Parameter	Type	Description
bucket_name	String	OBS bucket name. The value contains 3 to 63 characters and must start with a digit or lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.
file_prefix_name	String	Prefix of trace files that need to be stored in OBS buckets. The value can contain 0 to 64 characters, including letters, digits, hyphens (-), underscores (_), and periods (.).
is_obs_created	Boolean	Whether the OBS bucket is automatically created by the tracker.
is_authorized_bucket	Boolean	Whether CTS has been granted permissions to perform operations on the OBS bucket.
bucket_lifecycle	Long	Duration that traces are stored in the OBS bucket. This parameter is valid when tracker_type is set to data .
compress_type	String	Compression type. The value can be JSON (no compression) or GZIP (compression). The default format is GZIP. Enumerated values: <ul style="list-style-type: none">• gzip• json
is_sort_by_service	Boolean	Whether to sort the path by cloud service. If this option is enabled, the cloud service name is added to the transfer file path. The default value is true .

Table 6-74 DataBucketQuery

Parameter	Type	Description
data_bucket_name	String	OBS bucket name. The value contains 3 to 63 characters and must start with a digit or lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.
search_enabled	Boolean	Whether the logs of the tracked bucket can be searched.

Parameter	Type	Description
data_event	Array of strings	<p>Name of the bucket tracked by a data tracker.</p> <ul style="list-style-type: none">• This parameter is mandatory when the data tracker is enabled or disabled.• This parameter is unavailable for a management tracker.• Once a tracker is created, the bucket that it tracks cannot be changed.• READ OBS: read operations; WRITE OBS: write operations. <p>Enumerated values:</p> <ul style="list-style-type: none">• WRITE• READ

Status code: 400**Table 6-75** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-76** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-77** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404**Table 6-78** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-79** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-80** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

- Creating a management tracker
POST https://{endpoint}/v3/{project_id}/tracker

```
{  
    "tracker_type" : "system",  
    "tracker_name" : "system",  
    "obs_info" : {  
        "is_obs_created" : false,  
        "bucket_name" : "test-data-tracker",  
        "file_prefix_name" : "11"  
    },  
    "is_lts_enabled" : true,  
    "is_support_trace_files_encryption" : true,  
    "kms_id" : "13a4207c-7abe-4b68-8510-16b84c3b5504",  
    "is_support_validate" : true  
}
```

- Creating a data tracker

```
{  
    "tracker_type" : "data",  
    "tracker_name" : "data-tracker-name",  
    "obs_info" : {  
        "is_obs_created" : false,  
    }  
}
```

```
        "bucket_name" : "saveTraceBucket",
        "file_prefix_name" : "11",
        "bucket.lifecycle" : 30
    },
    "is_lts_enabled" : true,
    "data_bucket" : {
        "data_event" : [ "READ", "WRITE" ],
        "data_bucket_name" : "ctest0423"
    }
}
```

Example Response

Status code: 201

The request is successful.

```
{
    "id" : "2e6fa9b8-8c6e-456d-b5d3-77be972d220b",
    "create_time" : 1587958482923,
    "domain_id" : "axxxxxxxxx4d4fb4bxxxxxxxx791fbf",
    "is_support_trace_files_encryption" : true,
    "kms_id" : "13a4207c-7abe-4b68-8510-16b84c3b5504",
    "obs_info" : {
        "is_obs_created" : false,
        "bucket_name" : "test-bucket",
        "is_authorized_bucket" : false,
        "file_prefix_name" : "11",
        "bucket.lifecycle" : 30
    },
    "project_id" : "bb1xxxxxxxxxe4f498cbxxxxxxxx35634",
    "lts" : {
        "is_lts_enabled" : true,
        "log_group_name" : "CTS",
        "log_topic_name" : "system-trace"
    },
    "is_support_validate" : true,
    "tracker_name" : "system",
    "tracker_type" : "system",
    "status" : "enabled"
}
```

Status Code

Status Code	Description
201	The request is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested resource does not exist.
500	Failed to complete the request because of an internal service error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Code

For details, see [Error Codes](#).

6.3.2 Modifying a Tracker

Function

Configuration items of the tracker can be modified, including Trace Transfer to OBS, Key Event Notification, Encrypt Trace File, Retrieve Management Traces Using LTS, Verify Trace File, and parameters for enabling and disabling a tracker.

Modifying the tracker does not affect the existing operation records. After the modification is complete, the new rules are immediately applied to operation recording.

URI

PUT /v3/{project_id}/tracker

Table 6-81 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see Obtaining an Account ID and Project ID .

Request Parameters

Table 6-82 Request body parameters

Parameter	Mandatory	Type	Description
tracker_type	Yes	String	Tracker type. The value can be system (management tracker), or data (data tracker). Both data and management trackers have the following parameters: is_lts_enabled , obs_info and is_support_validate . Parameters for management trackers: is_support_trace_files_encryption and kms_id . Parameters for data trackers: tracker_name and data_bucket . Enumerated values: <ul style="list-style-type: none">• system• data
tracker_name	Yes	String	Tracker name. When tracker_type is set to system , the default value system is used. When tracker_type is set to data , you need to set this parameter to a tracker name.
status	No	String	Tracker status. The value can be enabled or disabled . If you change the value to disabled , the tracker stops recording traces. Enumerated values: <ul style="list-style-type: none">• enabled• disabled
is_lts_enabled	No	Boolean	Whether to enable trace analysis.

Parameter	Mandatory	Type	Description
is_organization_tracker	No	Boolean	Whether to apply the tracker configuration to the organization. This parameter is valid only for the management tracker. If the value is set to true , the audit logs of all members in the ORG organization in the current region will be transferred to the OBS bucket or LTS log stream configured for the management tracker. However, audit logs of other members cannot be viewed on the Trace List page.
management_event_selector	No	ManagementEventSelector object	Cloud services whose traces will not be transferred. Currently, the value can only be set to KMS , indicating that the createDatakey traces of KMS will not be transferred.
obs_info	No	TrackerObsInfo object	Configurations of an OBS bucket to which traces will be transferred.
is_support_trace_files_encryption	No	Boolean	Whether trace files are encrypted during transfer to an OBS bucket. This parameter is valid when tracker_type is set to system . This parameter must be used with kms_id .
kms_id	No	String	Key ID used for transferring and encrypting trace files. This key ID is obtained from Key Management Service (KMS). This parameter is valid when tracker_type is set to system . This parameter is mandatory when is_support_trace_files_encryption is set to true .
is_support_validate	No	Boolean	Whether trace file verification is enabled for trace transfer.

Parameter	Mandatory	Type	Description
data_bucket	No	DataBucket object	Information of an OBS bucket to be tracked. This parameter is valid when tracker_type is set to data .

Table 6-83 ManagementEventSelector

Parameter	Mandatory	Type	Description
exclude_service	No	Array of strings	Cloud services whose traces will not be transferred. Currently, the value can only be set to KMS , indicating that the <code>createDatakey</code> traces of KMS will not be transferred.

Table 6-84 TrackerObsInfo

Parameter	Mandatory	Type	Description
bucket_name	No	String	OBS bucket name. The value contains 3 to 63 characters and must start with a digit or lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.
file_prefix_name	No	String	Prefix of trace files that need to be stored in OBS buckets. The value can contain 0 to 64 characters, including letters, digits, hyphens (-), underscores (_), and periods (.).
is_obs_created	No	Boolean	Whether an OBS bucket is created. If the value is true , an OBS bucket will be created to store trace files. If the value is false , trace files will be stored in an existing OBS bucket.

Parameter	Mandatory	Type	Description
bucket_lifecycle	No	Integer	<p>Duration that traces are stored in the OBS bucket. This parameter is valid when tracker_type is set to data.</p> <p>Enumerated values:</p> <ul style="list-style-type: none">• 30• 60• 90• 180• 1095
compress_type	No	String	<p>Compression type. The value can be JSON (no compression) or GZIP (compression). The default format is GZIP.</p> <p>Enumerated values:</p> <ul style="list-style-type: none">• gzip• json
is_sort_by_service	No	Boolean	Whether to sort the path by cloud service. If this option is enabled, the cloud service name is added to the transfer file path. The default value is true .

Table 6-85 DataBucket

Parameter	Mandatory	Type	Description
data_bucket_name	No	String	<p>Name of the bucket tracked by a data tracker.</p> <ul style="list-style-type: none">• This parameter is mandatory when the data tracker is enabled or disabled.• This parameter is unavailable for a management tracker.• Once a tracker is created, the bucket that it tracks cannot be changed.

Parameter	Mandatory	Type	Description
data_event	No	Array of strings	<p>Type of operations tracked by a data tracker.</p> <ul style="list-style-type: none">• This parameter is mandatory when the data tracker is enabled or disabled.• This parameter is unavailable for a management tracker.• READ OBS: read operations; WRITE OBS: write operations. <p>Enumerated values:</p> <ul style="list-style-type: none">• WRITE• READ

Response Parameters

Status code: 400

Table 6-86 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401

Table 6-87 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403

Table 6-88 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404**Table 6-89** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-90** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-91** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

- Modifying a management tracker

```
PUT https://[endpoint]/v3/{project_id}/tracker

{
    "tracker_type" : "system",
    "tracker_name" : "system",
    "obs_info" : {
        "is_obs_created" : false,
        "bucket_name" : "test-data-tracker",
        "file_prefix_name" : "11"
    }
}
```

```
        },
        "is_lts_enabled" : false,
        "is_support_trace_files_encryption" : false,
        "kms_id" : "",
        "is_support_validate" : false,
        "status" : "enabled"
    }
• Modifying a data tracker
{
    "tracker_type" : "data",
    "tracker_name" : "data-tracker-name",
    "obs_info" : {
        "is_obs_created" : false,
        "bucket_name" : "",
        "file_prefix_name" : "",
        "bucket.lifecycle" : 60
    },
    "is_lts_enabled" : true,
    "data_bucket" : {
        "data_event" : [ "READ", "WRITE" ]
    }
}
```

Example Response

None

Status Codes

Status Code	Description
200	The request is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The server failed to find the requested resource.
500	Failed to complete the request because of an internal service error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Code

For details, see [Error Codes](#).

6.3.3 Querying a Tracker

Function

After CTS is enabled, you can view details about the tracker on the **Tracker** page. The details include the name of the tracker, name of the OBS bucket for storing traces, and prefix of the trace files stored in the OBS bucket.

URI

GET /v3/{project_id}/trackers

Table 6-92 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see Obtaining an Account ID and Project ID .

Table 6-93 Query parameters

Parameter	Mandatory	Type	Description
tracker_name	No	String	Tracker name. If this parameter is not specified, all trackers of a tenant will be queried.
tracker_type	No	String	Tracker type. The value can be system (management tracker), or data (data tracker). Enumerated values: <ul style="list-style-type: none">• system• data

Request Parameters

None

Response Parameters

Status code: 200

Table 6-94 Response body parameters

Parameter	Type	Description
trackers	Array of TrackerResponseBody objects	List of tracker information.

Table 6-95 TrackerResponseBody

Parameter	Type	Description
id	String	Unique tracker ID.
create_time	Long	Timestamp when the tracker was created.
kms_id	String	Key ID used for transferring and encrypting trace files. This key ID is obtained from Key Management Service (KMS). This parameter is mandatory when tracker_type is set to system and is_support_trace_files_encryption is set to true .
is_support_validate	Boolean	Whether to enable trace file verification.
lts	Lts object	Detail about trace analysis.
tracker_type	String	Tracker type. The value can be system (management tracker), or data (data tracker). Enumerated values: <ul style="list-style-type: none">• system• data
domain_id	String	Account ID. For details, see Obtaining an Account ID and Project ID .
project_id	String	Project ID.
tracker_name	String	Tracker name. The default value is system .
status	String	Tracker status. The value can be enabled , disabled , or error . If the value is set to error , the detail field is required for specifying the source of the error. Enumerated values: <ul style="list-style-type: none">• enabled• disabled
detail	String	This parameter is returned only when the tracker status is error . It indicates the cause of the abnormal status, and its value can be bucketPolicyError , noBucket , or arrears .
is_support_trace_files_encryption	Boolean	Whether trace files are encrypted during transfer to an OBS bucket. This parameter must be used with kms_id . This function is supported only when the value of tracker_type is system .
obs_info	ObsInfo object	Information about the bucket to which traces are transferred.

Parameter	Type	Description
data_bucket	DataBucketQuery object	Information about the bucket tracked by a data tracker. This parameter is valid when tracker_type is set to data .
group_id	String	LTS log group ID.
stream_id	String	LTS log stream ID.
is_organization_tracker	Boolean	Whether to apply the tracker configuration to the organization. This parameter is valid only for the management tracker. If the value is set to true , the audit logs of all members in the ORG organization in the current region will be transferred to the OBS bucket or LTS log stream configured for the management tracker. However, audit logs of other members cannot be viewed on the Trace List page.
management_event_selector	ManagementEventSelector object	Cloud services whose traces will not be transferred. Currently, the value can only be set to KMS , indicating that the createDatakey traces of KMS will not be transferred.

Table 6-96 Lts

Parameter	Type	Description
is_lts_enabled	Boolean	Specifies whether to enable the LTS search function.
log_group_name	String	Name of the log group that CTS creates in LTS.
log_topic_name	String	Specifies the name of the log topic that CTS creates in LTS.

Table 6-97 ObsInfo

Parameter	Type	Description
bucket_name	String	OBS bucket name. The value contains 3 to 63 characters and must start with a digit or lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.

Parameter	Type	Description
file_prefix_name	String	Prefix of trace files that need to be stored in OBS buckets. The value can contain 0 to 64 characters, including letters, digits, hyphens (-), underscores (_), and periods (.).
is_obs_created	Boolean	Whether the OBS bucket is automatically created by the tracker.
is_authorized_bucket	Boolean	Whether CTS has been granted permissions to perform operations on the OBS bucket.
bucket_lifecycle	Long	Duration that traces are stored in the OBS bucket. This parameter is valid when tracker_type is set to data .
compress_type	String	Compression type. The value can be JSON (no compression) or GZIP (compression). The default format is GZIP. Enumerated values: <ul style="list-style-type: none">• gzip• json
is_sort_by_service	Boolean	Whether to sort the path by cloud service. If this option is enabled, the cloud service name is added to the transfer file path. The default value is true .

Table 6-98 DataBucketQuery

Parameter	Type	Description
data_bucket_name	String	OBS bucket name. The value contains 3 to 63 characters and must start with a digit or lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.
search_enabled	Boolean	Whether the logs of the tracked bucket can be searched.

Parameter	Type	Description
data_event	Array of strings	<p>Name of the bucket tracked by a data tracker.</p> <ul style="list-style-type: none">• This parameter is mandatory when the data tracker is enabled or disabled.• This parameter is unavailable for a management tracker.• Once a tracker is created, the bucket that it tracks cannot be changed.• READ OBS: read operations; WRITE OBS: write operations. <p>Enumerated values:</p> <ul style="list-style-type: none">• WRITE• READ

Table 6-99 ManagementEventSelector

Parameter	Type	Description
exclude_service	Array of strings	Cloud services whose traces will not be transferred. Currently, the value can only be set to KMS , indicating that the createDatakey traces of KMS will not be transferred.

Status code: 400**Table 6-100** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-101** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403

Table 6-102 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-103** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-104** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

GET https://{endpoint}/v3/{project_id}/trackers?tracker_name=system

Example Response

Status code: 200

The request is successful.

```
{  
    "trackers": [ {  
        "is_support_trace_files_encryption": true,  
        "create_time": 1589886034121,  
        "stream_id": "4a1ef2b6-d79a-4dc6-90f0-48151cd5491b",  
        "kms_id": "7dbbbb3fa-93e4-4528-bc7b-9beb794b0229",  
        "group_id": "26fa12ac-75f7-42ed-8118-ab9f2263042f",  
        "is_support_validate": false,  
        "obs_info": {  
            "is_obs_created": false,  
            "bucket_name": "",  
            "is_authorized_bucket": false,  
            "file_prefix_name": "",  
            "bucket.lifecycle": 0  
        },  
        "lts": {  
            "is_lts_created": false,  
            "lts_id": "4a1ef2b6-d79a-4dc6-90f0-48151cd5491b",  
            "lts_type": "OBS",  
            "lts_status": "Normal",  
            "lts_create_time": 1589886034121  
        }  
    }]  
}
```

```
        "log_group_name" : "CTS",
        "is_lts_enabled" : true,
        "log_topic_name" : "system-trace"
    },
    "tracker_type" : "system",
    "domain_id" : "2306579dc99f4c8690b14b68e734fc9",
    "project_id" : "24edf66e79d04187acb99a463e610764",
    "tracker_name" : "system",
    "id" : "ebf8d1c3-762b-4ce3-b316-6b1aa32f8be3",
    "status" : "enabled"
}, {
    "domain_id" : "2306579dc99f4c8690b14b68e734fc9",
    "is_support_trace_files_encryption" : false,
    "obs_info" : {
        "is_obs_created" : false,
        "bucket_name" : "",
        "is_authorized_bucket" : false,
        "file_prefix_name" : "",
        "bucket.lifecycle" : 0
    },
    "create_time" : 1589276171198,
    "project_id" : "24edf66e79d04187acb99a463e610764",
    "data_bucket" : {
        "data_event" : [ "READ", "WRITE" ],
        "search_enabled" : false,
        "data_bucket_name" : "cstest0423"
    },
    "tracker_name" : "sdsa",
    "is_support_validate" : false,
    "lts" : {
        "log_group_name" : "CTS",
        "is_lts_enabled" : false,
        "log_topic_name" : "sdsa"
    },
    "id" : "c9a3961d-3aa0-4e60-8e63-dd4ce7f1a88a",
    "status" : "enabled",
    "tracker_type" : "data"
} ]
}
```

Status Code

Status Code	Description
200	The request is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
500	Failed to complete the request because of an internal service error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Code

For details, see [Error Codes](#).

6.3.4 Deleting a Tracker

Function

This API is used to delete trackers. Only data trackers can be deleted. Deleting a tracker has no impact on the operation records that have been generated. When you enable CTS again, you can still view those traces.

URI

DELETE /v3/{project_id}/trackers

Table 6-105 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .

Table 6-106 Query parameters

Parameter	Mandatory	Type	Description
tracker_name	No	String	Tracker name. If this parameter is not specified, all data trackers of the current tenant account will be deleted.
tracker_type	No	String	Tracker type. Only data trackers can be deleted. The default value is data . Enumerated values: <ul style="list-style-type: none">• data

Request Parameters

None

Response Parameters

Status code: 400

Table 6-107 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-108** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-109** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404**Table 6-110** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-111** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503

Table 6-112 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX.
error_msg	String	Error message.

Example Requests

```
DELETE https://{endpoint}/v3/{project_id}/trackers?tracker_name=data-tracker-name
```

Example Responses

None

Status Code

Status Code	Description
204	The deletion is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The server failed to find the requested resource or some trackers failed to be deleted.
500	The server has received the request but encountered an internal error, or the tracker deletion failed.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.4 Other APIs

6.4.1 Querying the Tracker Quota of a Tenant

Function

This API is used to query the tracker quota of a tenant.

URI

GET /v3/{project_id}/quotas

Table 6-113 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see Obtaining an Account ID and Project ID .

Request Parameters

None

Response Parameters

Status code: 200

Table 6-114 Response body parameter

Parameter	Type	Description
resources	Array of Quota objects	List of tracker information.

Table 6-115 Quota

Parameter	Type	Description
type	String	Quota resource type.
used	Long	Number of used resources.
quota	Long	Total number of resources.

Status code: 400

Table 6-116 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-117** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-118** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404**Table 6-119** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-120** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-121** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

GET https://{endpoint}/v3/{project_id}/quotas

Example Response**Status code: 200**

The request is successful.

```
{  
  "resources": [ {  
    "type": "data_tracker",  
    "used": 9,  
    "quota": 100  
  }, {  
    "type": "system_tracker",  
    "used": 1,  
    "quota": 1  
  } ]  
}
```

Status Code

Status Code	Description
200	The request is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested resource does not exist.
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error CodeFor details, see [Error Codes](#).

6.4.2 Querying All Operations on a Cloud Service

Function

This API is used to list all operations on a cloud service.

URI

GET /v3/{project_id}/operations

Table 6-122 Path parameter

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see Obtaining an Account ID and Project ID .

Table 6-123 Query parameters

Parameter	Mandatory	Type	Description
service_type	No	String	Type of the cloud service on which operations are performed.
resource_type	No	String	Type of the resource on which operations are performed. If this parameter is used, service_type is mandatory.

Request Parameters

None

Response Parameters

Status code: 200

Table 6-124 Response body parameter

Parameter	Type	Description
operations	Array of ListOperation objects	All operations on the cloud service.

Table 6-125 ListOperation

Parameter	Type	Description
service_type	String	Type of the cloud service on which operations are performed.
resource_type	String	Type of the resource on which operations are performed.
operation_list	Array of strings	Array of operation names.

Status code: 400**Table 6-126** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-127** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-128** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404

Table 6-129 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-130** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-131** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

GET https://{endpoint}/v3/{project_id}/operations

Example Response

Status code: 200

The request is successfully sent.

```
{  
  "operations": [  
    {  
      "service_type": "cts",  
      "resource_type": "tracker",  
      "operation_list": [ "updateTracker", "createTracker", "deleteTracker" ]  
    }, {  
      "service_type": "cts",  
      "resource_type": "notification",  
      "operation_list": [ "updateNotification", "createNotification", "deleteNotification" ]  
    } ]  
}
```

Status Codes

Status Code	Description
200	The request is successfully sent.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested resource does not exist.
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.4.3 Querying the Audit Log Operator List

Function

This API is used to query the audit log operator list.

URI

GET /v3/{project_id}/user-resources

Table 6-132 Path parameter

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see Obtaining an Account ID and Project ID .

Request Parameters

None

Response Parameters

Status code: 200

Table 6-133 Response body parameter

Parameter	Type	Description
users	Array of UserResource objects	List of users who have performed operations in the last 30 days.

Table 6-134 UserResource

Parameter	Type	Description
name	String	Username.

Status code: 400**Table 6-135** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-136** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-137** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404

Table 6-138 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500

Table 6-139 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503

Table 6-140 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

```
GET https://{endpoint}/v3/{project_id}/user-resource
```

Example Response

Status code: 200

The request is successfully sent.

```
{
  "users": [
    {
      "name": "user1"
    },
    {
      "name": "user2"
    }
  ]
}
```

Status Codes

Status Code	Description
200	The request is successfully sent.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested resource does not exist.
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.4.4 Checking Whether Data Can Be Transferred to the Configured OBS Bucket

Function

This API is used to check whether data can be transferred to the OBS bucket.

URI

POST /v3/{domain_id}/checkbucket

Table 6-141 Path parameter

Parameter	Mandatory	Type	Description
domain_id	Yes	String	Account ID. For details, see Obtaining an Account ID and Project ID .

Request Parameters

Table 6-142 Request body parameter

Parameter	Mandatory	Type	Description
buckets	No	Array of CheckBucket Request objects	List of OBS buckets to be checked.

Table 6-143 CheckBucketRequest

Parameter	Mandatory	Type	Description
bucket_name	Yes	String	OBS bucket name. The value contains 3 to 63 characters and must start with a digit or lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.
bucket_location	Yes	String	OBS bucket location.
kms_id	No	String	Key ID used for encrypting transferred trace files. This parameter is mandatory when is_support_trace_files_encryption is set to true .
is_support_trace_files_encryption	No	Boolean	Whether trace files are encrypted during transfer to an OBS bucket. This parameter must be used with kms_id .

Response Parameters

Status code: 200

Table 6-144 Response body parameter

Parameter	Type	Description
buckets	Array of Bucket objects	Response body for checking the OBS bucket status.

Table 6-145 Bucket

Parameter	Type	Description
bucket_name	String	OBS bucket name. The value contains 3 to 63 characters and must start with a digit or lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.
bucket_location	String	Bucket location.
kms_id	String	Key ID used for transferring and encrypting trace files. This parameter is mandatory when is_support_trace_files_encryption is set to true .
is_support_trace_files_encryption	Boolean	Whether trace files are encrypted during transfer to an OBS bucket. This parameter must be used with kms_id .
check_bucket_response	CheckBucketResponse object	Check result of the OBS bucket.

Table 6-146 CheckBucketResponse

Parameter	Type	Description
error_code	String	Error code.
error_message	String	Error message.
response_code	Integer	Returned HTTP status code.
success	Boolean	Whether the transfer is successful.

Status code: 400**Table 6-147** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401

Table 6-148 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-149** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404**Table 6-150** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-151** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-152** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

Example request body for checking the OBS bucket status:

```
GET https://{endpoint}/v3/{domain_id}/checkbucket

{
  "buckets" : [ {
    "bucket_location" : "cn-north-1",
    "bucket_name" : "bucket1",
    "is_support_trace_files_encryption" : false,
    "kms_id" : "1f26f8d8-65d4-436b-bea2-bd0ac1984f71"
  }, {
    "bucket_location" : "cn-north-2",
    "bucket_name" : "bucket2",
    "is_support_trace_files_encryption" : false,
    "kms_id" : "0c1b7d87-5186-411a-86ce-ed3b2ec848c9"
  } ]
}
```

Example Response

Status code: 200

The request is successfully sent.

```
{
  "buckets" : [ {
    "bucket_location" : "cn-north-1",
    "bucket_name" : "bucket1",
    "check_bucket_response" : {
      "response_code" : 200,
      "success" : true
    },
    "is_support_trace_files_encryption" : false,
    "kms_id" : "1f26f8d8-65d4-436b-bea2-bd0ac1984f71"
  }, {
    "bucket_location" : "cn-north-2",
    "bucket_name" : "bucket2",
    "check_bucket_response" : {
      "error_code" : "OBS.NoSuchBucket",
      "error_message" : "Error message:Request Error.OBS service Error Message.",
      "response_code" : 404,
      "success" : false
    },
    "is_support_trace_files_encryption" : false,
    "kms_id" : "0c1b7d87-5186-411a-86ce-ed3b2ec848c9"
  } ]
}
```

Status Codes

Status Code	Description
200	The request is successfully sent.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested resource does not exist.

Status Code	Description
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.4.5 Querying the Resources Involved in the Traces

Function

This API is used to query the resources involved in the traces.

URI

GET /v3/{domain_id}/resources

Table 6-153 Path parameter

Parameter	Mandatory	Type	Description
domain_id	Yes	String	Account ID. For details, see Obtaining an Account ID and Project ID .

Request Parameters

None

Response Parameters

Status code: 200

Table 6-154 Response body parameter

Parameter	Type	Description
resources	Array of TraceResource objects	Returned resource list.

Table 6-155 TraceResource

Parameter	Type	Description
service_type	String	Cloud service type. The value must be the acronym of a cloud service that has been connected with CTS. It is a word composed of uppercase letters.
resource	Array of strings	Resources corresponding to the cloud services.

Status code: 400**Table 6-156** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 401**Table 6-157** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-158** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404

Table 6-159 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-160** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-161** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

GET https://{endpoint}/v3/{domain_id}/resources

Example Response

Status code: 200

The request is successfully sent.

```
{  
  "resources" : [ {  
    "service_type" : "CTS",  
    "resource" : [ "trace", "notification", "tracker" ]  
  }, {  
    "service_type" : "AOM",  
    "resource" : [ "xxxx1", "xxxx2" ]  
  } ]  
}
```

Status Codes

Status Code	Description
200	The request is successfully sent.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested resource does not exist.
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.5 Tag Management

6.5.1 Adding CTS Resource Tags in Batches

Function

This API is used to add CTS resource tags in batches.

URI

POST /v3/{project_id}/{resource_type}/{resource_id}/tags/create

Table 6-162 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see Obtaining an Account ID and Project ID .
resource_id	Yes	String	Resource ID.

Parameter	Mandatory	Type	Description
resource_type	Yes	String	Resource type of CTS. Currently, only cts-tracker is supported. Value: <ul style="list-style-type: none">• cts-tracker

Request Parameters

Table 6-163 Request body parameter

Parameter	Mandatory	Type	Description
tags	No	Array of Tags objects	List of tags.

Table 6-164 Tags

Parameter	Mandatory	Type	Description
key	No	String	Tag key, which can contain a maximum of 128 Unicode characters. A tag value can contain letters, digits, spaces, and special characters (_.:/=+@). It cannot start or end with a space, or start with _sys_.
value	No	String	Tag value, which can contain a maximum of 255 Unicode characters. If value is specified, tags are deleted by key and value. If value is not specified, tags are deleted by key. A tag value can contain letters, digits, spaces, and special characters (_.:/=+@) but cannot start or end with a space.

Response Parameters

Status code: 401

Table 6-165 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403**Table 6-166** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404**Table 6-167** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500**Table 6-168** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503**Table 6-169** Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

Example of creating a tracker tag:

```
POST https://{{endpoint}}/v3/{{project_id}}/{{resource_type}}/{{resource_id}}/tags/create
```

```
{  
  "tags": [ {  
    "key": "111",  
    "value": "33"  
  } ]  
}
```

Example Response

None

Status Codes

Status Code	Description
200	The creation is successful.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested resource does not exist.
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

6.5.2 Deleting CTS Resource Tags in Batches

Function

This API is used to delete CTS resource tags in batches.

URI

```
DELETE /v3/{{project_id}}/{{resource_type}}/{{resource_id}}/tags/delete
```

Table 6-170 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see Obtaining an Account ID and Project ID .
resource_id	Yes	String	Resource ID.
resource_type	Yes	String	Resource type of CTS. Currently, only cts-tracker is supported. Value: <ul style="list-style-type: none">• cts-tracker

Request Parameters

Table 6-171 Request body parameter

Parameter	Mandatory	Type	Description
tags	No	Array of Tags objects	List of tags.

Table 6-172 Tags

Parameter	Mandatory	Type	Description
key	No	String	Tag key, which can contain a maximum of 128 Unicode characters. A tag value can contain letters, digits, spaces, and special characters (_.:/=+@). It cannot start or end with a space, or start with _sys_.
value	No	String	Tag value, which can contain a maximum of 255 Unicode characters. If value is specified, tags are deleted by key and value. If value is not specified, tags are deleted by key. A tag value can contain letters, digits, spaces, and special characters (_.:/=+@) but cannot start or end with a space.

Response Parameters

Status code: 401

Table 6-173 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 403

Table 6-174 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 404

Table 6-175 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 500

Table 6-176 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Status code: 503

Table 6-177 Response body parameters

Parameter	Type	Description
error_code	String	Error code. Format: CTS.XXX .
error_msg	String	Error message.

Example Request

Example of deleting a tracker tag:

```
DELETE https://[endpoint]/v3/[project_id]/[resource_type]/[resource_id]/tags/delete
{
  "tags": [ {
    "key": "111",
    "value": "33"
  }]
}
```

Example Response

None

Status Codes

Status Code	Description
204	The deletion is successful.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested resource does not exist.
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

For details, see [Error Codes](#).

7 Out-of-Date APIs

7.1 API Version Management

7.1.1 Querying All API Versions

Function

This API is used to query all API versions supported by CTS.

URI

GET /

Request Parameters

None

Response Parameters

Status code: 200

Table 7-1 Response body parameters

Parameter	Type	Description
version	Array of Version objects	Indicates the lists of all API versions.

Table 7-2 Version

Parameter	Type	Description
id	String	Identifies a version. An example version ID is v1.
links	Array of LinksBody objects	Indicates an API URL.
version	String	If microversions are supported, set this parameter to the maximum microversion supported. Otherwise, leave this parameter empty.
status	String	Indicates the version status. Possible values are CURRENT (widely used version), SUPPORTED (earlier version which is still supported), and DEPRECATED (deprecated version which may be deleted later). Enumeration values: <ul style="list-style-type: none">• CURRENT• SUPPORTED• DEPRECATED
updated	String	Indicates the Coordinated Universal time (UTC) time when the version was released. For example, the value is 2014-06-28T12:20:21Z for v1.
min_version	String	If microversions are supported, set this parameter to the minimum microversion supported. Otherwise, leave this parameter empty.

Table 7-3 LinksBody

Parameter	Type	Description
href	String	Indicates an address referenced by the current API version.
rel	String	Indicates the relationship between the current API version and the referenced address.

Example Requests

None

Example Responses

Status code: 200

The request is successful.

```
{  
  "version": [ {  
    "id": "v1.0",  
    "links": {  
      "href": "https://x.x.x.x/v1.0/",  
      "rel": "self"  
    },  
    "min_version": "",  
    "status": "CURRENT",  
    "updated": "2018-09-30T00:00:00Z",  
    "version": ""  
  }, {  
    "id": "v2.0",  
    "links": {  
      "href": "https://x.x.x.x/v2.0/",  
      "rel": "self"  
    },  
    "min_version": "",  
    "status": "SUPPORTED",  
    "updated": "2018-09-30T00:00:00Z",  
    "version": ""  
  } ]  
}
```

Status Codes

Status Code	Description
200	The request is successful.
404	The server failed to find the requested resource.
500	The server encountered an unexpected condition which prevented it from fulfilling the request.

Error Codes

See [Error Codes](#).

7.1.2 Querying a Specific API Version

Function

This API is used to query a specific API version.

URI

GET /{version}

Table 7-4 Path parameters

Parameter	Mandatory	Type	Description
version	Yes	String	Indicates the version.

Request Parameters

None

Response Parameters

Status code: 200

Table 7-5 Response body parameters

Parameter	Type	Description
version	Object	Indicates the information of the API version.

Table 7-6 Version

Parameter	Type	Description
id	String	Identifies a version. An example version ID is v1.
links	Array of LinksBody objects	Indicates an API URL.
version	String	If microversions are supported, set this parameter to the maximum microversion supported. Otherwise, leave this parameter empty.
status	String	Indicates the version status. Possible values are CURRENT (widely used version), SUPPORTED (earlier version which is still supported), and DEPRECATED (deprecated version which may be deleted later). Enumeration values: <ul style="list-style-type: none">• CURRENT• SUPPORTED• DEPRECATED
updated	String	Indicates the Coordinated Universal time (UTC) time when the version was released. For example, the value is 2014-06-28T12:20:21Z for v1.

Parameter	Type	Description
min_version	String	If microversions are supported, set this parameter to the minimum microversion supported. Otherwise, leave this parameter empty.

Table 7-7 LinksBody

Parameter	Type	Description
href	String	Indicates an address referenced by the current API version.
rel	String	Indicates the relationship between the current API version and the referenced address.

Example Requests

None

Example Responses

Status code: 200

The request is successful.

```
{  
    "version": {  
        "id": "v1.0",  
        "links": {  
            "href": "https://x.x.x.x/v1.0/",  
            "rel": "self"  
        },  
        "min_version": "",  
        "status": "CURRENT",  
        "updated": "2018-09-30T00:00:00Z",  
        "version": ""  
    }  
}
```

Status Codes

Status Code	Description
200	The request is successful.
404	The server failed to find the requested resource.
500	The server encountered an unexpected condition which prevented it from fulfilling the request.

Error Codes

See [Error Codes](#).

7.2 Trace Management

7.2.1 Querying Traces (v1.0)

Function

This API is used to query records of operations on resources in the last seven days.

URI

GET /v1.0/{project_id}/{tracker_name}/trace

Table 7-8 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Identifies a project. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
tracker_name	Yes	String	Indicates the tracker name. Currently, only one management tracker is available for one account and the tracker name is system .

Table 7-9 Query parameters

Parameter	Mandatory	Type	Description
service_type	No	String	Indicates the cloud service on which the recorded operation was performed. The value must be the abbreviation of a cloud service that has been interconnected with CTS. It is a word composed of uppercase letters. For cloud services that have been interconnected with CTS, see section "Supported Services and Operations" in the <i>Cloud Trace Service User Guide</i> .

Parameter	Mandatory	Type	Description
user	No	String	Indicates the name of a user whose traces are to be queried.
from	No	Long	Indicates the UTC millisecond timestamp of the start time of the query. The value contains 13 numbers and the default value is the timestamp of the last hour. Traces generated after the specified timestamp will be queried. The parameters from and to should be used together.
limit	No	Integer	Indicates the number of traces to query. The default value is 10 and the maximum value is 200 .
next	No	String	This parameter is used to query traces generated earlier than its specified value. The value can be that of marker in the response. next can be used with from and to . Traces generated in the overlap of the two time ranges specified respectively by next and by from and to will be returned.
resource_id	No	String	Identifies a cloud resource whose traces are to be queried.
resource_name	No	String	Indicates the name of the resource whose traces are to be queried. The value can contain uppercase letters.
resource_type	No	String	Indicates the type of the resource whose traces are to be queried.

Parameter	Mandatory	Type	Description
to	No	Long	Indicates the UTC millisecond timestamp of the end time of the query. The value contains 13 numbers and the default value is the timestamp of the current time. Traces generated before the specified timestamp will be queried. The parameters to and from should be used together.
trace_id	No	String	Identifies a trace. If this parameter is specified, other query criteria will not take effect.
trace_name	No	String	Indicates the trace name. The value can contain uppercase letters.
trace_rating	No	String	Indicates the trace status. The value can be normal , warning , or incident .

Request Parameters

None

Response Parameters

Status code: 200

Table 7-10 Response body parameters

Parameter	Type	Description
traces	Array of Traces objects	Indicates the list of returned traces.
meta_data	MetaData object	Indicates the number of returned traces and the marker.

Table 7-11 Traces

Parameter	Type	Description
resource_id	String	Identifies a cloud resource on which the recorded operation was performed.

Parameter	Type	Description
trace_name	String	Indicates the trace name. A trace name contains 1 to 64 characters and must start with a letter. Only letters, numbers, hyphens (-), underscores (_), and periods (.) are allowed.
trace_rating	String	Indicates the trace status. The value can be normal , warning , or incident . Enumeration values: <ul style="list-style-type: none">• normal• warning• incident
trace_type	String	Indicates the trace source. The value can be ApiCall , ConsoleAction , or SystemAction .
request	String	Indicates the request body of the recorded operation.
response	String	Indicates the response body of the recorded operation.
code	String	Indicates the returned HTTP status code of the recorded operation.
api_version	String	Indicates the version of the API called in the trace.
message	String	Indicates the remarks added by other cloud services to the trace.
record_time	Long	Indicates the timestamp when a trace was recorded by CTS.
trace_id	String	Identifies a trace. The value is the UUID generated by the system.
time	Long	Indicates the timestamp when a trace was generated.
user	UserInfo object	Indicates the information of the user who performed the recorded operation.
service_type	String	Indicates the cloud service on which the recorded operation was performed. The value must be the abbreviation of a cloud service that has been interconnected with CTS. It is a word composed of uppercase letters.
resource_type	String	Indicates the type of the resource on which the recorded operation was performed.

Parameter	Type	Description
source_ip	String	Indicates the IP address of the user who performed the operation that triggered the trace.
resource_name	String	Indicates the name of the resource on which the recorded operation was performed.
request_id	String	Identifies the request of the recorded operation.
location_info	String	Indicates the information required for fault locating after a request error occurred.
endpoint	String	Indicates the endpoint in the detail page URL of the cloud resource on which the recorded operation was performed.
resource_url	String	Indicates the detail page URL (excluding the endpoint) of the cloud resource on which the recorded operation was performed.

Table 7-12 UserInfo

Parameter	Type	Description
id	String	Identifies an account. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
name	String	Indicates the account name.
domain	BaseUser object	Indicates the domain information of the user who performed the operation that triggered the trace.

Table 7-13 BaseUser

Parameter	Type	Description
id	String	Identifies an account. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
name	String	Indicates the account name.

Table 7-14 MetaData

Parameter	Type	Description
count	Integer	Indicates the number of returned traces.
marker	String	Identifies the last trace returned. The value of this parameter can be used as the value of next . If the value of marker is null , all traces have been returned under the specified query criteria.

Example Requests

```
GET https://[endpoint]/v1.0/{project_id}/{tracker_name}/trace?  
limit=11&to=1479095278000&from=1478490478000&trace_name=createTracker&resource_type=tracker&service_type=CTS
```

Example Responses

Status code: 200

The request is successful.

```
{  
  "meta_data": {  
    "count": 2,  
    "marker": "e001ccb8-bc09-11e6-b2cc-2640a43cc6e8"  
  },  
  "traces": [ {  
    "time": 1472148708232,  
    "user": {  
      "name": "xxx",  
      "domain": {  
        "name": "xxx",  
        "id": "ded649d814464428ba89d04d7955c93e"  
      }  
    },  
    "response": {  
      "code": "VPC.0514",  
      "message": "Update port fail."  
    },  
    "code": 200,  
    "service_type": "VPC",  
    "resource_type": "eip",  
    "resource_name": "192.144.163.1",  
    "resource_id": "d502809d-0d1d-41ce-9690-784282142ccc",  
    "trace_name": "deleteEip",  
    "trace_rating": "warning",  
    "trace_type": "ConsoleAction",  
    "api_version": "2.0",  
    "record_time": 1481066128032,  
    "trace_id": "e001ccb9-bc09-11e6-b00b-4b2a61338db6"  
  }, {  
    "time": 1472148708232,  
    "user": {  
      "name": "xxx",  
      "domain": {  
        "name": "xxx",  
        "id": "ded649d814464428ba89d04d7955c93e"  
      }  
    },  
    "response": {  
  }
```

```
        "code" : "VPC.0514",
        "message" : "Update port fail."
    },
    "code" : 200,
    "service_type" : "VPC",
    "resource_type" : "eip",
    "resource_name" : "192.144.163.1",
    "resource_id" : "d502809d-0d1d-41ce-9690-784282142ccc",
    "trace_name" : "deleteEip",
    "trace_rating" : "warning",
    "trace_type" : "ConsoleAction",
    "api_version" : "2.0",
    "record_time" : 1481066128032,
    "trace_id" : "e001ccb8-bc09-11e6-b2cc-2640a43cc6e8"
} ]
}
```

Status Codes

Status Code	Description
200	The request is successful.
400	The query parameters are abnormal.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested trace does not exist.
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

7.2.2 Querying Traces (v2.0)

Function

This API is used to query records of operations on resources in the last seven days.

URI

GET /v2.0/{project_id}/{tracker_name}/trace

Table 7-15 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Identifies a project. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
tracker_name	Yes	String	Indicates the tracker name. Currently, only one management tracker is available for one account and the tracker name is system .

Table 7-16 Query parameters

Parameter	Mandatory	Type	Description
service_type	No	String	Indicates the cloud service on which the recorded operation was performed. The value must be the abbreviation of a cloud service that has been interconnected with CTS. It is a word composed of uppercase letters. For cloud services that have been interconnected with CTS, see section "Supported Services and Operations" in the <i>Cloud Trace Service User Guide</i> .
user	No	String	Indicates the name of a user whose traces are to be queried.
from	No	Long	Indicates the UTC millisecond timestamp of the start time of the query. The value contains 13 numbers and the default value is the timestamp of the last hour. Traces generated after the specified timestamp will be queried. The parameters from and to should be used together.
limit	No	Integer	Indicates the number of traces to query. The default value is 10 and the maximum value is 200 .

Parameter	Mandatory	Type	Description
next	No	String	This parameter is used to query traces generated earlier than its specified value. The value can be that of marker in the response. next can be used with from and to . Traces generated in the overlap of the two time ranges specified respectively by next and by from and to will be returned.
resource_id	No	String	Identifies a cloud resource whose traces are to be queried.
resource_name	No	String	Indicates the name of the resource whose traces are to be queried. The value can contain uppercase letters.
resource_type	No	String	Indicates the type of the resource whose traces are to be queried.
to	No	Long	Indicates the UTC millisecond timestamp of the end time of the query. The value contains 13 numbers and the default value is the timestamp of the current time. Traces generated before the specified timestamp will be queried. The parameters to and from should be used together.
trace_id	No	String	Identifies a trace. If this parameter is specified, other query criteria will not take effect.
trace_name	No	String	Indicates the trace name. The value can contain uppercase letters.
trace_rating	No	String	Indicates the trace status. The value can be normal , warning , or incident .

Request Parameters

None

Response Parameters

Status code: 200

Table 7-17 Response body parameters

Parameter	Type	Description
traces	Array of Traces objects	Indicates the list of returned traces.
meta_data	MetaData object	Indicates the number of returned traces and the marker.

Table 7-18 Traces

Parameter	Type	Description
resource_id	String	Identifies a cloud resource on which the recorded operation was performed.
trace_name	String	Indicates the trace name. A trace name contains 1 to 64 characters and must start with a letter. Only letters, numbers, hyphens (-), underscores (_), and periods (.) are allowed.
trace_rating	String	Indicates the trace status. The value can be normal , warning , or incident . Enumeration values: <ul style="list-style-type: none">• normal• warning• incident
trace_type	String	Indicates the trace source. The value can be ApiCall , ConsoleAction , or SystemAction .
request	String	Indicates the request body of the recorded operation.
response	String	Indicates the response body of the recorded operation.
code	String	Indicates the returned HTTP status code of the recorded operation.
api_version	String	Indicates the version of the API called in the trace.
message	String	Indicates the remarks added by other cloud services to the trace.
record_time	Long	Indicates the timestamp when a trace was recorded by CTS.

Parameter	Type	Description
trace_id	String	Identifies a trace. The value is the UUID generated by the system.
time	Long	Indicates the timestamp when a trace was generated.
user	UserInfo object	Indicates the information of the user who performed the recorded operation.
service_type	String	Indicates the cloud service on which the recorded operation was performed. The value must be the abbreviation of a cloud service that has been interconnected with CTS. It is a word composed of uppercase letters.
resource_type	String	Indicates the type of the resource on which the recorded operation was performed.
source_ip	String	Indicates the IP address of the user who performed the operation that triggered the trace.
resource_name	String	Indicates the name of the resource on which the recorded operation was performed.
request_id	String	Identifies the request of the recorded operation.
location_info	String	Indicates the information required for fault locating after a request error occurred.
endpoint	String	Indicates the endpoint in the detail page URL of the cloud resource on which the recorded operation was performed.
resource_url	String	Indicates the detail page URL (excluding the endpoint) of the cloud resource on which the recorded operation was performed.

Table 7-19 UserInfo

Parameter	Type	Description
id	String	Identifies an account. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
name	String	Indicates the account name.
domain	BaseUser object	Indicates the domain information of the user who performed the operation that triggered the trace.

Table 7-20 BaseUser

Parameter	Type	Description
id	String	Identifies an account. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
name	String	Indicates the account name.

Table 7-21 MetaData

Parameter	Type	Description
count	Integer	Indicates the number of returned traces.
marker	String	Identifies the last trace returned. The value of this parameter can be used as the value of next . If the value of marker is null , all traces have been returned under the specified query criteria.

Example Requests

```
GET https://{endpoint}/v2.0/{project_id}/{tracker_name}/trace?  
limit=11&to=1479095278000&from=1478490478000&trace_name=createTracker&resource_type=tracker&service_type=CTS
```

Example Responses

Status code: 200

The request is successful.

```
{  
  "meta_data": {  
    "count": 2,  
    "marker": "e001ccb8-bc09-11e6-b2cc-2640a43cc6e8"  
  },  
  "traces": [ {  
    "time": 1472148708232,  
    "user": {  
      "name": "xxx",  
      "domain": {  
        "name": "xxx",  
        "id": "ded649d814464428ba89d04d7955c93e"  
      }  
    },  
    "response": {  
      "code": "VPC.0514",  
      "message": "Update port fail."  
    },  
    "code": 200,  
    "service_type": "VPC",  
    "resource_type": "eip",  
    "resource_name": "192.144.163.1",  
    "resource_id": "d502809d-0d1d-41ce-9690-784282142ccc",  
    "trace_name": "deleteEip",  
    "trace_rating": "warning",  
  }]
```

```
"trace_type" : "ConsoleAction",
"api_version" : "2.0",
"record_time" : 1481066128032,
"trace_id" : "e001ccb9-bc09-11e6-b00b-4b2a61338db6"
}, {
  "time" : 1472148708232,
  "user" : {
    "name" : "xxx",
    "domain" : {
      "name" : "xxx",
      "id" : "ded649d814464428ba89d04d7955c93e"
    }
  },
  "response" : {
    "code" : "VPC.0514",
    "message" : "Update port fail."
  },
  "code" : 200,
  "service_type" : "VPC",
  "resource_type" : "eip",
  "resource_name" : "192.144.163.1",
  "resource_id" : "d502809d-0d1d-41ce-9690-784282142ccc",
  "trace_name" : "deleteEip",
  "trace_rating" : "warning",
  "trace_type" : "ConsoleAction",
  "api_version" : "2.0",
  "record_time" : 1481066128032,
  "trace_id" : "e001ccb8-bc09-11e6-b2cc-2640a43cc6e8"
} ]
}
```

Status Codes

Status Code	Description
200	The request is successful.
400	The query parameters are abnormal.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested trace does not exist.
500	The server has received the request but encountered an internal error.
503	The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

7.3 Tracker Management

7.3.1 Creating a Tracker

Function

When you enable CTS, a tracker is automatically created to associate with the cloud services you are using and record all operations on the services. Currently, only one management tracker can be created for a cloud account in a region. Operation records are retained for 7 days and you can check the records on the CTS console. To store records for a longer period, you can transfer records to an Object Storage Service (OBS) bucket in real time.

URI

POST /v1.0/{project_id}/tracker

Table 7-22 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Identifies a project. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .

Request Parameters

Table 7-23 Request body parameters

Parameter	Mandatory	Type	Description
bucket_name	Yes	String	Indicate the name of an OBS bucket. A name contains 3 to 63 characters and must start with a number or lowercase letter. Only lowercase letters, numbers, hyphens (-), and periods (.) are allowed.
file_prefix_name	No	String	Indicates a file name prefix to mark trace files that need to be stored in an OBS bucket. A prefix contains up to 64 characters. Only letters, numbers, hyphens (-), underscores (_), and periods (.) are allowed.

Parameter	Mandatory	Type	Description
is_obs_created	No	Boolean	Indicates whether to create an OBS bucket. The default value is false . When the value is true , you can create an OBS bucket to store trace files. When the value is false , you can select an existing OBS bucket to store trace files. A bucket name contains 3 to 63 characters and can consist of lowercase letters, numbers, a period (.) and a hyphen (-).
is_support_trace_files_encryption	No	Boolean	Indicates whether trace files are encrypted during transfer to an OBS bucket. This parameter must be used together with kms_id .
kms_id	No	String	Identifies a key used for trace file encryption. The key ID is obtained from Key Management Service (KMS). It is mandatory when is_support_trace_files_encryption is set to true .
lts	No	Lts object	Indicates detail about trace analysis.
log_file_validate	No	LogFileValidate object	Indicates detail about file verification.

Table 7-24 Lts

Parameter	Mandatory	Type	Description
is_lts_enabled	Yes	Boolean	Indicates whether traces are synchronized to LTS for trace analysis.
log_group_name	Yes	String	Indicates the name of the log group that CTS creates in LTS.
log_topic_name	Yes	String	Indicates the name of the log stream that CTS creates in LTS.

Table 7-25 LogFileValidate

Parameter	Mandatory	Type	Description
is_support_validate	Yes	Boolean	Indicates whether trace file verification is enabled.

Response Parameters

Status code: 201

Table 7-26 Response body parameters

Parameter	Type	Description
id	String	Uniquely identifies a tracker.
create_time	Long	Indicates the timestamp when the tracker was created.
domain_id	String	Identifies an account. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
project_id	String	Identifies a project.
is_support_trace_files_encryption	Boolean	Indicates whether trace files are encrypted during transfer to an OBS bucket. This parameter must be used together with kms_id .
kms_id	String	Identifies a key used for trace file encryption. The key ID is obtained from Key Management Service (KMS). It is mandatory when is_support_trace_files_encryption is set to true .
obs_info	ObsInfo object	Indicates information of an OBS bucket.
status	String	Indicates the status of a tracker. The value is enabled .
tracker_name	String	Indicates the tracker name.
tracker_type	String	Indicates the tracker type.
group_id	String	Identifies a log group.
stream_id	String	Identifies a log stream.
lts	Lts object	Indicates detail about trace analysis.
is_support_validate	Boolean	Indicates whether trace file verification is enabled. The verification is supported only when the value of tracker_type is system .

Table 7-27 ObsInfo

Parameter	Type	Description
bucket_name	String	Indicate the name of an OBS bucket. A name contains 3 to 63 characters and must start with a number or lowercase letter. Only lowercase letters, numbers, hyphens (-), and periods (.) are allowed.
file_prefix_name	String	Indicates a file name prefix to mark trace files that need to be stored in an OBS bucket. A prefix contains up to 64 characters. Only letters, numbers, hyphens (-), underscores (_), and periods (.) are allowed.
is_obs_created	Boolean	Indicates whether the OBS bucket is automatically created by the tracker.
is_authorized_bucket	Boolean	Indicates whether CTS has been granted permissions to perform operations on the OBS bucket.
bucket_lifecycle	String	Indicates the duration that traces are stored in the OBS bucket. This parameter is valid when tracker_type is set to data .

Table 7-28 Lts

Parameter	Type	Description
is_lts_enabled	Boolean	Indicates whether traces are synchronized to LTS for trace analysis.
log_group_name	String	Indicates the name of the log group that CTS creates in LTS.
log_topic_name	String	Indicates the name of the log stream that CTS creates in LTS.

Example Requests

```
POST https://[endpoint]/v1.0/{project_id}/tracker

{
  "bucket_name": "obs-f1da",
  "is_support_trace_files_encryption": true,
  "kms_id": "13a4207c-7abe-4b68-8510-16b84c3b5504",
  "is_obs_created": true,
  "file_prefix_name": "yO8Q",
  "lts": {
    "is_lts_enabled": true,
    "log_group_name": "CTS",
    "log_topic_name": "system-trace"
  },
  "log_file_validate": {
```

```
    "is_support_validate": true
  }
}
```

Example Responses

Status code: 201

The request is successful.

```
{
  "id": "2e6fa9b8-8c6e-456d-b5d3-77be972d220b",
  "create_time": 1587958482923,
  "domain_id": "axxxxxxxxx4d4fb4bxxxxxxxx791fbf",
  "is_support_trace_files_encryption": true,
  "kms_id": "13a4207c-7abe-4b68-8510-16b84c3b5504",
  "obs_info": {
    "bucket_name": "obs-f1da",
    "file_prefix_name": "yO8Q"
  },
  "project_id": "bb1xxxxxxxxe4f498cbxxxxxxxx35634",
  "lts": {
    "is_lts_enabled": true,
    "log_group_name": "CTS",
    "log_topic_name": "system-trace"
  },
  "log_file_validate": {
    "is_support_validate": true
  },
  "tracker_name": "system",
  "tracker_type": "system",
  "status": "enabled"
}
```

Status Codes

Status Code	Description
201	The request is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The requested OBS bucket does not exist.
500	The server has received the request but encountered an internal error.

Error Codes

See [Error Codes](#).

7.3.2 Querying a Tracker

Function

This API is used to query details about a tracker. The detailed information includes the name of the tracker, name of the OBS bucket for storing traces, and file name prefix of the traces files stored in the OBS bucket.

URI

GET /v1.0/{project_id}/tracker

Table 7-29 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Identifies a project. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .

Table 7-30 Query parameters

Parameter	Mandatory	Type	Description
tracker_name	Yes	String	Indicates the tracker name. If this parameter is not specified, all trackers in your account will be queried. Currently, only one management tracker is available for one account and the tracker name is system .

Request Parameters

None

Response Parameters

Status code: 200

Table 7-31 Response body parameters

Parameter	Type	Description
id	String	Uniquely identifies a tracker.

Parameter	Type	Description
create_time	Long	Indicates the timestamp when the tracker was created.
domain_id	String	Identifies an account. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
project_id	String	Identifies a project.
tracker_name	String	Indicates the tracker name. The value is system .
tracker_type	String	Indicates the tracker type.
bucket_name	String	Indicate the name of an OBS bucket. A name contains 3 to 63 characters and must start with a number or lowercase letter. Only lowercase letters, numbers, hyphens (-), and periods (.) are allowed.
file_prefix_name	String	Indicates a file name prefix to mark trace files that need to be stored in an OBS bucket.
status	String	Indicates the status of a tracker. The value can be enabled , disabled , or error . If the value is error , the detail field is required for specifying the source of the error. Enumeration values: <ul style="list-style-type: none">• enabled• disabled
detail	String	This parameter is returned only when the tracker status is error . It indicates the cause of the abnormal status, and its value can be bucketPolicyError , noBucket , or arrears .
is_obs_created	Boolean	Indicates whether to create an OBS bucket. When the value is true , you can create an OBS bucket to store trace files. When the value is false , you can select an existing OBS bucket to store trace files. A bucket name contains 3 to 63 characters and can consist of lowercase letters, numbers, a period (.) and a hyphen (-).
is_support_trace_files_encryption	Boolean	Indicates whether trace files are encrypted during transfer to an OBS bucket. This parameter must be used together with kms_id .
kms_id	String	Identifies a key used for trace file encryption. The key ID is obtained from Key Management Service (KMS). It is mandatory when is_support_trace_files_encryption is set to true .

Parameter	Type	Description
group_id	String	Identifies a log group.
stream_id	String	Identifies a log stream.
lts	Lts object	Indicates detail about trace analysis.
is_support_validate	Boolean	Indicates whether trace file verification is enabled.

Table 7-32 Lts

Parameter	Type	Description
is_lts_enabled	Boolean	Indicates whether traces are synchronized to LTS for trace analysis.
log_group_name	String	Indicates the name of the log group that CTS creates in LTS.
log_topic_name	String	Indicates the name of the log stream that CTS creates in LTS.

Example Requests

```
GET https://{endpoint}/v1.0/{project_id}/tracker?tracker_name=system
```

Example Responses

Status code: 200

The request is successful.

```
{
  "id": "2e6fa9b8-8c6e-456d-b5d3-77be972d220b",
  "create_time": 158795842923,
  "domain_id": "aexxxxxxx4d4fb4bexxxxxx791fbf",
  "is_support_trace_files_encryption": true,
  "kms_id": "13a4207c-7abe-4b68-8510-16b84c3b5504",
  "bucket_name": "obs-f1da",
  "file_prefix_name": "yO8Q",
  "project_id": "bb1xxxxxxxxe4f498cbxxxxxxx35634",
  "lts": {
    "is_lts_enabled": true,
    "log_group_name": "CTS",
    "log_topic_name": "system-trace"
  },
  "log_file_validate": {
    "is_support_validate": true
  },
  "tracker_name": "system",
  "tracker_type": "system",
  "status": "enabled"
}
```

Status Codes

Status Code	Description
200	The request is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
500	The server has received the request but encountered an internal error.

Error Codes

See [Error Codes](#).

7.3.3 Deleting a Tracker

Function

This API is used to delete a tracker. Deleting a tracker will not delete collected operation records. When you enable CTS again, you can still view those operation records.

URI

DELETE /v1.0/{project_id}/tracker

Table 7-33 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Identifies a project. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .

Table 7-34 Query parameters

Parameter	Mandatory	Type	Description
tracker_name	Yes	String	Indicates the tracker name. If this parameter is not specified, all trackers in your account will be deleted. Currently, only one management tracker is available for one account and the tracker name is system .

Request Parameters

None

Response Parameters

None

Example Requests

```
DELETE https://{endpoint}/v1.0/{project_id}/tracker?tracker_name=system
```

Example Responses

None

Status Codes

Status Code	Description
204	The deletion is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The server failed to find the requested resource or some trackers failed to be deleted.
500	The server has received the request but encountered an internal error, or some trackers failed to be deleted.

Error Codes

See [Error Codes](#).

7.3.4 Modifying a Tracker

Function

This API is used to modify configurations of a tracker, including trace transfer to OBS buckets, key event notifications, trace file encryption, management trace searching using Log Tank Service (LTS), trace file integrity check, and tracker enablement or disablement. Modifying tracker parameters does not affect the collected operation records. After the modification is complete, the new settings are immediately applied to operation recording.

URI

PUT /v1.0/{project_id}/tracker/{tracker_name}

Table 7-35 Path parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Identifies a project. For details, see section "Obtaining the Account ID and Project ID" in <i>Cloud Trace Service API Reference</i> .
tracker_name	Yes	String	Indicates the tracker name. Currently, only one management tracker is available for one account and the tracker name is system .

Request Parameters

Table 7-36 Request body parameters

Parameter	Mandatory	Type	Description
bucket_name	No	String	Indicate the name of an OBS bucket. A name contains 3 to 63 characters and must start with a number or lowercase letter. Only lowercase letters, numbers, hyphens (-), and periods (.) are allowed.

Parameter	Mandatory	Type	Description
file_prefix_name	No	String	Indicates a file name prefix to mark trace files that need to be stored in an OBS bucket. A prefix contains up to 64 characters. Only letters, numbers, hyphens (-), underscores (_), and periods (.) are allowed.
status	No	String	Indicates the status of a tracker. The value can be enabled or disabled . If you change the value to disabled , the tracker stops recording traces. ' ' and '_' can contain 0 to 64 characters. Enumeration values: <ul style="list-style-type: none">• enabled• disabled
is_obs_created	No	Boolean	Indicates whether to create an OBS bucket. When the value is true , you can create an OBS bucket to store trace files. When the value is false , you can select an existing OBS bucket to store trace files. A bucket name contains 3 to 63 characters and can consist of lowercase letters, numbers, a period (.) and a hyphen (-).
is_support_trace_files_encryption	No	Boolean	Indicates whether trace files are encrypted during transfer to an OBS bucket. This parameter must be used together with kms_id .
kms_id	No	String	Identifies a key used for trace file encryption. The key ID is obtained from Key Management Service (KMS). It is mandatory when is_support_trace_files_encryption is set to true .
lts	No	Lts object	Indicates detail about trace analysis.
log_file_validate	No	LogFileValidate object	Indicates detail about file verification.

Table 7-37 Lts

Parameter	Mandatory	Type	Description
is_lts_enabled	Yes	Boolean	Indicates whether traces are synchronized to LTS for trace analysis.
log_group_name	Yes	String	Indicates the name of the log group that CTS creates in LTS.
log_topic_name	Yes	String	Indicates the name of the log stream that CTS creates in LTS.

Table 7-38 LogFileValidate

Parameter	Mandatory	Type	Description
is_support_validate	Yes	Boolean	Indicates whether trace file verification is enabled.

Response Parameters

None

Example Requests

```
PUT https://{endpoint}/v1.0/{project_id}/tracker/system

{
  "bucket_name" : "my_created_bucket",
  "file_prefix_name" : "some_folder",
  "is_obs_created": true,
  "is_support_trace_files_encryption": true,
  "kms_id": "13a4207c-7abe-4b68-8510-16b84c3b5504",
  "lts": {
    "is_lts_enabled": true,
    "log_group_name": 'CTS',
    "log_topic_name": 'system-trace'
  },
  "log_file_validate": {
    "is_support_validate": true
  },
  "status" : "disabled"
}
```

Example Responses

None

Status Codes

Status Code	Description
200	The request is successful.
400	The server failed to process the request.
401	The request is rejected due to authentication failure.
403	The server understood the request but refused to authorize it.
404	The server failed to find the requested resource.
500	The server has received the request but encountered an internal error, or some trackers failed to be deleted.

Error Codes

See [Error Codes](#).

8 Permissions Policies and Supported Actions

This section describes fine-grained permissions management for your CTS. If your account does not require individual IAM users, you can skip this section.

By default, new IAM users do not have permissions assigned. You need to add a user to one or more groups, and attach permissions policies or roles to these groups. Users inherit permissions from the groups to which they are added and can perform specified operations on cloud services based on the permissions.

You can grant users permissions by using [roles](#) and [policies](#). Roles are a type of coarse-grained authorization mechanism that defines permissions related to user responsibilities. Policies define API-based permissions for operations on specific resources under certain conditions, allowing for more fine-grained, secure access control of cloud resources.

NOTE

Policy-based authorization is useful if you want to allow or deny the access to an API.

An account has all the permissions required to call all APIs, but IAM users must be assigned the required permissions. The permissions required for calling an API are determined by the actions supported by the API. Only users who have been granted permissions allowing the actions can call the API successfully. For example, if an IAM user wants to query traces using an API, the user must have been granted permissions that allow the `cts:trace:list` action.

Supported Actions

CTS provides system-defined policies that can be directly used in IAM. As the enterprise administrator, you can also create custom policies and use them to supplement system-defined policies, implementing more refined access control. Operations supported by policies are specific to APIs. The following are common concepts related to policies:

- Permissions: Defined by actions in a custom policy.
- APIs: REST APIs that can be called by a user who has been granted specific permissions.

- Actions: Specific operations that are allowed or denied.
- Related actions: Actions on which a specific action depends to take effect. When assigning permissions for the action to a user, you also need to assign permissions for the related actions.
- IAM or enterprise projects: Type of projects for which an action will take effect. Policies that contain actions for both IAM and enterprise projects can be used and take effect for both IAM and Enterprise Management. Policies that only contain actions for IAM projects can be used and only take effect for IAM.

 NOTE

The check mark (✓) and cross symbol (✗) indicate that an action takes effect or does not take effect for the corresponding type of projects.

Permission	API	Action	Related Action	IAM Project	Enterprise Project
Querying a trace list	GET /v3/{project_id}/traces	cts:trace:list	-	✓	✗
Querying a trace list	GET /v2.0/{project_id}/{tracker_name}/trace	cts:trace:list	-	✓	✗
Querying a trace list	GET /v1.0/{project_id}/{tracker_name}/trace	cts:trace:list	-	✓	✗
Querying a tracker	GET /v3/{project_id}/trackers	cts:tracker:list	obs:bucket:GetBucketAcl obs:bucket>ListAllIMyBuckets	✓	✗
Querying a tracker	GET /v1.0/{project_id}/tracker	cts:tracker:list	obs:bucket:GetBucketAcl obs:bucket>ListAllIMyBuckets	✓	✗

Permission	API	Action	Related Action	IAM Project	Enterprise Project
Creating a tracker	POST /v3/{project_id}/tracker	cts:tracker:create	lts:topics:list lts:topics:create lts:groups:list lts:groups:create obs:bucket:CreateBucket obs:bucket:HeadBucket obs:bucket:GetLifecycleConfiguration obs:bucket:PutLifecycleConfiguration obs:bucket:GetBucketAcl obs:bucket:PutBucketAcl cmkms:cmk:list	/	x
Creating a tracker	POST /v1.0/{project_id}/tracker	cts:tracker:create	lts:topics:list lts:topics:create lts:groups:list lts:groups:create obs:bucket:CreateBucket obs:bucket:HeadBucket obs:bucket:GetLifecycleConfiguration obs:bucket:PutLifecycleConfiguration obs:bucket:GetBucketAcl obs:bucket:PutBucketAcl cmkms:cmk:list	/	x

Permission	API	Action	Related Action	IAM Project	Enterprise Project
Modifying a tracker	PUT /v3/{project_id}/tracker	cts:tracker:update	lts:topics:list lts:topics:create lts:groups:list lts:groups:create obs:bucket:CreateBucket obs:bucket:HeadBucket obs:bucket:GetLifecycleConfiguration obs:bucket:PutLifecycleConfiguration obs:bucket:GetBucketAcl obs:bucket:PutBucketAcl kms:cmk:list	/	x
Modifying a tracker	PUT /v1.0/{project_id}/tracker/{tracker_name}	cts:tracker:update	lts:topics:list lts:topics:create lts:groups:list lts:groups:create obs:bucket:CreateBucket obs:bucket:HeadBucket obs:bucket:GetLifecycleConfiguration obs:bucket:PutLifecycleConfiguration obs:bucket:GetBucketAcl obs:bucket:PutBucketAcl kms:cmk:list	/	x
Deleting a tracker	DELETE /v3/{project_id}/trackers	cts:tracker:delete	-	/	x

Permission	API	Action	Related Action	IAM Project	Enterprise Project
Deleting a tracker	DELETE /v1.0/{project_id}/tracker	cts:tracker:delete	-	✓	x
Querying the tracker quota	GET /v3/{project_id}/quotas	cts:quota:get	-	✓	x

9 Appendix

9.1 Error Codes

If an error code starting with **APIGW** is returned after you call an API, rectify the fault by referring to [Error Codes](#).

Status Code	Error Codes	Error Message	Description	Solution
400	CTS.0001	The IAM or OBS service is abnormal.	The IAM or OBS service is abnormal.	Contact technical support.
400	CTS.0003	The message body is empty or invalid.	The message body is empty or invalid.	Verify the body content and format.
400	CTS.0200	The number of trackers has reached the upper limit.	The number of trackers has reached the upper limit.	Delete or modify unnecessary trackers.
400	CTS.0201	A management tracker has been created.	A management tracker has been created.	Check whether a management tracker is already available.
400	CTS.0202	The value of the tracker_type parameter is incorrect.	The value of tracker_type is invalid.	Change its value to system or data .

Status Code	Error Codes	Error Message	Description	Solution
400	CTS.0203	The value of tracker_name parameter is in an incorrect format.	The value of tracker_name is invalid.	Modify its value by referring to the parameter descriptions.
400	CTS.0204	The tracker_name parameter of a management tracker can only be set to system.	The tracker_name parameter of a management tracker can only be set to system .	Modify its value by referring to the parameter descriptions.
400	CTS.0205	The status parameter can only be set to enabled or disabled.	The status parameter can only be set to enabled or disabled .	Change its value to enabled or disabled .
400	CTS.0206	The data_bucket parameter cannot be included in the message body for a management tracker.	The data_bucket parameter cannot be included in the message body for a management tracker.	Delete the data_bucket parameter.
400	CTS.0207	The tracker_name parameter in the message body cannot be set to system for a data tracker.	The tracker_name parameter in the message body cannot be set to system for a data tracker.	Change the value of tracker_name to a value other than system .
400	CTS.0209	A type of operations on an OBS bucket can be tracked by only one tracker.	A type of operations on an OBS bucket can be tracked by only one tracker.	Change the tracker configurations.

Status Code	Error Codes	Error Message	Description	Solution
400	CTS.0210	The OBS bucket to track cannot be empty.	The OBS bucket to be tracked cannot be empty.	Select another bucket or ensure that the bucket is not empty.
400	CTS.0211	The tracked OBS bucket does not exist.	The OBS bucket to be tracked does not exist.	Check whether bucket_name is correctly set.
400	CTS.0212	The tracked OBS bucket cannot be modified.	The tracked OBS bucket cannot be modified.	Withdraw the changes on the OBS bucket.
400	CTS.0213	The OBS bucket used for trace transfer cannot be a tracked OBS bucket.	The OBS bucket used for trace transfer cannot be the tracked OBS bucket.	Select another OBS bucket for trace transfer.
400	CTS.0215	The OBS bucket already exists.	The OBS bucket already exists.	Change the value of bucket_name .
400	CTS.0216	Failed to create a bucket.	Failed to create bucket.	Contact technical support.
400	CTS.0217	Failed to set a lifecycle rule for the OBS bucket.	Failed to set a lifecycle rule for the OBS bucket.	Contact technical support.
400	CTS.0218	The value of file_prefix_name is in an incorrect format.	The value of file_prefix_name is invalid.	Modify its value by referring to the parameter descriptions.
400	CTS.0219	The operation type cannot be empty.	The operation type cannot be empty.	Select at least one operation type to track.
400	CTS.0220	KMS is not supported.	KMS is not supported.	Contact technical support.

Status Code	Error Codes	Error Message	Description	Solution
400	CTS.0221	The KMS ID is empty.	The KMS ID is empty.	Check whether the KMS ID is correct.
400	CTS.0222	KMS verification failed.	KMS verification failed.	Check whether the KMS ID is correct.
400	CTS.0225	Only WRITE and/or READ operations on the OBS bucket can be tracked.	The bucket operation must be write, read, or read/write.	Check whether the input parameters are correctly set.
400	CTS.0231	Invalid bucket name. A bucket name must be a string of 3 to 63 characters, including only lowercase letters, digits, hyphens (-), or periods (.). It must start with a digit or a lowercase letter.	Invalid bucket name. A bucket name must contain 3 to 63 characters and start with a digit or a lowercase letter. Only lowercase letters, digits, hyphens (-), and periods (.) are allowed.	Check whether the bucket name is correct.
400	CTS.0300	Query failed.	Query failed.	Try again later or contact technical support.
403	CTS.0002	Authentication failed or you do not have the permissions required.	Authentication failed or you do not have the permissions required.	Check your permissions.
403	CTS.0208	The tracker already exists.	The tracker already exists.	Check whether the tracker exists.
404	CTS.0100	API version query is not supported in CTS.	API version query is not supported in CTS.	Contact technical support.


Status Code	Error Codes	Error Message	Description	Solution
404	CTS.0214	The tracker does not exist.	The tracker does not exist.	Check whether the tracker has been deleted.
500	CTS.0004	Failed to write data.	Failed to write data.	Contact technical support.
500	CTS.0005	Failed to read data.	Failed to read data.	Contact technical support.

9.2 Obtaining an Account ID and Project ID

Obtaining Account and Project IDs from the Console

Account ID (**domain-id**) and project ID are required for some URLs when an API is called. You can perform the following operations to obtain these IDs:

1. Log in to the management console. Hover the mouse pointer over the username and choose **My Credentials** from the drop-down list.

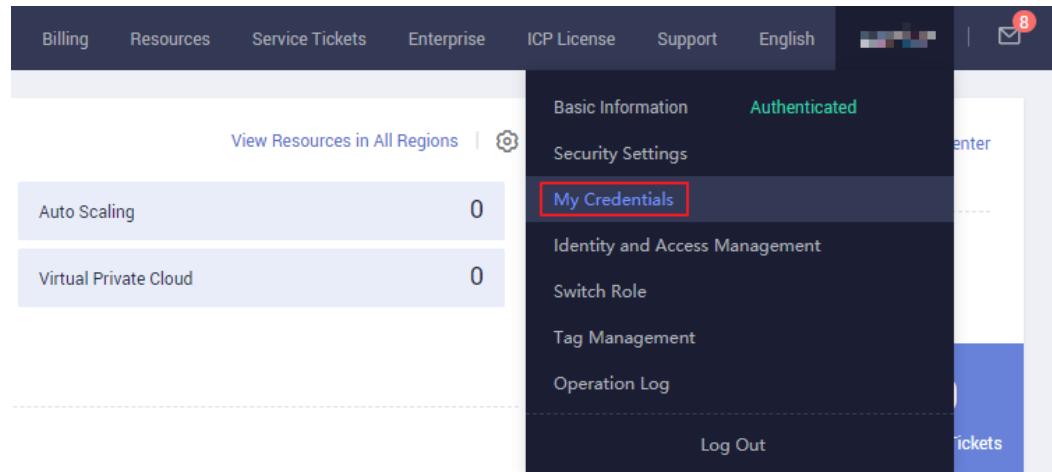

2. On the **My Credentials** page, view the account and project IDs.

The screenshot shows the Cloud Trace Service API Reference interface. At the top, it says "My Credentials". Below that is a user profile icon with a "Change" link. To the right, there are several account settings: Username, User ID, Account Name, Account ID (which is highlighted with a red box), Email Address, Mobile Number (with a note: "No mobile number has been bound to your account"), Password Strength (labeled "Strong"), Login Authentication (labeled "Disabled"), and Virtual MFA Device. There are "Change" and "Bind" buttons next to some of these fields. Below this is a "Projects" section with a table:

Region	Project Name	Project ID
AF-Johannesburg	af-south-1	[redacted]
AP-Hong Kong	ap-southeast-1	[redacted]

If there are multiple projects in one region, expand **Region** and view sub-project IDs from the **Project ID** column.

Obtaining Project IDs by Calling an API

The API for obtaining a project ID is **GET https://{{Endpoint}}/v3/projects**. {{Endpoint}} indicates the endpoint of IAM.

In the following example, **id** indicates a project ID.

```
{  
  "projects": [  
    {  
      "domain_id": "65382450e8f64ac0870cd180xxxx",  
      "is_domain": false,  
      "parent_id": "65382450e8f64ac0870cd180d1xxxx",  
      "name": "xx-region-1",  
      "description": "",  
      "links": {  
        "next": null,  
        "previous": null,  
        "self": "https://www.example.com/v3/projects/a4a5d4098fb4474fa22cd05f89xxxx"  
      },  
      "id": "a4a5d4098fb4474fa22cd0xxxx",  
      "enabled": true  
    }  
  ],  
  "links": {  
    "next": null,  
    "previous": null,  
    "self": "https://www.example.com/v3/projects"  
  }  
}
```

A Change History

Released On	Description
2023-03-31	<p>This issue is the twenty-first official release.</p> <p>Incorporated the following change:</p> <p>Added the description of compress_type and is_sort_by_service to "Creating a Tracker".</p>
2021-10-15	<p>This issue is the twentieth official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none">● Added the following V3 APIs:<ul style="list-style-type: none">- Creating a key event notification- Modifying a key event notification- Querying a key event notification- Deleting a key event notification
2020-08-18	<p>This issue is the nineteenth official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none">● Renamed section "API (V1) as "Out-of-Date APIs".● Added the following sections:<ul style="list-style-type: none">- API Calling- Endpoints- Constraints- Concepts- API Versions

Released On	Description
2020-06-30	<p>This issue is the eighteenth official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none"> ● Added the following V3 APIs: <ul style="list-style-type: none"> - Querying traces - Creating a tracker - Modifying a tracker - Querying a tracker - Deleting a tracker - Querying the tracker quota ● Added the following API calling examples: <ul style="list-style-type: none"> - Example 1: Creating a management tracker - Example 2: Querying a tracker list - Example 3: Querying management traces
2019-09-03	<p>This issue is the seventeenth official release.</p> <p>Incorporated the following changes:</p> <p>Added section "Querying Traces (v2.0)".</p>
2019-07-24	<p>This issue is the sixteenth official release.</p> <p>Incorporated the following changes:</p> <p>Modified section "Obtaining the Account ID and Project ID".</p>
2019-01-30	<p>This issue is the fifteenth official release.</p> <p>Incorporated the following changes:</p> <p>Modified section "Error Codes" and added error messages.</p>
2018-09-30	<p>This issue is the fourteenth official release.</p> <p>Incorporated the following changes:</p> <p>Added section "API Version Management". API versions can be queried.</p>
2018-01-30	<p>This issue is the twelfth official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none"> ● In sections "Creating a Tracker", "Modifying a Tracker", and "Querying a Tracker", added the description of the All option for the Operation Type field in key event notifications. ● Added error codes cts.0042 to cts.0045 and cts.0048.

Released On	Description
2017-11-25	<p>This issue is the eleventh official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none">• In sections "Creating a Tracker" and "Modifying a Tracker", added fields to support the verification of trace file integrity.• In sections "Creating a Tracker" and "Modifying a Tracker", added fields to support notifications of login operations in key event notifications.
2017-10-30	<p>This issue is the tenth official release.</p> <p>Incorporated the following changes:</p> <p>In sections "Creating a Tracker" and "Modifying a Tracker", added fields to support management trace analysis using LTS.</p>
2017-09-30	<p>This issue is the ninth official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none">• Added the description of the key event notification API.• In sections "Creating a Tracker", "Modifying a Tracker", and "Querying a Tracker", added descriptions of bucket creation and fields about KMS.• In section "Error Codes", added the OBS error information.
2017-08-30	<p>This issue is the eighth official release.</p> <p>Incorporated the following changes:</p> <p>In section "Querying Traces (v1.0)", added the descriptions of fields request_id, location_info, endpoint, and resource_url.</p>
2017-05-26	<p>This issue is the seventh official release.</p> <p>Incorporated the following changes:</p> <p>In section "Modifying a Tracker", modified the description of API response.</p>
2017-04-28	<p>This issue is the sixth official release.</p> <p>Incorporated the following changes:</p> <p>Added section "Querying Traces (v2.0)".</p>
2017-02-27	<p>This issue is the fifth official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none">• In section "Querying a Tracker", modified the description of return code 200.• In section "Querying Traces", added the description of the user field

Released On	Description
2017-02-08	<p>This issue is the fourth official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none"> • In section "Modifying a Tracker", added the description of return code 400. • In section "Querying a Tracker", added the description of return code 400. • In section "Deleting a Tracker", added the description of return code 400. • In section "Error Codes", modified the description of error code cts.0005 and cts.0007.
2017-02-03	<p>This issue is the third official release.</p> <p>Incorporated the following changes:</p> <ul style="list-style-type: none"> • In section "Creating a Tracker", added the description of return code 400. • In section "Modifying a Tracker", added the naming rule for bucket_name and added the description of tracker_name to the URL part. • In sections "Querying a Tracker" and "Deleting a Tracker", removed the description of tracker_name from the Request Parameters part and URI part. • In section "Error Codes", modified the description of the error code cts.0023. • In section "Querying Traces", modified descriptions of parameters trace_id, response, code, message, from, and to. Added descriptions of return codes 400 and 404.
2017-01-20	<p>This issue is the second official release.</p> <p>Incorporated the following changes:</p> <p>Added the servicetype field to the API used for querying traces.</p>
2016-12-30	This issue is the first official release.