

**CodeArts Deploy**

# **API Reference**

**Issue**            03  
**Date**             2024-06-28



**Copyright © Huawei Technologies Co., Ltd. 2024. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

## **Trademarks and Permissions**



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

## **Notice**

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

# Security Declaration

## Vulnerability

Huawei's regulations on product vulnerability management are subject to the *Vul. Response Process*. For details about this process, visit the following web page:

<https://www.huawei.com/en/psirt/vul-response-process>

For vulnerability information, enterprise customers can visit the following web page:

<https://securitybulletin.huawei.com/enterprise/en/security-advisory>

---

# Contents

---

<b>1 Before You Start.....</b>	<b>1</b>
1.1 Overview.....	1
1.2 Calling Method.....	1
1.3 Endpoints.....	1
1.4 Glossary.....	2
<b>2 API Overview.....</b>	<b>4</b>
<b>3 Calling APIs.....</b>	<b>7</b>
3.1 Making an API Request.....	7
3.2 Authentication.....	10
3.3 Response.....	11
<b>4 APIs.....</b>	<b>13</b>
4.1 Managing Host Clusters.....	13
4.1.1 Creating a Host Cluster.....	13
4.1.2 Querying a Host Cluster List.....	18
4.1.3 Deleting a Host Cluster.....	25
4.1.4 Querying a Host Cluster.....	29
4.1.5 Modifying a Host Cluster.....	34
4.1.6 Creating a Host Cluster (Recommended).....	39
4.1.7 Querying a Host Cluster List (Recommended).....	46
4.1.8 Querying a Host Cluster (Recommended).....	56
4.1.9 Editing a Host Cluster.....	63
4.1.10 Deleting a Host Cluster (Recommended).....	68
4.1.11 Querying Information About the Environment Associated with a Host Cluster.....	73
4.1.12 Querying the Basic Environment Information List of an Application.....	77
4.2 Managing Hosts.....	81
4.2.1 Creating a Host.....	81
4.2.2 Querying a Host List.....	87
4.2.3 Querying Host Details.....	94
4.2.4 Modifying a Host.....	100
4.2.5 Deleting a Host.....	106
4.2.6 Creating a Host (Recommended).....	110
4.2.7 Querying a Host List (Recommended).....	116

4.2.8 Querying Host Details (Recommended).....	122
4.2.9 Editing Host Information in a Host Cluster.....	128
4.2.10 Deleting a Host from a Host Cluster.....	134
4.2.11 Cloning Hosts to the Target Host Cluster in Batches.....	138
4.2.12 Deleting Hosts from a Host Cluster in Batches.....	143
4.3 Managing Applications.....	147
4.3.1 Obtaining an Application List.....	147
4.3.2 Creating an Application Using a Template.....	156
4.3.3 Deploying an Application.....	165
4.3.4 Obtaining the Details of an Application.....	172
4.3.5 Deleting an Application.....	179
4.3.6 Querying the Historical Deployment Records of a Specified Application in a Project by the Start Time and End Time.....	183
4.3.7 Obtaining an Application List (Recommended).....	191
4.3.8 Creating an Application (Recommended).....	203
4.3.9 Updating an Application.....	211
4.3.10 Obtaining Application Details (Recommended).....	216
4.3.11 Deleting an Application (Recommended).....	231
4.3.12 Querying the Execution Parameters of a Deployment Record.....	236
4.3.13 Cloning an Application.....	241
4.3.14 Deleting Applications from a Project in Batches.....	245
4.3.15 Checking Whether an Application with the Same Name Exists in a Project.....	249
4.3.16 Disabling and Enabling an Application.....	253
4.4 Managing Application Groups.....	257
4.4.1 Querying a Group List.....	257
4.4.2 Creating a Group.....	261
4.4.3 Modifying a Group.....	265
4.4.4 Deleting a Group.....	269
4.4.5 Moving a Group.....	271
4.4.6 Moving an Application to a Specified Group.....	275
4.5 Managing Application Permissions.....	279
4.5.1 Querying the Instance-Level/Project-Level Permission Matrix of an Application.....	279
4.5.2 Modifying Application Permissions in Batches.....	284
4.5.3 Configuring Authentication Levels for Applications in Batches.....	289
4.5.4 Checking whether the current user has the permission to create applications in a project.....	293
4.6 Measuring Deployment Record.....	297
4.6.1 Obtaining the Application Deployment Success Rate in a Specified Project.....	297
4.6.2 Obtaining the Application Deployment Success Rate in a Specified Application.....	303
4.7 Managing Environments.....	308
4.7.1 Creating an Environment for an Application.....	308
4.7.2 Querying an Environment List of an Application.....	313
4.7.3 Editing an Environment in an Application.....	319
4.7.4 Deleting an Environment from an Application.....	324

---

4.7.5 Querying Environment Details.....	328
4.7.6 Importing a Host to an Environment.....	333
4.7.7 Deleting a Host from an Environment.....	338
4.7.8 Querying a Host List in an Environment.....	342
4.8 Managing Host Cluster Permissions.....	347
4.8.1 Querying the Host Cluster Permission Matrix.....	348
4.8.2 Modifying the Host Cluster Permission Matrix.....	350
4.8.3 Checking Whether the Current User Has Permissions to Create a Host Cluster in a Project.....	353
4.9 Managing Environment Permissions.....	356
4.9.1 Querying Environment Permissions.....	356
4.9.2 Editing Environment Permission.....	359
<b>5 Application Examples.....</b>	<b>363</b>
5.1 Example 1: Querying a Host Cluster List.....	363
5.2 Example 2: Querying Host Cluster Details by ID.....	364
5.3 Example 3: Querying the Host List of a Specified Host Cluster.....	366
<b>6 Appendixes.....</b>	<b>368</b>
6.1 Status Codes.....	368
6.2 Error Codes.....	371
6.3 Obtaining a Project ID.....	387
6.4 Obtaining an Account ID.....	387

# 1 Before You Start

---

[Overview](#)

[Calling Method](#)

[Endpoints](#)

[Glossary](#)

## 1.1 Overview

Welcome to CodeArts Deploy. CodeArts Deploy provides visualized, one-click deployment. It supports deployment on VMs or containers by using Tomcat, Spring Boot, and other templates or by flexibly orchestrating atomic actions. It also supports parallel deployment and seamless integration with CodeArts Pipeline, providing standard deployment environments and implementing automatic deployment.

You can use the APIs described in this document to perform various operations, such as creating hosts and host clusters, and deploying applications. For details about all supported operations, see [API Overview](#).

If you plan to access CodeArts Deploy through an API, ensure that you are familiar with CodeArts Deploy concepts. For details, see [Service Overview](#).

## 1.2 Calling Method

CodeArts Deploy supports Representational State Transfer (REST) APIs, allowing you to call APIs using HTTPS. For details about API calling, see [Making an API Request](#).

## 1.3 Endpoints

An endpoint is the **request address** for calling an API. Endpoints vary depending on services and regions. You can query the endpoints of a service from "Regions and Endpoints".

**Table 1** lists the endpoints of CodeArts Deploy. Select a desired one based on the service requirements.

**Table 1-1** CodeArts Deploy endpoints

Region Name	Region	Endpoint	Protocol
AP-Singapore	ap-southeast-3	codearts-deploy.ap-southeast-3.myhuaweicloud.com	HTTPS
LA-Mexico City2	la-north-2	codearts-deploy.la-north-2.myhuaweicloud.com	HTTPS
LA-Sao Paulo1	sa-brazil-1	codearts-deploy.sa-brazil-1.myhuaweicloud.com	HTTPS


## 1.4 Glossary

- **Account**  
An account is created upon successful registration with Huawei Cloud. The account has full access permissions for all of its cloud services and resources. It can be used to reset user passwords and grant user permissions. The account is a payment entity and should not be used directly to perform routine management. For security purposes, create IAM users and grant them permissions for routine management.
- **User**  
A user is created using a domain to use cloud services. Each user has its own identity credentials (password and access keys).  
An IAM user can view the account ID and user ID on the [My Credentials](#) page of the console. The account name, username, and password will be required for API authentication.
- **Region**  
Regions are divided from the dimensions of geographical location and network latency. Public services, such as Elastic Cloud Server (ECS), Elastic Volume Service (EVS), Object Storage Service (OBS), Virtual Private Cloud (VPC), Elastic IP (EIP), and Image Management Service (IMS), are shared within the same region. Regions are classified into universal and dedicated regions. A universal region provides universal cloud services for common tenants. A dedicated region provides specific services for specific tenants.  
For details, see [Region and AZ](#).
- **Availability Zone (AZ)**  
An availability zone (AZ) contains one or more physical data centers. Each AZ has independent cooling, fire extinguishing, moisture-proof, and electricity facilities. Within an AZ, computing, network, storage, and other resources are logically divided into multiple clusters. AZs within a region are interconnected using high-speed optical fibers to support cross-AZ high-availability systems.



- **Project**  
Projects group and isolate resources (including compute, storage, network, and other resources) across physical regions. A default project is provided for each region, and subprojects can be created under each default project. Users can be granted permissions to access all resources in a specific project. For more refined access control, create subprojects under a project and create resources in the subprojects. Users can then be assigned permissions to access only specific resources in the subprojects.

**Figure 1-1** Project isolation model

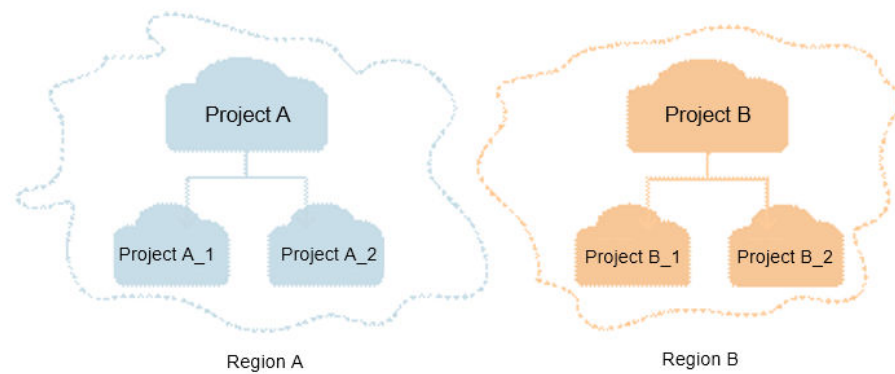

You can obtain the project ID on the [My Credentials](#) page.

# 2 API Overview

**Table 2-1** CodeArts Deploy API Overview

Type	API	Description
Host cluster management	Create a host cluster	This API is used to create a host cluster in a project.
	Create a host cluster (recommended)	This API is used to create a host cluster in a project.
	Query a host cluster list	This API is used to query a host cluster list based on conditions.
	Query a host cluster list (recommended)	This API is used to query a host cluster list based on conditions.
	Delete a host cluster	This API is used to delete a host cluster by ID.
	Query a host cluster	This API is used to query details about a host cluster by ID.
	Query a host cluster (recommended)	This API is used to query details about a host cluster by ID.
	Modify a host cluster	This API is used to modify host cluster information by ID.
Host management	Create a host	This API is used to create a host in a specified host cluster.
	Create a host (recommended)	This API is used to create a host in a specified host cluster.
	Query a host list	This API is used to query a host list in a specified host cluster by ID.
	Query a host list (recommended)	This API is used to query a host list in a specified host cluster by ID.
	Query host details	This API is used to query host details by host ID.

Type	API	Description
	Query host details (recommended)	This API is used to query host details by host ID.
	Modify a host	This API is used to modify host information by host ID.
	Delete a host	This API is used to delete a host by ID.
Application management	Obtain an application list	This API is used to query the application list in a project.
	Obtain an application list (recommended)	This API is used to query the application list in a project.
	Create an application using a template	This API is used to create an application using a template.
	Create an application (recommended)	This API is used to create an application.
	Deploy an application	This API is used to deploy an application by deployment task ID.
	Obtain application details	This API is used to obtain application details by deployment task ID.
	Obtain application details (recommended)	This API is used to obtain application details of a specified ID.
	Delete an application	This API is used to delete an application by deployment task ID.
	Delete an application (recommended)	This API is used to delete an application of a specified ID.
	Query the historical deployment records of a specified application in a project by the start time and end time	This API is used to query the historical deployment records of a specified application in a project based on the start time and end time.
	Query the execution parameters of a deployment record	This API is used to query the execution parameters of a deployment record.

Type	API	Description
Deployment record measurement	Obtain the success rate of deployed applications in a specified project.	This API is used to obtain the success rate of deployed applications in a specified project.
	This API is used to obtain the success rate of deployed applications in a specified application.	This API is used to obtain the success rate of deployed applications in a specified application.
Environment management	Create an environment for an application	This API is used to create an environment for an application.
	Query the environment list of an application	This API is used to query the environment list of an application.
	Delete an environment from an application	This API is used to delete an environment of an application.
	Query environment details	This API is used to query environment details.
	Import a host in an environment	This API is used to import a host in an environment.
	Delete a host from an environment	This API is used to delete a host of an environment.

# 3 Calling APIs

---

[Making an API Request](#)

[Authentication](#)

[Response](#)

## 3.1 Making an API Request

This section describes the structure of a REST API request, and calls the IAM API for obtaining a user token as an example. The obtained token can then be used to authenticate the calling of other APIs.

### Request URI

The format of a request URI is as follows:

**{URI-scheme} :// {Endpoint} / {resource-path} ? {query-string}**


Although a request URI is included in the request header, most programming languages or frameworks require the request URI to be transmitted separately.

- **URI-scheme:** Protocol used to transmit requests. All APIs use HTTPS.
- **Endpoint:** Domain name or IP address of the server bearing the REST service endpoint. Obtain the value from [Regions and Endpoints](#). For example, the endpoint of IAM in the **AP-Singapore** region is **iam.ap-southeast-3.myhuaweicloud.com**.
- **resource-path:** Access path of an API for performing a specified operation. Obtain the value from the URI of an API. For example, the **resource-path** of the API for obtaining a user token is **/v3/auth/tokens**.
- **query-string:** optional query parameter. Ensure that a question mark (?) is included before a query parameter that is in the format of "Parameter name=Parameter value". For example, **? limit=10** indicates that a maximum of 10 data records will be displayed.

For example, if you want to obtain a token of IAM in the AP-Singapore region, you need to use the endpoint (**iam.ap-southeast-3.huaweicloud.com**) of this region and find **resource-path** (**/v3/auth/tokens**) in the URI for [obtaining a user token](#). Here is an example.

```
https://iam.ap-southeast-3.huaweicloud.com/v3/auth/tokens
```

**Figure 3-1** Example URI

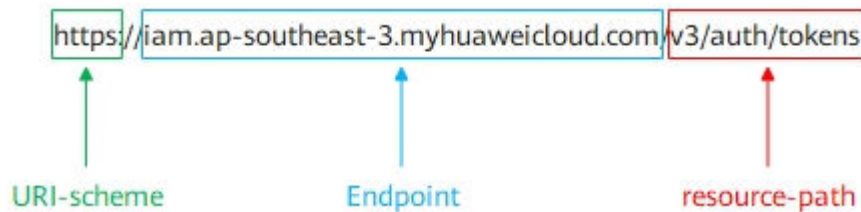

#### NOTE

To simplify the URI display in this document, each API is provided only with a resource path and a request method. The **URI-scheme** of all APIs is **HTTPS**, and the endpoints of all APIs in the same region are identical.

## Request Methods

HTTP defines the following request methods that can be used to send a request to the server.

- **GET:** requests the server to return specified resources.
- **PUT:** requests the server to update specified resources.
- **POST:** requests the server to add resources or perform special operations.
- **DELETE:** requests the server to delete specified resources, such as an object.
- **HEAD:** same as **GET** except that the server must return only the response header.
- **PATCH:** requests the server to update partial content of a specified resource. If the resource does not exist, a new resource will be created.

For example, in the case of the URI for [obtaining a user token](#), the request method is **POST**. The request is as follows:

```
POST https://iam.ap-southeast-3.myhuaweicloud.com/v3/auth/tokens
```

## Request Header

You can add additional fields, for example, the fields required by a specified URI or HTTP method, to a request header. For example, to request for the authentication information, add **Content-Type**, which specifies the request body type.

Common request header fields:

- **Content-Type:** specifies the request body type or format. This field is mandatory and its default value is **application/json**. Other values of this field will be provided for specific APIs if any.
- **X-Auth-Token:** A user token only for token-based API authentication. The user token is a response to the API used to [obtain a user token](#). This API is the only one that does not require authentication.

 NOTE

In addition to supporting token-based authentication, public cloud APIs also support authentication using AK/SK. During AK/SK-based authentication, an SDK is used to sign the request, and the **Authorization** (signature information) and **X-Sdk-Date** (time when the request is sent) header fields are automatically added to the request.

For more information, see [AK/SK-based Authentication](#).

The API used to [obtain a user token](#) does not require authentication. Therefore, only the **Content-Type** field needs to be added to requests for calling the API. An example of such requests is as follows:

```
POST https://iam.ap-southeast-3.myhuaweicloud.com/v3/auth/tokens
Content-Type: application/json
```

## Request Body

A request body is generally sent in structured format. It corresponds to **Content-Type** in the request header and transfers content except the request header.

The request body varies according to APIs. Certain APIs do not require the request body, such as GET and DELETE.

In the case of the API used to [obtain a user token](#), the request parameters and parameter description can be obtained from the API request. The following example request has a body included. Replace *username*, *domainname*, *\*\*\*\*\**, and *xxxxxxxxxx* with the actual values. *username* indicates the username, *domainname* indicates the name of the account to which the user belongs, *\*\*\*\*\** indicates the login password, and *xxxxxxxxxx* indicates the project name (**ap-southeast-3**). You can obtain the value from [Regions and Endpoints](#).

 NOTE

The **scope** parameter specifies where a token takes effect. You can set **scope** to an account or a project under an account. In the following example, the token takes effect only for the resources in a specified project. For more information about this API, see [Obtaining a User Token](#).

```
POST https://iam.ap-southeast-3.myhuaweicloud.com/v3/auth/tokens
Content-Type: application/json
```

```
{
  "auth": {
    "identity": {
      "methods": [
        "password"
      ],
      "password": {
        "user": {
          "name": "username",
          "password": "*****",
          "domain": {
            "name": "domainname"
          }
        }
      }
    }
  },
  "scope": {
    "project": {
      "name": "xxxxxxxxxx"
    }
  }
}
```

If all data required by a request is available, you can send the request to call the API through [curl](#), [Postman](#), or coding. In the response to the API used to [obtain a user token](#), **x-subject-token** is the desired user token. This token can then be used to authenticate the calling of other APIs.

## 3.2 Authentication

Requests for calling an API can be authenticated using either of the following methods:

- Token-based authentication: Requests are authenticated using a token.
- AK/SK-based authentication: Requests are authenticated by encrypting the request body using an AK/SK pair.

### Token-based Authentication

#### NOTE

The validity period of a token is 24 hours. When using a token for authentication, cache it to prevent frequently calling the IAM API for obtaining a user token.

A token specifies temporary permissions in a computer system. During API authentication using a token, the token is added to requests to get permissions for calling the API.

When calling the API to [obtain a user token](#), you must set **auth.scope** in the request body to **project**.

```
{
  "auth": {
    "identity": {
      "methods": [
        "password"
      ],
      "password": {
        "user": {
          "name": "username",
          "password": "*****",
          "domain": {
            "name": "domainname"
          }
        }
      }
    },
    "scope": {
      "project": {
        "name": "xxxxxxxx"
      }
    }
  }
}
```

After a token is obtained, the **X-Auth-Token** header field must be added to requests to specify the token when calling other APIs. For example, if the token is **ABCDEFJ....**, **X-Auth-Token: ABCDEFJ....** should be added to a request as follows:

```
GET https://iam.ap-southeast-3.myhuaweicloud.com/v3/auth/projects
Content-Type: application/json
X-Auth-Token: ABCDEFJ....
```



## AK/SK-based Authentication

### NOTE

AK/SK authentication supports API requests with a body no larger than 12 MB. For API requests with a larger body, use token authentication.

In AK/SK-based authentication, AK/SK is used to sign requests and the signature is then added to the requests for authentication.

- **AK:** access key ID. It is a unique ID associated with an SK. AK is used together with SK to sign requests.
- **SK:** secret access key. It is used together with an access key ID to identify a sender who initiates a request and to cryptographically sign requests, preventing the request from being modified.

In AK/SK-based authentication, you can use an AK/SK to sign requests based on the signature algorithm or use the signing SDK to sign requests. For details about how to sign requests and use the signing SDK, see [AK/SK Signing and Authentication Guide](#).

---

### NOTICE

The signing SDK is only used for signing requests and is different from the SDKs provided by services.

---

## 3.3 Response

### Status Code

After sending a request, you will receive a response, including a status code, response header, and response body.

A status code is a group of digits, ranging from 1xx to 5xx. It indicates the status of a request. For more information, see [Status Codes](#).

If status code **201** is returned for calling the API used to [obtain a user token](#), the request is successful.

### Response Header

Similar to a request, a response also has a header, for example, **Content-Type**.

[Figure 3-2](#) shows the response header fields for the API used to [obtain a user token](#). The **x-subject-token** header field is the desired user token. This token can then be used to authenticate the calling of other APIs.

**Figure 3-2** Header fields of the response to the request for obtaining a user token

```
connection → keep-alive
content-type → application/json
date → Tue, 12 Feb 2019 06:52:13 GMT
server → Web Server
strict-transport-security → max-age=31536000; includeSubdomains;
transfer-encoding → chunked
via → proxy A
x-content-type-options → nosniff
x-download-options → noopen
x-frame-options → SAMEORIGIN
x-iam-trace-id → 218d45ab-d674-4995-af3a-2d0255ba41b5
x-subject-token → [REDACTED]
x-xss-protection → 1; mode=block
```

## Response Body

The body of a response is often returned in structured format as specified in the **Content-Type** header field. The response body transfers content except the response header.

For the API used to **obtain a user token**, the response body is as follows: The following is part of the response body for the API used to obtain a user token:

```
{
  "token": {
    "expires_at": "2019-02-13T06:52:13.855000Z",
    "methods": [
      "password"
    ],
    "catalog": [
      {
        "endpoints": [
          {
            "region_id": "ap-southeast-3",
            .....

```

If an error occurs during API calling, an error code and the corresponding error message will be displayed. The following shows an error response body:

```
{
  "error_msg": "The format of message is error",
  "error_code": "AS.0001"
}
```

In the response message body, **error\_code** is an error code, and **error\_msg** provides information about the error.

# 4 APIs

---

- [Managing Host Clusters](#)
- [Managing Hosts](#)
- [Managing Applications](#)
- [Managing Application Groups](#)
- [Managing Application Permissions](#)
- [Measuring Deployment Record](#)
- [Managing Environments](#)
- [Managing Host Cluster Permissions](#)
- [Managing Environment Permissions](#)

## 4.1 Managing Host Clusters

### 4.1.1 Creating a Host Cluster

#### Function

This API is used to create a host cluster in a project. This API will not be maintained after September 30, 2024. You can use the CreateHostCluster API instead.

#### Calling Method

For details, see [Calling APIs](#).

#### URI

POST /v2/host-groups

## Request Parameters

**Table 4-1** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-2** Request body parameters

Parameter	Mandatory	Type	Description
name	Yes	String	Host cluster name
region_name	Yes	String	Region information
project_id	Yes	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
os	Yes	String	Operating system: Windows or Linux
slave_cluster_id	No	String	Slave cluster ID. If the value is null, the default slave cluster is used. If slave is user-defined, the slave cluster ID is used.
description	No	String	Description

Parameter	Mandatory	Type	Description
is_proxy_mode	No	Integer	Whether the host cluster is in proxy access mode. 1: Yes. 0: No.

## Response Parameters

**Status code: 200**

**Table 4-3** Response body parameters

Parameter	Type	Description
group_id	String	Host cluster ID

## Example Requests

When creating a host cluster, you need to enter basic information, including the host cluster name, description, operating system, and whether be proxy access mode.

```
https://{endpoint}/v2/host-groups  
  
{  
  "name" : "test123",  
  "description" : "",  
  "region_name" : "cn-north-7",  
  "project_id" : "6039d4480efc4dddb178abff98719913",  
  "os" : "linux",  
  "slave_cluster_id" : "",  
  "is_proxy_mode" : 1  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "group_id" : "f3938bd63e354d2bb9d9cf7b5dc3bf95"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

When creating a host cluster, you need to enter basic information, including the host cluster name, description, operating system, and whether be proxy access mode.

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class CreateDeploymentGroupSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();

        CreateDeploymentGroupRequest request = new CreateDeploymentGroupRequest();
        DeploymentGroup body = new DeploymentGroup();
        body.withIsProxyMode(1);
        body.withDescription("");
        body.withSlaveClusterId("");
        body.withOs(DeploymentGroup.OsEnum.fromValue("linux"));
        body.withProjectId("6039d4480efc4dddb178abff98719913");
        body.withRegionName("cn-north-7");
        body.withName("test123");
        request.withBody(body);
        try {
            CreateDeploymentGroupResponse response = client.createDeploymentGroup(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

When creating a host cluster, you need to enter basic information, including the host cluster name, description, operating system, and whether be proxy access mode.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
```

```
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CreateDeploymentGroupRequest()
        request.body = DeploymentGroup(
            is_proxy_mode=1,
            description="",
            slave_cluster_id="",
            os="linux",
            project_id="6039d4480efc4dddb178abff98719913",
            region_name="cn-north-7",
            name="test123"
        )
        response = client.create_deployment_group(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

When creating a host cluster, you need to enter basic information, including the host cluster name, description, operating system, and whether be proxy access mode.

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()
```

```
client := codeartsdeploy.NewCodeArtsDeployClient(
    codeartsdeploy.CodeArtsDeployClientBuilder().
        WithRegion(region.ValueOf("<YOUR REGION>")).
        WithCredential(auth).
        Build())

request := &model.CreateDeploymentGroupRequest{
    isProxyModeDeploymentGroup:= int32(1)
    descriptionDeploymentGroup:= ""
    slaveClusterIdDeploymentGroup:= ""
    request.Body = &model.DeploymentGroup{
        IsProxyMode: &isProxyModeDeploymentGroup,
        Description: &descriptionDeploymentGroup,
        SlaveClusterId: &slaveClusterIdDeploymentGroup,
        Os: model.GetDeploymentGroupOsEnum().LINUX,
        ProjectId: "6039d4480efc4dddb178abff98719913",
        RegionName: "cn-north-7",
        Name: "test123",
    }
}
response, err := client.CreateDeploymentGroup(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.2 Querying a Host Cluster List

### Function

This API is used to query a host cluster list by specified criteria. This API will not be maintained after September 30, 2024. You can use the ListHostClusters API instead.

### Calling Method

For details, see [Calling APIs](#).



## URI

GET /v2/host-groups

**Table 4-4** Query Parameters

Parameter	Mandatory	Type	Description
project_id	No	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
region_name	Yes	String	Region information
os	No	String	Operating system: Windows or Linux
offset	No	Integer	Offset, which is the position where the query starts. The value must be no less than 0.
limit	No	Integer	Number of items displayed on each page. The default value is 1,000.
name	No	String	Host cluster name
sort_key	No	String	Sorting field: nickName NAME OWNER_NAME CREATE_TIME name owner_name create_time. If this parameter is left blank, the default sorting mode is used.
sort_dir	No	String	Sorting mode: DESC (default) and ASC.

## Request Parameters

**Table 4-5** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200**

**Table 4-6** Response body parameters

Parameter	Type	Description
total	Integer	Number of host clusters
host_groups	Array of <a href="#">Deployment GroupDetail</a> objects	Response body of host cluster details

**Table 4-7** DeploymentGroupDetail

Parameter	Type	Description
group_id	String	Host cluster ID
created_time	String	Creation time
updated_time	String	Modification time
host_count	Integer	Number of hosts in a cluster. A maximum of 200 hosts can be added to a host cluster.
project_name	String	Project name
name	String	Host cluster name
region_name	String	Region information
project_id	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
os	String	Operating system: Windows or Linux
auto_connection_test_switch	Integer	The automatic test function has been removed. This field is invalid.
slave_cluster_id	String	Slave cluster ID. If the value is null, the default slave cluster is used. If slave is user-defined, the slave cluster ID is used.
nick_name	String	Alias
created_by	<a href="#">UserInfo</a> object	<b>Parameter description:</b> User information, including user ID and username. <b>Constraints:</b> N/A

Parameter	Type	Description
updated_by	<a href="#">UserInfo</a> object	<b>Parameter description:</b> User information, including user ID and username. <b>Constraints:</b> N/A
description	String	Description
permission	<a href="#">PermissionGroupDetail</a> object	Host cluster permission details

**Table 4-8** UserInfo

Parameter	Type	Description
user_id	String	<b>Parameter description:</b> User ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
user_name	String	<b>Parameter description:</b> Username. <b>Value range:</b> The value consists of 1-255 characters. Only letters and digits are allowed.

**Table 4-9** PermissionGroupDetail

Parameter	Type	Description
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_add_host	Boolean	Whether you have the permission to add hosts
can_manage	Boolean	Whether you have permission to edit the host cluster permission matrix

## Example Requests

```
https://{endpoint}/v2/host-groups?region_name=cn-north-7&project_id=6039d4480efc4dddb178abff98719913&offset=1&limit=10&sort_key=create_time&sort_dir=DESC
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "total" : 1,
  "host_groups" : [ {
    "name" : "testwyk",
    "description" : "11122211",
    "os" : "linux",
    "nick_name" : "A/B Side Account",
    "group_id" : "ab7647b0863c4e969c8949d38d591339",
    "region_name" : "cn-north-7",
    "project_id" : "6039d4480efc4dddb178abff98719913",
    "permission" : {
      "can_view" : true,
      "can_edit" : true,
      "can_delete" : true,
      "can_add_host" : true,
      "can_manage" : true
    },
    "created_by" : {
      "user_id" : "6baa7454109d47c192f22078fe6cda20",
      "user_name" : "devcloud_devcloud_l00490255_01"
    },
    "updated_by" : {
      "user_id" : "6baa7454109d47c192f22078fe6cda20",
      "user_name" : "devcloud_devcloud_l00490255_01"
    },
    "auto_connection_test_switch" : 0,
    "slave_cluster_id" : "",
    "created_time" : "2021-04-01 17:05:53",
    "updated_time" : "2021-04-21 14:29:14",
    "host_count" : 1,
    "project_name" : null
  } ]
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListHostGroupsSolution {

    public static void main(String[] args) {
```

```
// The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment variables and decrypted during use to ensure security.
// In this example, AK and SK are stored in environment variables for authentication. Before running this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
String ak = System.getenv("CLOUD_SDK_AK");
String sk = System.getenv("CLOUD_SDK_SK");

ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
ListHostGroupsRequest request = new ListHostGroupsRequest();
try {
    ListHostGroupsResponse response = client.listHostGroups(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.getenv("CLOUD_SDK_AK")
    sk = os.getenv("CLOUD_SDK_SK")

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ListHostGroupsRequest()
        response = client.list_host_groups(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListHostGroupsRequest{}
    response, err := client.ListHostGroups(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.3 Deleting a Host Cluster

### Function

This API is used to delete a host cluster by ID. This API will not be maintained after September 30, 2024.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v2/host-groups/{group\_id}

**Table 4-10** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

### Request Parameters

**Table 4-11** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200**

**Table 4-12** Response body parameters

Parameter	Type	Description
group_id	String	Host cluster ID

## Example Requests

```
https://{endpoint}/v2/host-groups/f3938bd63e354d2bb9d9cf7b5dc3bf95
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "group_id" : "f3938bd63e354d2bb9d9cf7b5dc3bf95"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class DeleteDeploymentGroupSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
    }  
}
```



```
// In this example, AK and SK are stored in environment variables for authentication. Before running
this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
String ak = System.getenv("CLOUD_SDK_AK");
String sk = System.getenv("CLOUD_SDK_SK");

ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
DeleteDeploymentGroupRequest request = new DeleteDeploymentGroupRequest();
request.withGroupId("{group_id}");
try {
    DeleteDeploymentGroupResponse response = client.deleteDeploymentGroup(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.getenv("CLOUD_SDK_AK")
    sk = os.getenv("CLOUD_SDK_SK")

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = DeleteDeploymentGroupRequest()
        request.group_id = "{group_id}"
        response = client.delete_deployment_group(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.DeleteDeploymentGroupRequest{}
    request.GroupId = "{group_id}"
    response, err := client.DeleteDeploymentGroup(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.4 Querying a Host Cluster

### Function

This API is used to query details about a host cluster by ID. This API will not be maintained after September 30, 2024. You can use the ShowHostClusterDetail API instead.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/host-groups/{group\_id}

**Table 4-13** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

### Request Parameters

**Table 4-14** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

### Response Parameters

**Status code: 200**

**Table 4-15** Response body parameters

Parameter	Type	Description
group_id	String	Host cluster ID
created_time	String	Creation time
updated_time	String	Modification time

Parameter	Type	Description
host_count	Integer	Number of hosts in a cluster. A maximum of 200 hosts can be added to a host cluster.
project_name	String	Project name
name	String	Host cluster name
region_name	String	Region information
project_id	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
os	String	Operating system: Windows or Linux
auto_connection_test_switch	Integer	The automatic test function has been removed. This field is invalid.
slave_cluster_id	String	Slave cluster ID. If the value is null, the default slave cluster is used. If slave is user-defined, the slave cluster ID is used.
nick_name	String	Alias
created_by	<a href="#">UserInfo</a> object	<b>Parameter description:</b> User information, including user ID and username. <b>Constraints:</b> N/A
updated_by	<a href="#">UserInfo</a> object	<b>Parameter description:</b> User information, including user ID and username. <b>Constraints:</b> N/A
description	String	Description
permission	<a href="#">PermissionGroupDetail</a> object	Host cluster permission details

**Table 4-16** UserInfo

Parameter	Type	Description
user_id	String	<b>Parameter description:</b> User ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
user_name	String	<b>Parameter description:</b> Username. <b>Value range:</b> The value consists of 1-255 characters. Only letters and digits are allowed.

**Table 4-17** PermissionGroupDetail

Parameter	Type	Description
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_add_host	Boolean	Whether you have the permission to add hosts
can_manage	Boolean	Whether you have permission to edit the host cluster permission matrix

## Example Requests

```
https://{endpoint}/v2/host-groups/ab7647b0863c4e969c8949d38d591339
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "name" : "test",
  "description" : "11122211",
  "os" : "linux",
  "region_name" : "cn-north-7",
  "project_id" : "6039d4480efc4dddb178abff98719913",
  "created_by" : {
    "user_id" : "6baa7454109d47c192f22078fe6cda20",
    "user_name" : "devcloud_devcloud_l00490255_01"
  },
  "updated_by" : {
    "user_id" : "6baa7454109d47c192f22078fe6cda20",
    "user_name" : "devcloud_devcloud_l00490255_01"
  },
}
```

```
"permission" : {
  "can_view" : true,
  "can_edit" : true,
  "can_delete" : true,
  "can_add_host" : true,
  "can_manage" : true
},
"auto_connection_test_switch" : 0,
"slave_cluster_id" : "",
"nick_name" : "A/B Side Account",
"group_id" : "ab7647b0863c4e969c8949d38d591339",
"created_time" : "2021-04-01 17:05:53",
"updated_time" : "2021-04-21 14:29:14",
"host_count" : 1
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowDeploymentGroupDetailSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowDeploymentGroupDetailRequest request = new ShowDeploymentGroupDetailRequest();
        request.withGroupId("{group_id}");
        try {
            ShowDeploymentGroupDetailResponse response = client.showDeploymentGroupDetail(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

```
}  
}  
}
```

## Python

```
# coding: utf-8  
  
import os  
from huaweicloudsdkcore.auth.credentials import BasicCredentials  
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion  
from huaweicloudsdkcore.exceptions import exceptions  
from huaweicloudsdkcodeartsdeploy.v2 import *  
  
if __name__ == "__main__":  
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
    # variables and decrypted during use to ensure security.  
    # In this example, AK and SK are stored in environment variables for authentication. Before running this  
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
    ak = os.environ["CLOUD_SDK_AK"]  
    sk = os.environ["CLOUD_SDK_SK"]  
  
    credentials = BasicCredentials(ak, sk)  
  
    client = CodeArtsDeployClient.new_builder() \  
        .with_credentials(credentials) \  
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \  
        .build()  
  
    try:  
        request = ShowDeploymentGroupDetailRequest()  
        request.group_id = "{group_id}"  
        response = client.show_deployment_group_detail(request)  
        print(response)  
    except exceptions.ClientRequestException as e:  
        print(e.status_code)  
        print(e.request_id)  
        print(e.error_code)  
        print(e.error_msg)
```

## Go

```
package main  
  
import (  
    "fmt"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"  
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"  
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"  
)  
  
func main() {  
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
    // variables and decrypted during use to ensure security.  
    // In this example, AK and SK are stored in environment variables for authentication. Before running this  
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
    ak := os.Getenv("CLOUD_SDK_AK")  
    sk := os.Getenv("CLOUD_SDK_SK")  
  
    auth := basic.NewCredentialsBuilder().  
        WithAk(ak).  
        WithSk(sk).  
        Build()  
  
    client := codeartsdeploy.NewCodeArtsDeployClient(  
        codeartsdeploy.CodeArtsDeployClientBuilder().
```

```
WithRegion(region.ValueOf("<YOUR REGION>")).
WithCredential(auth).
Build()

request := &model.ShowDeploymentGroupDetailRequest{}
request.GroupId = "{group_id}"
response, err := client.ShowDeploymentGroupDetail(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.5 Modifying a Host Cluster

### Function

This API is used to modify host cluster information by ID. This API will not be maintained after September 30, 2024.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v2/host-groups/{group\_id}

**Table 4-18** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID



## Request Parameters

**Table 4-19** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-20** Request body parameters

Parameter	Mandatory	Type	Description
name	Yes	String	Host cluster name
description	No	String	Description
slave_cluster_id	No	String	Custom slave resource pool ID
auto_connection_test_switch	No	Integer	The automatic test function has been removed. This field is invalid.

## Response Parameters

**Status code: 200**

**Table 4-21** Response body parameters

Parameter	Type	Description
group_id	String	Host cluster ID

## Example Requests

Modify the basic information about the target host cluster, including the host cluster name and description.

```
https://{endpoint}/v2/host-groups/f3938bd63e354d2bb9d9cf7b5dc3bf95
{
  "name" : "test123",
  "description" : "This is a description.",
  "slave_cluster_id" : "",
  "auto_connection_test_switch" : 0
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "group_id" : "f3938bd63e354d2bb9d9cf7b5dc3bf95"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

Modify the basic information about the target host cluster, including the host cluster name and description.

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class UpdateDeploymentGroupSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");
    }
}
```

```
ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
UpdateDeploymentGroupRequest request = new UpdateDeploymentGroupRequest();
request.withGroupId("{group_id}");
DeploymentGroupUpdateRequest body = new DeploymentGroupUpdateRequest();

body.setAutoConnectionTestSwitch(DeploymentGroupUpdateRequest.AutoConnectionTestSwitchEnum.NU
MBER_0);
body.withSlaveClusterId("");
body.withDescription("This is a description.");
body.withName("test123");
request.withBody(body);
try {
    UpdateDeploymentGroupResponse response = client.updateDeploymentGroup(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

Modify the basic information about the target host cluster, including the host cluster name and description.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = UpdateDeploymentGroupRequest()
        request.group_id = "{group_id}"
        request.body = DeploymentGroupUpdateRequest(
```

```
        auto_connection_test_switch=0,
        slave_cluster_id="",
        description="This is a description.",
        name="test123"
    )
    response = client.update_deployment_group(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

Modify the basic information about the target host cluster, including the host cluster name and description.

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.UpdateDeploymentGroupRequest{}
    request.GroupId = "{group_id}"
    autoConnectionTestSwitchDeploymentGroupUpdateRequest:=
model.GetDeploymentGroupUpdateRequestAutoConnectionTestSwitchEnum().E_0
    slaveClusterIdDeploymentGroupUpdateRequest:= ""
    descriptionDeploymentGroupUpdateRequest:= "This is a description."
    request.Body = &model.DeploymentGroupUpdateRequest{
        AutoConnectionTestSwitch: &autoConnectionTestSwitchDeploymentGroupUpdateRequest,
        SlaveClusterId: &slaveClusterIdDeploymentGroupUpdateRequest,
        Description: &descriptionDeploymentGroupUpdateRequest,
        Name: "test123",
    }
    response, err := client.UpdateDeploymentGroup(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.6 Creating a Host Cluster (Recommended)

### Function

This API is used to create a host cluster in a project.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/resources/host-groups

## Request Parameters

**Table 4-22** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-23** Request body parameters

Parameter	Mandatory	Type	Description
name	Yes	String	<b>Parameter description:</b> Host cluster name. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-), underscores (_), and periods (.) are allowed. <b>Default value:</b> N/A

Parameter	Mandatory	Type	Description
project_id	Yes	String	<b>Parameter description:</b> Project ID. For details, see [Obtaining a Project ID] (CloudDeploy_api_0014.xml). <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A
os	Yes	String	<b>Parameter description:</b> OS of the host cluster. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• Windows: Windows OS.</li><li>• Linux: Linux OS.</li></ul> <b>Default value:</b> N/A
slave_cluster_id	No	String	<b>Parameter description:</b> Slave cluster ID. If the ID is left empty, the official resource pool is used by default. The self-hosted resource pool is used when the self-hosted resource pool slave cluster ID is transferred. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 1-32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

Parameter	Mandatory	Type	Description
description	No	String	<b>Parameter description:</b> Host cluster description. <b>Constraints:</b> N/A <b>Value range:</b> The value is a string of 0 to 500 characters. <b>Default value:</b> N/A
is_proxy_mode	Yes	Integer	<b>Parameter description:</b> Whether the host cluster is in the proxy mode. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• 0: Non-proxy mode host cluster.</li><li>• 1: Proxy mode host cluster.</li></ul> <b>Default value:</b> N/A

## Response Parameters

Status code: 200

Table 4-24 Response body parameters

Parameter	Type	Description
id	String	<b>Parameter description:</b> Host cluster ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
status	String	<b>Parameter description:</b> Request success or failure state. <b>Value range:</b> <ul style="list-style-type: none"><li>• success: Request succeeded</li><li>• failed: Request failed</li></ul>



## Example Requests

When creating a host cluster, you need to enter basic information, including the host cluster name, description, operating system, and whether be proxy access mode.

```
https://{endpoint}/v1/resources/host-groups

{
  "name" : "test123",
  "description" : "",
  "project_id" : "6039d4480efc4dddb178abff98719913",
  "os" : "linux",
  "slave_cluster_id" : "",
  "is_proxy_mode" : 1
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status" : "success",
  "id" : "f3938bd63e354d2bb9d9cf7b5dc3bf95"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

When creating a host cluster, you need to enter basic information, including the host cluster name, description, operating system, and whether be proxy access mode.

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class CreateHostClusterSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);
```

```
CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
CreateHostClusterRequest request = new CreateHostClusterRequest();
CreateHostClusterRequestBody body = new CreateHostClusterRequestBody();
body.withIsProxyMode(1);
body.withDescription("");
body.withSlaveClusterId("");
body.withOs(CreateHostClusterRequestBody.OsEnum.fromValue("linux"));
body.withProjectId("6039d4480efc4dddb178abff98719913");
body.withName("test123");
request.withBody(body);
try {
    CreateHostClusterResponse response = client.createHostCluster(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

When creating a host cluster, you need to enter basic information, including the host cluster name, description, operating system, and whether be proxy access mode.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CreateHostClusterRequest()
        request.body = CreateHostClusterRequestBody(
            is_proxy_mode=1,
            description="",
            slave_cluster_id="",
            os="linux",
```

```
        project_id="6039d4480efc4dddb178abff98719913",
        name="test123"
    )
    response = client.create_host_cluster(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

When creating a host cluster, you need to enter basic information, including the host cluster name, description, operating system, and whether be proxy access mode.

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CreateHostClusterRequest{}
    descriptionCreateHostClusterRequestBody := ""
    slaveClusterIdCreateHostClusterRequestBody := ""
    request.Body = &model.CreateHostClusterRequestBody{
        IsProxyMode: int32(1),
        Description: &descriptionCreateHostClusterRequestBody,
        SlaveClusterId: &slaveClusterIdCreateHostClusterRequestBody,
        Os: model.GetCreateHostClusterRequestBodyOsEnum().LINUX,
        ProjectId: "6039d4480efc4dddb178abff98719913",
        Name: "test123",
    }
    response, err := client.CreateHostCluster(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.7 Querying a Host Cluster List (Recommended)

### Function

This API is used to query a host cluster list by specified criteria.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/resources/host-groups

Table 4-25 Query Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	<b>Parameter description:</b> Project ID. For details, see [Obtaining a Project ID] (CloudDeploy_api_0014.xml). <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

Parameter	Mandatory	Type	Description
name	No	String	<b>Parameter description:</b> Keyword in the host cluster name. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-), underscores (_), and periods (.) are allowed. <b>Default value:</b> N/A
os	No	String	<b>Parameter description:</b> OS of the host cluster. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• Windows: Windows OS.</li><li>• Linux: Linux OS.</li></ul> <b>Default value:</b> N/A
page_index	No	Integer	<b>Parameter description:</b> Page number for pagination query. <b>Constraints:</b> N/A <b>Value range:</b> 1-2,147,483,647 <b>Default value:</b> 1
page_size	No	Integer	<b>Parameter description:</b> Number of items displayed on each page. <b>Constraints:</b> N/A <b>Value range:</b> 1-1,000 <b>Default value:</b> 1,000

Parameter	Mandatory	Type	Description
sort_field	No	String	<b>Parameter description:</b> Sorting field query. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• nick_name: Nickname.</li><li>• name: Host cluster name.</li></ul> <b>Default value:</b> N/A
sort_type	No	String	<b>Parameter description:</b> Sorting order. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• desc: Descending order.</li><li>• asc: Ascending order.</li></ul> <b>Default value:</b> desc
is_proxy_mode	No	Integer	<b>Parameter description:</b> Whether the host cluster is in the proxy mode. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• 0: Non-proxy mode host cluster.</li><li>• 1: Proxy mode host cluster.</li></ul> <b>Default value:</b> N/A

Parameter	Mandatory	Type	Description
slave_cluster_id	No	String	<b>Parameter description:</b> Transfer default to query host clusters using the official resource pool. Transfer a self-hosted resource pool ID to query host clusters using the self-hosted resource pool. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. Or default is transferred to query the host clusters using the official resource pool. <b>Default value:</b> N/A

## Request Parameters

Table 4-26 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

**Table 4-27** Response body parameters

Parameter	Type	Description
status	String	<b>Parameter description:</b> Request success or failure state. <b>Value range:</b> <ul style="list-style-type: none"><li>• success: Request succeeded</li><li>• failed: Request failed</li></ul>
total	Integer	<b>Parameter description:</b> Number of host clusters. <b>Value range:</b> 0-1,000
result	Array of <a href="#">HostClusterInfo</a> objects	<b>Parameter description:</b> Host cluster list. <b>Constraints:</b> The number of host clusters cannot exceed 1,000.

**Table 4-28** HostClusterInfo

Parameter	Type	Description
id	String	<b>Parameter description:</b> Host cluster ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
host_count	Integer	<b>Parameter description:</b> Number of hosts in a cluster. <b>Value range:</b> 0-200
name	String	<b>Parameter description:</b> Host cluster name. <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-), underscores (_), and periods (.) are allowed.



Parameter	Type	Description
project_id	String	<b>Parameter description:</b> Project ID. For details, see [Obtaining a Project ID] (CloudDeploy_api_0014.xml). <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
os	String	<b>Parameter description:</b> OS of the host cluster. <b>Value range:</b> <ul style="list-style-type: none"><li>• Windows: Windows OS.</li><li>• Linux: Linux OS.</li></ul>
slave_cluster_id	String	<b>Parameter description:</b> Self-hosted resource pool ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
created_by	<a href="#">UserInfo</a> object	<b>Parameter description:</b> User information, including user ID and username. <b>Constraints:</b> N/A
description	String	<b>Parameter description:</b> Host cluster description. <b>Value range:</b> The value is a string of 0 to 500 characters.
permission	<a href="#">PermissionClusterDetail</a> object	<b>Parameter description:</b> Host cluster permission information. <b>Constraints:</b> N/A
nick_name	String	<b>Parameter description:</b> User nickname. <b>Value range:</b> The value is a string of 1 to 30 characters.
env_count	Integer	<b>Parameter description:</b> Number of environments associated with a host cluster. <b>Value range:</b> 0-200

**Table 4-29** UserInfo

Parameter	Type	Description
user_id	String	<b>Parameter description:</b> User ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
user_name	String	<b>Parameter description:</b> Username. <b>Value range:</b> The value consists of 1-255 characters. Only letters and digits are allowed.

**Table 4-30** PermissionClusterDetail

Parameter	Type	Description
can_view	Boolean	<b>Parameter description:</b> Whether a user has the view permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the view permission</li><li>• false: Without the view permission</li></ul>
can_edit	Boolean	<b>Parameter description:</b> Whether a user has the edit permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the edit permission</li><li>• false: Without the edit permission</li></ul>
can_delete	Boolean	<b>Parameter description:</b> Whether a user has the delete permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the delete permission</li><li>• false: Without the delete permission</li></ul>

Parameter	Type	Description
can_add_host	Boolean	<b>Parameter description:</b> Whether a user has the permission to add hosts <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the permission to add hosts</li><li>• false: Without the permission to add hosts</li></ul>
can_manage	Boolean	<b>Parameter description:</b> Whether a user has permission to manage the host cluster permission matrix <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the permission to manage the host cluster permission matrix</li><li>• false: Without the permission to manage the host cluster permission matrix</li></ul>

## Example Requests

```
https://{endpoint}/v1/resources/host-groups?  
project_id=5d091b14d7f54a139db644092fdc415c&page_index=1&page_size=10&sort_field=name&sort_type=  
asc
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "status": "success",  
  "total": 1,  
  "result": [ {  
    "name": "testwyk",  
    "description": "11122211",  
    "os": "linux",  
    "nick_name": "A/B Side Account",  
    "id": "ab7647b0863c4e969c8949d38d591339",  
    "project_id": "6039d4480efc4dddb178abff98719913",  
    "permission": {  
      "can_view": true,  
      "can_edit": true,  
      "can_delete": true,  
      "can_add_host": true,  
      "can_manage": true  
    },  
    "created_by": {  
      "user_id": "6baa7454109d47c192f22078fe6cda20",  
      "user_name": "devcloud_devcloud_l00490255_01"  
    },  
    "env_count": 1,  
    "slave_cluster_id": ""  
  } ]  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListHostClustersSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ListHostClustersRequest request = new ListHostClustersRequest();
        try {
            ListHostClustersResponse response = client.listHostClusters(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
```

```
variables and decrypted during use to ensure security.
# In this example, AK and SK are stored in environment variables for authentication. Before running this
example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
ak = os.environ["CLOUD_SDK_AK"]
sk = os.environ["CLOUD_SDK_SK"]

credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = ListHostClustersRequest()
    response = client.list_host_clusters(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListHostClustersRequest{}
    response, err := client.ListHostClusters(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.8 Querying a Host Cluster (Recommended)

### Function

This API is used to query details about a host cluster by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/resources/host-groups/{group\_id}

**Table 4-31** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	<b>Parameter description:</b> Host cluster ID. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

## Request Parameters

Table 4-32 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

Table 4-33 Response body parameters

Parameter	Type	Description
status	String	<b>Parameter description:</b> Request success or failure state. <b>Value range:</b> <ul style="list-style-type: none"><li>• success: Request succeeded</li><li>• failed: Request failed</li></ul>
result	<a href="#">HostClusterInfoDetailDetail</a> object	<b>Parameter description:</b> Host cluster information. <b>Value range:</b> N/A

Table 4-34 HostClusterInfoDetailDetail

Parameter	Type	Description
id	String	<b>Parameter description:</b> Host cluster ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.

Parameter	Type	Description
name	String	<b>Parameter description:</b> Host cluster name. <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-), underscores (_), and periods (.) are allowed.
os	String	<b>Parameter description:</b> OS of the host cluster. <b>Value range:</b> <ul style="list-style-type: none"><li>• Windows: Windows OS.</li><li>• Linux: Linux OS.</li></ul>
slave_cluster_id	String	<b>Parameter description:</b> Self-hosted resource pool ID. <b>Value range:</b> The value consists of 1-32 characters. Only letters and digits are allowed.
created_by	<b>UserInfo</b> object	<b>Parameter description:</b> User information, including user ID and username. <b>Constraints:</b> N/A
description	String	<b>Parameter description:</b> Host cluster description. <b>Value range:</b> The value is a string of 0 to 500 characters.
permission	<b>PermissionClusterDetail</b> object	<b>Parameter description:</b> Host cluster permission information. <b>Constraints:</b> N/A
nick_name	String	<b>Parameter description:</b> User nickname. <b>Value range:</b> The value is a string of 1 to 30 characters.



Parameter	Type	Description
is_proxy_mode	Integer	<b>Parameter description:</b> Whether the host cluster is in the proxy mode. <b>Value range:</b> <ul style="list-style-type: none"><li>0: Non-proxy mode host cluster.</li><li>1: Proxy mode host cluster.</li></ul>
created_time	String	<b>Parameter description:</b> Time when a host cluster is created. The value format is yyyy-MM-dd HH:mm:ss. For example, '2021-04-01 17:05:53'. <b>Value range:</b> N/A
updated_time	String	<b>Parameter description:</b> Time when a host cluster is updated. The value format is yyyy-MM-dd HH:mm:ss. For example, '2021-04-01 17:05:53'. <b>Value range:</b> N/A

Table 4-35 UserInfo

Parameter	Type	Description
user_id	String	<b>Parameter description:</b> User ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
user_name	String	<b>Parameter description:</b> Username. <b>Value range:</b> The value consists of 1-255 characters. Only letters and digits are allowed.

**Table 4-36** PermissionClusterDetail

Parameter	Type	Description
can_view	Boolean	<b>Parameter description:</b> Whether a user has the view permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the view permission</li><li>• false: Without the view permission</li></ul>
can_edit	Boolean	<b>Parameter description:</b> Whether a user has the edit permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the edit permission</li><li>• false: Without the edit permission</li></ul>
can_delete	Boolean	<b>Parameter description:</b> Whether a user has the delete permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the delete permission</li><li>• false: Without the delete permission</li></ul>
can_add_host	Boolean	<b>Parameter description:</b> Whether a user has the permission to add hosts <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the permission to add hosts</li><li>• false: Without the permission to add hosts</li></ul>
can_manage	Boolean	<b>Parameter description:</b> Whether a user has permission to manage the host cluster permission matrix <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With the permission to manage the host cluster permission matrix</li><li>• false: Without the permission to manage the host cluster permission matrix</li></ul>

## Example Requests

<https://{endpoint}/v1/resources/host-groups/ab7647b0863c4e969c8949d38d591339>

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status": "success",
  "result": {
    "id": "ab7647b0863c4e969c8949d38d591339",
    "name": "test",
    "description": "11122211",
    "os": "linux",
    "created_by": {
      "user_id": "6baa7454109d47c192f22078fe6cda20",
      "user_name": "devcloud_devcloud_l00490255_01"
    },
    "permission": {
      "can_view": true,
      "can_edit": true,
      "can_delete": true,
      "can_add_host": true,
      "can_manage": true
    },
    "is_proxy_mode": 0,
    "slave_cluster_id": "",
    "nick_name": "A/B Side Account",
    "created_time": "2021-04-01 17:05:53",
    "updated_time": "2021-04-21 14:29:14"
  }
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowHostClusterDetailSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowHostClusterDetailRequest request = new ShowHostClusterDetailRequest();
        request.withGroupId("{group_id}");
        try {
            ShowHostClusterDetailResponse response = client.showHostClusterDetail(request);
            System.out.println(response.toString());
        }
    }
}
```

```
    } catch (ConnectionException e) {
        e.printStackTrace();
    } catch (RequestTimeoutException e) {
        e.printStackTrace();
    } catch (ServiceResponseException e) {
        e.printStackTrace();
        System.out.println(e.getHttpStatusCode());
        System.out.println(e.getRequestId());
        System.out.println(e.getErrorCode());
        System.out.println(e.getErrorMsg());
    }
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ShowHostClusterDetailRequest()
        request.group_id = "{group_id}"
        response = client.show_host_cluster_detail(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
```

```
ak := os.Getenv("CLOUD_SDK_AK")
sk := os.Getenv("CLOUD_SDK_SK")

auth := basic.NewCredentialsBuilder().
    WithAk(ak).
    WithSk(sk).
    Build()

client := codeartsdeploy.NewCodeArtsDeployClient(
    codeartsdeploy.CodeArtsDeployClientBuilder().
        WithRegion(region.ValueOf("<YOUR REGION>")).
        WithCredential(auth).
        Build())

request := &model.ShowHostClusterDetailRequest{}
request.GroupId = "{group_id}"
response, err := client.ShowHostClusterDetail(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.9 Editing a Host Cluster

### Function

This API is used to edit a host cluster.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v1/resources/host-groups/{group\_id}

**Table 4-37** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

## Request Parameters

**Table 4-38** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-39** Request body parameters

Parameter	Mandatory	Type	Description
name	Yes	String	Host cluster name
description	No	String	Host cluster description

Parameter	Mandatory	Type	Description
slave_cluster_id	No	String	Slave cluster ID. If the value is null, the CloudOctopus slave cluster is used. If slave is user-defined, the slave cluster ID is used.

## Response Parameters

**Status code: 200**

**Table 4-40** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
id	String	Host cluster ID

## Example Requests

This API is used to edit a host cluster, including the host cluster description, host cluster name, and self-hosted resource pool ID.

```
https://{endpoint}/v1/resources/host-groups/f8421b5e91684258afc1d92ec46f67a2
{
  "description" : "Update the description",
  "name" : "Updating a Host Cluster Name",
  "slave_cluster_id" : ""
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status" : "success",
  "id" : "f8421b5e91684258afc1d92ec46f67a2"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

This API is used to edit a host cluster, including the host cluster description, host cluster name, and self-hosted resource pool ID.

```
package com.huaweicloud.sdk.test;
```

```
import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class UpdateHostClusterSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        UpdateHostClusterRequest request = new UpdateHostClusterRequest();
        request.withGroupId("{group_id}");
        HostClusterRequest body = new HostClusterRequest();
        body.withSlaveClusterId("");
        body.withDescription("Update the description");
        body.withName("Updating a Host Cluster Name");
        request.withBody(body);
        try {
            UpdateHostClusterResponse response = client.updateHostCluster(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

This API is used to edit a host cluster, including the host cluster description, host cluster name, and self-hosted resource pool ID.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
```



```
variables and decrypted during use to ensure security.
# In this example, AK and SK are stored in environment variables for authentication. Before running this
example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
ak = os.environ["CLOUD_SDK_AK"]
sk = os.environ["CLOUD_SDK_SK"]

credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = UpdateHostClusterRequest()
    request.group_id = "{group_id}"
    request.body = HostClusterRequest(
        slave_cluster_id="",
        description="Update the description",
        name="Updating a Host Cluster Name"
    )
    response = client.update_host_cluster(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

This API is used to edit a host cluster, including the host cluster description, host cluster name, and self-hosted resource pool ID.

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.UpdateHostClusterRequest{}
    request.GroupId = "{group_id}"
    slaveClusterIdHostClusterRequest:= ""
    descriptionHostClusterRequest:= "Update the description"
    request.Body = &model.HostClusterRequest{
```

```
SlaveClusterId: &slaveClusterIdHostClusterRequest,  
Description: &descriptionHostClusterRequest,  
Name: "Updating a Host Cluster Name",  
}  
response, err := client.UpdateHostCluster(request)  
if err == nil {  
    fmt.Printf("%+v\n", response)  
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.10 Deleting a Host Cluster (Recommended)

### Function

This API is used to delete a host cluster by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v1/resources/host-groups/{group\_id}

**Table 4-41** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	<b>Parameter description:</b> Host cluster ID. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

## Request Parameters

**Table 4-42** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

Table 4-43 Response body parameters

Parameter	Type	Description
status	String	<b>Parameter description:</b> Request success or failure state. <b>Value range:</b> <ul style="list-style-type: none"><li>• success: Request succeeded</li><li>• failed: Request failed</li></ul>
id	String	<b>Parameter description:</b> Host cluster ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.

## Example Requests

```
https://{endpoint}/v1/resources/host-groups/f8421b5e91684258afc1d92ec46f67a2
```

## Example Responses

Status code: 200

OK: The request is successful.

```
{  
  "status" : "success",  
  "id" : "f8421b5e91684258afc1d92ec46f67a2"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class DeleteHostClusterSolution {  
    public static void main(String[] args) {
```

```
// The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
environment variables and decrypted during use to ensure security.
// In this example, AK and SK are stored in environment variables for authentication. Before running
this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
String ak = System.getenv("CLOUD_SDK_AK");
String sk = System.getenv("CLOUD_SDK_SK");

ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
DeleteHostClusterRequest request = new DeleteHostClusterRequest();
request.withGroupId("{group_id}");
try {
    DeleteHostClusterResponse response = client.deleteHostCluster(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.getenv("CLOUD_SDK_AK")
    sk = os.getenv("CLOUD_SDK_SK")

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = DeleteHostClusterRequest()
        request.group_id = "{group_id}"
        response = client.delete_host_cluster(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
```

```
print(e.error_code)
print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.DeleteHostClusterRequest{}
    request.GroupId = "{group_id}"
    response, err := client.DeleteHostCluster(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.11 Querying Information About the Environment Associated with a Host Cluster

### Function

This API is used to query information about the environment associated with a host cluster.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/resources/host-groups/{group\_id}/environments/infos

**Table 4-44** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

**Table 4-45** Query Parameters

Parameter	Mandatory	Type	Description
page_index	No	Integer	Page number
page_size	No	Integer	Number of records per page

### Request Parameters

**Table 4-46** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

### Response Parameters

**Status code: 200**

**Table 4-47** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
total	Integer	Total number of associated environments
result	Array of <b>EnvironmentInfo</b> objects	Environment information list

**Table 4-48** EnvironmentInfo

Parameter	Type	Description
id	String	Environment ID
name	String	Environment name
app_id	String	Application ID
app_name	String	Application name
project_id	String	Project ID

## Example Requests

```
https://{endpoint}/v1/resources/host-groups/849f425a74034fd2a4e60c367414efba/environments/infos?
page_index=1&page_size=10
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status": "success",
  "result": [ {
    "id": "54e5b8b0d10148cc96142ac9d6c1c1f6",
    "name": "Test_environment_update",
    "project_id": "7e6caf3cd9a64d5b8ea451e38221892e",
    "app_name": "VM_deployment_and_update",
    "app_id": "8ddf0566c1784da29faac80516fa8425"
  } ],
  "total": 1
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;
```



```
import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListAssociateEnvironmentsInfosSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ListAssociateEnvironmentsInfosRequest request = new ListAssociateEnvironmentsInfosRequest();
        request.withGroupId("{group_id}");
        try {
            ListAssociateEnvironmentsInfosResponse response = client.listAssociateEnvironmentsInfos(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)
```

```
client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = ListAssociateEnvironmentsInfosRequest()
    request.group_id = "{group_id}"
    response = client.list_associate_environments_infos(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListAssociateEnvironmentsInfosRequest{}
    request.GroupId = "{group_id}"
    response, err := client.ListAssociateEnvironmentsInfos(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.1.12 Querying the Basic Environment Information List of an Application

### Function

This API is used to query the basic environment information list of an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/applications/{application\_id}/host-groups/base/infos

**Table 4-49** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID

**Table 4-50** Query Parameters

Parameter	Mandatory	Type	Description
project_uuid	Yes	String	Project ID
os	No	String	Operating system: Windows or Linux
page_index	No	Integer	Page number
page_size	No	Integer	Number of records on each page
name	No	String	Search by host cluster name

## Request Parameters

**Table 4-51** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200**

**Table 4-52** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
total	Integer	Total quantity
result	Array of <b>EnvironmentBaseInfo</b> objects	Basic environment information list

**Table 4-53** EnvironmentBaseInfo

Parameter	Type	Description
name	String	Environment name
os	String	Operating system: Windows or Linux
uuid	String	Environment ID
group_id	String	Host cluster ID
host_count	Integer	Number of hosts in an environment

## Example Requests

```
https://{endpoint}/v1/applications/fe50d93c5a7f4335bb44a68419606ced/host-groups/base/infos?project_uuid=7e6caf3cd9a64d5b8ea451e38221892e&page_index=1&page_size=1000
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status": "success",
  "result": [ {
    "name": "Create an environment test permission",
    "os": "linux",
    "uuid": "c51d2173c541496c9561f77ccdacf13e",
    "group_id": "c51d2173c541496c9561f77ccdacf13e",
    "host_count": 0
  } ],
  "total": 1
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListHostGroupBaseInfosSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ListHostGroupBaseInfosRequest request = new ListHostGroupBaseInfosRequest();
        request.withApplicationId("{application_id}");
        try {
            ListHostGroupBaseInfosResponse response = client.listHostGroupBaseInfos(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

```
}  
}
```

## Python

```
# coding: utf-8  
  
import os  
from huaweicloudsdkcore.auth.credentials import BasicCredentials  
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion  
from huaweicloudsdkcore.exceptions import exceptions  
from huaweicloudsdkcodeartsdeploy.v2 import *  
  
if __name__ == "__main__":  
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
    variables and decrypted during use to ensure security.  
    # In this example, AK and SK are stored in environment variables for authentication. Before running this  
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
    ak = os.environ["CLOUD_SDK_AK"]  
    sk = os.environ["CLOUD_SDK_SK"]  
  
    credentials = BasicCredentials(ak, sk)  
  
    client = CodeArtsDeployClient.new_builder() \  
        .with_credentials(credentials) \  
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \  
        .build()  
  
    try:  
        request = ListHostGroupBaseInfosRequest()  
        request.application_id = "{application_id}"  
        response = client.list_host_group_base_infos(request)  
        print(response)  
    except exceptions.ClientRequestException as e:  
        print(e.status_code)  
        print(e.request_id)  
        print(e.error_code)  
        print(e.error_msg)
```

## Go

```
package main  
  
import (  
    "fmt"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"  
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"  
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"  
)  
  
func main() {  
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
    variables and decrypted during use to ensure security.  
    // In this example, AK and SK are stored in environment variables for authentication. Before running this  
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
    ak := os.Getenv("CLOUD_SDK_AK")  
    sk := os.Getenv("CLOUD_SDK_SK")  
  
    auth := basic.NewCredentialsBuilder().  
        WithAk(ak).  
        WithSk(sk).  
        Build()  
  
    client := codeartsdeploy.NewCodeArtsDeployClient(  
        codeartsdeploy.CodeArtsDeployClientBuilder().  
            WithRegion(region.ValueOf("<YOUR REGION>")).
```

```
WithCredential(auth).  
Build()  
  
request := &model.ListHostGroupBaseInfosRequest{}  
request.ApplicationId = "{application_id}"  
response, err := client.ListHostGroupBaseInfos(request)  
if err == nil {  
    fmt.Printf("%+v\n", response)  
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

# 4.2 Managing Hosts

## 4.2.1 Creating a Host

### Function

This API is used to create a host in a specified host cluster. This API will not be maintained after September 30, 2024. You can use the CreateHost API instead.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v2/host-groups/{group\_id}/hosts

**Table 4-54** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

## Request Parameters

**Table 4-55** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-56** Request body parameters

Parameter	Mandatory	Type	Description
host_name	Yes	String	Host name
ip	Yes	String	Enter an elastic IP address, for example, 161.17.101.12.
port	Yes	Integer	SSH port, for example, 22.
os	Yes	String	Operating system: Windows or Linux, which must be the same as that of the host cluster.
as_proxy	Yes	Boolean	Proxy or not
proxy_host_id	No	String	Proxy ID



Parameter	Mandatory	Type	Description
authorization	Yes	<b>DeploymentHostAuthorizationBody</b> object	Log in to the host for authentication by password or key.
install_icagent	No	Boolean	Application Operations Management (AOM) is enabled for free to provide metric monitoring, log query, and alarm functions. (The ICAgent is automatically installed and supports only Huawei Cloud Linux hosts.)

**Table 4-57** DeploymentHostAuthorizationBody

Parameter	Mandatory	Type	Description
username	Yes	String	Username. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
password	No	String	Password. When the authentication type is 0, the password is mandatory.
private_key	No	String	Key. When the authentication type is 1, the key is mandatory.
trusted_type	Yes	Integer	Authentication type. 0 indicates password authentication, and 1 indicates key authentication.

## Response Parameters

Status code: 200

**Table 4-58** Response body parameters

Parameter	Type	Description
host_id	String	Host ID

## Example Requests

When creating a host, you need to enter the basic information about the host, including the host name, IP address, port number, username, and password.

```
https://{endpoint}/v2/host-groups/ab7647b0863c4e969c8949d38d591339/hosts

{
  "host_name" : "100.101.28.215",
  "ip" : "100.101.28.215",
  "port" : "22",
  "os" : "linux",
  "as_proxy" : false,
  "proxy_host_id" : "",
  "authorization" : {
    "username" : "root",
    "password" : "*****",
    "private_key" : "",
    "trusted_type" : 0
  },
  "install_icagent" : true
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "host_id" : "300d6d2e53624d0da08b182099ad10f7"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

When creating a host, you need to enter the basic information about the host, including the host name, IP address, port number, username, and password.

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class CreateDeploymentHostSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");
    }
}
```

```
ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
CreateDeploymentHostRequest request = new CreateDeploymentHostRequest();
request.withGroupId("{group_id}");
DeploymentHost body = new DeploymentHost();
DeploymentHostAuthorizationBody authorizationbody = new DeploymentHostAuthorizationBody();
authorizationbody.withUsername("root")
    .withPassword("*****")
    .withPrivateKey("")
    .withTrustedType(DeploymentHostAuthorizationBody.TrustedTypeEnum.NUMBER_0);
body.withInstallAgent(true);
body.withAuthorization(authorizationbody);
body.withProxyHostId("");
body.withAsProxy(false);
body.withOs(DeploymentHost.OsEnum.fromValue("linux"));
body.withPort(22);
body.withIp("100.101.28.215");
body.withHostName("100.101.28.215");
request.withBody(body);
try {
    CreateDeploymentHostResponse response = client.createDeploymentHost(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

When creating a host, you need to enter the basic information about the host, including the host name, IP address, port number, username, and password.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
```

```
.build()

try:
    request = CreateDeploymentHostRequest()
    request.group_id = "{group_id}"
    authorizationbody = DeploymentHostAuthorizationBody(
        username="root",
        password="*****",
        private_key="",
        trusted_type=0
    )
    request.body = DeploymentHost(
        install_icagent=True,
        authorization=authorizationbody,
        proxy_host_id="",
        as_proxy=False,
        os="linux",
        port=22,
        ip="100.101.28.215",
        host_name="100.101.28.215"
    )
    response = client.create_deployment_host(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

When creating a host, you need to enter the basic information about the host, including the host name, IP address, port number, username, and password.

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CreateDeploymentHostRequest{}
    request.GroupId = "{group_id}"
    passwordAuthorization:= "*****"
    privateKeyAuthorization:= ""
    authorizationbody := &model.DeploymentHostAuthorizationBody{
```

```
Username: "root",
Password: &passwordAuthorization,
PrivateKey: &privateKeyAuthorization,
TrustedType: model.GetDeploymentHostAuthorizationBodyTrustedTypeEnum().E_0,
}
installcagentDeploymentHost:= true
proxyHostIdDeploymentHost:= ""
request.Body = &model.DeploymentHost{
    Installcagent: &installcagentDeploymentHost,
    Authorization: authorizationbody,
    ProxyHostId: &proxyHostIdDeploymentHost,
    AsProxy: false,
    Os: model.GetDeploymentHostOsEnum().LINUX,
    Port: int32(22),
    Ip: "100.101.28.215",
    HostName: "100.101.28.215",
}
response, err := client.CreateDeploymentHost(request)
if err == nil {
    fmt.Printf("%v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.2 Querying a Host List

### Function

This API is used to query a host list in a specified host cluster by ID. This API will not be maintained after September 30, 2024. You can use the ListNewHosts API instead.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/host-groups/{group\_id}/hosts

**Table 4-59** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

**Table 4-60** Query Parameters

Parameter	Mandatory	Type	Description
as_proxy	No	Boolean	Proxy or not
offset	No	Integer	Offset, which is the position where the query starts. The value must be no less than 0.
limit	No	Integer	Number of items displayed on each page. The default value is 1,000.
name	No	String	Host name. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
sort_key	No	String	Sorting field. The value can be AS_PROXY HOST_NAME OS OWNER_NAME as_proxy host_name os owner_name nickName. If this parameter is left blank, the default value as_proxy is used.
sort_dir	No	String	The default sorting mode is DESC. DESC: descending order. ASC: ascending order.
with_auth	No	Boolean	Whether the returned result is encrypted.

## Request Parameters

**Table 4-61** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

**Table 4-62** Response body parameters

Parameter	Type	Description
total	Integer	Host quantity
group_name	String	Host cluster name
hosts	Array of <a href="#">DeploymentHostDetail</a> objects	Host list information

**Table 4-63** DeploymentHostDetail

Parameter	Type	Description
group_id	String	Host cluster ID
host_name	String	Host name
ip	String	Enter an elastic IP address, for example, 161.17.101.12.
port	Integer	SSH port, for example, 22.
os	String	Operating system: Windows or Linux, which must be the same as that of the host cluster.
as_proxy	Boolean	Proxy or not
proxy_host_id	String	Proxy ID
authorization	<a href="#">DeploymentHostAuthorizationBody</a> object	Log in to the host for authentication by password or key.
install_icagent	Boolean	Application Operations Management (AOM) is enabled for free to provide metric monitoring, log query, and alarm functions. (The ICAgent is automatically installed and supports only Huawei Cloud Linux hosts.)
host_id	String	Host ID
proxy_host	<a href="#">DeploymentHostDetail</a> object	Proxy details
group_name	String	Host cluster name

Parameter	Type	Description
project_id	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
project_name	String	Project name
permission	<a href="#">PermissionHostDetail</a> object	Host-related permission details
update_time	String	Update time
lastest_connection_time	String	Last connection time
connection_status	String	Connection status
owner_name	String	Owner name
updater_id	String	Updater ID
create_time	String	Creation time
nick_name	String	Alias
owner_id	String	Owner ID
updater_name	String	Updater name
connection_result	String	Connection result

**Table 4-64** DeploymentHostAuthorizationBody

Parameter	Type	Description
username	String	Username. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
password	String	Password. When the authentication type is 0, the password is mandatory.
private_key	String	Key. When the authentication type is 1, the key is mandatory.
trusted_type	Integer	Authentication type. 0 indicates password authentication, and 1 indicates key authentication.



**Table 4-65** PermissionHostDetail

Parameter	Type	Description
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_add_host	Boolean	Whether you have the permission to add hosts
can_connection_test	Boolean	Whether you have permission to test host connectivity

## Example Requests

```
https://{endpoint}/v2/host-groups/ab7647b0863c4e969c8949d38d591339/hosts?offset=0&limit=10&sort_key=AS_PROXY&sort_dir=asc&with_auth=false
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "hosts": [ {
    "host_name": "100.101.28.203",
    "ip": "100.101.28.203",
    "port": 22,
    "os": "linux",
    "authorization": {
      "username": "root",
      "password": null,
      "private_key": null,
      "trusted_type": 0
    },
    "permission": {
      "can_view": true,
      "can_edit": true,
      "can_delete": true,
      "can_add_host": true,
      "can_connection_test": true
    },
    "host_id": "2cc913cc9a494f09b7320801ebacad02",
    "group_id": "ab7647b0863c4e969c8949d38d591339",
    "as_proxy": false,
    "proxy_host_id": null,
    "owner_id": "6baa7454109d47c192f22078fe6cda20",
    "owner_name": "devcloud_devcloud_l00490255_01",
    "updater_id": "6baa7454109d47c192f22078fe6cda20",
    "updater_name": "devcloud_devcloud_l00490255_01",
    "connection_status": "success",
    "install_icagent": false,
    "create_time": "2021-04-15 11:01:51",
    "update_time": "2021-04-21 15:04:24",
    "connection_result": "Connection established",
    "lastest_connection_time": "2021-04-15 11:02:00",
    "nick_name": "A/B Side Account",
    "proxy_host": null,
    "group_name": null,
    "project_id": "6039d4480efc4dddb178abff98719913",
    "project_name": null
  }
]
```

```
    }],  
    "total" : 1,  
    "group_name" : "test"  
  }  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class ListHostsSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
        // In this example, AK and SK are stored in environment variables for authentication. Before running  
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
        String ak = System.getenv("CLOUD_SDK_AK");  
        String sk = System.getenv("CLOUD_SDK_SK");  
  
        ICredential auth = new BasicCredentials()  
            .withAk(ak)  
            .withSk(sk);  
  
        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()  
            .withCredential(auth)  
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))  
            .build();  
        ListHostsRequest request = new ListHostsRequest();  
        request.withGroupId("{group_id}");  
        try {  
            ListHostsResponse response = client.listHosts(request);  
            System.out.println(response.toString());  
        } catch (ConnectionException e) {  
            e.printStackTrace();  
        } catch (RequestTimeoutException e) {  
            e.printStackTrace();  
        } catch (ServiceResponseException e) {  
            e.printStackTrace();  
            System.out.println(e.getStatusCode());  
            System.out.println(e.getRequestId());  
            System.out.println(e.getErrorCode());  
            System.out.println(e.getErrorMsg());  
        }  
    }  
}
```

### Python

```
# coding: utf-8  
  
import os  
from huaweicloudsdkcore.auth.credentials import BasicCredentials
```

```
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ListHostsRequest()
        request.group_id = "{group_id}"
        response = client.list_hosts(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListHostsRequest{}
    request.GroupId = "{group_id}"
    response, err := client.ListHosts(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
```

```
    fmt.Println(err)
  }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.3 Querying Host Details

### Function

This API is used to query host details by ID. This API will not be maintained after September 30, 2024. You can use the ShowHostDetail API instead.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/host-groups/{group\_id}/hosts/{host\_id}

**Table 4-66** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID
host_id	Yes	String	Host ID

## Request Parameters

**Table 4-67** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200****Table 4-68** Response body parameters

Parameter	Type	Description
group_id	String	Host cluster ID
host_name	String	Host name
ip	String	Enter an elastic IP address, for example, 161.17.101.12.
port	Integer	SSH port, for example, 22.
os	String	Operating system: Windows or Linux, which must be the same as that of the host cluster.
as_proxy	Boolean	Proxy or not
proxy_host_id	String	Proxy ID
authorization	<b>Deployment HostAuthorizationBody</b> object	Log in to the host for authentication by password or key.
install_icagent	Boolean	Application Operations Management (AOM) is enabled for free to provide metric monitoring, log query, and alarm functions. (The ICAgent is automatically installed and supports only Huawei Cloud Linux hosts.)
host_id	String	Host ID
proxy_host	<b>Deployment HostDetail</b> object	Proxy details
group_name	String	Host cluster name

Parameter	Type	Description
project_id	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
project_name	String	Project name
permission	<a href="#">PermissionHostDetail</a> object	Host-related permission details
update_time	String	Update time
lastest_connection_time	String	Last connection time
connection_status	String	Connection status
owner_name	String	Owner name
updater_id	String	Updater ID
create_time	String	Creation time
nick_name	String	Alias
owner_id	String	Owner ID
updater_name	String	Updater name
connection_result	String	Connection result

**Table 4-69** DeploymentHostAuthorizationBody

Parameter	Type	Description
username	String	Username. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
password	String	Password. When the authentication type is 0, the password is mandatory.
private_key	String	Key. When the authentication type is 1, the key is mandatory.
trusted_type	Integer	Authentication type. 0 indicates password authentication, and 1 indicates key authentication.

**Table 4-70** PermissionHostDetail

Parameter	Type	Description
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_add_host	Boolean	Whether you have the permission to add hosts
can_connection_test	Boolean	Whether you have permission to test host connectivity

## Example Requests

```
https://{endpoint}/v2/host-groups/ab7647b0863c4e969c8949d38d591339/hosts/  
300d6d2e53624d0da08b182099ad10f7
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "ip": "100.101.28.215",  
  "port": 22,  
  "os": "linux",  
  "authorization": {  
    "username": "root",  
    "password": null,  
    "private_key": null,  
    "trusted_type": 0  
  },  
  "permission": {  
    "can_view": true,  
    "can_edit": true,  
    "can_delete": true,  
    "can_add_host": true,  
    "can_connection_test": true  
  },  
  "group_id": "ab7647b0863c4e969c8949d38d591339",  
  "host_name": "100.101.28.215",  
  "as_proxy": false,  
  "proxy_host_id": null,  
  "owner_id": "6baa7454109d47c192f22078fe6cda20",  
  "owner_name": "devcloud_devcloud_l00490255_01",  
  "updater_id": "6baa7454109d47c192f22078fe6cda20",  
  "updater_name": "devcloud_devcloud_l00490255_01",  
  "connection_status": "success",  
  "install_icagent": false,  
  "create_time": "2021-05-13 09:35:41",  
  "update_time": "2021-05-13 09:35:41",  
  "connection_result": "Connection established",  
  "lastest_connection_time": "2021-05-13 09:36:11",  
  "nick_name": "A/B Side Account",  
  "host_id": "300d6d2e53624d0da08b182099ad10f7"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowDeploymentHostDetailSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowDeploymentHostDetailRequest request = new ShowDeploymentHostDetailRequest();
        request.withGroupId("{group_id}");
        request.withHostId("{host_id}");
        try {
            ShowDeploymentHostDetailResponse response = client.showDeploymentHostDetail(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
```



```
# The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment variables and decrypted during use to ensure security.
# In this example, AK and SK are stored in environment variables for authentication. Before running this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
ak = os.environ["CLOUD_SDK_AK"]
sk = os.environ["CLOUD_SDK_SK"]

credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = ShowDeploymentHostDetailRequest()
    request.group_id = "{group_id}"
    request.host_id = "{host_id}"
    response = client.show_deployment_host_detail(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ShowDeploymentHostDetailRequest{}
    request.GroupId = "{group_id}"
    request.HostId = "{host_id}"
    response, err := client.ShowDeploymentHostDetail(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.4 Modifying a Host

### Function

This API is used to modify host information by ID. This API will not be maintained after September 30, 2024.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v2/host-groups/{group\_id}/hosts/{host\_id}

**Table 4-71** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID
host_id	Yes	String	Host ID

## Request Parameters

**Table 4-72** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-73** Request body parameters

Parameter	Mandatory	Type	Description
host_name	Yes	String	Host name
ip	Yes	String	Enter an elastic IP address, for example, 161.17.101.12.
port	Yes	Integer	SSH port, for example, 22.
as_proxy	Yes	Boolean	Proxy or not
proxy_host_id	No	String	Proxy ID
authorization	Yes	<b>DeploymentHostAuthorizationBody</b> object	Log in to the host for authentication by password or key.

Parameter	Mandatory	Type	Description
install_icagent	No	Boolean	Application Operations Management (AOM) is enabled for free to provide metric monitoring, log query, and alarm functions. (The ICAgent is automatically installed and supports only Huawei Cloud Linux hosts.)
sync	No	Boolean	Whether to sync the password of the current host to the hosts with the same IP address, username, and port number in other host clusters in the same project.

**Table 4-74** DeploymentHostAuthorizationBody

Parameter	Mandatory	Type	Description
username	Yes	String	Username. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
password	No	String	Password. When the authentication type is 0, the password is mandatory.
private_key	No	String	Key. When the authentication type is 1, the key is mandatory.
trusted_type	Yes	Integer	Authentication type. 0 indicates password authentication, and 1 indicates key authentication.

## Response Parameters

**Status code: 200**

**Table 4-75** Response body parameters

Parameter	Type	Description
host_id	String	Host ID

## Example Requests

Modify the basic information about the target host, including the host name, IP address, and port number.

```
https://{endpoint}/v2/host-groups/ab7647b0863c4e969c8949d38d591339/hosts/  
300d6d2e53624d0da08b182099ad10f7  
  
{  
  "host_name" : "100.101.28.215",  
  "ip" : "100.101.28.215",  
  "port" : 22,  
  "as_proxy" : false,  
  "proxy_host_id" : null,  
  "authorization" : {  
    "username" : "root",  
    "password" : null,  
    "private_key" : "",  
    "trusted_type" : 0  
  },  
  "install_icagent" : false,  
  "sync" : true  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "host_id" : "300d6d2e53624d0da08b182099ad10f7"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

Modify the basic information about the target host, including the host name, IP address, and port number.

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class UpdateDeploymentHostSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
        // In this example, AK and SK are stored in environment variables for authentication. Before running  
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
        String ak = System.getenv("CLOUD_SDK_AK");  
        String sk = System.getenv("CLOUD_SDK_SK");  
    }  
}
```

```
ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
UpdateDeploymentHostRequest request = new UpdateDeploymentHostRequest();
request.withGroupId("{group_id}");
request.withHostId("{host_id}");
DeploymentHostRequest body = new DeploymentHostRequest();
DeploymentHostAuthorizationBody authorizationbody = new DeploymentHostAuthorizationBody();
authorizationbody.withUsername("root")
    .withPrivateKey("")
    .withTrustedType(DeploymentHostAuthorizationBody.TrustedTypeEnum.NUMBER_0);
body.withHostName("100.101.28.215");
body.withSync(true);
body.withAsProxy(false);
body.withInstallAgent(false);
body.withIp("100.101.28.215");
body.withPort(22);
body.withAuthorization(authorizationbody);
request.withBody(body);
try {
    UpdateDeploymentHostResponse response = client.updateDeploymentHost(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

Modify the basic information about the target host, including the host name, IP address, and port number.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
```

```
.build()

try:
    request = UpdateDeploymentHostRequest()
    request.group_id = "{group_id}"
    request.host_id = "{host_id}"
    authorizationbody = DeploymentHostAuthorizationBody(
        username="root",
        private_key="",
        trusted_type=0
    )
    request.body = DeploymentHostRequest(
        host_name="100.101.28.215",
        sync=True,
        as_proxy=False,
        install_icagent=False,
        ip="100.101.28.215",
        port=22,
        authorization=authorizationbody
    )
    response = client.update_deployment_host(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

Modify the basic information about the target host, including the host name, IP address, and port number.

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.UpdateDeploymentHostRequest{}
    request.GroupId = "{group_id}"
    request.HostId = "{host_id}"
    privateKeyAuthorization := ""
    authorizationbody := &model.DeploymentHostAuthorizationBody{
        Username: "root",
```

```
    PrivateKey: &privateKeyAuthorization,
    TrustedType: model.GetDeploymentHostAuthorizationBodyTrustedTypeEnum().E_0,
  }
  syncDeploymentHostRequest:= true
  installcagentDeploymentHostRequest:= false
  request.Body = &model.DeploymentHostRequest{
    HostName: "100.101.28.215",
    Sync: &syncDeploymentHostRequest,
    AsProxy: false,
    Installcagent: &installcagentDeploymentHostRequest,
    Ip: "100.101.28.215",
    Port: int32(22),
    Authorization: authorizationbody,
  }
  response, err := client.UpdateDeploymentHost(request)
  if err == nil {
    fmt.Printf("%+v\n", response)
  } else {
    fmt.Println(err)
  }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.5 Deleting a Host

### Function

This API is used to delete a host by ID. This API will not be maintained after September 30, 2024.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v2/host-groups/{group\_id}/hosts/{host\_id}



**Table 4-76** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID
host_id	Yes	String	Host ID

## Request Parameters

**Table 4-77** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200**

**Table 4-78** Response body parameters

Parameter	Type	Description
host_id	String	Host ID

## Example Requests

```
https://{endpoint}/v2/host-groups/ab7647b0863c4e969c8949d38d591339/hosts/  
300d6d2e53624d0da08b182099ad10f7
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "host_id" : "300d6d2e53624d0da08b182099ad10f7"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class DeleteDeploymentHostSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
        // In this example, AK and SK are stored in environment variables for authentication. Before running  
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
        String ak = System.getenv("CLOUD_SDK_AK");  
        String sk = System.getenv("CLOUD_SDK_SK");  
  
        ICredential auth = new BasicCredentials()  
            .withAk(ak)  
            .withSk(sk);  
  
        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()  
            .withCredential(auth)  
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))  
            .build();  
        DeleteDeploymentHostRequest request = new DeleteDeploymentHostRequest();  
        request.withGroupId("{group_id}");  
        request.withHostId("{host_id}");  
        try {  
            DeleteDeploymentHostResponse response = client.deleteDeploymentHost(request);  
            System.out.println(response.toString());  
        } catch (ConnectionException e) {  
            e.printStackTrace();  
        } catch (RequestTimeoutException e) {  
            e.printStackTrace();  
        } catch (ServiceResponseException e) {  
            e.printStackTrace();  
            System.out.println(e.getHttpStatusCode());  
            System.out.println(e.getRequestId());  
            System.out.println(e.getErrorCode());  
        }  
    }  
}
```

```
        System.out.println(e.getErrorMsg());
    }
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = DeleteDeploymentHostRequest()
        request.group_id = "{group_id}"
        request.host_id = "{host_id}"
        response = client.delete_deployment_host(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()
```

```
client := codeartsdeploy.NewCodeArtsDeployClient(  
    codeartsdeploy.CodeArtsDeployClientBuilder().  
        WithRegion(region.ValueOf("<YOUR REGION>")).  
        WithCredential(auth).  
        Build())  
  
request := &model.DeleteDeploymentHostRequest{}  
request.GroupId = "{group_id}"  
request.HostId = "{host_id}"  
response, err := client.DeleteDeploymentHost(request)  
if err == nil {  
    fmt.Printf("%+v\n", response)  
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.6 Creating a Host (Recommended)

### Function

This API is used to create a host in a specified host cluster.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/resources/host-groups/{group\_id}/hosts

**Table 4-79** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

## Request Parameters

**Table 4-80** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-81** Request body parameters

Parameter	Mandatory	Type	Description
host_name	Yes	String	Host name
ip	Yes	String	Enter an elastic IP address, for example, 161.17.101.12.
port	Yes	Integer	SSH port, for example, 22.
os	Yes	String	Operating system: Windows or Linux, which must be the same as that of the host cluster.
as_proxy	Yes	Boolean	Proxy or not
proxy_host_id	No	String	Proxy ID

Parameter	Mandatory	Type	Description
authorization	Yes	<a href="#">HostAuthorizationBody</a> object	Log in to the host for authentication by password or key.
install_icagent	No	Boolean	Application Operations Management (AOM) is enabled for free to provide metric monitoring, log query, and alarm functions. (The ICAgent is automatically installed and supports only Huawei Cloud Linux hosts.)

**Table 4-82** HostAuthorizationBody

Parameter	Mandatory	Type	Description
username	Yes	String	Username. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
password	No	String	Password. When the authentication type is 0, the password is mandatory.
private_key	No	String	Key. When the authentication type is 1, the key is mandatory.
trusted_type	Yes	Integer	Authentication type. 0 indicates password authentication, and 1 indicates key authentication.

## Response Parameters

Status code: 200

**Table 4-83** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
id	String	Host ID

## Example Requests

When creating a host, you need to enter the basic information about the host, including the host name, IP address, port number, username, and password.

```
https://{endpoint}/v1/resources/host-groups/ab7647b0863c4e969c8949d38d591339/hosts

{
  "host_name" : "100.101.28.215",
  "ip" : "100.101.28.215",
  "port" : "22",
  "os" : "linux",
  "as_proxy" : false,
  "proxy_host_id" : "",
  "authorization" : {
    "username" : "root",
    "password" : "*****",
    "private_key" : "",
    "trusted_type" : 0
  },
  "install_icagent" : true
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status" : "success",
  "id" : "300d6d2e53624d0da08b182099ad10f7"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

When creating a host, you need to enter the basic information about the host, including the host name, IP address, port number, username, and password.

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class CreateHostSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");
    }
}
```

```
ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
CreateHostRequest request = new CreateHostRequest();
request.withGroupId("{group_id}");
CreateHostRequestBody body = new CreateHostRequestBody();
HostAuthorizationBody authorizationbody = new HostAuthorizationBody();
authorizationbody.withUsername("root")
    .withPassword("*****")
    .withPrivateKey("")
    .withTrustedType(HostAuthorizationBody.TrustedTypeEnum.NUMBER_0);
body.withInstallAgent(true);
body.withAuthorization(authorizationbody);
body.withProxyHostId("");
body.withAsProxy(false);
body.withOs(CreateHostRequestBody.OsEnum.fromValue("linux"));
body.withPort(22);
body.withIp("100.101.28.215");
body.withHostName("100.101.28.215");
request.withBody(body);
try {
    CreateHostResponse response = client.createHost(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

When creating a host, you need to enter the basic information about the host, including the host name, IP address, port number, username, and password.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
```



```
.with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \  
.build()  
  
try:  
  request = CreateHostRequest()  
  request.group_id = "{group_id}"  
  authorizationbody = HostAuthorizationBody(  
    username="root",  
    password="*****",  
    private_key="",  
    trusted_type=0  
  )  
  request.body = CreateHostRequestBody(  
    install_icagent=True,  
    authorization=authorizationbody,  
    proxy_host_id="",  
    as_proxy=False,  
    os="linux",  
    port=22,  
    ip="100.101.28.215",  
    host_name="100.101.28.215"  
  )  
  response = client.create_host(request)  
  print(response)  
except exceptions.ClientRequestException as e:  
  print(e.status_code)  
  print(e.request_id)  
  print(e.error_code)  
  print(e.error_msg)
```

## Go

When creating a host, you need to enter the basic information about the host, including the host name, IP address, port number, username, and password.

```
package main  
  
import (  
  "fmt"  
  "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"  
  codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"  
  "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"  
  region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"  
)  
  
func main() {  
  // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
  risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
  variables and decrypted during use to ensure security.  
  // In this example, AK and SK are stored in environment variables for authentication. Before running this  
  example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
  ak := os.Getenv("CLOUD_SDK_AK")  
  sk := os.Getenv("CLOUD_SDK_SK")  
  
  auth := basic.NewCredentialsBuilder().  
    WithAk(ak).  
    WithSk(sk).  
    Build()  
  
  client := codeartsdeploy.NewCodeArtsDeployClient(  
    codeartsdeploy.CodeArtsDeployClientBuilder().  
      WithRegion(region.ValueOf("<YOUR REGION>")).  
      WithCredential(auth).  
      Build())  
  
  request := &model.CreateHostRequest{}  
  request.GroupId = "{group_id}"  
  passwordAuthorization:= "*****"  
  privateKeyAuthorization:= ""
```

```
authorizationbody := &model.HostAuthorizationBody{
    Username: "root",
    Password: &passwordAuthorization,
    PrivateKey: &privateKeyAuthorization,
    TrustedType: model.GetHostAuthorizationBodyTrustedTypeEnum().E_0,
}
installcagentCreateHostRequestBody:= true
proxyHostIdCreateHostRequestBody:= ""
request.Body = &model.CreateHostRequestBody{
    Installcagent: &installcagentCreateHostRequestBody,
    Authorization: authorizationbody,
    ProxyHostId: &proxyHostIdCreateHostRequestBody,
    AsProxy: false,
    Os: model.GetCreateHostRequestBodyOsEnum().LINUX,
    Port: int32(22),
    Ip: "100.101.28.215",
    HostName: "100.101.28.215",
}
response, err := client.CreateHost(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.7 Querying a Host List (Recommended)

### Function

This API is used to query a host list in a specified host cluster by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/resources/host-groups/{group\_id}/hosts

**Table 4-84** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Project ID

**Table 4-85** Query Parameters

Parameter	Mandatory	Type	Description
key_field	No	String	Fuzzy search information about the host name
environment_id	No	String	Environment ID
page_index	No	Integer	Page number
page_size	No	Integer	Number of items displayed on each page. The default value is 10.
sort_key	No	String	Sorting field: as_proxy host_name owner_name. If this parameter is left blank, the default sorting mode is used.
sort_dir	No	String	Sorting mode: DESC (default) and ASC.
as_proxy	No	Boolean	Proxy or not

## Request Parameters

**Table 4-86** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

**Table 4-87** Response body parameters

Parameter	Type	Description
total	Integer	Host quantity
status	String	Request success or failure status
result	Array of <a href="#">HostInfo</a> objects	Host information list

**Table 4-88** HostInfo

Parameter	Type	Description
uuid	String	Host ID
ip	String	Host IP address
os	String	Host OS
port	Integer	Port
authorization	<a href="#">HostAuthorizationBody</a> object	Log in to the host for authentication by password or key.
permission	<a href="#">PermissionHostDetailNew</a> object	Host-related permission details
host_name	String	Host name
as_proxy	Boolean	Proxy or not
group_id	String	Host cluster ID
proxy_host_id	String	Proxy ID
owner_id	String	Host owner ID
owner_name	String	Host owner name
proxy_host	<a href="#">HostInfo</a> object	Proxy details
connection_status	String	Connectivity status
create_time	String	Creation time
lastest_connection_time	String	Last connection time
connection_result	String	Connectivity verification result

Parameter	Type	Description
nick_name	String	Host owner alias
import_status	String	Import status
env_count	Integer	Number of associated environments

**Table 4-89** HostAuthorizationBody

Parameter	Type	Description
username	String	Username. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
password	String	Password. When the authentication type is 0, the password is mandatory.
private_key	String	Key. When the authentication type is 1, the key is mandatory.
trusted_type	Integer	Authentication type. 0 indicates password authentication, and 1 indicates key authentication.

**Table 4-90** PermissionHostDetailNew

Parameter	Type	Description
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_add_host	Boolean	Whether you have the permission to add hosts
can_copy	Boolean	Whether you have the permission to clone hosts

## Example Requests

```
https://{endpoint}/v1/resources/host-groups/317aea99cf2944fcacf88b34ef771843/hosts?
page_index=1&page_size=10&sort_key=host_name&sort_dir=ASC&as_proxy=false
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result": [ {
```

```
"host_name" : "100.101.28.203",
"ip" : "100.101.28.203",
"port" : 22,
"os" : "linux",
"authorization" : {
  "username" : "root",
  "password" : null,
  "private_key" : null,
  "trusted_type" : 0
},
"permission" : {
  "can_view" : true,
  "can_edit" : true,
  "can_delete" : true,
  "can_add_host" : true,
  "can_copy" : true
},
"uuid" : "2cc913cc9a494f09b7320801ebacad02",
"group_id" : "ab7647b0863c4e969c8949d38d591339",
"as_proxy" : false,
"proxy_host_id" : "",
"owner_id" : "6baa7454109d47c192f22078fe6cda20",
"owner_name" : "devcloud_devcloud_l00490255_01",
"connection_status" : "success",
"create_time" : "2021-04-15 11:01:51",
"connection_result" : "Connection established",
"lastest_connection_time" : "2021-04-15 11:02:00",
"nick_name" : "A/B Side Account",
"proxy_host" : null,
"import_status" : null,
"env_count" : 1
}],
"total" : 1,
"status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListNewHostsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);
```

```
CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
ListNewHostsRequest request = new ListNewHostsRequest();
request.withGroupId("{group_id}");
try {
    ListNewHostsResponse response = client.listNewHosts(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ListNewHostsRequest()
        request.group_id = "{group_id}"
        response = client.list_new_hosts(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
```

```
"github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListNewHostsRequest{}
    request.GroupId = "{group_id}"
    response, err := client.ListNewHosts(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.8 Querying Host Details (Recommended)

### Function

This API is used to query host details by ID.

### Calling Method

For details, see [Calling APIs](#).



## URI

GET /v1/resources/host-groups/{group\_id}/hosts/{host\_id}

**Table 4-91** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID
host_id	Yes	String	Host ID

## Request Parameters

**Table 4-92** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

**Table 4-93** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
result	<a href="#">HostInfoDetail</a> object	Host details

**Table 4-94** HostInfoDetail

Parameter	Type	Description
host_id	String	Host ID
ip	String	Host IP address
os	String	Host OS
port	Integer	Port number

Parameter	Type	Description
authorization	<a href="#">HostAuthorizationBody</a> object	Log in to the host for authentication by password or key.
permission	<a href="#">PermissionHostDetailNew</a> object	Host-related permission details
group_id	String	Host cluster ID
host_name	String	Host name
as_proxy	Boolean	Proxy or not
proxy_host_id	String	Proxy ID
owner_name	String	Host owner name
proxy_host	<a href="#">HostInfoDetail</a> object	Proxy details
connection_status	String	Connectivity status
create_time	String	Creation time
update_time	String	Update time
lastest_connection_time	String	Last connection time
connection_result	String	Connectivity verification result
install_icagent	Boolean	Application Operations Management (AOM) is enabled for free to provide metric monitoring, log query, and alarm functions. (The ICAgent is automatically installed and supports only Huawei Cloud Linux hosts.)
nick_name	String	Creator alias

**Table 4-95** HostAuthorizationBody

Parameter	Type	Description
username	String	Username. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
password	String	Password. When the authentication type is 0, the password is mandatory.
private_key	String	Key. When the authentication type is 1, the key is mandatory.

Parameter	Type	Description
trusted_type	Integer	Authentication type. 0 indicates password authentication, and 1 indicates key authentication.

**Table 4-96** PermissionHostDetailNew

Parameter	Type	Description
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_add_host	Boolean	Whether you have the permission to add hosts
can_copy	Boolean	Whether you have the permission to clone hosts

## Example Requests

```
https://{endpoint}/v1/resources/host-groups/ab7647b0863c4e969c8949d38d591339/hosts/300d6d2e53624d0da08b182099ad10f7
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result" : {
    "host_id" : "300d6d2e53624d0da08b182099ad10f7",
    "ip" : "100.101.28.215",
    "port" : 22,
    "os" : "linux",
    "authorization" : {
      "username" : "root",
      "password" : null,
      "private_key" : null,
      "trusted_type" : 0
    },
    "permission" : {
      "can_view" : true,
      "can_edit" : true,
      "can_delete" : true,
      "can_add_host" : true,
      "can_copy" : true
    },
    "group_id" : "ab7647b0863c4e969c8949d38d591339",
    "host_name" : "100.101.28.215",
    "as_proxy" : false,
    "proxy_host_id" : null,
    "owner_name" : "devcloud_devcloud_l00490255_01",
    "proxy_host" : null,
    "connection_status" : "success",
    "install_icagent" : false,
  }
}
```

```
"create_time" : "2021-05-13 09:35:41",
"update_time" : "2021-05-13 09:35:41",
"connection_result" : "Connection established",
"lastest_connection_time" : "2021-05-13 09:36:11",
"nick_name" : "A/B Side Account"
},
"status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowHostDetailSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowHostDetailRequest request = new ShowHostDetailRequest();
        request.withGroupId("{group_id}");
        request.withHostId("{host_id}");
        try {
            ShowHostDetailResponse response = client.showHostDetail(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ShowHostDetailRequest()
        request.group_id = "{group_id}"
        request.host_id = "{host_id}"
        response = client.show_host_detail(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())
```

```
request := &model.ShowHostDetailRequest{}
request.GroupId = "{group_id}"
request.HostId = "{host_id}"
response, err := client.ShowHostDetail(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.9 Editing Host Information in a Host Cluster

### Function

This API is used to edit host information in a host cluster by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v1/resources/host-groups/{group\_id}/hosts/{host\_id}

**Table 4-97** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID
host_id	Yes	String	Host ID

## Request Parameters

**Table 4-98** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-99** Request body parameters

Parameter	Mandatory	Type	Description
as_proxy	No	Boolean	Proxy host or not
authorization	No	<a href="#">DeploymentHostAuthorizationBody</a> object	Log in to the host for authentication by password or key.
host_name	Yes	String	Host name
ip	Yes	String	Host IP address, for example, 161.17.101.12.
port	Yes	Integer	SSH Port number, for example, 22.
proxy_host_id	No	String	Proxy host ID

Parameter	Mandatory	Type	Description
sync	No	Boolean	Whether to sync host information
install_icagent	No	Boolean	Whether to install ICAGENT

**Table 4-100** DeploymentHostAuthorizationBody

Parameter	Mandatory	Type	Description
username	Yes	String	Username. The value can contain letters, digits, hyphens (-), underscores (_), and periods (.).
password	No	String	Password. When the authentication type is 0, the password is mandatory.
private_key	No	String	Key. When the authentication type is 1, the key is mandatory.
trusted_type	Yes	Integer	Authentication type. 0 indicates password authentication, and 1 indicates key authentication.

## Response Parameters

Status code: 200

**Table 4-101** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
id	String	Host ID

## Example Requests

```
https://{endpoint}/v1/resources/host-groups/6bec5f67ab9b4c34a21c7ffe0b0191c8/hosts/a94facdc4b1e40d799dbe6de91167072
```

```
{
  "as_proxy" : false,
  "host_name" : "hostName",
  "install_icagent" : true,
  "ip" : "100.101.28.215",
  "port" : 22,
```



```
"proxy_host_id" : "",
"authorization" : {
  "username" : "root",
  "password" : "*****",
  "private_key" : "",
  "trusted_type" : 0
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status" : "success",
  "id" : "a94facdc4b1e40d799dbe6de91167072"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class UpdateHostInfoSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        UpdateHostInfoRequest request = new UpdateHostInfoRequest();
        request.withGroupId("{group_id}");
        request.withHostId("{host_id}");
        DeploymentHostRequestExternal body = new DeploymentHostRequestExternal();
        DeploymentHostAuthorizationBody authorizationbody = new DeploymentHostAuthorizationBody();
        authorizationbody.withUsername("root")
            .withPassword("*****")
            .withPrivateKey("")
            .withTrustedType(DeploymentHostAuthorizationBody.TrustedTypeEnum.NUMBER_0);
        body.withInstallIcagent(true);
```

```
body.withProxyHostId("");
body.withPort(22);
body.withIp("100.101.28.215");
body.withHostName("hostName");
body.withAuthorization(authorizationbody);
body.withAsProxy(false);
request.withBody(body);
try {
    UpdateHostInfoResponse response = client.updateHostInfo(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = UpdateHostInfoRequest()
        request.group_id = "{group_id}"
        request.host_id = "{host_id}"
        authorizationbody = DeploymentHostAuthorizationBody(
            username="root",
            password="*****",
            private_key="",
            trusted_type=0
        )
        request.body = DeploymentHostRequestExternal(
            install_icagent=True,
            proxy_host_id="",
            port=22,
            ip="100.101.28.215",
            host_name="hostName",
            authorization=authorizationbody,
            as_proxy=False
        )
```

```
response = client.update_host_info(request)
print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.UpdateHostInfoRequest{}
    request.GroupId = "{group_id}"
    request.HostId = "{host_id}"
    passwordAuthorization := "*****"
    privateKeyAuthorization := ""
    authorizationbody := &model.DeploymentHostAuthorizationBody{
        Username: "root",
        Password: &passwordAuthorization,
        PrivateKey: &privateKeyAuthorization,
        TrustedType: model.GetDeploymentHostAuthorizationBodyTrustedTypeEnum().E_0,
    }
    installIcagentDeploymentHostRequestExternal := true
    proxyHostIdDeploymentHostRequestExternal := ""
    asProxyDeploymentHostRequestExternal := false
    request.Body = &model.DeploymentHostRequestExternal{
        InstallIcagent: &installIcagentDeploymentHostRequestExternal,
        ProxyHostId: &proxyHostIdDeploymentHostRequestExternal,
        Port: int32(22),
        Ip: "100.101.28.215",
        HostName: "hostName",
        Authorization: authorizationbody,
        AsProxy: &asProxyDeploymentHostRequestExternal,
    }
    response, err := client.UpdateHostInfo(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

```
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.10 Deleting a Host from a Host Cluster

### Function

This API is used to delete a host from a host cluster by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v1/resources/host-groups/{group\_id}/hosts/{host\_id}

**Table 4-102** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID
host_id	Yes	String	Host ID

## Request Parameters

**Table 4-103** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200****Table 4-104** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
id	String	Host ID

## Example Requests

```
https://{endpoint}/v1/resources/host-groups/6bec5f67ab9b4c34a21c7ffe0b0191c8/hosts/a94facdc4b1e40d799dbe6de91167072
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status" : "success",
  "id" : "a94facdc4b1e40d799dbe6de91167072"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class DeleteHostSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();

        DeleteHostRequest request = new DeleteHostRequest();
        request.withGroupId("{group_id}");
        request.withHostId("{host_id}");
        try {
            DeleteHostResponse response = client.deleteHost(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = DeleteHostRequest()
        request.group_id = "{group_id}"
        request.host_id = "{host_id}"
        response = client.delete_host(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())
```

```
request := &model.DeleteHostRequest{}
request.GroupId = "{group_id}"
request.HostId = "{host_id}"
response, err := client.DeleteHost(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.11 Cloning Hosts to the Target Host Cluster in Batches

### Function

This API is used to clone hosts to the target host cluster in batches.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/resources/host-groups/{group\_id}/hosts/replication

**Table 4-105** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Source host cluster ID



## Request Parameters

**Table 4-106** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-107** Request body parameters

Parameter	Mandatory	Type	Description
host_uuids	Yes	Array of strings	Host ID list
target_group_id	Yes	String	Target host cluster ID

## Response Parameters

Status code: 200

**Table 4-108** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
result	Boolean	Returned result

## Example Requests

```
https://{endpoint}/v1/resources/host-groups/8518ee4e95924495ae18addce39b2015/hosts/replication
{
  "host_uuids" : [ "5fd1c0334d7343338054af811fef8e4b" ],
  "target_group_id" : "849f425a74034fd2a4e60c367414efba"
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status" : "success",
  "result" : true
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class CopyHostsToTargetSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);
```

```
CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
CopyHostsToTargetRequest request = new CopyHostsToTargetRequest();
request.withGroupId("{group_id}");
DeploymentHostsCopyRequest body = new DeploymentHostsCopyRequest();
List<String> listbodyHostUuids = new ArrayList<>();
listbodyHostUuids.add("5fd1c0334d7343338054af811fef8e4b");
body.withTargetGroupId("849f425a74034fd2a4e60c367414efba");
body.withHostUuids(listbodyHostUuids);
request.withBody(body);
try {
    CopyHostsToTargetResponse response = client.copyHostsToTarget(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CopyHostsToTargetRequest()
        request.group_id = "{group_id}"
        listHostUuidsbody = [
            "5fd1c0334d7343338054af811fef8e4b"
        ]
        request.body = DeploymentHostsCopyRequest(
            target_group_id="849f425a74034fd2a4e60c367414efba",
            host_uuids=listHostUuidsbody
        )
        response = client.copy_hosts_to_target(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
```

```
print(e.request_id)
print(e.error_code)
print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CopyHostsToTargetRequest{}
    request.GroupId = "{group_id}"
    var listHostUidsbody = List<String>{
        "5fd1c0334d7343338054af811fef8e4b",
    }
    request.Body = &model.DeploymentHostsCopyRequest{
        TargetGroupId: "849f425a74034fd2a4e60c367414efba",
        HostUids: listHostUidsbody,
    }
    response, err := client.CopyHostsToTarget(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.2.12 Deleting Hosts from a Host Cluster in Batches

### Function

This API is used to delete hosts from a host cluster in batches.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/resources/host-groups/{group\_id}/hosts/batch-delete

**Table 4-109** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

### Request Parameters

**Table 4-110** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-111** Request body parameters

Parameter	Mandatory	Type	Description
host_id_list	No	Array of strings	Host ID list

## Response Parameters

**Status code: 200**

**Table 4-112** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
result	Array of strings	Returned result

## Example Requests

```
https://{endpoint}/v1/resources/host-groups/2a8c2da888c04a5eaff10d0787c90ea4/hosts/batch-delete
{
  "host_id_list" : [ "5fd1c0334d7343338054af811fef8e4b" ]
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status" : "success",
  "result" : [ "450c2301c9ea4d82a6d9a06ce59ba6b4" ]
}
```

## SDK Sample Code

The SDK sample code is as follows.

## Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class BatchDeleteHostsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        BatchDeleteHostsRequest request = new BatchDeleteHostsRequest();
        request.withGroupId("{group_id}");
        DeploymentHostListEntity body = new DeploymentHostListEntity();
        List<String> listbodyHostIdList = new ArrayList<>();
        listbodyHostIdList.add("5fd1c0334d734338054af811fef8e4b");
        body.withHostIdList(listbodyHostIdList);
        request.withBody(body);
        try {
            BatchDeleteHostsResponse response = client.batchDeleteHosts(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *
```

```
if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = BatchDeleteHostsRequest()
        request.group_id = "{group_id}"
        listHostIdListbody = [
            "5fd1c0334d7343338054af811fef8e4b"
        ]
        request.body = DeploymentHostListEntity(
            host_id_list=listHostIdListbody
        )
        response = client.batch_delete_hosts(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.BatchDeleteHostsRequest{}
    request.GroupId = "{group_id}"
    var listHostIdListbody = []string{
        "5fd1c0334d7343338054af811fef8e4b",
    }
```



```
}
request.Body = &model.DeploymentHostListEntity{
    HostIdList: &listHostIdListbody,
}
response, err := client.BatchDeleteHosts(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

# 4.3 Managing Applications

## 4.3.1 Obtaining an Application List

### Function

This API is used to query an application list in a project. This API will not be maintained after September 30, 2024. You can use the ListAllApp API instead.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/{project\_id}/tasks/list

**Table 4-113** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .

**Table 4-114** Query Parameters

Parameter	Mandatory	Type	Description
page	Yes	Integer	Page number, indicating that the query starts from this page. The value of page is no less than 1.
size	Yes	Integer	Number of items displayed on each page. The value of size is no more than 100.

## Request Parameters

**Table 4-115** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200**

**Table 4-116** Response body parameters

Parameter	Type	Description
total_num	Integer	Total number
result	Array of <a href="#">TaskInfo</a> objects	Returned result

**Table 4-117** TaskInfo

Parameter	Type	Description
task_id	String	Deployment task ID
name	String	Application name
project_id	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
project_name	String	Project name
deploy_system	String	Deployment type. Options: deployTemplate, ansible, and shell.
create_time	String	Creation time
update_time	String	Modification time
state	String	Application status: Draft and Available.
execution_time	String	Last deployment time
description	String	Description
is_default_permission	Boolean	Whether to use the default permission matrix
template_id	String	Template ID
owner	String	Username of the application creator
nick_name	String	Alias of the application creator
owner_id	String	ID of the application creator
tenant_id	String	Tenant ID of the application creator
tenant_name	String	Tenant name of the application creator
slave_cluster_id	String	Slave cluster ID. If the value is null, the default slave cluster is used. If slave is user-defined, the slave cluster ID is used.
is_care	Boolean	Whether you have favorited the application

Parameter	Type	Description
can_modify	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_view	Boolean	Whether you have the view permission
can_execute	Boolean	Whether you have the deploy permission
can_copy	Boolean	Whether you have the clone permission
can_manage	Boolean	Whether you have permission to edit the application permission matrix
can_disable	Boolean	Whether you have permission to disable applications
app_component_list	Array of <a href="#">AppComponentDao</a> objects	Mapping between applications and AOM application components
role_id	Integer	Role ID. 0: Application creator. -1: Project creator. 3: Project manager. 4: Developer. 5: Test manager. 6: Tester. 7: Participant. 8: Viewer.
id	String	Deployment task ID
release_id	Integer	Deployment record sequence number
is_disable	Boolean	Whether the application is disabled
duration	String	Deployment time
execution_state	String	Deployment status
executor_id	String	Deployer ID
executor_name	String	Deployer name
steps	Map<String,Step>	Deployment procedure

**Table 4-118** AppComponentDao

Parameter	Type	Description
task_id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.

Parameter	Type	Description
app_id	String	<b>Parameter description:</b> AOM application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
app_name	String	<b>Parameter description:</b> AOM application name. <b>Value range:</b> The value consists of letters and digits.
comp_id	String	<b>Parameter description:</b> AOM application component ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
comp_name	String	<b>Parameter description:</b> AOM application component name. <b>Value range:</b> The value consists of 0 to 128 characters.
domain_id	String	<b>Parameter description:</b> Tenant ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
region	String	<b>Parameter description:</b> Region information. <b>Value range:</b> The value consists of 1 to 256 characters.
state	String	<b>Parameter description:</b> Whether the AOM application component takes effect. <b>Value range:</b> <ul style="list-style-type: none"><li>● 0: Initialized.</li><li>● 1: The operation is successful and takes effect.</li></ul>

Table 4-119 Step

Parameter	Type	Description
id	String	<b>Parameter description:</b> Action ID. <b>Value range:</b> N/A
name	String	<b>Parameter description:</b> Action name. <b>Value range:</b> N/A
params	Map<String,String>	<b>Parameter description:</b> Action parameter. <b>Value range:</b> N/A
enable	Boolean	<b>Parameter description:</b> Whether an action is enabled. <b>Value range:</b> <ul style="list-style-type: none"><li>● true: Enabled</li><li>● false: Disabled</li></ul>

## Example Requests

```
https://endpoint/v2/332f53cbabc44863a46ce6b4f82a9fe7/tasks/list?page=1&size=2
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result": [ {
    "id": "2c82ffe8d00d4968a4e5f7a36d87ae17",
    "name": "Message Notification",
    "state": "succeeded",
    "owner": "devcloud_devcloud_l00490255_01",
    "duration": "00:00:50",
    "project_id": "332f53cbabc44863a46ce6b4f82a9fe7",
    "project_name": "DeployMan-UI-L0",
    "deploy_system": "deployTemplate",
    "create_time": "2022-02-09 16:34:20",
    "update_time": "2022-03-05 09:04:39",
    "execution_time": "2022-04-11 15:50:23",
    "execution_state": "succeeded",
    "role_id": -1,
    "is_default_permission": false,
    "executor_id": "6baa7454109d47c192f22078fe6cda20",
    "executor_nick_name": "A/B Side Account",
    "nick_name": "A/B Side Account",
    "owner_id": "6baa7454109d47c192f22078fe6cda20",
```

```
"is_care" : true,
"can_modify" : true,
"can_delete" : true,
"can_view" : true,
"can_execute" : true,
"can_copy" : true,
"can_manage" : true,
"can_disable" : false,
"release_id" : 61640,
"is_disable" : true
}, {
  "id" : "a9c3ef27a1f34a1abf1dc84d927d7d39",
  "name" : "412",
  "state" : "failed",
  "owner" : "paas_clouddeploy_h00472130_01",
  "duration" : "00:02:36",
  "project_id" : "332f53cbabc44863a46ce6b4f82a9fe7",
  "project_name" : "DeployMan-UI-L0",
  "deploy_system" : "deployTemplate",
  "create_time" : "2022-04-12 17:26:07",
  "update_time" : "2022-04-12 17:26:07",
  "execution_time" : "2022-04-13 11:45:09",
  "execution_state" : "failed",
  "role_id" : -1,
  "is_default_permission" : false,
  "executor_id" : "04ec4661a8df4359b50980a9c958c86d",
  "executor_nick_name" : "paas_clouddeploy_h00472130_01",
  "nick_name" : "paas_clouddeploy_h00472130_01",
  "owner_id" : "04ec4661a8df4359b50980a9c958c86d",
  "is_care" : false,
  "can_modify" : true,
  "can_delete" : true,
  "can_view" : true,
  "can_execute" : true,
  "can_copy" : true,
  "can_manage" : true,
  "can_disable" : false,
  "release_id" : 29,
  "is_disable" : true
}],
"total_num" : 331
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListDeployTasksSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
```

```
this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
String ak = System.getenv("CLOUD_SDK_AK");
String sk = System.getenv("CLOUD_SDK_SK");

ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
ListDeployTasksRequest request = new ListDeployTasksRequest();
request.withProjectId("{project_id}");
try {
    ListDeployTasksResponse response = client.listDeployTasks(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ListDeployTasksRequest()
        request.project_id = "{project_id}"
        response = client.list_deploy_tasks(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```



## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListDeployTasksRequest{}
    request.ProjectId = "{project_id}"
    response, err := client.ListDeployTasks(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.2 Creating an Application Using a Template

### Function

This API is used to create an application using a template. This API will not be maintained after September 30, 2024. You can use the CreateApp API instead.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v2/tasks/template-task

### Request Parameters

**Table 4-120** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-121** Request body parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
project_name	Yes	String	Project name
template_id	Yes	String	Deployment template ID
task_name	Yes	String	Application name
slave_cluster_id	No	String	Custom slave resource pool ID
configs	No	Array of <a href="#">ConfigInfoDO</a> objects	Deployment parameter type

**Table 4-122** ConfigInfoDO

Parameter	Mandatory	Type	Description
name	No	String	Deployment parameter name which can be customized.
type	No	String	Type. If name is set, type is mandatory. If type is left empty, the default value text is used.
description	No	String	Description
value	No	String	Deployment parameter value
task_id	No	String	Deployment task ID, which is automatically generated when the application is created.
static_status	No	Integer	Whether the static parameter is used. 1: The parameter cannot be changed during deployment. 0: the parameter can be changed and is reported to the pipeline.
limits	No	Array of <a href="#">ParamTypeLimits</a> objects	When the parameter type is enum, the optional value must be entered.

**Table 4-123** ParamTypeLimits

Parameter	Mandatory	Type	Description
name	No	String	Enumerated value optional parameter

## Response Parameters

Status code: 200

**Table 4-124** Response body parameters

Parameter	Type	Description
task_name	String	Application name
task_id	String	Deployment task ID

## Example Requests

This API is used to create an application using the Deploy a Spring Boot Application template in a specified project.

```
https://{endpoint}/v2/tasks/template-task

{
  "project_id" : "6039d4480efc4dddb178abff98719913",
  "project_name" : "Deploy",
  "template_id" : "6efb0b24e2e9489eb0e53ee12904a19e",
  "task_name" : "Deploytest",
  "configs" : [ {
    "name" : "serviceName",
    "type" : "text",
    "description" : "Service name",
    "value" : "SpringBoot-Demo"
  }, {
    "name" : "releaseVersion",
    "type" : "text",
    "description" : "Version number",
    "value" : "1.1.1"
  }, {
    "name" : "jdk_path",
    "type" : "text",
    "description" : "",
    "value" : "/usr/local/jdk"
  }, {
    "name" : "package_url",
    "type" : "text",
    "description" : "",
    "value" : "/${serviceName}/${releaseVersion}/${serviceName}.jar"
  }, {
    "name" : "spring_path",
    "type" : "text",
    "description" : "",
    "value" : "/usr/local/${serviceName}.jar"
  }, {
    "name" : "download_path",
    "type" : "text",
```

```
"description" : "",
"value" : "/usr/local/"
}, {
  "name" : "service_port",
  "type" : "text",
  "description" : "",
  "value" : "<%= service_port%>"
}, {
  "name" : "host_group",
  "type" : "host_group",
  "description" : "",
  "value" : "<%= host_group%>"
}, {
  "name" : "component_name",
  "type" : "text",
  "description" : "",
  "value" : "aom-${serviceName}"
}, {
  "name" : "log_path",
  "type" : "text",
  "description" : "",
  "value" : "/usr/local/*.log"
}
}]
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "task_name" : "Deploytest",
  "task_id" : "140ca97e701d4c4c93c59ffd5bdb32ec"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

This API is used to create an application using the Deploy a Spring Boot Application template in a specified project.

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class CreateDeployTaskByTemplateSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
```

this example, set environment variables CLOUD\_SDK\_AK and CLOUD\_SDK\_SK in the local environment

```
String ak = System.getenv("CLOUD_SDK_AK");
String sk = System.getenv("CLOUD_SDK_SK");

ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
CreateDeployTaskByTemplateRequest request = new CreateDeployTaskByTemplateRequest();
TemplateTaskRequestBody body = new TemplateTaskRequestBody();
List<ConfigInfoDO> listbodyConfigs = new ArrayList<>();
listbodyConfigs.add(
    new ConfigInfoDO()
        .withName("serviceName")
        .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
        .withDescription("Service name")
        .withValue("SpringBoot-Demo")
);
listbodyConfigs.add(
    new ConfigInfoDO()
        .withName("releaseVersion")
        .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
        .withDescription("Version number")
        .withValue("1.1.1")
);
listbodyConfigs.add(
    new ConfigInfoDO()
        .withName("jdk_path")
        .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
        .withDescription("")
        .withValue("/usr/local/jdk")
);
listbodyConfigs.add(
    new ConfigInfoDO()
        .withName("package_url")
        .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
        .withDescription("")
        .withValue("/${serviceName}/${releaseVersion}/${serviceName}.jar")
);
listbodyConfigs.add(
    new ConfigInfoDO()
        .withName("spring_path")
        .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
        .withDescription("")
        .withValue("/usr/local/${serviceName}.jar")
);
listbodyConfigs.add(
    new ConfigInfoDO()
        .withName("download_path")
        .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
        .withDescription("")
        .withValue("/usr/local/")
);
listbodyConfigs.add(
    new ConfigInfoDO()
        .withName("service_port")
        .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
        .withDescription("")
        .withValue("<%= service_port%>")
);
listbodyConfigs.add(
    new ConfigInfoDO()
        .withName("host_group")
        .withType(ConfigInfoDO.TypeEnum.fromValue("host_group"))
        .withDescription("")
);
```

```
        .withValue("<%= host_group%>")
    );
    listbodyConfigs.add(
        new ConfigInfoDO()
            .withName("component_name")
            .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
            .withDescription("")
            .withValue("aom-${serviceName}")
    );
    listbodyConfigs.add(
        new ConfigInfoDO()
            .withName("log_path")
            .withType(ConfigInfoDO.TypeEnum.fromValue("text"))
            .withDescription("")
            .withValue("/usr/local/*.log")
    );
    body.withConfigs(listbodyConfigs);
    body.withTaskName("Deploytest");
    body.withTemplateId("6efb0b24e2e9489eb0e53ee12904a19e");
    body.withProjectName("Deploy");
    body.withProjectId("6039d4480efc4dddb178abff98719913");
    request.withBody(body);
    try {
        CreateDeployTaskByTemplateResponse response = client.createDeployTaskByTemplate(request);
        System.out.println(response.toString());
    } catch (ConnectionException e) {
        e.printStackTrace();
    } catch (RequestTimeoutException e) {
        e.printStackTrace();
    } catch (ServiceResponseException e) {
        e.printStackTrace();
        System.out.println(e.getHttpStatusCode());
        System.out.println(e.getRequestId());
        System.out.println(e.getErrorCode());
        System.out.println(e.getErrorMsg());
    }
}
}
```

## Python

This API is used to create an application using the Deploy a Spring Boot Application template in a specified project.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
```

```
request = CreateDeployTaskByTemplateRequest()
listConfigbody = [
    ConfigInfoDO(
        name="serviceName",
        type="text",
        description="Service name",
        value="SpringBoot-Demo"
    ),
    ConfigInfoDO(
        name="releaseVersion",
        type="text",
        description="Version number",
        value="1.1.1"
    ),
    ConfigInfoDO(
        name="jdk_path",
        type="text",
        description="",
        value="/usr/local/jdk"
    ),
    ConfigInfoDO(
        name="package_url",
        type="text",
        description="",
        value="/${serviceName}/${releaseVersion}/${serviceName}.jar"
    ),
    ConfigInfoDO(
        name="spring_path",
        type="text",
        description="",
        value="/usr/local/${serviceName}.jar"
    ),
    ConfigInfoDO(
        name="download_path",
        type="text",
        description="",
        value="/usr/local/"
    ),
    ConfigInfoDO(
        name="service_port",
        type="text",
        description="",
        value="<%= service_port%>"
    ),
    ConfigInfoDO(
        name="host_group",
        type="host_group",
        description="",
        value="<%= host_group%>"
    ),
    ConfigInfoDO(
        name="component_name",
        type="text",
        description="",
        value="aom-${serviceName}"
    ),
    ConfigInfoDO(
        name="log_path",
        type="text",
        description="",
        value="/usr/local/*.log"
    )
]
request.body = TemplateTaskRequestBody(
    configs=listConfigbody,
    task_name="Deploytest",
    template_id="6efb0b24e2e9489eb0e53ee12904a19e",
    project_name="Deploy",
    project_id="6039d4480efc4dddb178abff98719913"
```



```
)
response = client.create_deploy_task_by_template(request)
print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

This API is used to create an application using the Deploy a Spring Boot Application template in a specified project.

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CreateDeployTaskByTemplateRequest{}
    nameConfigs:= "serviceName"
    typeConfigs:= model.GetConfigInfoDoTypeEnum().TEXT
    descriptionConfigs:= "Service name"
    valueConfigs:= "SpringBoot-Demo"
    nameConfigs1:= "releaseVersion"
    typeConfigs1:= model.GetConfigInfoDoTypeEnum().TEXT
    descriptionConfigs1:= "Version number"
    valueConfigs1:= "1.1.1"
    nameConfigs2:= "jdk_path"
    typeConfigs2:= model.GetConfigInfoDoTypeEnum().TEXT
    descriptionConfigs2:= ""
    valueConfigs2:= "/usr/local/jdk"
    nameConfigs3:= "package_url"
    typeConfigs3:= model.GetConfigInfoDoTypeEnum().TEXT
    descriptionConfigs3:= ""
    valueConfigs3:= "${serviceName}/${releaseVersion}/${serviceName}.jar"
    nameConfigs4:= "spring_path"
    typeConfigs4:= model.GetConfigInfoDoTypeEnum().TEXT
    descriptionConfigs4:= ""
    valueConfigs4:= "/usr/local/${serviceName}.jar"
    nameConfigs5:= "download_path"
    typeConfigs5:= model.GetConfigInfoDoTypeEnum().TEXT
    descriptionConfigs5:= ""
    valueConfigs5:= "/usr/local/"
```

```
nameConfigs6:= "service_port"
typeConfigs6:= model.GetConfigInfoDoTypeEnum().TEXT
descriptionConfigs6:= ""
valueConfigs6:= "<%= service_port%>"
nameConfigs7:= "host_group"
typeConfigs7:= model.GetConfigInfoDoTypeEnum().HOST_GROUP
descriptionConfigs7:= ""
valueConfigs7:= "<%= host_group%>"
nameConfigs8:= "component_name"
typeConfigs8:= model.GetConfigInfoDoTypeEnum().TEXT
descriptionConfigs8:= ""
valueConfigs8:= "aom-${serviceName}"
nameConfigs9:= "log_path"
typeConfigs9:= model.GetConfigInfoDoTypeEnum().TEXT
descriptionConfigs9:= ""
valueConfigs9:= "/usr/local/*.log"
var listConfigbody = []model.ConfigInfoDo{
    {
        Name: &nameConfigs,
        Type: &typeConfigs,
        Description: &descriptionConfigs,
        Value: &valueConfigs,
    },
    {
        Name: &nameConfigs1,
        Type: &typeConfigs1,
        Description: &descriptionConfigs1,
        Value: &valueConfigs1,
    },
    {
        Name: &nameConfigs2,
        Type: &typeConfigs2,
        Description: &descriptionConfigs2,
        Value: &valueConfigs2,
    },
    {
        Name: &nameConfigs3,
        Type: &typeConfigs3,
        Description: &descriptionConfigs3,
        Value: &valueConfigs3,
    },
    {
        Name: &nameConfigs4,
        Type: &typeConfigs4,
        Description: &descriptionConfigs4,
        Value: &valueConfigs4,
    },
    {
        Name: &nameConfigs5,
        Type: &typeConfigs5,
        Description: &descriptionConfigs5,
        Value: &valueConfigs5,
    },
    {
        Name: &nameConfigs6,
        Type: &typeConfigs6,
        Description: &descriptionConfigs6,
        Value: &valueConfigs6,
    },
    {
        Name: &nameConfigs7,
        Type: &typeConfigs7,
        Description: &descriptionConfigs7,
        Value: &valueConfigs7,
    },
    {
        Name: &nameConfigs8,
        Type: &typeConfigs8,
        Description: &descriptionConfigs8,
```

```
        Value: &valueConfigs8,
    },
    {
        Name: &nameConfigs9,
        Type: &typeConfigs9,
        Description: &descriptionConfigs9,
        Value: &valueConfigs9,
    },
}
request.Body = &model.TemplateTaskRequestBody{
    Configs: &listConfigsbody,
    TaskName: "Deploytest",
    TemplateId: "6efb0b24e2e9489eb0e53ee12904a19e",
    ProjectName: "Deploy",
    ProjectId: "6039d4480efc4dddb178abff98719913",
}
response, err := client.CreateDeployTaskByTemplate(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.3 Deploying an Application

### Function

This API is used to deploy an application by deployment task ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v2/tasks/{task\_id}/start

**Table 4-125** Path Parameters

Parameter	Mandatory	Type	Description
task_id	Yes	String	Deployment task ID

## Request Parameters

**Table 4-126** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-127** Request body parameters

Parameter	Mandatory	Type	Description
params	No	Array of <b>DynamicConfigInfo</b> objects	Parameters transferred during application deployment

Parameter	Mandatory	Type	Description
record_id	No	String	Deployment ID of an application. You can use record_id to roll back the application to the previous deployment status. Select the historical deployment record of the application and obtain the record ID from the URL.
trigger_source	No	String	Trigger source. 0: Deployment can be triggered through all requests. 1: Deployment can be triggered only through pipeline.

**Table 4-128** DynamicConfigInfo

Parameter	Mandatory	Type	Description
key	No	String	Parameter name transferred when deploying application
value	No	String	Parameter value transferred during application deployment
type	No	String	Type. If a dynamic parameter is set, the type is mandatory.

## Response Parameters

Status code: 200

**Table 4-129** Response body parameters

Parameter	Type	Description
id	String	Deployment record ID
task_id	String	Deployment task ID
job_name	String	Name of the application to be executed
app_component_list	Array of <a href="#">AppComponentDao</a> objects	Mapping between applications and AOM application components

**Table 4-130** AppComponentDao

Parameter	Type	Description
task_id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
app_id	String	<b>Parameter description:</b> AOM application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
app_name	String	<b>Parameter description:</b> AOM application name. <b>Value range:</b> The value consists of letters and digits.
comp_id	String	<b>Parameter description:</b> AOM application component ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
comp_name	String	<b>Parameter description:</b> AOM application component name. <b>Value range:</b> The value consists of 0 to 128 characters.
domain_id	String	<b>Parameter description:</b> Tenant ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
region	String	<b>Parameter description:</b> Region information. <b>Value range:</b> The value consists of 1 to 256 characters.

Parameter	Type	Description
state	String	<b>Parameter description:</b> Whether the AOM application component takes effect. <b>Value range:</b> <ul style="list-style-type: none"><li>0: Initialized.</li><li>1: The operation is successful and takes effect.</li></ul>

## Example Requests

This API is used to deploy an application by deployment application ID.

```
https://{endpoint}/v2/tasks/d2dc947ec2424d8789bb3984bb3adf45/start
{
  "params" : []
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "id" : "0ee9c8e6a7dc44109541e53c6dccb47c",
  "task_id" : "d2dc947ec2424d8789bb3984bb3adf45",
  "job_name" : "job_0ee9c8e6a7dc44109541e53c6dccb47c_1620810492008",
  "app_component_list" : []
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

This API is used to deploy an application by deployment application ID.

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class StartDeployTaskSolution {

    public static void main(String[] args) {
```

```
// The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
environment variables and decrypted during use to ensure security.
// In this example, AK and SK are stored in environment variables for authentication. Before running
this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
String ak = System.getenv("CLOUD_SDK_AK");
String sk = System.getenv("CLOUD_SDK_SK");

ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();

StartDeployTaskRequest request = new StartDeployTaskRequest();
request.withTaskId("{task_id}");
try {
    StartDeployTaskResponse response = client.startDeployTask(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

This API is used to deploy an application by deployment application ID.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.getenv("CLOUD_SDK_AK")
    sk = os.getenv("CLOUD_SDK_SK")

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = StartDeployTaskRequest()
        request.task_id = "{task_id}"
        response = client.start_deploy_task(request)
        print(response)
    except exceptions.ClientRequestException as e:
```



```
print(e.status_code)
print(e.request_id)
print(e.error_code)
print(e.error_msg)
```

## Go

This API is used to deploy an application by deployment application ID.

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.StartDeployTaskRequest{}
    request.TaskId = "{task_id}"
    response, err := client.StartDeployTask(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.4 Obtaining the Details of an Application

### Function

This API is used to obtain application details by deployment task ID. This API will not be maintained after September 30, 2024. You can use the ShowAppDetailById API instead.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/tasks/{task\_id}

**Table 4-131** Path Parameters

Parameter	Mandatory	Type	Description
task_id	Yes	String	Deployment task ID

### Request Parameters

**Table 4-132** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

### Response Parameters

Status code: 200

**Table 4-133** Response body parameters

Parameter	Type	Description
task_id	String	Deployment task ID
name	String	Application name

Parameter	Type	Description
project_id	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
project_name	String	Project name
deploy_system	String	Deployment type. Options: deployTemplate, ansible, and shell.
create_time	String	Creation time
update_time	String	Modification time
state	String	Application status: Draft and Available.
execution_time	String	Last deployment time
description	String	Description
is_default_permission	Boolean	Whether to use the default permission matrix
template_id	String	Template ID
owner	String	Username of the application creator
nick_name	String	Alias of the application creator
owner_id	String	ID of the application creator
tenant_id	String	Tenant ID of the application creator
tenant_name	String	Tenant name of the application creator
slave_cluster_id	String	Slave cluster ID. If the value is null, the default slave cluster is used. If slave is user-defined, the slave cluster ID is used.
is_care	Boolean	Whether you have favorited the application
can_modify	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_view	Boolean	Whether you have the view permission
can_execute	Boolean	Whether you have the deploy permission
can_copy	Boolean	Whether you have the clone permission
can_manage	Boolean	Whether you have permission to edit the application permission matrix
can_disable	Boolean	Whether you have permission to disable applications

Parameter	Type	Description
app_component_list	Array of <a href="#">AppComponentDao</a> objects	Mapping between applications and AOM application components
role_id	Integer	Role ID. 0: Application creator. -1: Project creator. 3: Project manager. 4: Developer. 5: Test manager. 6: Tester. 7: Participant. 8: Viewer.
id	String	Deployment task ID
release_id	Integer	Deployment record sequence number
is_disable	Boolean	Whether the application is disabled
duration	String	Deployment time
execution_state	String	Deployment status
executor_id	String	Deployer ID
executor_nickname	String	Deployer name
steps	Map<String,Step>	Deployment procedure

**Table 4-134** AppComponentDao

Parameter	Type	Description
task_id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
app_id	String	<b>Parameter description:</b> AOM application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
app_name	String	<b>Parameter description:</b> AOM application name. <b>Value range:</b> The value consists of letters and digits.

Parameter	Type	Description
comp_id	String	<b>Parameter description:</b> AOM application component ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
comp_name	String	<b>Parameter description:</b> AOM application component name. <b>Value range:</b> The value consists of 0 to 128 characters.
domain_id	String	<b>Parameter description:</b> Tenant ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
region	String	<b>Parameter description:</b> Region information. <b>Value range:</b> The value consists of 1 to 256 characters.
state	String	<b>Parameter description:</b> Whether the AOM application component takes effect. <b>Value range:</b> <ul style="list-style-type: none"><li>0: Initialized.</li><li>1: The operation is successful and takes effect.</li></ul>

**Table 4-135** Step

Parameter	Type	Description
id	String	<b>Parameter description:</b> Action ID. <b>Value range:</b> N/A
name	String	<b>Parameter description:</b> Action name. <b>Value range:</b> N/A

Parameter	Type	Description
params	Map<String,String>	<b>Parameter description:</b> Action parameter. <b>Value range:</b> N/A
enable	Boolean	<b>Parameter description:</b> Whether an action is enabled. <b>Value range:</b> <ul style="list-style-type: none"><li>● true: Enabled</li><li>● false: Disabled</li></ul>

## Example Requests

```
https://{endpoint}/v2/tasks/d2dc947ec2424d8789bb3984bb3adf45
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "task_id": "d2dc947ec2424d8789bb3984bb3adf45",
  "name": "wyktest111",
  "state": "Available",
  "description": "111222",
  "owner": "devcloud_devcloud_l00490255_01",
  "steps": {
    "step1": {
      "id": "1583",
      "name": "Select a deployment source",
      "params": { },
      "enable": true
    },
    "step2": {
      "id": "1293",
      "name": "Health Test via URLs",
      "params": { },
      "enable": true
    }
  },
  "project_id": "6039d4480efc4dddb178abff98719913",
  "project_name": "wyk_test",
  "deploy_system": "deployTemplate",
  "create_time": "2021-04-01 17:07:49",
  "update_time": "2021-05-17 11:26:58",
  "role_id": 0,
  "is_default_permission": false,
  "template_id": "242ea879b3444b8391c3feb2e9c073de",
  "nick_name": "A/B Side Account",
  "owner_id": "6baa7454109d47c192f22078fe6cda20",
  "tenant_id": "26a680dd72e7482eb60d2ef5513588bb",
  "tenant_name": "devcloud_devcloud_l00490255_01",
  "slave_cluster_id": "",
  "is_care": false,
  "can_modify": true,
  "can_delete": true,
}
```

```
"can_view" : true,
"can_execute" : true,
"can_copy" : true,
"can_manage" : true,
"can_disable" : false,
"app_component_list" : [ ],
"is_disable" : true
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowDeployTaskDetailSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowDeployTaskDetailRequest request = new ShowDeployTaskDetailRequest();
        request.withTaskId("{task_id}");
        try {
            ShowDeployTaskDetailResponse response = client.showDeployTaskDetail(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ShowDeployTaskDetailRequest()
        request.task_id = "{task_id}"
        response = client.show_deploy_task_detail(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())
```



```
request := &model.ShowDeployTaskDetailRequest{}
request.TaskId = "{task_id}"
response, err := client.ShowDeployTaskDetail(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.5 Deleting an Application

### Function

This API is used to delete an application by deployment task ID. This API will not be maintained after September 30, 2024. You can use the DeleteApplication API instead.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v2/tasks/{task\_id}

**Table 4-136** Path Parameters

Parameter	Mandatory	Type	Description
task_id	Yes	String	Deployment task ID

## Request Parameters

**Table 4-137** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200****Table 4-138** Response body parameters

Parameter	Type	Description
task_id	String	Deployment task ID

## Example Requests

```
https://{endpoint}/v2/tasks/b024060ac00749178e72713ae82b0da2
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "task_id" : "b024060ac00749178e72713ae82b0da2"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class DeleteDeployTaskSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        DeleteDeployTaskRequest request = new DeleteDeployTaskRequest();
        request.withTaskId("{task_id}");
        try {
            DeleteDeployTaskResponse response = client.deleteDeployTask(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8

import os
```

```
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = DeleteDeployTaskRequest()
        request.task_id = "{task_id}"
        response = client.delete_deploy_task(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.DeleteDeployTaskRequest{}
    request.TaskId = "{task_id}"
    response, err := client.DeleteDeployTask(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    }
}
```

```
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.6 Querying the Historical Deployment Records of a Specified Application in a Project by the Start Time and End Time

### Function

This API is used to query the historical deployment records of a specified application in a project by the start time and end time.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/{project\_id}/task/{id}/history

**Table 4-139** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	<b>Parameter description:</b> Project ID. For details, see [Obtaining a Project ID] (CloudDeploy_api_0014.xml). <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A
id	Yes	String	<b>Parameter description:</b> Deployment application ID. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

**Table 4-140** Query Parameters

Parameter	Mandatory	Type	Description
page	Yes	Integer	<b>Parameter description:</b> Page number, which means the query starts from this page. <b>Constraints:</b> N/A <b>Value range:</b> 1-99,999 <b>Default value:</b> N/A

Parameter	Mandatory	Type	Description
size	Yes	Integer	<b>Parameter description:</b> Number of items displayed on each page. <b>Constraints:</b> N/A <b>Value range:</b> 1-100 <b>Default value:</b> N/A
start_date	Yes	String	<b>Parameter description:</b> Start time. The value format is yyyy-MM-dd. For example, 2022-03-16. <b>Constraints:</b> This parameter is used together with end_date. The value of end_date must be later than or equal to the value of start_date. The time range cannot exceed 30 days. <b>Value range:</b> N/A <b>Default value:</b> N/A
end_date	Yes	String	<b>Parameter description:</b> End time. The value format is yyyy-MM-dd. For example, 2022-04-15. <b>Constraints:</b> This parameter is used together with start_date. The value of end_date must be later than or equal to the value of start_date. The time range cannot exceed 30 days. <b>Value range:</b> N/A <b>Default value:</b> N/A

## Request Parameters

**Table 4-141** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>

## Response Parameters

**Status code: 200****Table 4-142** Response body parameters

Parameter	Type	Description
result	Array of <a href="#">ExecuteRecordV2Body</a> objects	<b>Parameter description:</b> List of historical application deployment records.



Parameter	Type	Description
total_num	Integer	<b>Parameter description:</b> Total number of historical application deployment records between the start time and end time. <b>Value range:</b> N/A

**Table 4-143** ExecuteRecordV2Body

Parameter	Type	Description
duration	String	<b>Parameter description:</b> Deployment duration. <b>Value range:</b> N/A
state	String	<b>Parameter description:</b> Application status. <b>Value range:</b> N/A
operator	String	<b>Parameter description:</b> Operator username. <b>Value range:</b> N/A
execution_id	String	<b>Parameter description:</b> Deployment record ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
start_time	String	<b>Parameter description:</b> Start time of application deployment. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A
nickname	String	<b>Parameter description:</b> Operator nickname. <b>Value range:</b> N/A

Parameter	Type	Description
end_time	String	<b>Parameter description:</b> End time of application deployment. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A
release_id	Long	<b>Parameter description:</b> Deployment record sequence number. <b>Value range:</b> N/A
type	String	<b>Parameter description:</b> Deployment type. <b>Value range:</b> <ul style="list-style-type: none"><li>install: Installation and deployment.</li></ul>

## Example Requests

```
https://{endpoint}/v2/5ab1363a143f46aa9959a4a8c2616589/task/ad9c1d60282544d2b5a380ea22539cf1/history?page=2&size=2&start_date=2022-03-16&end_date=2022-04-15
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result" : [ {
    "duration" : "00:16:53",
    "state" : "succeeded",
    "type" : "install",
    "operator" : "devcloud_devcloud_l00490255_01",
    "execution_id" : "50f18ce454a64ea5a62a33d56617b831",
    "start_time" : "2022-04-15 15:03:24",
    "nickname" : "A/B Side Account",
    "end_time" : "2022-04-15 15:20:17",
    "release_id" : 20
  }, {
    "duration" : "00:15:31",
    "state" : "failed",
    "type" : "install",
    "operator" : "devcloud_devcloud_l00490255_01",
    "execution_id" : "f757fbe93d35494ba0ff73b34e2f79aa",
    "start_time" : "2022-04-15 15:03:15",
    "nickname" : "A/B Side Account",
    "end_time" : "2022-04-15 15:18:46",
    "release_id" : 19
  } ],
  "total_num" : 20
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListDeployTaskHistoryByDateSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ListDeployTaskHistoryByDateRequest request = new ListDeployTaskHistoryByDateRequest();
        request.withProjectId("{project_id}");
        request.withId("{id}");
        try {
            ListDeployTaskHistoryByDateResponse response = client.listDeployTaskHistoryByDate(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
```

```
# The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment variables and decrypted during use to ensure security.
# In this example, AK and SK are stored in environment variables for authentication. Before running this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
ak = os.environ["CLOUD_SDK_AK"]
sk = os.environ["CLOUD_SDK_SK"]

credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = ListDeployTaskHistoryByDateRequest()
    request.project_id = "{project_id}"
    request.id = "{id}"
    response = client.list_deploy_task_history_by_date(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListDeployTaskHistoryByDateRequest{}
    request.ProjectId = "{project_id}"
    request.Id = "{id}"
    response, err := client.ListDeployTaskHistoryByDate(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.7 Obtaining an Application List (Recommended)

### Function

This API is used to query an application list in a project.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/applications/list

## Request Parameters

**Table 4-144** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-145** Request body parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	<b>Parameter description:</b> Project ID. For details, see [Obtaining a Project ID] (CloudDeploy_api_0014.xml). <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

Parameter	Mandatory	Type	Description
page	Yes	Integer	<b>Parameter description:</b> Page number, which means the query starts from this page. <b>Constraints:</b> N/A <b>Value range:</b> 1-99,999 <b>Default value:</b> N/A
size	Yes	Integer	<b>Parameter description:</b> Number of items displayed on each page. <b>Constraints:</b> N/A <b>Value range:</b> 1-100 <b>Default value:</b> N/A
sort_name	No	String	<b>Parameter description:</b> Sort field name. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• name: Application name.</li><li>• startTime: Start time.</li></ul> <b>Default value:</b> N/A

Parameter	Mandatory	Type	Description
sort_by	No	String	<b>Parameter description:</b> Sorting sequence. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• ASC: Ascending</li><li>• asc: Ascending</li><li>• DESC: Descending</li><li>• desc: Descending</li></ul> <b>Default value:</b> N/A
states	No	Array of strings	<b>Parameter description:</b> Application status list. <b>Constraints:</b> N/A <b>Value range:</b> <ul style="list-style-type: none"><li>• abort: Deployment suspended</li><li>• failed: Deployment failed</li><li>• not_started: Execution canceled</li><li>• pending: Queuing</li><li>• running: Deployment in progress</li><li>• succeeded: Deployment succeeded</li><li>• timeout: Deployment times out</li><li>• not_executed: Deployment not executed</li></ul> <b>Default value:</b> N/A



Parameter	Mandatory	Type	Description
group_id	No	String	<b>Parameter description:</b> Application group ID. Enter no_grouped to query ungrouped applications. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed or the no_grouped value is transferred. <b>Default value:</b> N/A

## Response Parameters

Status code: 200

Table 4-146 Response body parameters

Parameter	Type	Description
total_num	Integer	<b>Parameter description:</b> Total number of applications. <b>Value range:</b> N/A
result	Array of <a href="#">AppExecutionInfo</a> objects	<b>Parameter description:</b> Application list array.

Table 4-147 AppExecutionInfo

Parameter	Type	Description
id	String	<b>Parameter description:</b> Application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.

Parameter	Type	Description
name	String	<b>Parameter description:</b> Application name. <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-) and underscores (_) are allowed.
duration	String	<b>Parameter description:</b> Deployment time. <b>Value range:</b> N/A
is_disable	Boolean	<b>Parameter description:</b> Whether the application is disabled. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: Disabled</li><li>• false: Not disabled</li></ul>
project_id	String	<b>Parameter description:</b> Project ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
project_name	String	<b>Parameter description:</b> Project name. <b>Value range:</b> The value consists of 3 to 128 characters.
is_care	Boolean	<b>Parameter description:</b> Whether a user has favorited the application. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: Added to favorites</li><li>• false: Not added to favorites</li></ul>
can_modify	Boolean	<b>Parameter description:</b> Whether a user has the edit permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>

Parameter	Type	Description
can_delete	Boolean	<b>Parameter description:</b> Whether a user has the delete permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_view	Boolean	<b>Parameter description:</b> Whether a user has the view permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_execute	Boolean	<b>Parameter description:</b> Whether a user has the deploy permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_copy	Boolean	<b>Parameter description:</b> Whether a user has the clone permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_manage	Boolean	<b>Parameter description:</b> Whether a user has permission to edit the application permission matrix. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_create_env	Boolean	<b>Parameter description:</b> Whether a user has the permission to create environments. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>

Parameter	Type	Description
can_disable	Boolean	<b>Parameter description:</b> Whether a user has permission to disable applications. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
deploy_system	String	<b>Parameter description:</b> Deployment mode. <b>Value range:</b> <ul style="list-style-type: none"><li>• deployTemplate: Deployment template</li></ul>
create_user_id	String	<b>Parameter description:</b> ID of the application creator. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
create_tenant_id	String	<b>Parameter description:</b> Tenant ID of the application creator. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
create_time	String	<b>Parameter description:</b> Creation time. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A
update_time	String	<b>Parameter description:</b> Modification time. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A
execution_time	String	<b>Parameter description:</b> Last deployment time. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A

Parameter	Type	Description
end_time	String	<b>Parameter description:</b> Deployment end time. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A
execution_state	String	<b>Parameter description:</b> Deployment status. <b>Value range:</b> N/A
release_id	Integer	<b>Parameter description:</b> Deployment record sequence number. <b>Value range:</b> N/A
executor_id	String	<b>Parameter description:</b> Deployer ID. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
executor_nickname	String	<b>Parameter description:</b> Deployer nickname. <b>Value range:</b> N/A
arrange_infos	Array of <a href="#">TaskBaseResponseBody</a> objects	<b>Parameter description:</b> Deployment task information.

**Table 4-148** TaskBaseResponseBody

Parameter	Type	Description
id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.

Parameter	Type	Description
state	String	<b>Parameter description:</b> Deployment task status. <b>Value range:</b> <ul style="list-style-type: none"><li>Available: Executable state</li><li>Draft: Draft state</li></ul>
deploy_system	String	<b>Parameter description:</b> Deployment mode. <b>Value range:</b> <ul style="list-style-type: none"><li>deployTemplate: Deployment template</li></ul>

## Example Requests

This API is used to obtain an application list.

```
https://{endpoint}/v1/applications/list  
  
{  
  "project_id" : "6039d4480efc4dddb178abff98719913",  
  "page" : 1,  
  "size" : 10  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "result" : [ {  
    "id" : "cb439d016d8641c8a44c177a121fad15",  
    "name" : "Test",  
    "duration" : "00:00:17",  
    "is_disable" : true,  
    "project_id" : "1ff8aa6dda4643bd9cbddb588fb24bde",  
    "project_name" : "Project 1",  
    "is_care" : false,  
    "can_modify" : true,  
    "can_delete" : true,  
    "can_view" : true,  
    "can_execute" : true,  
    "can_copy" : true,  
    "can_manage" : false,  
    "can_create_env" : false,  
    "can_disable" : false,  
    "create_user_id" : "04ec4661a8df4359b50980a9c958c86d",  
    "create_tenant_id" : "208fbb09068e4820b9209ef9ff4da73d",  
    "create_time" : "2023-07-05 20:34:40.0",  
    "update_time" : "2023-08-02 14:20:30.0",  
    "execution_time" : "2023-08-18 09:40:16",  
    "end_time" : "2023-08-18 09:40:33",  
    "execution_state" : "failed",  
    "release_id" : 4,  
    "executor_id" : "6baa7454109d47c192f22078fe6cda20",  
    "executor_nick_name" : "Test Account",  
    "arrange_infos" : [ {
```

```
"id" : "e700f15965694253940502911220d76b",
"state" : "failed",
"deploy_system" : "deployTemplate"
} ]
} ],
"total_num" : 1
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

This API is used to obtain an application list.

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListAllAppSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ListAllAppRequest request = new ListAllAppRequest();
        ListAllAppRequestBody body = new ListAllAppRequestBody();
        body.setSize(10);
        body.setPage(1);
        body.setProjectId("6039d4480efc4ddb178abff98719913");
        request.setBody(body);
        try {
            ListAllAppResponse response = client.listAllApp(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

```
}  
}
```

## Python

This API is used to obtain an application list.

```
# coding: utf-8  
  
import os  
from huaweicloudsdkcore.auth.credentials import BasicCredentials  
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion  
from huaweicloudsdkcore.exceptions import exceptions  
from huaweicloudsdkcodeartsdeploy.v2 import *  
  
if __name__ == "__main__":  
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
    # variables and decrypted during use to ensure security.  
    # In this example, AK and SK are stored in environment variables for authentication. Before running this  
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
    ak = os.environ["CLOUD_SDK_AK"]  
    sk = os.environ["CLOUD_SDK_SK"]  
  
    credentials = BasicCredentials(ak, sk)  
  
    client = CodeArtsDeployClient.new_builder() \  
        .with_credentials(credentials) \  
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \  
        .build()  
  
    try:  
        request = ListAllAppRequest()  
        request.body = ListAllAppRequestBody(  
            size=10,  
            page=1,  
            project_id="6039d4480efc4dddb178abff98719913"  
        )  
        response = client.list_all_app(request)  
        print(response)  
    except exceptions.ClientRequestException as e:  
        print(e.status_code)  
        print(e.request_id)  
        print(e.error_code)  
        print(e.error_msg)
```

## Go

This API is used to obtain an application list.

```
package main  
  
import (  
    "fmt"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"  
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"  
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"  
)  
  
func main() {  
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
    // variables and decrypted during use to ensure security.  
    // In this example, AK and SK are stored in environment variables for authentication. Before running this  
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
    ak := os.Getenv("CLOUD_SDK_AK")  
    sk := os.Getenv("CLOUD_SDK_SK")
```



```
auth := basic.NewCredentialsBuilder().
    WithAk(ak).
    WithSk(sk).
    Build()

client := codeartsdeploy.NewCodeArtsDeployClient(
    codeartsdeploy.CodeArtsDeployClientBuilder().
        WithRegion(region.ValueOf("<YOUR REGION>")).
        WithCredential(auth).
        Build())

request := &model.ListAllAppRequest{}
request.Body = &model.ListAllAppRequestBody{
    Size: int32(10),
    Page: int32(1),
    ProjectId: "6039d4480efc4dddb178abff98719913",
}
response, err := client.ListAllApp(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.8 Creating an Application (Recommended)

### Function

This API is used to create an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/applications

## Request Parameters

**Table 4-149** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-150** Request body parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID
name	Yes	String	Application name
description	No	String	Description
group_id	No	String	Group ID
is_draft	Yes	Boolean	Whether the application is in draft status
create_type	Yes	String	Creation type. template: Create an application using a template.

Parameter	Mandatory	Type	Description
slave_cluster_id	No	String	Custom slave resource pool ID
trigger	No	<a href="#">TaskTriggerVO</a> object	Deployment task triggering scenarios
arrange_infos	No	Array of <a href="#">TaskV2RequestBody</a> objects	Deployment task list

**Table 4-151** TaskTriggerVO

Parameter	Mandatory	Type	Description
trigger_source	No	String	Scenario where a deployment task can be executed. 0: All execution requests can be triggered. 1: Only pipeline can be triggered.
artifact_source_system	No	String	When a task can be triggered only by the pipeline, source information transferred by the pipeline only supports CodeArts Artifact.
artifact_type	No	String	When a task can be triggered only by the pipeline, the artifact type is generic and docker for the pipeline source.

**Table 4-152** TaskV2RequestBody

Parameter	Mandatory	Type	Description
template_id	No	String	Template ID
operation_list	No	Array of <a href="#">DeployV2OperationsDO</a> objects	Deployment orchestration list information

**Table 4-153** DeployV2OperationsDO

Parameter	Mandatory	Type	Description
id	No	String	Step ID
name	No	String	Step name
description	No	String	Description
code	No	String	Download URL
params	No	String	Detailed definition of step
entrance	No	String	Entry function
version	No	String	Version
module_id	No	String	Module ID

## Response Parameters

**Status code: 200**

**Table 4-154** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
result	<a href="#">AppBaseResponse</a> object	<b>Parameter description:</b> Response body for creating or deleting an application.

**Table 4-155** AppBaseResponse

Parameter	Type	Description
id	String	<b>Parameter description:</b> Application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
name	String	<b>Parameter description:</b> Application name. <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-) and underscores (_) are allowed.

Parameter	Type	Description
region	String	<b>Parameter description:</b> Region to which the application belongs. <b>Value range:</b> N/A
arrange_infos	Array of <a href="#">TaskBaseBody</a> objects	<b>Parameter description:</b> Deployment task list.

**Table 4-156** TaskBaseBody

Parameter	Type	Description
id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.

## Example Requests

This API is used to create an application.

```
https://{endpoint}/v1/applications
```

```
{
  "name" : "deployenv20230822192953",
  "project_id" : "55837d272adf4eee90319800e2da6961",
  "description" : "This API is used to create an application using a blank template.",
  "trigger" : {
    "trigger_source" : 0,
    "artifact_source_system" : "",
    "artifact_type" : ""
  },
  "slave_cluster_id" : "",
  "create_type" : "template",
  "is_draft" : true,
  "arrange_infos" : [ ]
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result" : {
    "id" : "e700f15965694253940502911220d76b",
    "name" : "testApp",
    "region" : "cn-north-7",
    "arrange_infos" : [ {
      "id" : "e700f15965694253940502911220d76b"
    } ]
  }
}
```

```
    }  
  },  
  "status" : "success"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

This API is used to create an application.

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
import java.util.List;  
import java.util.ArrayList;  
  
public class CreateAppSolution {  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
        // In this example, AK and SK are stored in environment variables for authentication. Before running  
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
        String ak = System.getenv("CLOUD_SDK_AK");  
        String sk = System.getenv("CLOUD_SDK_SK");  
  
        ICredential auth = new BasicCredentials()  
            .withAk(ak)  
            .withSk(sk);  
  
        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()  
            .withCredential(auth)  
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))  
            .build();  
  
        CreateAppRequest request = new CreateAppRequest();  
        CreateAppRequestBody body = new CreateAppRequestBody();  
        TaskTriggerVO triggerbody = new TaskTriggerVO();  
        triggerbody.withTriggerSource("0")  
            .withArtifactSourceSystem("")  
            .withArtifactType("");  
        body.withTrigger(triggerbody);  
        body.withSlaveClusterId("");  
        body.withCreateType(CreateAppRequestBody.CreateTypeEnum.fromValue("template"));  
        body.withIsDraft(true);  
        body.withDescription("This API is used to create an application using a blank template.");  
        body.withName("deployenv20230822192953");  
        body.withProjectId("55837d272adf4eee90319800e2da6961");  
        request.withBody(body);  
        try {  
            CreateAppResponse response = client.createApp(request);  
            System.out.println(response.toString());  
        } catch (ConnectionException e) {  
            e.printStackTrace();  
        } catch (RequestTimeoutException e) {  
            e.printStackTrace();  
        }  
    }  
}
```

```
    } catch (ServiceResponseException e) {
        e.printStackTrace();
        System.out.println(e.getHttpStatusCode());
        System.out.println(e.getRequestId());
        System.out.println(e.getErrorCode());
        System.out.println(e.getErrorMsg());
    }
}
}
```

## Python

This API is used to create an application.

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CreateAppRequest()
        triggerbody = TaskTriggerVO(
            trigger_source="0",
            artifact_source_system="",
            artifact_type=""
        )
        request.body = CreateAppRequestBody(
            trigger=triggerbody,
            slave_cluster_id="",
            create_type="template",
            is_draft=True,
            description="This API is used to create an application using a blank template.",
            name="deployenv20230822192953",
            project_id="55837d272adf4eee90319800e2da6961"
        )
        response = client.create_app(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

This API is used to create an application.

```
package main
```

```
import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CreateAppRequest{}
    triggerSourceTrigger:= "0"
    artifactSourceSystemTrigger:= ""
    artifactTypeTrigger:= ""
    triggerbody := &model.TaskTriggerVo{
        TriggerSource: &triggerSourceTrigger,
        ArtifactSourceSystem: &artifactSourceSystemTrigger,
        ArtifactType: &artifactTypeTrigger,
    }
    slaveClusterIdCreateAppRequestBody:= ""
    descriptionCreateAppRequestBody:= "This API is used to create an application using a blank template."
    request.Body = &model.CreateAppRequestBody{
        Trigger: triggerbody,
        SlaveClusterId: &slaveClusterIdCreateAppRequestBody,
        CreateType: model.GetCreateAppRequestBodyCreateTypeEnum().TEMPLATE,
        IsDraft: true,
        Description: &descriptionCreateAppRequestBody,
        Name: "deployenv20230822192953",
        ProjectId: "55837d272adf4eee90319800e2da6961",
    }
    response, err := client.CreateApp(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.



## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.9 Updating an Application

### Function

This API is used to update an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v1/applications

## Request Parameters

**Table 4-157** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-158** Request body parameters

Parameter	Mandatory	Type	Description
id	Yes	String	Application ID
project_id	Yes	String	Project ID
name	Yes	String	Application name
description	No	String	Description
is_draft	Yes	Boolean	Whether the application is in draft status
create_type	Yes	String	Creation type. template: Create an application using a template.

Parameter	Mandatory	Type	Description
slave_cluster_id	No	String	Custom slave resource pool ID
trigger	No	<a href="#">TaskTriggerVO</a> object	Triggering settings for application deployment
arrange_infos	No	Array of <a href="#">UpdateTaskV2RequestBody</a> objects	Deployment task list

**Table 4-159** TaskTriggerVO

Parameter	Mandatory	Type	Description
trigger_source	No	String	Scenario where a deployment task can be executed. 0: All execution requests can be triggered. 1: Only pipeline can be triggered.
artifact_source_system	No	String	When a task can be triggered only by the pipeline, source information transferred by the pipeline only supports CodeArts Artifact.
artifact_type	No	String	When a task can be triggered only by the pipeline, the artifact type is generic and docker for the pipeline source.

**Table 4-160** UpdateTaskV2RequestBody

Parameter	Mandatory	Type	Description
id	No	String	Deployment task ID
deploy_system	No	String	Deployment system. deployTemplate: Deployment template.
template_id	No	String	Template ID
operation_list	No	Array of <a href="#">DeployV2OperationsDO</a> objects	Deployment orchestration list information

**Table 4-161** DeployV2OperationsDO

Parameter	Mandatory	Type	Description
id	No	String	Step ID
name	No	String	Step name
description	No	String	Description
code	No	String	Download URL
params	No	String	Detailed definition of step
entrance	No	String	Entry function
version	No	String	Version
module_id	No	String	Module ID

## Response Parameters

**Status code: 200**

**Table 4-162** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
result	<a href="#">AppBaseResponse</a> object	<b>Parameter description:</b> Response body for creating or deleting an application.

**Table 4-163** AppBaseResponse

Parameter	Type	Description
id	String	<b>Parameter description:</b> Application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
name	String	<b>Parameter description:</b> Application name. <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-) and underscores (_) are allowed.

Parameter	Type	Description
region	String	<b>Parameter description:</b> Region to which the application belongs. <b>Value range:</b> N/A
arrange_infos	Array of <a href="#">TaskBaseBody</a> objects	<b>Parameter description:</b> Deployment task list.

**Table 4-164** TaskBaseBody

Parameter	Type	Description
id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.

## Example Requests

Update an application.

```
https://{endpoint}/v1/applications
```

```
{
  "id": "e700f15965694253940502911220d76b",
  "name": "deployenv20230822192953",
  "project_id": "55837d272adf4eee90319800e2da6961",
  "description": "Update an application.",
  "trigger": {
    "trigger_source": 0,
    "artifact_source_system": "",
    "artifact_type": ""
  },
  "slave_cluster_id": "",
  "create_type": "template",
  "is_draft": true,
  "arrange_infos": [ {
    "id": "e700f15965694253940502911220d76b",
    "deploy_system": "deployTemplate",
    "template_id": "ec939bdf63194aca9fad45b3ba05643e",
    "operation_list": [ ]
  } ]
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result": {
```

```
{
  "id": "e700f15965694253940502911220d76b",
  "name": "testApp",
  "region": "cn-north-7",
  "arrange_infos": [ {
    "id": "e700f15965694253940502911220d76b"
  } ]
},
"status": "success"
}
```

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.10 Obtaining Application Details (Recommended)

### Function

This API is used to obtain application details by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/applications/{app\_id}/info

**Table 4-165** Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	<b>Parameter description:</b> Application ID. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

## Request Parameters

**Table 4-166** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

**Table 4-167** Response body parameters

Parameter	Type	Description
result	<a href="#">AppDetailInfo</a> object	<b>Parameter description:</b> Application details.
status	String	<b>Parameter description:</b> Request success or failure state. <b>Value range:</b> <ul style="list-style-type: none"><li>• success: Request succeeded</li><li>• error: Request failed</li></ul>

**Table 4-168** AppDetailInfo

Parameter	Type	Description
id	String	<b>Parameter description:</b> Application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
name	String	<b>Parameter description:</b> Application name. <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-) and underscores (_) are allowed.

Parameter	Type	Description
region	String	<b>Parameter description:</b> Region to which the application belongs. <b>Value range:</b> N/A
description	String	<b>Parameter description:</b> Description. <b>Value range:</b> The value consists of 0-1,024 characters.
is_disable	Boolean	<b>Parameter description:</b> Whether the application is disabled. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: Disabled</li><li>• false: Not disabled</li></ul>
create_type	String	<b>Parameter description:</b> Creation method. <b>Value range:</b> <ul style="list-style-type: none"><li>• template: Flexible application orchestration</li></ul>
project_id	String	<b>Parameter description:</b> Project ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
project_name	String	<b>Parameter description:</b> Project name. <b>Value range:</b> The value consists of 3 to 128 characters.
slave_cluster_id	String	<b>Parameter description:</b> Slave cluster ID. If the ID is left empty, the official resource pool is used by default. The self-hosted resource pool is used when the self-hosted resource pool slave cluster ID is transferred. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed or the null value is transferred.



Parameter	Type	Description
is_care	Boolean	<b>Parameter description:</b> Whether a user has favorited the application. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: Added to favorites</li><li>• false: Not added to favorites</li></ul>
can_modify	Boolean	<b>Parameter description:</b> Whether a user has the edit permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_delete	Boolean	<b>Parameter description:</b> Whether a user has the delete permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_view	Boolean	<b>Parameter description:</b> Whether a user has the view permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_execute	Boolean	<b>Parameter description:</b> Whether a user has the deploy permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_copy	Boolean	<b>Parameter description:</b> Whether a user has the clone permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_manage	Boolean	<b>Parameter description:</b> Whether a user has permission to edit the application permission matrix. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>

Parameter	Type	Description
can_create_env	Boolean	<b>Parameter description:</b> Whether a user has the permission to create environments. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_disable	Boolean	<b>Parameter description:</b> Whether a user has permission to disable applications. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
owner_tenant_id	String	<b>Parameter description:</b> Tenant ID of the application owner. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
create_user_id	String	<b>Parameter description:</b> ID of the application creator. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
create_tenant_id	String	<b>Parameter description:</b> Tenant ID of the application creator. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
create_time	String	<b>Parameter description:</b> Creation time. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A
update_time	String	<b>Parameter description:</b> Modification time. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A

Parameter	Type	Description
permission_level	String	<b>Parameter description:</b> Application authentication level. <b>Value range:</b> <ul style="list-style-type: none"><li>project: Authentication at project level</li><li>instance: Authentication at instance level</li></ul>
arrange_infos	Array of <a href="#">TaskV2Info</a> objects	<b>Parameter description:</b> Deployment task information.

**Table 4-169** TaskV2Info

Parameter	Type	Description
id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
name	String	<b>Parameter description:</b> Deployment task name. <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-) and underscores (_) are allowed.
state	String	<b>Parameter description:</b> Deployment task status. <b>Value range:</b> <ul style="list-style-type: none"><li>Available: Executable state</li><li>Draft: Draft state</li></ul>
description	String	<b>Parameter description:</b> Description. <b>Value range:</b> The value consists of 0-1,024 characters.
owner	String	<b>Parameter description:</b> Deployment application owner. <b>Value range:</b> N/A

Parameter	Type	Description
steps	Map<String,Step>	<b>Parameter description:</b> Deployment action.
project_id	String	<b>Parameter description:</b> Project ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
project_name	String	<b>Parameter description:</b> Project name. <b>Value range:</b> The value consists of 3 to 128 characters.
deploy_system	String	<b>Parameter description:</b> Deployment mode. <b>Value range:</b> <ul style="list-style-type: none"><li>• deployTemplate: Deployment template</li></ul>
create_time	String	<b>Parameter description:</b> Creation time. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A
update_time	String	<b>Parameter description:</b> Modification time. The value format is yyyy-MM-dd HH:mm:ss. For example, 2021-02-25 10:37:27. <b>Value range:</b> N/A
role_id	Integer	<b>Parameter description:</b> Role ID. <b>Value range:</b> N/A
is_default_permission	Boolean	<b>Parameter description:</b> Whether a role is the default role. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: Yes</li><li>• false: No</li></ul>

Parameter	Type	Description
template_id	String	<b>Parameter description:</b> Template ID. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
nick_name	String	<b>Parameter description:</b> Nickname of the application creator. <b>Value range:</b> The value consists of 0 to 128 characters.
owner_id	String	<b>Parameter description:</b> ID of the application creator. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
tenant_id	String	<b>Parameter description:</b> Tenant ID of the application creator. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed.
tenant_name	String	<b>Parameter description:</b> Tenant name of the application creator. <b>Value range:</b> The value consists of 0 to 128 characters.
slave_cluster_id	String	<b>Parameter description:</b> Slave cluster ID. If the ID is left empty, the official resource pool is used by default. The self-hosted resource pool is used when the self-hosted resource pool slave cluster ID is transferred. <b>Value range:</b> The value consists of 1-32 characters. Letters and digits are allowed or the null value is transferred.
is_care	Boolean	<b>Parameter description:</b> Whether a user has favorited the application. <b>Value range:</b> <ul style="list-style-type: none"><li>● true: Added to favorites</li><li>● false: Not added to favorites</li></ul>

Parameter	Type	Description
can_modify	Boolean	<b>Parameter description:</b> Whether a user has the edit permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_delete	Boolean	<b>Parameter description:</b> Whether a user has the delete permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_view	Boolean	<b>Parameter description:</b> Whether a user has the view permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_execute	Boolean	<b>Parameter description:</b> Whether a user has the deploy permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_copy	Boolean	<b>Parameter description:</b> Whether a user has the clone permission. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_manage	Boolean	<b>Parameter description:</b> Whether a user has permission to edit the application permission matrix. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
can_create_env	Boolean	<b>Parameter description:</b> Whether a user has the permission to create environments. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>

Parameter	Type	Description
can_disable	Boolean	<b>Parameter description:</b> Whether a user has permission to disable applications. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: With permission</li><li>• false: Without permission</li></ul>
app_component_list	Array of <a href="#">AppComponentDao</a> objects	<b>Parameter description:</b> Application component list.
release_id	Integer	<b>Parameter description:</b> Deployment record sequence number. <b>Value range:</b> N/A
app_id	String	<b>Parameter description:</b> Deployment task ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
is_disable	Boolean	<b>Parameter description:</b> Whether the application is disabled. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: Disabled</li><li>• false: Not disabled</li></ul>

Table 4-170 Step

Parameter	Type	Description
id	String	<b>Parameter description:</b> Action ID. <b>Value range:</b> N/A
name	String	<b>Parameter description:</b> Action name. <b>Value range:</b> N/A

Parameter	Type	Description
params	Map<String,String>	<b>Parameter description:</b> Action parameter. <b>Value range:</b> N/A
enable	Boolean	<b>Parameter description:</b> Whether an action is enabled. <b>Value range:</b> <ul style="list-style-type: none"><li>• true: Enabled</li><li>• false: Disabled</li></ul>

**Table 4-171** AppComponentDao

Parameter	Type	Description
task_id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
app_id	String	<b>Parameter description:</b> AOM application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
app_name	String	<b>Parameter description:</b> AOM application name. <b>Value range:</b> The value consists of letters and digits.
comp_id	String	<b>Parameter description:</b> AOM application component ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
comp_name	String	<b>Parameter description:</b> AOM application component name. <b>Value range:</b> The value consists of 0 to 128 characters.



Parameter	Type	Description
domain_id	String	<b>Parameter description:</b> Tenant ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
region	String	<b>Parameter description:</b> Region information. <b>Value range:</b> The value consists of 1 to 256 characters.
state	String	<b>Parameter description:</b> Whether the AOM application component takes effect. <b>Value range:</b> <ul style="list-style-type: none"><li>● 0: Initialized.</li><li>● 1: The operation is successful and takes effect.</li></ul>

## Example Requests

```
https://{endpoint}/v1/applications/d2dc947ec2424d8789bb3984bb3adf45/info
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result": {
    "id": "d9e0532073e2475dbed64b22e64f3b26",
    "name": "deployenv202308211530723",
    "region": "cn-north-7",
    "description": "for_test",
    "is_disable": true,
    "create_type": "template",
    "project_id": "1ff8aa6dda4643bd9cbdbb588fb24bde",
    "project_name": "Test Item",
    "slave_cluster_id": null,
    "is_care": false,
    "can_modify": true,
    "can_delete": true,
    "can_view": true,
    "can_execute": true,
    "can_copy": true,
    "can_manage": true,
    "can_create_env": true,
    "can_disable": true,
    "owner_tenant_id": "208fbb09068e4820b9209ef9ff4da73d",
    "create_user_id": "6baa7454109d47c192f22078fe6cda20",
    "create_tenant_id": "26a680dd72e7482eb60d2ef5513588bb",
    "create_time": "2023-08-21 15:30:51.0",
    "update_time": "2023-08-21 15:30:51.0",
  }
}
```

```
"permission_level" : "instance",
"arrange_infos" : [ {
  "id" : "685a6f3b80264e7d96f2ba308f8414e5",
  "name" : "deployenv202308211530723",
  "state" : "Draft",
  "description" : "for_test",
  "owner" : "devcloud_devcloud_l00490255_01",
  "steps" : {
    "step1" : {
      "id" : null,
      "name" : "Install Go",
      "params" : { },
      "enable" : true
    },
    "step2" : {
      "id" : null,
      "name" : "Download Software Package",
      "params" : { },
      "enable" : true
    },
    "step3" : {
      "id" : null,
      "name" : "Stop Go Service",
      "params" : { },
      "enable" : true
    },
    "step4" : {
      "id" : null,
      "name" : "Start Go Service",
      "params" : { },
      "enable" : true
    },
    "step5" : {
      "id" : null,
      "name" : "Test Service",
      "params" : { },
      "enable" : true
    }
  }
},
"project_id" : "1ff8aa6dda4643bd9cbdbb588fb24bde",
"project_name" : "Test Item",
"deploy_system" : "deployTemplate",
"create_time" : "2023-08-21 15:30:51",
"update_time" : "2023-08-21 15:30:51",
"role_id" : 0,
"is_default_permission" : false,
"template_id" : "681bd91f9d6e42cdb4cb84d6718de9fe",
"nick_name" : "Alias",
"owner_id" : "6baa7454109d47c192f22078fe6cda20",
"tenant_id" : "26a680dd72e7482eb60d2ef5513588bb",
"tenant_name" : "devcloud_devcloud_l00490255_01",
"slave_cluster_id" : null,
"is_care" : false,
"can_modify" : true,
"can_delete" : true,
"can_view" : true,
"can_execute" : true,
"can_copy" : true,
"can_manage" : true,
"can_create_env" : false,
"can_disable" : false,
"app_component_list" : [ ],
"release_id" : 0,
"app_id" : "d9e0532073e2475dbed64b22e64f3b26",
"is_disable" : true
} ]
},
"status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowAppDetailByIdSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowAppDetailByIdRequest request = new ShowAppDetailByIdRequest();
        request.withAppId("{app_id}");
        try {
            ShowAppDetailByIdResponse response = client.showAppDetailById(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
```

risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment variables and decrypted during use to ensure security.

# In this example, AK and SK are stored in environment variables for authentication. Before running this example, set environment variables CLOUD\_SDK\_AK and CLOUD\_SDK\_SK in the local environment

```
ak = os.environ["CLOUD_SDK_AK"]
sk = os.environ["CLOUD_SDK_SK"]

credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = ShowAppDetailByIdRequest()
    request.app_id = "{app_id}"
    response = client.show_app_detail_by_id(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ShowAppDetailByIdRequest{}
    request.AppId = "{app_id}"
    response, err := client.ShowAppDetailById(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.11 Deleting an Application (Recommended)

### Function

This API is used to delete an application by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v1/applications/{app\_id}

Table 4-172 Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	<b>Parameter description:</b> Application ID. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

## Request Parameters

**Table 4-173** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200****Table 4-174** Response body parameters

Parameter	Type	Description
status	String	<b>Parameter description:</b> Request success or failure state. <b>Value range:</b> <ul style="list-style-type: none"><li>• success: Request succeeded</li><li>• error: Request failed</li></ul>
result	<a href="#">AppBaseResponse</a> object	<b>Parameter description:</b> Response body for creating or deleting an application.

Table 4-175 AppBaseResponse

Parameter	Type	Description
id	String	<b>Parameter description:</b> Application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.
name	String	<b>Parameter description:</b> Application name. <b>Value range:</b> The value consists of 3-128 characters. Only letters, digits, hyphens (-) and underscores (_) are allowed.
region	String	<b>Parameter description:</b> Region to which the application belongs. <b>Value range:</b> N/A
arrange_infos	Array of <b>TaskBaseBody</b> objects	<b>Parameter description:</b> Deployment task list.

Table 4-176 TaskBaseBody

Parameter	Type	Description
id	String	<b>Parameter description:</b> Deployment application ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.

## Example Requests

```
https://{endpoint}/v1/applications/b024060ac00749178e72713ae82b0da2
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "result" : {  
    "id" : "20168cbc8504479d84f118ae72f87763",  
    "name" : "test_app",
```

```
"region" : "cn-north-7",
"arrange_infos" : [ {
  "id" : "5d55203938db46939cd41a66ef2c4a52"
} ]
},
"status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class DeleteApplicationSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        DeleteApplicationRequest request = new DeleteApplicationRequest();
        request.withAppId("{app_id}");
        try {
            DeleteApplicationResponse response = client.deleteApplication(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8
```



```
import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = DeleteApplicationRequest()
        request.app_id = "{app_id}"
        response = client.delete_application(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.DeleteApplicationRequest{}
    request.AppId = "{app_id}"
    response, err := client.DeleteApplication(request)
    if err == nil {
```

```
    fmt.Printf("%+v\n", response)
  } else {
    fmt.Println(err)
  }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.12 Querying the Execution Parameters of a Deployment Record

### Function

This API is used to query the execution parameters of a deployment record.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/history/tasks/{task\_id}/params

**Table 4-177** Path Parameters

Parameter	Mandatory	Type	Description
task_id	Yes	String	<b>Parameter description:</b> Deployment application ID. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

**Table 4-178** Query Parameters

Parameter	Mandatory	Type	Description
record_id	No	String	<b>Parameter description:</b> Execution record ID. <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

## Request Parameters

**Table 4-179** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

Table 4-180 Response body parameters

Parameter	Type	Description
[items]	Array of <a href="#">ConfigInfo</a> objects	Response body for querying deployment record execution parameters

Table 4-181 ConfigInfo

Parameter	Type	Description
name	String	<b>Parameter description:</b> Parameter name. <b>Value range:</b> N/A
type	String	<b>Parameter description:</b> Parameter type. <b>Value range:</b> N/A
value	String	<b>Parameter description:</b> Parameter value. <b>Value range:</b> N/A

## Example Requests

```
https://{endpoint}/v1/history/tasks/8e1eb7f010d4442ca150e3a1a5d96d94/params?record_id=8bcfde0419bf4d62b4676de99bcc7403
```

## Example Responses

Status code: 200

OK: The request is successful.

```
[ {  
  "name" : "service_port",  
  "type" : "text",  
  "value" : 8080  
}]
```

## SDK Sample Code

The SDK sample code is as follows.

## Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowExecutionParamsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowExecutionParamsRequest request = new ShowExecutionParamsRequest();
        request.withTaskId("{task_id}");
        try {
            ShowExecutionParamsResponse response = client.showExecutionParams(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
```

```
sk = os.environ["CLOUD_SDK_SK"]

credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = ShowExecutionParamsRequest()
    request.task_id = "{task_id}"
    response = client.show_execution_params(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ShowExecutionParamsRequest{}
    request.TaskId = "{task_id}"
    response, err := client.ShowExecutionParams(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.13 Cloning an Application

### Function

This API is used to clone an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/applications/{app\_id}/duplicate

**Table 4-182** Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID

### Request Parameters

**Table 4-183** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

### Response Parameters

**Status code: 200**

**Table 4-184** Response body parameters

Parameter	Type	Description
result	<a href="#">AppBaseInfo</a> object	Basic application information
status	String	Request success or failure status

**Table 4-185** AppBaseInfo

Parameter	Type	Description
id	String	Application ID
name	String	Application name
region	String	Region information
is_disable	Boolean	Whether the application is disabled

## Example Requests

```
https://{endpoint}/v1/applications/42cf463ae2ab4c2e9825a8932874782f/duplicate
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result" : {
    "id" : "a21d1951433c47a9b72cb72933d27df8",
    "name" : "Test_Copy_92131",
    "region" : "cn-north-7",
    "is_disable" : false
  },
  "status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;
```



```
public class CopyApplicationSolution {
    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        CopyApplicationRequest request = new CopyApplicationRequest();
        request.withAppId("{app_id}");
        try {
            CopyApplicationResponse response = client.copyApplication(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.getenv("CLOUD_SDK_AK")
    sk = os.getenv("CLOUD_SDK_SK")

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CopyApplicationRequest()
        request.app_id = "{app_id}"
        response = client.copy_application(request)
```

```
print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CopyApplicationRequest{}
    request.AppId = "{app_id}"
    response, err := client.CopyApplication(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.14 Deleting Applications from a Project in Batches

### Function

This API is used to delete applications from a project in batches.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v2/applications/batch-delete

### Request Parameters

**Table 4-186** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-187** Request body parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID
application_ids	Yes	Array of strings	Application ID list

### Response Parameters

Status code: 200

**Table 4-188** Response body parameters

Parameter	Type	Description
result	Array of <a href="#">AppDeleteResult</a> objects	Result of deleting applications in batches
total_num	Integer	Total number of applications deleted in batches

**Table 4-189** AppDeleteResult

Parameter	Type	Description
application_id	String	Application ID
application_name	String	Application name
status	String	Deletion result: success or error
error_reason	String	Causes of deletion failures

## Example Requests

```
https://{endpoint}/v2/applications/batch-delete  
  
{  
  "application_ids": [ "eac65c10c5c34df1824af96ec93a9eea", "3ba2ad194ff141e39b1d3d0749242858" ],  
  "project_id": "0a38ce9ba3c740c199a0f872b6163661"  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "result": [{  
    "application_id": "eac65c10c5c34df1824af96ec93a9eea",  
    "application_name": "Application name 1",  
    "error_reason": "",  
    "status": "success"  
  }, {  
    "application_id": "eac65c10c5c34df1824af96ec93a9eeb",  
    "application_name": "Application name 2",  
    "error_reason": "No permissions.",  
    "status": "error"  
  }],  
  "total_num": 2  
}
```

## SDK Sample Code

The SDK sample code is as follows.

## Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class BatchDeleteAppSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();

        BatchDeleteAppRequest request = new BatchDeleteAppRequest();
        AppBatchDeleteRequest body = new AppBatchDeleteRequest();
        List<String> listbodyApplicationIds = new ArrayList<>();
        listbodyApplicationIds.add("eac65c10c5c34df1824af96ec93a9eea");
        listbodyApplicationIds.add("3ba2ad194ff141e39b1d3d0749242858");
        body.withApplicationIds(listbodyApplicationIds);
        body.withProjectId("0a38ce9ba3c740c199a0f872b6163661");
        request.withBody(body);
        try {
            BatchDeleteAppResponse response = client.batchDeleteApp(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *
```

```
if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = BatchDeleteAppRequest()
        listApplicationIdsbody = [
            "eac65c10c5c34df1824af96ec93a9eea",
            "3ba2ad194ff141e39b1d3d0749242858"
        ]
        request.body = AppBatchDeleteRequest(
            application_ids=listApplicationIdsbody,
            project_id="0a38ce9ba3c740c199a0f872b6163661"
        )
        response = client.batch_delete_app(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.BatchDeleteAppRequest{}
    var listApplicationIdsbody = []string{
```

```
"eac65c10c5c34df1824af96ec93a9eea",
"3ba2ad194ff141e39b1d3d0749242858",
}
request.Body = &model.AppBatchDeleteRequest{
    ApplicationIds: listApplicationIdsbody,
    ProjectId: "0a38ce9ba3c740c199a0f872b6163661",
}
response, err := client.BatchDeleteApp(request)
if err == nil {
    fmt.Printf("%v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.15 Checking Whether an Application with the Same Name Exists in a Project

### Function

This API is used to check whether an application with the same name exists in a project.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/applications/exist

**Table 4-190** Query Parameters

Parameter	Mandatory	Type	Description
name	Yes	String	Application name

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID

## Request Parameters

Table 4-191 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

Table 4-192 Response body parameters

Parameter	Type	Description
result	Boolean	Whether an application with the same name exists in the project.
status	String	Request success or failure status

## Example Requests

```
https://{endpoint}/v1/applications/exist?name=test&project_id=46e2dd65b123456798137caebae6fa6d
```

## Example Responses

Status code: 200

OK: The request is successful.

```
{  
  "result" : false,  
  "status" : "success"  
}
```

## SDK Sample Code

The SDK sample code is as follows.



## Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class CheckIsDuplicateAppNameSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        CheckIsDuplicateAppNameRequest request = new CheckIsDuplicateAppNameRequest();
        try {
            CheckIsDuplicateAppNameResponse response = client.checkIsDuplicateAppName(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]
```

```
credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = CheckIsDuplicateAppNameRequest()
    response = client.check_is_duplicate_app_name(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CheckIsDuplicateAppNameRequest{}
    response, err := client.CheckIsDuplicateAppName(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.3.16 Disabling and Enabling an Application

### Function

This API is used to disable or enable an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v1/applications/{app\_id}/disable

**Table 4-193** Path Parameters

Parameter	Mandatory	Type	Description
app_id	Yes	String	Application ID

### Request Parameters

**Table 4-194** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-195** Request body parameters

Parameter	Mandatory	Type	Description
is_disable	Yes	Boolean	true: Disable. false: Enable.

## Response Parameters

**Status code: 200**

**Table 4-196** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status

## Example Requests

```
https://{endpoint}/v1/applications/dbc0305b030f41ce866739c3331166ff/disable  
  
{  
  "is_disable" : true  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "status" : "success"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class UpdateAppDisableStatusSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
```

```
environment variables and decrypted during use to ensure security.
// In this example, AK and SK are stored in environment variables for authentication. Before running
this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
String ak = System.getenv("CLOUD_SDK_AK");
String sk = System.getenv("CLOUD_SDK_SK");

ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
UpdateAppDisableStatusRequest request = new UpdateAppDisableStatusRequest();
request.withAppId("{app_id}");
UpdateAppDisableStatusRequestBody body = new UpdateAppDisableStatusRequestBody();
body.withIsDisable(true);
request.withBody(body);
try {
    UpdateAppDisableStatusResponse response = client.updateAppDisableStatus(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.getenv("CLOUD_SDK_AK")
    sk = os.getenv("CLOUD_SDK_SK")

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = UpdateAppDisableStatusRequest()
        request.app_id = "{app_id}"
        request.body = UpdateAppDisableStatusRequestBody(
            is_disable=True
        )
        response = client.update_app_disable_status(request)
```

```
print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.UpdateAppDisableStatusRequest{}
    request.AppId = "{app_id}"
    request.Body = &model.UpdateAppDisableStatusRequestBody{
        IsDisable: true,
    }
    response, err := client.UpdateAppDisableStatus(request)
    if err == nil {
        fmt.Printf("%v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

# 4.4 Managing Application Groups

## 4.4.1 Querying a Group List

### Function

This API is used to query a group list.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/projects/{project\_id}/applications/groups

**Table 4-197** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID

### Request Parameters

**Table 4-198** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

### Response Parameters

Status code: 200

**Table 4-199** Response body parameters

Parameter	Type	Description
result	Array of <a href="#">AppGroupsEntity</a> objects	Group information list
status	String	Request success or failure status

**Table 4-200** AppGroupsEntity

Parameter	Type	Description
id	String	Group ID
name	String	Group name
project_id	String	Project ID
path	String	Group path
parent_id	String	Parent group ID. The ID of the first level is null.
ordinal	Integer	Group sorting field
create_user_id	String	ID of the group creator
last_update_user_id	String	ID of the user who last updates the group
count	Integer	Total number of applications in the group
children	Array of <a href="#">AppGroupsEntity</a> objects	Child group list

## Example Requests

```
https://{endpoint}/v1/projects/0a38ce9ba3c740c199a0f872b6163661/applications/groups
```

## Example Responses

### Status code: 200

OK: The request is successful.

```
{
  "result": [ {
    "project_id": "0a38ce9ba3c740c199a0f872b6163661",
    "path": "55ad749142fc405398aad372a1f9eff1",
    "parent_id": null,
    "ordinal": 1,
    "name": "group_1",
    "last_update_user_id": "057842a25b000f6b1fcbc014a9ccccc",
    "id": "55ad749142fc405398aad372a1f9eff1",
    "create_user_id": "057842a25b000f6b1fcbc014a9ccccc",
  }
]
```



```
"count" : 0,  
"children" : [ ]  
}],  
"status" : "success"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class ListAppGroupsSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
        // In this example, AK and SK are stored in environment variables for authentication. Before running  
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
        String ak = System.getenv("CLOUD_SDK_AK");  
        String sk = System.getenv("CLOUD_SDK_SK");  
  
        ICredential auth = new BasicCredentials()  
            .withAk(ak)  
            .withSk(sk);  
  
        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()  
            .withCredential(auth)  
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))  
            .build();  
        ListAppGroupsRequest request = new ListAppGroupsRequest();  
        request.withProjectId("{project_id}");  
        try {  
            ListAppGroupsResponse response = client.listAppGroups(request);  
            System.out.println(response.toString());  
        } catch (ConnectionException e) {  
            e.printStackTrace();  
        } catch (RequestTimeoutException e) {  
            e.printStackTrace();  
        } catch (ServiceResponseException e) {  
            e.printStackTrace();  
            System.out.println(e.getStatusCode());  
            System.out.println(e.getRequestId());  
            System.out.println(e.getErrorCode());  
            System.out.println(e.getErrorMsg());  
        }  
    }  
}
```

### Python

```
# coding: utf-8  
  
import os
```

```
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ListAppGroupsRequest()
        request.project_id = "{project_id}"
        response = client.list_app_groups(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListAppGroupsRequest{}
    request.ProjectId = "{project_id}"
    response, err := client.ListAppGroups(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    }
}
```

```
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.4.2 Creating a Group

### Function

This API is used to create a group.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/projects/{project\_id}/applications/groups

**Table 4-201** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID

## Request Parameters

**Table 4-202** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-203** Request body parameters

Parameter	Mandatory	Type	Description
name	Yes	String	Group name
parent_id	No	String	Parent group ID

## Response Parameters

**Status code: 200**

**Table 4-204** Response body parameters

Parameter	Type	Description
result	String	Group ID
status	String	Request success or failure status

## Example Requests

```
https://{endpoint}/v1/projects/0a38ce9ba3c740c199a0f872b6163661/applications/groups  
  
{  
  "name" : "Group Name",  
  "parent_id" : "d26da1dc24314c63a253cbc452dabd96"  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "result" : "2f1a73c269d14345aa0652a611b30c8e",  
  "status" : "success"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class CreateAppGroupsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        CreateAppGroupsRequest request = new CreateAppGroupsRequest();
        request.withProjectId("{project_id}");
        CreateAppGroupsRequestBody body = new CreateAppGroupsRequestBody();
        body.withParentId("d26da1dc24314c63a253cbc452dabd96");
        body.withName("Group Name");
        request.withBody(body);
        try {
            CreateAppGroupsResponse response = client.createAppGroups(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
```

```
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CreateAppGroupsRequest()
        request.project_id = "{project_id}"
        request.body = CreateAppGroupsRequestBody(
            parent_id="d26da1dc24314c63a253cbc452dabd96",
            name="Group Name"
        )
        response = client.create_app_groups(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CreateAppGroupsRequest{}
    request.ProjectId = "{project_id}"
    parentIdCreateAppGroupsRequestBody:= "d26da1dc24314c63a253cbc452dabd96"
    request.Body = &model.CreateAppGroupsRequestBody{
```

```
ParentId: &parentIdCreateAppGroupsRequestBody,  
Name: "Group Name",  
}  
response, err := client.CreateAppGroups(request)  
if err == nil {  
    fmt.Printf("%+v\n", response)  
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.4.3 Modifying a Group

### Function

This API is used to modify a group.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v1/projects/{project\_id}/applications/groups/{group\_id}

**Table 4-205** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID
group_id	Yes	String	Group ID

## Request Parameters

**Table 4-206** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-207** Request body parameters

Parameter	Mandatory	Type	Description
name	Yes	String	Group name

## Response Parameters

**Status code: 200**

**Table 4-208** Response body parameters

Parameter	Type	Description
result	String	Group ID
status	String	Request success or failure status

## Example Requests

```
https://{endpoint}/v1/projects/0a38ce9ba3c740c199a0f872b6163661/applications/groups/a958794f9f4f4a24a96950c9cb279a4d
{
  "name" : "Group Name"
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result" : "a958794f9f4f4a24a96950c9cb279a4d",
  "status" : "success"
}
```



## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class UpdateAppGroupsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        UpdateAppGroupsRequest request = new UpdateAppGroupsRequest();
        request.withProjectId("{project_id}");
        request.withGroupId("{group_id}");
        UpdateAppGroupsRequestBody body = new UpdateAppGroupsRequestBody();
        body.withName("Group Name");
        request.withBody(body);
        try {
            UpdateAppGroupsResponse response = client.updateAppGroups(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
```

```
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = UpdateAppGroupsRequest()
        request.project_id = "{project_id}"
        request.group_id = "{group_id}"
        request.body = UpdateAppGroupsRequestBody(
            name="Group Name"
        )
        response = client.update_app_groups(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.UpdateAppGroupsRequest{}
    request.ProjectId = "{project_id}"
    request.GroupId = "{group_id}"
    request.Body = &model.UpdateAppGroupsRequestBody{
```

```
Name: "Group Name",
}
response, err := client.UpdateAppGroups(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.4.4 Deleting a Group

### Function

This API is used to delete a group.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v1/projects/{project\_id}/applications/groups/{group\_id}

**Table 4-209** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID
group_id	Yes	String	Group ID

## Request Parameters

**Table 4-210** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200****Table 4-211** Response body parameters

Parameter	Type	Description
result	String	Group ID
status	String	Request success or failure status

## Example Requests

```
https://{endpoint}/v1/projects/0a38ce9ba3c740c199a0f872b6163661/applications/groups/a958794f9f4f4a24a96950c9cb279a4d
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "result" : "a958794f9f4f4a24a96950c9cb279a4d",  
  "status" : "success"  
}
```

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.4.5 Moving a Group

### Function

This API is used to move a group up or down to adjust the position of the group on the page.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v1/projects/{project\_id}/applications/groups/swap

**Table 4-212** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID

### Request Parameters

**Table 4-213** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-214** Request body parameters

Parameter	Mandatory	Type	Description
id	Yes	String	Group ID
movement	Yes	Integer	Moving direction. 1: Upward. -1: Downward.

### Response Parameters

**Status code: 200**

**Table 4-215** Response body parameters

Parameter	Type	Description
result	String	Group ID
status	String	Request success or failure status

## Example Requests

```
https://{endpoint}/v1/projects/0a38ce9ba3c740c199a0f872b6163661/applications/groups/swap
{
  "id" : "a958794f9f4f4a24a96950c9cb279a4d",
  "movement" : 1
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result" : "a958794f9f4f4a24a96950c9cb279a4d",
  "status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class MoveAppGroupsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
```

```
        .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
        .build();
MoveAppGroupsRequest request = new MoveAppGroupsRequest();
request.withProjectId("{project_id}");
MoveAppGroupsRequestBody body = new MoveAppGroupsRequestBody();
body.withMovement(MoveAppGroupsRequestBody.MovementEnum.NUMBER_1);
body.withId("a958794f9f4f4a24a96950c9cb279a4d");
request.withBody(body);
try {
    MoveAppGroupsResponse response = client.moveAppGroups(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = MoveAppGroupsRequest()
        request.project_id = "{project_id}"
        request.body = MoveAppGroupsRequestBody(
            movement=1,
            id="a958794f9f4f4a24a96950c9cb279a4d"
        )
        response = client.move_app_groups(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.MoveAppGroupsRequest{}
    request.ProjectId = "{project_id}"
    request.Body = &model.MoveAppGroupsRequestBody{
        Movement: model.GetMoveAppGroupsRequestBodyMovementEnum().E_1,
        Id: "a958794f9f4f4a24a96950c9cb279a4d",
    }
    response, err := client.MoveAppGroups(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).



## 4.4.6 Moving an Application to a Specified Group

### Function

This API is used to move applications to a specified group (batch operations are supported).

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v1/projects/{project\_id}/applications/groups/move

**Table 4-216** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID

### Request Parameters

**Table 4-217** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-218** Request body parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Group ID
application_ids	Yes	Array of strings	Application ID list

### Response Parameters

**Status code: 200**

**Table 4-219** Response body parameters

Parameter	Type	Description
result	Array of <a href="#">MoveAppToGroupResult</a> objects	Result of moving an application to a specified group. Only the list of applications that fail to be moved is returned.
status	String	Request success or failure status

**Table 4-220** MoveAppToGroupResult

Parameter	Type	Description
code	String	Failed or not
application_id	String	Application ID
application_name	String	Application name
error_code	String	Error code
error_msg	String	Error message

## Example Requests

```
https://{endpoint}/v1/projects/0a38ce9ba3c740c199a0f872b6163661/applications/groups/move
{
  "application_ids": [ "a958794f9f4f4a24a96950c9cb279a4d", "a958794f9f4f4a24a96950c9cb279a4f" ],
  "group_id": "ec3ccc617cf3405b8a6236f26223112b"
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result": [],
  "status": "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
```

```
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class MoveAppToGroupSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        MoveAppToGroupRequest request = new MoveAppToGroupRequest();
        request.withProjectId("{project_id}");
        MoveAppToGroupRequestBody body = new MoveAppToGroupRequestBody();
        List<String> listbodyApplicationIds = new ArrayList<>();
        listbodyApplicationIds.add("a958794f9f4f4a24a96950c9cb279a4d");
        listbodyApplicationIds.add("a958794f9f4f4a24a96950c9cb279a4f");
        body.withApplicationIds(listbodyApplicationIds);
        body.withGroupId("ec3ccc617cf3405b8a6236f26223112b");
        request.withBody(body);
        try {
            MoveAppToGroupResponse response = client.moveAppToGroup(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
```

```
example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
ak = os.environ["CLOUD_SDK_AK"]
sk = os.environ["CLOUD_SDK_SK"]

credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = MoveAppToGroupRequest()
    request.project_id = "{project_id}"
    listApplicationIdsbody = [
        "a958794f9f4f4a24a96950c9cb279a4d",
        "a958794f9f4f4a24a96950c9cb279a4f"
    ]
    request.body = MoveAppToGroupRequestBody(
        application_ids=listApplicationIdsbody,
        group_id="ec3ccc617cf3405b8a6236f26223112b"
    )
    response = client.move_app_to_group(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.MoveAppToGroupRequest{}
    request.ProjectId = "{project_id}"
    var listApplicationIdsbody = []string{
        "a958794f9f4f4a24a96950c9cb279a4d",
        "a958794f9f4f4a24a96950c9cb279a4f",
    }
    request.Body = &model.MoveAppToGroupRequestBody{
```

```
ApplicationIds: listApplicationIdsbody,  
  GroupId: "ec3ccc617cf3405b8a6236f26223112b",  
}  
response, err := client.MoveAppToGroup(request)  
if err == nil {  
    fmt.Printf("%+v\n", response)  
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

# 4.5 Managing Application Permissions

## 4.5.1 Querying the Instance-Level/Project-Level Permission Matrix of an Application

### Function

This API is used to query the instance-level or project-level permission matrix of an application. If `app_id` is transferred, the instance-level permission matrix is queried. If `project_id` is transferred while `app_id` is not transferred, the project-level permission matrix is queried.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v3/applications/permissions

**Table 4-221** Query Parameters

Parameter	Mandatory	Type	Description
app_id	No	String	Application ID
project_id	No	String	Project ID

## Request Parameters

**Table 4-222** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

**Table 4-223** Response body parameters

Parameter	Type	Description
result	Array of <a href="#">ApplicationPermissionVO</a> objects	Role application permission
status	String	Request success or failure status

**Table 4-224** ApplicationPermissionVO

Parameter	Type	Description
can_modify	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_view	Boolean	Whether you have the view permission
can_execute	Boolean	Whether you have the execute permission
can_copy	Boolean	Whether you have the clone permission

Parameter	Type	Description
can_manage	Boolean	Whether you have the manage permission, including adding, deleting, modifying, querying, executing, and modifying permissions.
can_create_env	Boolean	Whether you have the permission to create environments
can_disable	Boolean	Whether you have the disable permission
name	String	Role name
region	String	Region information
role_id	String	Role ID
role_type	String	Role type. app-creator: Application creator. project: Project administrator. template-customized-inst: System roles. template-project-customized and project-customized: Custom roles.

## Example Requests

- This API is used to query the project-level permission matrix of an application.  
`https://{endpoint}/v3/applications/permissions?project_id=0a38ce9ba3c740c199a0f872b6163661`
- This API is used to query the instance-level permission matrix of an application.  
`https://{endpoint}/v3/applications/permissions?app_id=0a38ce9ba3c740c199a0f872b6163661`

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result": [ {
    "can_copy": true,
    "can_create_env": true,
    "can_delete": true,
    "can_disable": true,
    "can_execute": true,
    "can_manage": true,
    "can_modify": true,
    "can_view": true,
    "name": "App creator",
    "region": "cn-north-7",
    "role_id": "0",
    "role_type": "app-creator"
  }, {
    "can_copy": true,
    "can_create_env": true,
    "can_delete": true,
    "can_disable": true,
    "can_execute": true,
```

```
"can_manage" : true,
"can_modify" : true,
"can_view" : true,
"name" : "Project Admin",
"region" : "cn-north-7",
"role_id" : "2e510051361942a8b7ecea00144172b3",
"role_type" : "project"
}],
"status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListApplicationPermissionsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ListApplicationPermissionsRequest request = new ListApplicationPermissionsRequest();
        try {
            ListApplicationPermissionsResponse response = client.listApplicationPermissions(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```



## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ListApplicationPermissionsRequest()
        response = client.list_application_permissions(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListApplicationPermissionsRequest{}
```

```
response, err := client.ListApplicationPermissions(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.5.2 Modifying Application Permissions in Batches

### Function

This API is used to modify application permissions in batches.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v3/applications/permissions

### Request Parameters

**Table 4-225** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-226** Request body parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID
application_ids	Yes	Array of strings	Application list
roles	Yes	Array of <b>AppPermission</b> objects	Role permissions

**Table 4-227** AppPermission

Parameter	Mandatory	Type	Description
dev_role_id	Yes	String	Role ID
can_modify	Yes	Boolean	Whether you have the edit permission
can_delete	Yes	Boolean	Whether you have the delete permission
can_view	Yes	Boolean	Whether you have the view permission
can_execute	Yes	Boolean	Whether you have the execute permission
can_copy	Yes	Boolean	Whether you have the clone permission
can_manage	Yes	Boolean	Whether you can manage permissions
can_create_env	Yes	Boolean	Whether you have the permission to create environments
can_disable	Yes	Boolean	Whether you have the disable permission

## Response Parameters

**Status code: 200**

**Table 4-228** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status

## Example Requests

```
https://{endpoint}/v3/applications/permissions

{
  "application_ids": [ "eac65c10c5c34df1824af96ec93a9eea", "3ba2ad194ff141e39b1d3d0749242858" ],
  "project_id": "0a38ce9ba3c740c199a0f872b6163661",
  "roles": [ {
    "dev_role_id": "ba0d4b2e-f7e6-46a3-aece-3002ff640e73",
    "can_copy": true,
    "can_create_env": true,
    "can_delete": true,
    "can_disable": true,
    "can_execute": true,
    "can_manage": true,
    "can_modify": true,
    "can_view": true
  } ]
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status": "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class BatchUpdateApplicationPermissionsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
```

```
        .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();

        BatchUpdateApplicationPermissionsRequest request = new
BatchUpdateApplicationPermissionsRequest();
        BatchUpdateApplicationPermissionsRequestBody body = new
BatchUpdateApplicationPermissionsRequestBody();
        List<AppPermission> listbodyRoles = new ArrayList<>();
        listbodyRoles.add(
            new AppPermission()
                .withDevRoleId("ba0d4b2e-f7e6-46a3-aece-3002ff640e73")
                .withCanModify(true)
                .withCanDelete(true)
                .withCanView(true)
                .withCanExecute(true)
                .withCanCopy(true)
                .withCanManage(true)
                .withCanCreateEnv(true)
                .withCanDisable(true)
        );
        List<String> listbodyApplicationIds = new ArrayList<>();
        listbodyApplicationIds.add("eac65c10c5c34df1824af96ec93a9eea");
        listbodyApplicationIds.add("3ba2ad194ff141e39b1d3d0749242858");
        body.withRoles(listbodyRoles);
        body.withApplicationIds(listbodyApplicationIds);
        body.withProjectId("0a38ce9ba3c740c199a0f872b6163661");
        request.withBody(body);
        try {
            BatchUpdateApplicationPermissionsResponse response =
client.batchUpdateApplicationPermissions(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)
```

```
client = CodeArtsDeployClient.new_builder() \  
  .with_credentials(credentials) \  
  .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \  
  .build()  
  
try:  
  request = BatchUpdateApplicationPermissionsRequest()  
  listRolesbody = [  
    AppPermission(  
      dev_role_id="ba0d4b2e-f7e6-46a3-aece-3002ff640e73",  
      can_modify=True,  
      can_delete=True,  
      can_view=True,  
      can_execute=True,  
      can_copy=True,  
      can_manage=True,  
      can_create_env=True,  
      can_disable=True  
    )  
  ]  
  listApplicationIdsbody = [  
    "eac65c10c5c34df1824af96ec93a9eea",  
    "3ba2ad194ff141e39b1d3d0749242858"  
  ]  
  request.body = BatchUpdateApplicationPermissionsRequestBody(  
    roles=listRolesbody,  
    application_ids=listApplicationIdsbody,  
    project_id="0a38ce9ba3c740c199a0f872b6163661"  
  )  
  response = client.batch_update_application_permissions(request)  
  print(response)  
except exceptions.ClientRequestException as e:  
  print(e.status_code)  
  print(e.request_id)  
  print(e.error_code)  
  print(e.error_msg)
```

## Go

```
package main  
  
import (  
  "fmt"  
  "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"  
  codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"  
  "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"  
  region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"  
)  
  
func main() {  
  // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
  risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
  variables and decrypted during use to ensure security.  
  // In this example, AK and SK are stored in environment variables for authentication. Before running this  
  example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
  ak := os.Getenv("CLOUD_SDK_AK")  
  sk := os.Getenv("CLOUD_SDK_SK")  
  
  auth := basic.NewCredentialsBuilder().  
    WithAk(ak).  
    WithSk(sk).  
    Build()  
  
  client := codeartsdeploy.NewCodeArtsDeployClient(  
    codeartsdeploy.CodeArtsDeployClientBuilder().  
      WithRegion(region.ValueOf("<YOUR REGION>")).  
      WithCredential(auth).  
      Build())
```

```
request := &model.BatchUpdateApplicationPermissionsRequest{}
var listRolesbody = []model.AppPermission{
    {
        DevRoleId: "ba0d4b2e-f7e6-46a3-aece-3002ff640e73",
        CanModify: true,
        CanDelete: true,
        CanView: true,
        CanExecute: true,
        CanCopy: true,
        CanManage: true,
        CanCreateEnv: true,
        CanDisable: true,
    },
}
var listApplicationIdsbody = []string{
    "eac65c10c5c34df1824af96ec93a9eea",
    "3ba2ad194ff141e39b1d3d0749242858",
}
request.Body = &model.BatchUpdateApplicationPermissionsRequestBody{
    Roles: listRolesbody,
    ApplicationIds: listApplicationIdsbody,
    ProjectId: "0a38ce9ba3c740c199a0f872b6163661",
}
response, err := client.BatchUpdateApplicationPermissions(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.5.3 Configuring Authentication Levels for Applications in Batches

### Function

This API is used to configure the authentication level to project-level or instance-level for applications in batches.

### Calling Method

For details, see [Calling APIs](#).

## URI

PUT /v3/applications/permission-level

## Request Parameters

**Table 4-229** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-230** Request body parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID
permission_level	Yes	String	Application authentication level: instance and project.
application_ids	Yes	Array of strings	Application ID list

## Response Parameters

Status code: 200

**Table 4-231** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status

## Example Requests

```
https://{endpoint}/v3/applications/permission-level
```

```
{  
  "application_ids": [ "eac65c10c5c34df1824af96ec93a9eea", "3ba2ad194ff141e39b1d3d0749242858" ],  
  "project_id": "0a38ce9ba3c740c199a0f872b6163661",  
  "permission_level": "instance"  
}
```

## Example Responses

Status code: 200



OK: The request is successful.

```
{
  "status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class BatchUpdatePermissionLevelSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        BatchUpdatePermissionLevelRequest request = new BatchUpdatePermissionLevelRequest();
        BatchUpdatePermissionLevelRequestBody body = new BatchUpdatePermissionLevelRequestBody();
        List<String> listbodyApplicationIds = new ArrayList<>();
        listbodyApplicationIds.add("eac65c10c5c34df1824af96ec93a9eea");
        listbodyApplicationIds.add("3ba2ad194ff141e39b1d3d0749242858");
        body.withApplicationIds(listbodyApplicationIds);

        body.withPermissionLevel(BatchUpdatePermissionLevelRequestBody.PermissionLevelEnum.fromValue("instance"));
        body.withProjectId("0a38ce9ba3c740c199a0f872b6163661");
        request.withBody(body);
        try {
            BatchUpdatePermissionLevelResponse response = client.batchUpdatePermissionLevel(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
        }
    }
}
```

```
        System.out.println(e.getErrorMsg());
    }
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = BatchUpdatePermissionLevelRequest()
        listApplicationIdsbody = [
            "eac65c10c5c34df1824af96ec93a9eea",
            "3ba2ad194ff141e39b1d3d0749242858"
        ]
        request.body = BatchUpdatePermissionLevelRequestBody(
            application_ids=listApplicationIdsbody,
            permission_level="instance",
            project_id="0a38ce9ba3c740c199a0f872b6163661"
        )
        response = client.batch_update_permission_level(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
```

```
sk := os.Getenv("CLOUD_SDK_SK")

auth := basic.NewCredentialsBuilder().
    WithAk(ak).
    WithSk(sk).
    Build()

client := codeartsdeploy.NewCodeArtsDeployClient(
    codeartsdeploy.CodeArtsDeployClientBuilder().
        WithRegion(region.ValueOf("<YOUR REGION>")).
        WithCredential(auth).
        Build())

request := &model.BatchUpdatePermissionLevelRequest{}
var listApplicationIdsbody = []string{
    "eac65c10c5c34df1824af96ec93a9eea",
    "3ba2ad194ff141e39b1d3d0749242858",
}
request.Body = &model.BatchUpdatePermissionLevelRequestBody{
    ApplicationIds: listApplicationIdsbody,
    PermissionLevel:
model.GetBatchUpdatePermissionLevelRequestBodyPermissionLevelEnum().INSTANCE,
    ProjectId: "0a38ce9ba3c740c199a0f872b6163661",
}
response, err := client.BatchUpdatePermissionLevel(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.5.4 Checking whether the current user has the permission to create applications in a project.

### Function

This API is used to check whether the current user has the permission to create applications in a project.

## Calling Method

For details, see [Calling APIs](#).

## URI

GET /v1/applications/creatable

**Table 4-232** Query Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID

## Request Parameters

**Table 4-233** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200**

**Table 4-234** Response body parameters

Parameter	Type	Description
result	<a href="#">result</a> object	Result for whether the user has permissions to create applications
status	String	Request success or failure status

**Table 4-235** result

Parameter	Type	Description
creatable	Boolean	Whether the user has permissions to create applications

## Example Requests

```
https://{endpoint}/v1/applications/creatable?project_id=46e2dd65b123456798137caebae6fa6d
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "result" : {
    "creatable" : true
  },
  "status" : "success"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class CheckCanCreateSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        CheckCanCreateRequest request = new CheckCanCreateRequest();
        try {
            CheckCanCreateResponse response = client.checkCanCreate(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
        }
    }
}
```

```
        System.out.println(e.getErrorMsg());
    }
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CheckCanCreateRequest()
        response = client.check_can_create(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
```

```
WithRegion(region.ValueOf("<YOUR REGION>")).
WithCredential(auth).
Build()

request := &model.CheckCanCreateRequest{}
response, err := client.CheckCanCreate(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

# 4.6 Measuring Deployment Record

## 4.6.1 Obtaining the Application Deployment Success Rate in a Specified Project

### Function

This API is used to obtain the application deployment success rate in a specified project.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/{project\_id}/metrics/success-rate

**Table 4-236** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	<b>Parameter description:</b> Project ID. For details, see [Obtaining a Project ID] (CloudDeploy_api_0014.xml). <b>Constraints:</b> N/A <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed. <b>Default value:</b> N/A

**Table 4-237** Query Parameters

Parameter	Mandatory	Type	Description
start_date	Yes	String	<b>Parameter description:</b> Left boundary (included) of the application deployment start time range. The value format is yyyy-MM-dd. For example, 2022-01-01. <b>Constraints:</b> This parameter is used together with end_date. The value of end_date must be later than or equal to the value of start_date. The maximum time range is one year. <b>Value range:</b> N/A <b>Default value:</b> N/A



Parameter	Mandatory	Type	Description
end_date	Yes	String	<b>Parameter description:</b> Right boundary (included) of the application deployment start time range. The value format is yyyy-MM-dd. For example, 2022-10-26. <b>Constraints:</b> This parameter is used together with start_date. The value of end_date must be later than or equal to the value of start_date. The maximum time range is one year. <b>Value range:</b> N/A <b>Default value:</b> N/A

## Request Parameters

None

## Response Parameters

**Status code: 200**

**Table 4-238** Response body parameters

Parameter	Type	Description
success_rate	String	<b>Parameter description:</b> Success rate. <b>Value range:</b> N/A
project_id	String	<b>Parameter description:</b> Project ID. <b>Value range:</b> The value consists of 32 characters. Letters and digits are allowed.

Parameter	Type	Description
project_name	String	<b>Parameter description:</b> Project name. <b>Value range:</b> The value consists of 3 to 128 characters.
start_date	String	<b>Parameter description:</b> Left boundary (included) of the application deployment start time range. The value format is yyyy-MM-dd. For example, 2022-10-26. <b>Value range:</b> N/A
end_date	String	<b>Parameter description:</b> Right boundary (included) of the application deployment start time range. The value format is yyyy-MM-dd. For example, 2022-10-26. <b>Value range:</b> N/A
task_count	Integer	<b>Parameter description:</b> Number of queried applications. <b>Value range:</b> N/A
record_count	Integer	<b>Parameter description:</b> Number of queried application deployment records. <b>Value range:</b> N/A
success_record_count	Integer	<b>Parameter description:</b> Number of successful application deployment records. <b>Value range:</b> N/A

## Example Requests

This API is used to obtain the deployment success rate of the target application in a specified period.

```
https://{endpoint}/v2/89931e210b214b5892ea833712f0f5e0/metrics/success-rate?  
start_date=2022-01-01&end_date=2022-10-26
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "success_rate" : "34.09",
  "project_id" : "89931e210b214b5892ea833712f0f5e0",
  "project_name" : "Happy",
  "start_date" : "2022-01-01",
  "end_date" : "2022-10-26",
  "task_count" : 8,
  "record_count" : 44,
  "success_record_count" : 15
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowProjectSuccessRateSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowProjectSuccessRateRequest request = new ShowProjectSuccessRateRequest();
        request.withProjectId("{project_id}");
        try {
            ShowProjectSuccessRateResponse response = client.showProjectSuccessRate(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
        }
    }
}
```

```
        System.out.println(e.getErrorCode());
        System.out.println(e.getErrorMsg());
    }
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ShowProjectSuccessRateRequest()
        request.project_id = "{project_id}"
        response = client.show_project_success_rate(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()
```

```
client := codeartsdeploy.NewCodeArtsDeployClient(  
    codeartsdeploy.CodeArtsDeployClientBuilder().  
        WithRegion(region.ValueOf("<YOUR REGION>")).  
        WithCredential(auth).  
        Build())  
  
request := &model.ShowProjectSuccessRateRequest{}  
request.ProjectId = "{project_id}"  
response, err := client.ShowProjectSuccessRate(request)  
if err == nil {  
    fmt.Printf("%+v\n", response)  
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.6.2 Obtaining the Application Deployment Success Rate in a Specified Application

### Function

This API is used to obtain the application deployment success rate in a specified application.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v2/{project\_id}/tasks/metrics/success-rate

**Table 4-239** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .

## Request Parameters

**Table 4-240** Request body parameters

Parameter	Mandatory	Type	Description
start_date	Yes	String	Left boundary (included) of the application deployment start time. Format: MMM DD, YYYY.
end_date	Yes	String	Right boundary (included) of the application deployment start time. The format is YYYY-MM-DD. The maximum range is one year.
task_ids	Yes	Array of strings	Application ID list

## Response Parameters

Status code: 200

**Table 4-241** Response body parameters

Parameter	Type	Description
project_id	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
project_name	String	Project name
start_date	String	Left boundary (included) of the application deployment start time. Format: MMM DD, YYYY.
end_date	String	Right boundary (included) of the application deployment start time. The format is YYYY-MM-DD. The maximum range is one year.
tasks_success_rate	Array of <a href="#">TaskSuccessRate</a> objects	Application success rate list

**Table 4-242** TaskSuccessRate

Parameter	Type	Description
task_id	String	Application ID
task_name	String	Application name
success_rate	String	Success rate
record_count	Integer	Number of deployment records
success_recor d_count	Integer	Number of successful deployment records

## Example Requests

```
https://{endpoint}/v2/89931e210b214b5892ea833712f0f5e0/tasks/metrics/success-rate  
  
{  
  "start_date": "2022-01-01",  
  "end_date": "2022-10-26",  
  "task_ids": [ "5bf0a54f36b04ddda7b94470fee39307", "b6d20b703ffe4a04bc68790ddabf6ab7" ]  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "project_id": "89931e210b214b5892ea833712f0f5e0",  
  "project_name": "Happy",  
  "start_date": "2022-01-01",  
  "end_date": "2022-10-26",  
  "tasks_success_rate": [ {  
    "task_id": "5bf0a54f36b04ddda7b94470fee39307",  
    "task_name": "happy482 Health Test Through URLs",  
    "success_rate": "0",  
    "record_count": 8,  
    "success_record_count": 0  
  }, {  
    "task_id": "b6d20b703ffe4a04bc68790ddabf6ab7",  
    "task_name": "happy486 Start/Stop Tomcat",  
    "success_rate": "14.29",  
    "record_count": 14,  
    "success_record_count": 2  
  } ]  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;
```

```
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

import java.util.List;
import java.util.ArrayList;

public class ListTaskSuccessRateSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ListTaskSuccessRateRequest request = new ListTaskSuccessRateRequest();
        request.withProjectId("{project_id}");
        TasksSuccessRateQuery body = new TasksSuccessRateQuery();
        List<String> listbodyTaskIds = new ArrayList<>();
        listbodyTaskIds.add("5bf0a54f36b04ddda7b94470fee39307");
        listbodyTaskIds.add("b6d20b703ffe4a04bc68790ddabf6ab7");
        body.withTaskIds(listbodyTaskIds);
        body.withEndDate("2022-10-26");
        body.withStartDate("2022-01-01");
        request.withBody(body);
        try {
            ListTaskSuccessRateResponse response = client.listTaskSuccessRate(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
```



```
# In this example, AK and SK are stored in environment variables for authentication. Before running this
example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
ak = os.environ["CLOUD_SDK_AK"]
sk = os.environ["CLOUD_SDK_SK"]

credentials = BasicCredentials(ak, sk)

client = CodeArtsDeployClient.new_builder() \
    .with_credentials(credentials) \
    .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
    .build()

try:
    request = ListTaskSuccessRateRequest()
    request.project_id = "{project_id}"
    listTaskIdsbody = [
        "5bf0a54f36b04ddda7b94470fee39307",
        "b6d20b703ffe4a04bc68790ddabf6ab7"
    ]
    request.body = TasksSuccessRateQuery(
        task_ids=listTaskIdsbody,
        end_date="2022-10-26",
        start_date="2022-01-01"
    )
    response = client.list_task_success_rate(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListTaskSuccessRateRequest{}
    request.ProjectId = "{project_id}"
    var listTaskIdsbody = []string{
        "5bf0a54f36b04ddda7b94470fee39307",
        "b6d20b703ffe4a04bc68790ddabf6ab7",
    }
```

```
}
request.Body = &model.TasksSuccessRateQuery{
    TaskIds: listTaskIdsbody,
    EndDate: "2022-10-26",
    StartDate: "2022-01-01",
}
response, err := client.ListTaskSuccessRate(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

# 4.7 Managing Environments

## 4.7.1 Creating an Environment for an Application

### Function

This API is used to create an environment for an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/applications/{application\_id}/environments

**Table 4-243** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID

## Request Parameters

**Table 4-244** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-245** Request body parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
name	Yes	String	Environment name
deploy_type	Yes	Integer	Deployment type. 0: Host. 1: Kubernetes.
os	Yes	String	Operating system: Windows or Linux, which must be the same as that of the host cluster.
description	No	String	Environment description

## Response Parameters

Status code: 200

Table 4-246 Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
id	String	Environment ID

## Example Requests

```
https://{endpoint}/v1/applications/43943381f7764c52baae8e697720873f/environments
{
  "project_id" : "55837d272adf4eee90319800e2da6961",
  "name" : "Environment name",
  "deploy_type" : 0,
  "description" : "Environment Description",
  "os" : "linux"
}
```

## Example Responses

Status code: 200

OK: The request is successful.

```
{
  "status" : "success",
  "id" : "140ca97e701d4c4c93c5932d5bdb32ec"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class CreateEnvironmentSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    }
}
```

```
String ak = System.getenv("CLOUD_SDK_AK");
String sk = System.getenv("CLOUD_SDK_SK");

ICredential auth = new BasicCredentials()
    .withAk(ak)
    .withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();

CreateEnvironmentRequest request = new CreateEnvironmentRequest();
request.withApplicationId("{application_id}");
EnvironmentRequestBody body = new EnvironmentRequestBody();
body.withDescription("Environment Description");
body.withOs(EnvironmentRequestBody.OsEnum.fromValue("linux"));
body.withDeployType(0);
body.withName("Environment name");
body.withProjectId("55837d272adf4eee90319800e2da6961");
request.withBody(body);
try {
    CreateEnvironmentResponse response = client.createEnvironment(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CreateEnvironmentRequest()
        request.application_id = "{application_id}"
        request.body = EnvironmentRequestBody(
            description="Environment Description",
            os="linux",
```

```
        deploy_type=0,
        name="Environment name",
        project_id="55837d272adf4eee90319800e2da6961"
    )
    response = client.create_environment(request)
    print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.CreateEnvironmentRequest{}
    request.ApplicationId = "{application_id}"
    request.DescriptionEnvironmentRequestBody = "Environment Description"
    request.Body = &model.EnvironmentRequestBody{
        Description: &descriptionEnvironmentRequestBody,
        Os: model.GetEnvironmentRequestBodyOsEnum().LINUX,
        DeployType: int32(0),
        Name: "Environment name",
        ProjectId: "55837d272adf4eee90319800e2da6961",
    }
    response, err := client.CreateEnvironment(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.7.2 Querying an Environment List of an Application

### Function

This API is used to query an environment list of an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/applications/{application\_id}/environments

**Table 4-247** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID

**Table 4-248** Query Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details, see <a href="#">Obtaining a Project ID</a> .
page_index	No	Integer	Page number, indicating that the query starts from this page. The value of page is no less than 1.
page_size	No	Integer	Number of items displayed on each page. The value of size is no more than 100.
name	No	String	Name of the environment to be queried.

Parameter	Mandatory	Type	Description
sort_key	No	String	Sorting field. Data can be sorted by environment name, username, creation time, or user alias.
sort_dir	No	String	Sorting order: DESC (descending order) and ASC (ascending order).

## Request Parameters

Table 4-249 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

Table 4-250 Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
total	Integer	Total number of environments in an application
result	Array of <a href="#">Environment Detail</a> objects	Environment list information

Table 4-251 EnvironmentDetail

Parameter	Type	Description
id	String	Environment ID
name	String	Environment name



Parameter	Type	Description
description	String	Environment description
os	String	OS
nick_name	String	Alias
deploy_type	Integer	Deployment type. 0: Host. 1: Kubernetes.
created_time	String	Creation time
instance_count	Integer	Number of host instances in the environment
created_by	<b>UserInfo</b> object	<b>Parameter description:</b> User information, including user ID and username. <b>Constraints:</b> N/A
permission	<b>EnvironmentPermissionDetail</b> object	Environment permission details

**Table 4-252** UserInfo

Parameter	Type	Description
user_id	String	<b>Parameter description:</b> User ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.
user_name	String	<b>Parameter description:</b> Username. <b>Value range:</b> The value consists of 1-255 characters. Only letters and digits are allowed.

**Table 4-253** EnvironmentPermissionDetail

Parameter	Type	Description
can_delete	Boolean	Whether you have the permission to delete environments
can_deploy	Boolean	Whether you have the deploy permission

Parameter	Type	Description
can_edit	Boolean	Whether you have the permission to edit environments
can_manage	Boolean	Whether you have permission to edit the environment permission matrix.
can_view	Boolean	Whether you have the permission to check environments

## Example Requests

```
https://{endpoint}/v1/applications/43943381f7764c52baae8e697720873f/environments?  
project_id=55837d272adf4eee90319800e2da6961
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "status": "success",  
  "total": 1,  
  "result": [ {  
    "created_by": {  
      "user_id": "6baa7454109d47c192f22078fe6cda20",  
      "user_name": "devcloud_devcloud_l00490255_01"  
    },  
    "created_time": "2023-06-20 16:53:29.0",  
    "deploy_type": 0,  
    "description": "",  
    "id": "a0a2274acc4f482bb2ecf49f865879fa",  
    "name": "casdasd",  
    "nick_name": "A/B Side Account",  
    "os": "linux",  
    "permission": {  
      "can_delete": true,  
      "can_deploy": true,  
      "can_edit": true,  
      "can_manage": true,  
      "can_view": true  
    }  
  }  
]
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
```

```
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListEnvironmentsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ListEnvironmentsRequest request = new ListEnvironmentsRequest();
        request.withApplicationId("{application_id}");
        try {
            ListEnvironmentsResponse response = client.listEnvironments(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.getenv("CLOUD_SDK_AK")
    sk = os.getenv("CLOUD_SDK_SK")

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
```

```
request = ListEnvironmentsRequest()
request.application_id = "{application_id}"
response = client.list_environments(request)
print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListEnvironmentsRequest{}
    request.ApplicationId = "{application_id}"
    response, err := client.ListEnvironments(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.7.3 Editing an Environment in an Application

### Function

This API is used to edit an environment in an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v1/applications/{application\_id}/environments/{environment\_id}

**Table 4-254** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID
environment_id	Yes	String	Environment ID

## Request Parameters

**Table 4-255** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-256** Request body parameters

Parameter	Mandatory	Type	Description
name	No	String	Environment name
description	No	String	Environment description

## Response Parameters

**Status code: 200**

**Table 4-257** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status

Parameter	Type	Description
id	String	Environment ID

## Example Requests

```
https://{endpoint}/v1/applications/8ddf0566c1784da29faac80516fa8425/environments/  
54e5b8b0d10148cc96142ac9d6c1c1f6  
  
{  
  "description" : "description",  
  "name" : "newEnvironmentName"  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "status" : "success",  
  "id" : "54e5b8b0d10148cc96142ac9d6c1c1f6"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class UpdateEnvironmentSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
        // In this example, AK and SK are stored in environment variables for authentication. Before running  
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
        String ak = System.getenv("CLOUD_SDK_AK");  
        String sk = System.getenv("CLOUD_SDK_SK");  
  
        ICredential auth = new BasicCredentials()  
            .withAk(ak)  
            .withSk(sk);  
  
        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()  
            .withCredential(auth)  
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))  
            .build();  
        UpdateEnvironmentRequest request = new UpdateEnvironmentRequest();
```

```
request.withApplicationId("{application_id}");
request.withEnvironmentId("{environment_id}");
EnvironmentRequest body = new EnvironmentRequest();
body.withDescription("description");
body.withName("newEnvironmentName");
request.withBody(body);
try {
    UpdateEnvironmentResponse response = client.updateEnvironment(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = UpdateEnvironmentRequest()
        request.application_id = "{application_id}"
        request.environment_id = "{environment_id}"
        request.body = EnvironmentRequest(
            description="description",
            name="newEnvironmentName"
        )
        response = client.update_environment(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main
```



```
import (  
    "fmt"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"  
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"  
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"  
)  
  
func main() {  
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
    // variables and decrypted during use to ensure security.  
    // In this example, AK and SK are stored in environment variables for authentication. Before running this  
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
    ak := os.Getenv("CLOUD_SDK_AK")  
    sk := os.Getenv("CLOUD_SDK_SK")  
  
    auth := basic.NewCredentialsBuilder().  
        WithAk(ak).  
        WithSk(sk).  
        Build()  
  
    client := codeartsdeploy.NewCodeArtsDeployClient(  
        codeartsdeploy.CodeArtsDeployClientBuilder().  
            WithRegion(region.ValueOf("<YOUR REGION>")).  
            WithCredential(auth).  
            Build())  
  
    request := &model.UpdateEnvironmentRequest{  
        request.ApplicationId = "{application_id}"  
        request.EnvironmentId = "{environment_id}"  
        descriptionEnvironmentRequest:= "description"  
        nameEnvironmentRequest:= "newEnvironmentName"  
        request.Body = &model.EnvironmentRequest{  
            Description: &descriptionEnvironmentRequest,  
            Name: &nameEnvironmentRequest,  
        }  
    }  
    response, err := client.UpdateEnvironment(request)  
    if err == nil {  
        fmt.Printf("%v\n", response)  
    } else {  
        fmt.Println(err)  
    }  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.7.4 Deleting an Environment from an Application

### Function

This API is used to delete an environment in an application.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v1/applications/{application\_id}/environments/{environment\_id}

**Table 4-258** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID
environment_id	Yes	String	Environment ID

### Request Parameters

**Table 4-259** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

Table 4-260 Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
id	String	Environment ID

## Example Requests

```
https://endpoint/v1/applications/43943381f7764c52baae8e697720873f/environments/  
140ca97e701d4c4c93c5932d5bdb32ec
```

## Example Responses

Status code: 200

OK: The request is successful.

```
{  
  "status": "success",  
  "id": "140ca97e701d4c4c93c5932d5bdb32ec"  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class DeleteEnvironmentSolution {
```

```
public static void main(String[] args) {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
    // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
    // environment variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running
    // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    String ak = System.getenv("CLOUD_SDK_AK");
    String sk = System.getenv("CLOUD_SDK_SK");

    ICredential auth = new BasicCredentials()
        .withAk(ak)
        .withSk(sk);

    CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
        .withCredential(auth)
        .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
        .build();
    DeleteEnvironmentRequest request = new DeleteEnvironmentRequest();
    request.withApplicationId("{application_id}");
    request.withEnvironmentId("{environment_id}");
    try {
        DeleteEnvironmentResponse response = client.deleteEnvironment(request);
        System.out.println(response.toString());
    } catch (ConnectionException e) {
        e.printStackTrace();
    } catch (RequestTimeoutException e) {
        e.printStackTrace();
    } catch (ServiceResponseException e) {
        e.printStackTrace();
        System.out.println(e.getHttpStatusCode());
        System.out.println(e.getRequestId());
        System.out.println(e.getErrorCode());
        System.out.println(e.getErrMsg());
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.getenv("CLOUD_SDK_AK")
    sk = os.getenv("CLOUD_SDK_SK")

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = DeleteEnvironmentRequest()
        request.application_id = "{application_id}"
        request.environment_id = "{environment_id}"
        response = client.delete_environment(request)
        print(response)
```

```
except exceptions.ClientRequestException as e:  
    print(e.status_code)  
    print(e.request_id)  
    print(e.error_code)  
    print(e.error_msg)
```

## Go

```
package main  
  
import (  
    "fmt"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"  
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"  
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"  
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"  
)  
  
func main() {  
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security  
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment  
    // variables and decrypted during use to ensure security.  
    // In this example, AK and SK are stored in environment variables for authentication. Before running this  
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
    ak := os.Getenv("CLOUD_SDK_AK")  
    sk := os.Getenv("CLOUD_SDK_SK")  
  
    auth := basic.NewCredentialsBuilder().  
        WithAk(ak).  
        WithSk(sk).  
        Build()  
  
    client := codeartsdeploy.NewCodeArtsDeployClient(  
        codeartsdeploy.CodeArtsDeployClientBuilder().  
            WithRegion(region.ValueOf("<YOUR REGION>")).  
            WithCredential(auth).  
            Build())  
  
    request := &model.DeleteEnvironmentRequest{}  
    request.ApplicationId = "{application_id}"  
    request.EnvironmentId = "{environment_id}"  
    response, err := client.DeleteEnvironment(request)  
    if err == nil {  
        fmt.Printf("%+v\n", response)  
    } else {  
        fmt.Println(err)  
    }  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.7.5 Querying Environment Details

### Function

This API is used to query environment details.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/applications/{application\_id}/environments/{environment\_id}

**Table 4-261** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID
environment_id	Yes	String	Environment ID

### Request Parameters

**Table 4-262** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

### Response Parameters

**Status code: 200**

**Table 4-263** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status

Parameter	Type	Description
result	<a href="#">Environment Detail</a> object	Environment details

**Table 4-264** EnvironmentDetail

Parameter	Type	Description
id	String	Environment ID
name	String	Environment name
description	String	Environment description
os	String	OS
nick_name	String	Alias
deploy_type	Integer	Deployment type. 0: Host. 1: Kubernetes.
created_time	String	Creation time
instance_count	Integer	Number of host instances in the environment
created_by	<a href="#">UserInfo</a> object	<b>Parameter description:</b> User information, including user ID and username. <b>Constraints:</b> N/A
permission	<a href="#">Environment PermissionDetail</a> object	Environment permission details

**Table 4-265** UserInfo

Parameter	Type	Description
user_id	String	<b>Parameter description:</b> User ID. <b>Value range:</b> The value consists of 32 characters. Only letters and digits are allowed.

Parameter	Type	Description
user_name	String	<b>Parameter description:</b> Username. <b>Value range:</b> The value consists of 1-255 characters. Only letters and digits are allowed.

**Table 4-266** EnvironmentPermissionDetail

Parameter	Type	Description
can_delete	Boolean	Whether you have the permission to delete environments
can_deploy	Boolean	Whether you have the deploy permission
can_edit	Boolean	Whether you have the permission to edit environments
can_manage	Boolean	Whether you have permission to edit the environment permission matrix.
can_view	Boolean	Whether you have the permission to check environments

## Example Requests

```
https://{endpoint}/v1/applications/43943381f7764c52baae8e697720873f/environments/  
140ca97e701d4c4c93c5932d5bdb32ec
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "status": "success",  
  "result": {  
    "created_by": {  
      "user_id": "6baa7454109d47c192f22078fe6cda20",  
      "user_name": "devcloud_devcloud_l00490255_01"  
    },  
    "created_time": "2023-06-20 16:53:29.0",  
    "deploy_type": 0,  
    "description": "",  
    "id": "a0a2274acc4f482bb2ecf49f865879fa",  
    "name": "casdasd",  
    "nick_name": "A/B Side Account",  
    "os": "linux",  
    "permission": {  
      "can_delete": true,  
      "can_deploy": true,  
      "can_edit": true,  
      "can_manage": true,  
    }  
  }  
}
```



```
"can_view" : true
}
}
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ShowEnvironmentDetailSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        ShowEnvironmentDetailRequest request = new ShowEnvironmentDetailRequest();
        request.withApplicationId("{application_id}");
        request.withEnvironmentId("{environment_id}");
        try {
            ShowEnvironmentDetailResponse response = client.showEnvironmentDetail(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

### Python

```
# coding: utf-8

import os
```

```
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ShowEnvironmentDetailRequest()
        request.application_id = "{application_id}"
        request.environment_id = "{environment_id}"
        response = client.show_environment_detail(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ShowEnvironmentDetailRequest{}
    request.ApplicationId = "{application_id}"
    request.EnvironmentId = "{environment_id}"
    response, err := client.ShowEnvironmentDetail(request)
```

```
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.7.6 Importing a Host to an Environment

### Function

This API is used to import a host to an environment.

### Calling Method

For details, see [Calling APIs](#).

### URI

POST /v1/applications/{application\_id}/environments/{environment\_id}/hosts/import

**Table 4-267** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID
environment_id	Yes	String	Environment ID

## Request Parameters

**Table 4-268** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-269** Request body parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID
host_ids	Yes	Array of strings	ID list of the hosts to be imported

## Response Parameters

Status code: 200

**Table 4-270** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
result	Array of strings	ID list of the imported hosts

## Example Requests

```
https://{endpoint}/v1/applications/43943381f7764c52baae8e697720873f/environments/  
666ec038a53c4b9f899823747a7130e8/hosts/import  
  
{  
  "group_id" : "4b0cb2f098174d38b0c15645c13eae6f",  
  "host_ids" : [ "8e1eb7f010d4442ca150e3a1a5d96d94" ]  
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "status" : "success",  
  "result" : [ "c5fa45c92c0849229d003d98f52617eb" ]  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
import java.util.List;  
import java.util.ArrayList;  
  
public class ImportHostToEnvironmentSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
        // In this example, AK and SK are stored in environment variables for authentication. Before running  
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
        String ak = System.getenv("CLOUD_SDK_AK");  
        String sk = System.getenv("CLOUD_SDK_SK");  
  
        ICredential auth = new BasicCredentials()
```

```
.withAk(ak)
.withSk(sk);

CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
ImportHostToEnvironmentRequest request = new ImportHostToEnvironmentRequest();
request.withApplicationId("{application_id}");
request.withEnvironmentId("{environment_id}");
ImportHostToEnvironmentRequestBody body = new ImportHostToEnvironmentRequestBody();
List<String> listbodyHostIds = new ArrayList<>();
listbodyHostIds.add("8e1eb7f010d4442ca150e3a1a5d96d94");
body.withHostIds(listbodyHostIds);
body.withGroupid("4b0cb2f098174d38b0c15645c13eae6f");
request.withBody(body);
try {
    ImportHostToEnvironmentResponse response = client.importHostToEnvironment(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ImportHostToEnvironmentRequest()
        request.application_id = "{application_id}"
        request.environment_id = "{environment_id}"
        listHostIdsbody = [
            "8e1eb7f010d4442ca150e3a1a5d96d94"
        ]
        request.body = ImportHostToEnvironmentRequestBody(
            host_ids=listHostIdsbody,
            group_id="4b0cb2f098174d38b0c15645c13eae6f"
        )
```

```
)
response = client.import_host_to_environment(request)
print(response)
except exceptions.ClientRequestException as e:
    print(e.status_code)
    print(e.request_id)
    print(e.error_code)
    print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ImportHostToEnvironmentRequest{}
    request.ApplicationId = "{application_id}"
    request.EnvironmentId = "{environment_id}"
    var listHostIdsbody = []string{
        "8e1eb7f010d4442ca150e3a1a5d96d94",
    }
    request.Body = &model.ImportHostToEnvironmentRequestBody{
        HostIds: listHostIdsbody,
        GroupId: "4b0cb2f098174d38b0c15645c13eae6f",
    }
    response, err := client.ImportHostToEnvironment(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.7.7 Deleting a Host from an Environment

### Function

This API is used to delete a host from an environment.

### Calling Method

For details, see [Calling APIs](#).

### URI

DELETE /v1/applications/{application\_id}/environments/{environment\_id}/{host\_id}

**Table 4-271** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID
environment_id	Yes	String	Environment ID
host_id	Yes	String	Host ID



## Request Parameters

**Table 4-272** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200****Table 4-273** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
result	String	Environment ID

## Example Requests

```
https://{endpoint}/v1/applications/7de12f87232e46a79235f52d033b8688/environments/  
25e30c17f81042ba9a1a3383da39a7fc/c5fa45c92c0849229d003d98f52617eb
```

## Example Responses

### Status code: 200

OK: The request is successful.

```
{
  "status" : "success",
  "result" : "c5fa45c92c0849229d003d98f52617eb"
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class DeleteHostFromEnvironmentSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);

        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
            .withCredential(auth)
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
            .build();
        DeleteHostFromEnvironmentRequest request = new DeleteHostFromEnvironmentRequest();
        request.withApplicationId("{application_id}");
        request.withEnvironmentId("{environment_id}");
        request.withHostId("{host_id}");
        try {
            DeleteHostFromEnvironmentResponse response = client.deleteHostFromEnvironment(request);
            System.out.println(response.toString());
        } catch (ConnectionException e) {
            e.printStackTrace();
        } catch (RequestTimeoutException e) {
            e.printStackTrace();
        } catch (ServiceResponseException e) {
            e.printStackTrace();
            System.out.println(e.getHttpStatusCode());
            System.out.println(e.getRequestId());
            System.out.println(e.getErrorCode());
            System.out.println(e.getErrorMsg());
        }
    }
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = DeleteHostFromEnvironmentRequest()
        request.application_id = "{application_id}"
        request.environment_id = "{environment_id}"
        request.host_id = "{host_id}"
        response = client.delete_host_from_environment(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    // risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    // variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    // example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
```

```
Build()  
  
request := &model.DeleteHostFromEnvironmentRequest{}  
request.ApplicationId = "{application_id}"  
request.EnvironmentId = "{environment_id}"  
request.HostId = "{host_id}"  
response, err := client.DeleteHostFromEnvironment(request)  
if err == nil {  
    fmt.Printf("%+v\n", response)  
} else {  
    fmt.Println(err)  
}  
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.7.8 Querying a Host List in an Environment

### Function

This API is used to query a host list in an environment.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/applications/{application\_id}/environments/{environment\_id}/hosts

**Table 4-274** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID
environment_id	Yes	String	Environment ID

**Table 4-275** Query Parameters

Parameter	Mandatory	Type	Description
key_field	No	String	Fuzzy search by host name and IP address
as_proxy	No	Boolean	Proxy or not. true: Proxy.
page_index	No	Integer	Page number
page_size	No	Integer	Number of records on each page

## Request Parameters

**Table 4-276** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

**Status code: 200**

**Table 4-277** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
total	Integer	Total quantity
result	Array of <a href="#">EnvironmentHostInfo</a> objects	Host information list in the environment

**Table 4-278** EnvironmentHostInfo

Parameter	Type	Description
host_id	String	Host ID

Parameter	Type	Description
ip	String	Host IP address, for example, 161.17.101.12.
port	Integer	SSH Port number, for example, 22.
permission	<a href="#">EnvironmentHostPermission</a> object	Environment permission details
group_id	String	Host cluster ID
host_name	String	Host name
as_proxy	Boolean	Proxy or not
proxy_host_id	String	Proxy ID
proxy_host_name	String	Proxy name
owner_id	String	Host owner ID
owner_name	String	Host owner name
connection_status	String	Connection status
lastest_connection_time	String	Last connection time
connection_result	String	Connectivity verification result
nick_name	String	Creator alias

**Table 4-279** EnvironmentHostPermission

Parameter	Type	Description
can_delete	Boolean	Whether you have the delete permission
can_deploy	Boolean	Whether you have the deploy permission
can_edit	Boolean	Whether you have the edit permission
can_manage	Boolean	Whether you can manage permissions
can_view	Boolean	Whether you have the view permission

## Example Requests

```
https://{endpoint}/v1/applications/e1d7b7388b4641e2a027f5673fd6093b/environments/  
82c4eb8c522d42969a3da30123e1ecba/hosts?page_index=1&page_size=10&key_field=
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "status": "success",
  "result": [ {
    "ip": "100.85.172.31",
    "port": 22,
    "permission": {
      "can_view": true,
      "can_edit": true,
      "can_delete": true,
      "can_deploy": true,
      "can_manage": true
    },
    "host_id": "13c208e61c9541ab9895f450fd1cbf7c",
    "host_name": "test",
    "as_proxy": false,
    "group_id": "2a8c2da888c04a5eaff10d0787c90ea4",
    "proxy_host_id": "",
    "proxy_host_name": null,
    "owner_id": "6baa7454109d47c192f22078fe6cda20",
    "owner_name": "devcloud_devcloud_l00490255_01",
    "nick_name": "devcloud_devcloud_l00490255_01",
    "connection_status": "failed",
    "connection_result": "Connection failed",
    "lastest_connection_time": "2024-05-31 14:47:52"
  } ],
  "total": 1
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;

import com.huaweicloud.sdk.core.auth.ICredential;
import com.huaweicloud.sdk.core.auth.BasicCredentials;
import com.huaweicloud.sdk.core.exception.ConnectionException;
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;
import com.huaweicloud.sdk.core.exception.ServiceResponseException;
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;
import com.huaweicloud.sdk.codeartsdeploy.v2.*;
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;

public class ListEnvironmentHostsSolution {

    public static void main(String[] args) {
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or
        // environment variables and decrypted during use to ensure security.
        // In this example, AK and SK are stored in environment variables for authentication. Before running
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
        String ak = System.getenv("CLOUD_SDK_AK");
        String sk = System.getenv("CLOUD_SDK_SK");

        ICredential auth = new BasicCredentials()
            .withAk(ak)
            .withSk(sk);
```

```
CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()
    .withCredential(auth)
    .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))
    .build();
ListEnvironmentHostsRequest request = new ListEnvironmentHostsRequest();
request.withApplicationId("{application_id}");
request.withEnvironmentId("{environment_id}");
try {
    ListEnvironmentHostsResponse response = client.listEnvironmentHosts(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    # risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    # variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    # example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = ListEnvironmentHostsRequest()
        request.application_id = "{application_id}"
        request.environment_id = "{environment_id}"
        response = client.list_environment_hosts(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
```



```
codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
"github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    // In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak := os.Getenv("CLOUD_SDK_AK")
    sk := os.Getenv("CLOUD_SDK_SK")

    auth := basic.NewCredentialsBuilder().
        WithAk(ak).
        WithSk(sk).
        Build()

    client := codeartsdeploy.NewCodeArtsDeployClient(
        codeartsdeploy.CodeArtsDeployClientBuilder().
            WithRegion(region.ValueOf("<YOUR REGION>")).
            WithCredential(auth).
            Build())

    request := &model.ListEnvironmentHostsRequest{}
    request.ApplicationId = "{application_id}"
    request.EnvironmentId = "{environment_id}"
    response, err := client.ListEnvironmentHosts(request)
    if err == nil {
        fmt.Printf("%+v\n", response)
    } else {
        fmt.Println(err)
    }
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

# 4.8 Managing Host Cluster Permissions

## 4.8.1 Querying the Host Cluster Permission Matrix

### Function

This API is used to query the permission matrix of a host cluster by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v2/host-groups/{group\_id}/permissions

**Table 4-280** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

### Request Parameters

**Table 4-281** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

### Response Parameters

**Status code: 200**

**Table 4-282** Response body parameters

Parameter	Type	Description
[items]	Array of <a href="#">DevUcClusterPermission</a> objects	Host cluster permission matrix

**Table 4-283** DevUcClusterPermission

Parameter	Type	Description
region	String	Region information
role_id	String	Role ID
devuc_role_id_list	Array of strings	Role ID list
name	String	Role name
group_id	String	Host cluster ID
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_add_host	Boolean	Whether you have the permission to add hosts
can_manage	Boolean	Whether you can manage permissions
can_copy	Boolean	Whether you have the clone permission
create_time	String	Creation time
update_time	String	Modification time
role_type	String	Role type. project-customized: Custom roles. template-project-customized: System-defined roles. template-customized-inst: System roles. cluster-creator: Cluster creator. project_admin: Project creator.

## Example Requests

<https://{endpoint}/v2/host-groups/2a8c2da888c04a5eaff10d0787c90ea4/permissions>

## Example Responses

**Status code: 200**

OK: The request is successful.

```
[{
  "region": "region",
  "name": "Host cluster creator",
  "role_id": "0",
  "devuc_role_id_list": null,
  "group_id": "2a8c2da888c04a5eaff10d0787c90ea4",
  "can_view": true,
  "can_edit": true,
  "can_delete": true,
  "can_add_host": true,
  "can_manage": true,
  "can_copy": true,
  "create_time": "2024-05-31 14:32:59.0",
```

```
"update_time" : "2024-05-31 14:32:59.0",
"role_type" : "cluster-creator"
}, {
  "region" : "region",
  "name" : "Project admin",
  "role_id" : "a2e65d2647574f8491cac659a0249d24",
  "devuc_role_id_list" : null,
  "group_id" : "2a8c2da888c04a5eaff10d0787c90ea4",
  "can_view" : true,
  "can_edit" : true,
  "can_delete" : true,
  "can_add_host" : true,
  "can_manage" : true,
  "can_copy" : true,
  "create_time" : "2024-05-31 14:32:59.0",
  "update_time" : "2024-05-31 14:32:59.0",
  "role_type" : "project"
}]
```

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.8.2 Modifying the Host Cluster Permission Matrix

### Function

This API is used to modify the permission matrix of a host cluster by ID.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v2/host-groups/{group\_id}/permissions

**Table 4-284** Path Parameters

Parameter	Mandatory	Type	Description
group_id	Yes	String	Host cluster ID

## Request Parameters

**Table 4-285** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-286** Request body parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID
role_id	Yes	String	Role ID
permission_name	Yes	String	Permission name: can_view, can_edit, can_delete, can_add_host, can_manage, and can_copy.
permission_value	Yes	Boolean	true: Authorized. false: Not authorized.

## Response Parameters

**Status code: 200**

**Table 4-287** Response body parameters

Parameter	Type	Description
region	String	Region information
role_id	String	Role ID
devuc_role_id_list	Array of strings	Role ID list
name	String	Role name
group_id	String	Host cluster ID
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_add_host	Boolean	Whether you have the permission to add hosts
can_manage	Boolean	Whether you can manage permissions
can_copy	Boolean	Whether you have the clone permission
create_time	String	Creation time
update_time	String	Modification time
role_type	String	Role type. project-customized: Custom roles. template-project-customized: System-defined roles. template-customized-inst: System roles. cluster-creator: Cluster creator. project_admin: Project creator.

## Example Requests

```
https://{endpoint}/v2/host-groups/2a8c2da888c04a5eaff10d0787c90ea4/permissions
```

```
{
  "permission_name": "can_delete",
  "permission_value": true,
  "project_id": "7e6caf3cd9a64d5b8ea451e38221892e",
  "role_id": "c869ebc4000c4bb9a2605c4020450ab4"
}
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{
  "region": "region",
  "name": null,
  "role_id": "0",
  "devuc_role_id_list": null,
  "group_id": "2a8c2da888c04a5eaff10d0787c90ea4",
}
```

```
"can_view" : true,  
"can_edit" : true,  
"can_delete" : true,  
"can_add_host" : true,  
"can_manage" : true,  
"can_copy" : true,  
"create_time" : null,  
"update_time" : null,  
"role_type" : "cluster-creator"  
}
```

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

## 4.8.3 Checking Whether the Current User Has Permissions to Create a Host Cluster in a Project

### Function

This API is used to check whether the current user has permissions to create a host cluster in a project.

### Calling Method

For details, see [Calling APIs](#).

### URI

GET /v1/host-groups/creatable/{project\_id}/permissions

**Table 4-288** Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID

### Request Parameters

None

### Response Parameters

**Status code: 200**

**Table 4-289** Response body parameters

Parameter	Type	Description
can_created	Boolean	Whether you have permissions to create a host cluster. true: Authorized. false: Not authorized.

## Example Requests

```
https://{endpoint}/v1/host-groups/creatable/7e6caf3cd9a64d5b8ea451e38221892e/permissions
```

## Example Responses

**Status code: 200**

OK: The request is successful.

```
{  
  "can_created" : true  
}
```

## SDK Sample Code

The SDK sample code is as follows.

### Java

```
package com.huaweicloud.sdk.test;  
  
import com.huaweicloud.sdk.core.auth.ICredential;  
import com.huaweicloud.sdk.core.auth.BasicCredentials;  
import com.huaweicloud.sdk.core.exception.ConnectionException;  
import com.huaweicloud.sdk.core.exception.RequestTimeoutException;  
import com.huaweicloud.sdk.core.exception.ServiceResponseException;  
import com.huaweicloud.sdk.codeartsdeploy.v2.region.CodeArtsDeployRegion;  
import com.huaweicloud.sdk.codeartsdeploy.v2.*;  
import com.huaweicloud.sdk.codeartsdeploy.v2.model.*;  
  
public class CheckWhetherHostGroupCanBeCreatedSolution {  
  
    public static void main(String[] args) {  
        // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great  
        // security risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or  
        // environment variables and decrypted during use to ensure security.  
        // In this example, AK and SK are stored in environment variables for authentication. Before running  
        // this example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment  
        String ak = System.getenv("CLOUD_SDK_AK");  
        String sk = System.getenv("CLOUD_SDK_SK");  
  
        ICredential auth = new BasicCredentials()  
            .withAk(ak)  
            .withSk(sk);  
  
        CodeArtsDeployClient client = CodeArtsDeployClient.newBuilder()  
            .withCredential(auth)  
            .withRegion(CodeArtsDeployRegion.valueOf("<YOUR REGION>"))  
            .build();  
        CheckWhetherHostGroupCanBeCreatedRequest request = new  
        CheckWhetherHostGroupCanBeCreatedRequest();  
        request.withProjectId("{project_id}");  
        try {  
            CheckWhetherHostGroupCanBeCreatedResponse response =
```



```
client.checkWhetherHostGroupCanBeCreated(request);
    System.out.println(response.toString());
} catch (ConnectionException e) {
    e.printStackTrace();
} catch (RequestTimeoutException e) {
    e.printStackTrace();
} catch (ServiceResponseException e) {
    e.printStackTrace();
    System.out.println(e.getHttpStatusCode());
    System.out.println(e.getRequestId());
    System.out.println(e.getErrorCode());
    System.out.println(e.getErrorMsg());
}
}
```

## Python

```
# coding: utf-8

import os
from huaweicloudsdkcore.auth.credentials import BasicCredentials
from huaweicloudsdkcodeartsdeploy.v2.region.codeartsdeploy_region import CodeArtsDeployRegion
from huaweicloudsdkcore.exceptions import exceptions
from huaweicloudsdkcodeartsdeploy.v2 import *

if __name__ == "__main__":
    # The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
    # In this example, AK and SK are stored in environment variables for authentication. Before running this
    example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
    ak = os.environ["CLOUD_SDK_AK"]
    sk = os.environ["CLOUD_SDK_SK"]

    credentials = BasicCredentials(ak, sk)

    client = CodeArtsDeployClient.new_builder() \
        .with_credentials(credentials) \
        .with_region(CodeArtsDeployRegion.value_of("<YOUR REGION>")) \
        .build()

    try:
        request = CheckWhetherHostGroupCanBeCreatedRequest()
        request.project_id = "{project_id}"
        response = client.check_whether_host_group_can_be_created(request)
        print(response)
    except exceptions.ClientRequestException as e:
        print(e.status_code)
        print(e.request_id)
        print(e.error_code)
        print(e.error_msg)
```

## Go

```
package main

import (
    "fmt"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/core/auth/basic"
    codeartsdeploy "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2"
    "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/model"
    region "github.com/huaweicloud/huaweicloud-sdk-go-v3/services/codeartsdeploy/v2/region"
)

func main() {
    // The AK and SK used for authentication are hard-coded or stored in plaintext, which has great security
    risks. It is recommended that the AK and SK be stored in ciphertext in configuration files or environment
    variables and decrypted during use to ensure security.
```

```
// In this example, AK and SK are stored in environment variables for authentication. Before running this
example, set environment variables CLOUD_SDK_AK and CLOUD_SDK_SK in the local environment
ak := os.Getenv("CLOUD_SDK_AK")
sk := os.Getenv("CLOUD_SDK_SK")

auth := basic.NewCredentialsBuilder().
    WithAk(ak).
    WithSk(sk).
    Build()

client := codeartsdeploy.NewCodeArtsDeployClient(
    codeartsdeploy.CodeArtsDeployClientBuilder().
        WithRegion(region.ValueOf("<YOUR REGION>")).
        WithCredential(auth).
        Build())

request := &model.CheckWhetherHostGroupCanBeCreatedRequest{}
request.ProjectId = "{project_id}"
response, err := client.CheckWhetherHostGroupCanBeCreated(request)
if err == nil {
    fmt.Printf("%+v\n", response)
} else {
    fmt.Println(err)
}
}
```

## More

For SDK sample code of more programming languages, see the Sample Code tab in [API Explorer](#). SDK sample code can be automatically generated.

## Status Codes

Status Code	Description
200	OK: The request is successful.

## Error Codes

See [Error Codes](#).

# 4.9 Managing Environment Permissions

## 4.9.1 Querying Environment Permissions

### Function

This API is used to query environment permissions.

### Calling Method

For details, see [Calling APIs](#).

## URI

GET /v2/applications/{application\_id}/environments/{environment\_id}/permissions

**Table 4-290** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID
environment_id	Yes	String	Environment ID

## Request Parameters

**Table 4-291** Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

## Response Parameters

Status code: 200

**Table 4-292** Response body parameters

Parameter	Type	Description
[items]	Array<Array< <a href="#">DevUcEnvironmentPermission</a> >>	Permission data, which is of the list type

**Table 4-293** DevUcEnvironmentPermission

Parameter	Type	Description
id	Integer	Permission ID
role_id	String	Role ID
devuc_role_id_list	Array of strings	Role ID list

Parameter	Type	Description
role_type	String	Role type. environment-creator: Environment creator. project: Project administrator. template-customized-inst: System roles. template-project-customized and project-customized: Custom roles.
name	String	Role name
region	String	Region information
environment_id	String	Environment ID
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_deploy	Boolean	Whether you have the deploy permission
can_manage	Boolean	Whether you can manage permissions
create_time	String	Creation time
update_time	String	Modification time

## Example Requests

```
https://{endpoint}/v2/applications/8ddf0566c1784da29faac80516fa8425/environments/54e5b8b0d10148cc96142ac9d6c1c1f6/permissions
```

## Example Responses

**Status code: 200**

Permission data, which is of the list type

```
[ {
  "region": "region",
  "id": 99213234,
  "name": "Environment creator",
  "role_id": "0",
  "devuc_role_id_list": null,
  "environment_id": "be3e9690d6f64b23b54e79cd02c4b156",
  "can_view": true,
  "can_edit": true,
  "can_delete": true,
  "can_deploy": true,
  "can_manage": true,
  "create_time": "2024-06-21 17:23:55.0",
  "update_time": "2024-06-21 17:23:55.0",
  "role_type": "environment-creator"
}, {
  "region": "region",
  "id": 99213235,
  "name": "Project admin",
  "role_id": "a2e65d2647574f8491cac659a0249d24",
```

```
"devuc_role_id_list" : null,
"environment_id" : "be3e9690d6f64b23b54e79cd02c4b156",
"can_view" : true,
"can_edit" : true,
"can_delete" : true,
"can_deploy" : true,
"can_manage" : true,
"create_time" : "2024-06-21 17:23:55.0",
"update_time" : "2024-06-21 17:23:55.0",
"role_type" : "project"
} ]
```

## Status Codes

Status Code	Description
200	Permission data, which is of the list type

## Error Codes

See [Error Codes](#).

## 4.9.2 Editing Environment Permission

### Function

This API is used to edit the environment permission.

### Calling Method

For details, see [Calling APIs](#).

### URI

PUT /v2/applications/{application\_id}/environments/{environment\_id}/permissions

**Table 4-294** Path Parameters

Parameter	Mandatory	Type	Description
application_id	Yes	String	Application ID
environment_id	Yes	String	Environment ID

## Request Parameters

**Table 4-295** Request header parameters

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type (format). Possible values: <ul style="list-style-type: none"><li>• application/json;charset=utf-8</li><li>• application/json; charset=utf-8</li><li>• application/json;charset=UTF-8</li><li>• application/json; charset=UTF-8</li><li>• application/json</li><li>• application/octet-stream;charset=utf-8</li><li>• application/octet-stream; charset=utf-8</li><li>• text/html;charset=UTF-8</li><li>• text/html; charset=UTF-8</li></ul>
X-Auth-Token	Yes	String	User token. It can be obtained by calling an IAM API. The value of X-Subject-Token in the response header is the user token.

**Table 4-296** Request body parameters

Parameter	Mandatory	Type	Description
role_id	No	String	Role ID
permission_name	No	String	Permission name: can_view, can_edit, can_delete, can_deploy, and can_manage.
permission_value	No	Boolean	true: Authorized. false: Not authorized.

## Response Parameters

**Status code: 200**

**Table 4-297** Response body parameters

Parameter	Type	Description
status	String	Request success or failure status
result	<a href="#">DevUcEnvironmentPermission</a> object	Updated environment permission information

**Table 4-298** DevUcEnvironmentPermission

Parameter	Type	Description
id	Integer	Permission ID
role_id	String	Role ID
devuc_role_id_list	Array of strings	Role ID list
role_type	String	Role type. environment-creator: Environment creator. project: Project administrator. template-customized-inst: System roles. template-project-customized and project-customized: Custom roles.
name	String	Role name
region	String	Region information
environment_id	String	Environment ID
can_view	Boolean	Whether you have the view permission
can_edit	Boolean	Whether you have the edit permission
can_delete	Boolean	Whether you have the delete permission
can_deploy	Boolean	Whether you have the deploy permission
can_manage	Boolean	Whether you can manage permissions
create_time	String	Creation time
update_time	String	Modification time

## Example Requests

```
https://{endpoint}/v2/applications/8ddf0566c1784da29faac80516fa8425/environments/54e5b8b0d10148cc96142ac9d6c1c1f6/permissions
```

```
{  
  "permission_name" : "can_deploy",  
  "permission_value" : true,  
}
```

```
"role_id" : "e72b8cebe2c6499db2b23276b3820736"  
}
```

## Example Responses

**Status code: 200**

OK

```
{  
  "status" : "success",  
  "result" : {  
    "region" : "region",  
    "id" : null,  
    "name" : null,  
    "role_id" : "0",  
    "devuc_role_id_list" : null,  
    "environment_id" : "be3e9690d6f64b23b54e79cd02c4b156",  
    "can_view" : true,  
    "can_edit" : true,  
    "can_delete" : true,  
    "can_deploy" : true,  
    "can_manage" : true,  
    "create_time" : null,  
    "update_time" : null,  
    "role_type" : "environment-creator"  
  }  
}
```

## Status Codes

Status Code	Description
200	OK

## Error Codes

See [Error Codes](#).



# 5 Application Examples

[Example 1: Querying a Host Cluster List](#)

[Example 2: Querying Host Cluster Details by ID](#)

[Example 3: Querying the Host List of a Specified Host Cluster](#)

## 5.1 Example 1: Querying a Host Cluster List

### Scenario

This section provides an example of using an API to query the host cluster list as a CodeArts user.

For details on how to call APIs, see [Calling APIs](#).

### Prerequisite

You have created a CodeArts project.

### Approach

Query the list of all host clusters of the current user based on the user token.

### Querying the Host Cluster List

- API information:

```
URI: GET /v2/host-groups
```

- Request example:

```
GET https://{endpoint}/v2/host-groups?region_name=ap-southeast-3&project_id=6039d4480efc4dddb178abff98719913&offset=1&limit=10&sort_key=create_time&sort_dir=DESC
```

- Response example:

```
{
  "total" : 1,
  "host_groups" : [ {
    "name" : "testwyk",
    "description" : "11122211",
    "os" : "linux",
```

```
"nick_name" : "A/B_side_account",
"id" : 200001291,
"group_id" : "ab7647b0863c4e969c8949d38d591339",
"region_name" : "ap-southeast-3",
"project_id" : "6039d4480efc4dddb178abff98719913",
"permission" : {
  "can_view" : true,
  "can_edit" : true,
  "can_delete" : true,
  "can_add_host" : true,
  "can_manage" : true
},
"created_by" : {
  "user_id" : "6baa7454109d47c192f22078fe6cda20",
  "user_name" : "devcloud_devcloud_l00490255_01"
},
"updated_by" : {
  "user_id" : "6baa7454109d47c192f22078fe6cda20",
  "user_name" : "devcloud_devcloud_l00490255_01"
},
"auto_connection_test_switch" : 0,
"slave_cluster_id" : "",
"created_time" : "2021-04-01 17:05:53",
"updated_time" : "2021-04-21 14:29:14",
"host_count" : 1,
"project_name" : null
}]
}
```

## 5.2 Example 2: Querying Host Cluster Details by ID

### Scenario

This section uses a CodeArts user as an example to guide you using an API to query details about a specified host cluster.

For details on how to call APIs, see [Calling APIs](#).

### Prerequisite

You have created a CodeArts project, and host clusters exist in the project.

### Approach

Use an API to query the list of all host clusters, obtain *group\_id* of the target host cluster, and use *group\_id* to query details about the host cluster details. The procedure is as follows:

1. Query all host clusters of a user.
2. Query details about a host cluster.

### Step 1: Querying All Host Clusters of a User

- API information:  
URI: GET /v2/host-groups
- Request example:  
GET https://{endpoint}/v2/host-groups?region\_name=ap-southeast-3&project\_id=6039d4480efc4dddb178abff98719913&offset=1&limit=10&sort\_key=create\_time&sort\_dir=DESC

- Response example:

```
{
  "total" : 1,
  "host_groups" : [ {
    "name" : "testwyk",
    "description" : "11122211",
    "os" : "linux",
    "nick_name" : "A/B_side_account",
    "id" : 200001291,
    "group_id" : "ab7647b0863c4e969c8949d38d591339",
    "region_name" : "ap-southeast-3",
    "project_id" : "6039d4480efc4dddb178abff98719913",
    "permission" : {
      "can_view" : true,
      "can_edit" : true,
      "can_delete" : true,
      "can_add_host" : true,
      "can_manage" : true
    },
    "created_by" : {
      "user_id" : "6baa7454109d47c192f22078fe6cda20",
      "user_name" : "devcloud_devcloud_l00490255_01"
    },
    "updated_by" : {
      "user_id" : "6baa7454109d47c192f22078fe6cda20",
      "user_name" : "devcloud_devcloud_l00490255_01"
    },
    "auto_connection_test_switch" : 0,
    "slave_cluster_id" : "",
    "created_time" : "2021-04-01 17:05:53",
    "updated_time" : "2021-04-21 14:29:14",
    "host_count" : 1,
    "project_name" : null
  } ]
}
```

## Step 2: Querying Details About a Host Cluster

- API information:

URI: GET /v2/host-groups/{group\_id}

- Request example:

GET https://{endpoint}/v2/host-groups/ab7647b0863c4e969c8949d38d591339

- Response example:

```
{
  "name" : "test",
  "description" : "11122211",
  "os" : "linux",
  "region_name" : "ap-southeast-3",
  "project_id" : "6039d4480efc4dddb178abff98719913",
  "created_by" : {
    "user_id" : "6baa7454109d47c192f22078fe6cda20",
    "user_name" : "devcloud_devcloud_l00490255_01"
  },
  "updated_by" : {
    "user_id" : "6baa7454109d47c192f22078fe6cda20",
    "user_name" : "devcloud_devcloud_l00490255_01"
  },
  "permission" : {
    "can_view" : true,
    "can_edit" : true,
    "can_delete" : true,
    "can_add_host" : true,
    "can_manage" : true
  },
  "auto_connection_test_switch" : 0,
  "slave_cluster_id" : "",
  "nick_name" : "A/B_side_account",
}
```

```
"group_id" : "ab7647b0863c4e969c8949d38d591339",  
"created_time" : "2021-04-01 17:05:53",  
"updated_time" : "2021-04-21 14:29:14",  
"host_count" : 1  
}
```

## 5.3 Example 3: Querying the Host List of a Specified Host Cluster

### Scenario

This section provides an example of a CodeArts user on how to use an API to query hosts in a specified host cluster.

For details on how to call APIs, see [Calling APIs](#).

### Prerequisite

You have created a CodeArts project, and host clusters exist in the project.

### Approach

Use a user token to query the host group cluster, and use `group_id` to query the host list of the specified host cluster. The procedure is as follows:

1. Query all host clusters of a user.
2. Query the host list of a host cluster.

### Step 1: Querying All Host Clusters of a User

- API information:  
URI: GET /v2/host-groups
- Request example:  
GET https://{endpoint}/v2/host-groups?region\_name=ap-southeast-3&project\_id=6039d4480efc4dddb178abff98719913&offset=1&limit=10&sort\_key=create\_time&sort\_dir=DESC
- Response example:

```
{  
  "total" : 1,  
  "host_groups" : [ {  
    "name" : "testwyk",  
    "description" : "11122211",  
    "os" : "linux",  
    "nick_name" : "A/B_side_account",  
    "id" : 200001291,  
    "group_id" : "ab7647b0863c4e969c8949d38d591339",  
    "region_name" : "ap-southeast-3",  
    "project_id" : "6039d4480efc4dddb178abff98719913",  
    "permission" : {  
      "can_view" : true,  
      "can_edit" : true,  
      "can_delete" : true,  
      "can_add_host" : true,  
      "can_manage" : true  
    },  
    "created_by" : {  
      "user_id" : "6baa7454109d47c192f22078fe6cda20",  
      "user_name" : "devcloud_devcloud_l00490255_01"    }  
  }  
]
```

```
},
"updated_by" : {
  "user_id" : "6baa7454109d47c192f22078fe6cda20",
  "user_name" : "devcloud_devcloud_l00490255_01"
},
"auto_connection_test_switch" : 0,
"slave_cluster_id" : "",
"created_time" : "2021-04-01 17:05:53",
"updated_time" : "2021-04-21 14:29:14",
"host_count" : 1,
"project_name" : null
}]
}
```

## Step 2: Querying the Host List

- API information:

URI: GET /v2/host-groups/{group\_id}/hosts

- Request example:

GET https://{endpoint}/v2/host-groups/ab7647b0863c4e969c8949d38d591339/hosts?offset=0&limit=10&sort\_key=AS\_PROXY&sort\_dir=asc&with\_auth=false

- Response example:

```
{
  "hosts" : [ {
    "hostname" : "100.101.28.203",
    "ip" : "100.101.28.203",
    "port" : 22,
    "os" : "linux",
    "authorization" : {
      "username" : "root",
      "password" : null,
      "private_key" : null,
      "trusted_type" : 0
    },
    "permission" : {
      "can_view" : true,
      "can_edit" : true,
      "can_delete" : true,
      "can_add_host" : true,
      "can_connection_test" : true
    },
    "nickName" : "A/B_side_account",
    "id" : 200001149,
    "host_id" : "2cc913cc9a494f09b7320801ebacad02",
    "group_id" : "ab7647b0863c4e969c8949d38d591339",
    "as_proxy" : false,
    "proxy_host_id" : null,
    "owner_id" : "6baa7454109d47c192f22078fe6cda20",
    "owner_name" : "devcloud_devcloud_l00490255_01",
    "updater_id" : "6baa7454109d47c192f22078fe6cda20",
    "updater_name" : "devcloud_devcloud_l00490255_01",
    "connection_status" : "success",
    "install_icagent" : false,
    "create_time" : "2021-04-15 11:01:51",
    "update_time" : "2021-04-21 15:04:24",
    "connection_result" : "Connected",
    "lastest_connection_time" : "2021-04-15 11:02:00",
    "nick_name" : "A/B_side_account",
    "proxy_host" : null,
    "group_name" : null,
    "project_id" : "6039d4480efc4dddb178abff98719913",
    "project_name" : null
  } ],
  "total" : 1,
  "group_name" : "test"
}
```

# 6 Appendixes

[Status Codes](#)

[Error Codes](#)

[Obtaining a Project ID](#)

[Obtaining an Account ID](#)

## 6.1 Status Codes

Table 6-1 Status codes

Status Code	Message	Error Code Description
100	Continue	The client should continue with its request. This interim response is used to inform the client that the initial part of the request has been received and has not yet been rejected by the server.
101	Switching Protocols	Switch protocols. A protocol can only be switched to a more advanced protocol. For example, the protocol in use is switched to a later version of HTTP.
201	Created	The request has been fulfilled and resulted in a new resource being created.
202	Accepted	The request has been accepted for processing, but the processing has not been completed.
203	Non-Authoritative Information	The server successfully processed the request, but is returning information that may be from another source.

Status Code	Message	Error Code Description
204	NoContent	The server has successfully processed the request, but does not return any response. The status code is returned in response to an HTTP OPTIONS request.
205	Reset Content	The server has fulfilled the request, but the requester is required to reset the content.
206	Partial Content	The server has fulfilled the partial GET request for the resource.
300	Multiple Choices	There are multiple choices for a requested resource. A list of resource characteristics and addresses is returned for the client such as a browser to choose from.
301	Moved Permanently	This and all future requests have been permanently moved to the given URI indicated in this response.
302	Found	The requested resource has been temporarily moved.
303	See Other	Retrieve another URL, using a <b>GET</b> or <b>POST</b> method.
304	Not Modified	The requested resource has not been modified. When the server returns this status code, no resource is returned.
305	Use Proxy	The requested resource is available only through a proxy.
306	Unused	This HTTP status code is no longer used.
400	BadRequest	Invalid request. The client should not repeat the request without modifications.
401	Unauthorized	The authentication information provided by the client is incorrect or invalid.
402	Payment Required	Reserved request.
403	Forbidden	Request rejected. The server has received the request and understood it, but refuses to respond to it. The client should not repeat the request without modifications.

Status Code	Message	Error Code Description
404	NotFound	The requested resource cannot be found. The client should not repeat the request without modifications.
405	MethodNotAllowed	The method specified in the request is not allowed for the requested resource. The client should not repeat the request without modifications.
406	Not Acceptable	The server cannot implement the request based on the content characteristics of the request.
407	Proxy Authentication Required	This code is similar to 401, but indicates that the client must first authenticate itself with the proxy.
408	Request Time-out	The server timed out waiting for the request. The client may re-initiate the request without modifications at any time later.
409	Conflict	The request cannot be processed due to a conflict. This status code indicates that the resource that the client attempts to create already exists, or the request fails to be processed because of the update of the conflict request.
410	Gone	The requested resource cannot be found. This status code indicates that the requested resource has been deleted permanently.
411	Length Required	The server refused to process the request because the request does not specify the length of its content.
412	Precondition Failed	The server does not meet one of the preconditions that the requester puts on the request.
413	Request Entity Too Large	The server refuses to process a request because the request is too large. The server may disable the connection to prevent the client from sending requests consecutively. If the server temporarily cannot process the request, the response will contain a <b>Retry-After</b> header field.
414	Request-URI Too Large	The request URI is too long for the server to process.
415	Unsupported Media Type	The server does not support the media type in the request.



Status Code	Message	Error Code Description
416	Requested range not satisfiable	The requested range is invalid.
417	Expectation Failed	The server fails to meet the requirements of the <b>Expect</b> request header field.
422	UnprocessableEntity	The request is well-formed but is unable to respond due to semantic errors.
429	TooManyRequests	The client sends too many requests to the server within a given time, exceeding the client's access frequency limit or beyond the server's processing capability. In this case, the client should repeat requests after the time specified in the <b>Retry-After</b> header of the response expires.
500	InternalServerError	The server is able to receive the request but it cannot understand the request.
501	Not Implemented	The server does not support the requested function, and therefore cannot implement the request.
502	Bad Gateway	The server acting as a gateway or proxy receives an invalid response from a remote server.
503	ServiceUnavailable	The requested service is invalid. The client should not repeat the request without modifications.
504	ServerTimeout	The server could not return a timely response. The response will reach the client only if the request carries a timeout parameter.
505	HTTP Version not supported	The server does not support the HTTP protocol version used in the request.

## 6.2 Error Codes

If an error occurs during API calling, no result will be returned. Identify the error cause based on the error codes of each API. The returned message body contains the specific error code and information.

### Error Response Body Format

If an error occurs during API calling, an error code and the corresponding error message will be displayed. The following shows an error response body:

```
{  
  "error": {  
    "code": "DEV.CH.10001",
```

```
"message": "Param invalid"
},
"status": "failed"
}
```

In the response message body, **error\_code** is an error code, and **error\_msg** provides information about the error.

If an error code starting with **APIGW** is returned after you call an API, rectify the fault by referring to the instructions provided in [API Gateway Error Codes](#).

Status Codes	Error Codes	Error Message	Description	Solution
403	Deploy.00011154	Insufficient permissions.	Insufficient permissions.	Check whether you have the permission to perform this operation.
400	Deploy.00011001	Duplicate application.	Duplicate application.	Ensure that the application name is correct and try again.
404	Deploy.00011020	This application does not exist.	This application does not exist.	Ensure that the application exists and try again.
400	Deploy.00011027	The application is being deployed.	The application is being deployed.	Try again later.
400	Deploy.00011042	The draft application cannot be executed.	The draft application cannot be executed.	Save the draft as a formal application and try again.
400	Deploy.00011129	Too many applications for the tenant.	Too many applications for the tenant.	Delete some applications and try again.
403	Deploy.00011155	Real-time authentication incomplete.	Real-time authentication incomplete.	Please perform real-name authentication before access.
400	Deploy.00011156	No atomic operations enabled.	No atomic operations enabled.	Ensure that the atomic operation is correct and try again later.

Status Codes	Error Codes	Error Message	Description	Solution
400	Deploy.0001 1161	The application is being deployed.	The application is being deployed.	Stop deploying the application and try again.
404	Deploy.0001 1602	No templates found.	No templates found.	Ensure that the template exists and try again.
400	Deploy.0001 5002	One or more request parameters are invalid.	One or more request parameters are invalid.	Ensure that the parameters are correct and try again.
400	Deploy.0001 5829	The application is being deployed.	The application is being deployed.	Try again after the application deployment is complete.
400	Deploy.0001 5901	Invalid time range: \$ {start_date} - \$ {end_date}	Invalid time range: \$ {start_date} - \$ {end_date}	Check the time range. For example, the start time cannot be later than the end time.
400	Deploy.0001 5902	Exceeds \$ {max_time_range}.	Exceeds \$ {max_time_range}.	Check whether the time span exceeds the maximum range.
403	Deploy.0001 5903	Non-project member.	Non-project member.	Check whether the current user is a project member.
400	Deploy.0001 5904	Invalid date format: \$ {invalid_input_date}	Invalid date format: \$ {invalid_input_date}	Check the input date format.
400	Deploy.0001 5905	Non-static parameters of host clusters and enumeration types cannot be empty.	Non-static parameters of host clusters and enumeration types cannot be empty.	Check whether the non-static parameters of host clusters and enumeration types are empty.
404	Deploy.0001 6902	Project not found.	Project not found.	Check the project ID and try again.

Status Codes	Error Codes	Error Message	Description	Solution
400	Deploy.0001 6903	Invalid project name.	Invalid project name.	Check the project name and try again.
400	Deploy.0001 6905	Parameter type required with parameter name.	Parameter type required with parameter name.	Check whether the parameter type is correct.
400	Deploy.0001 6906	Incorrect enumerated value.	Incorrect enumerated value.	Check whether the entered enumerated value exists.
400	Deploy.0002 1008	Invalid password input.	Invalid password input.	Enter a correct password.
400	Deploy.0001 5158	Role not found.	Role not found.	Confirm the role before performing the operation.
404	Deploy.0001 1303	No execution records.	No execution records.	Perform the operation after confirmation.
403	Deploy.0006 0221	Insufficient permissions for this self-hosted resource pool.	Insufficient permissions for this self-hosted resource pool.	Apply for the permission first.
403	Deploy.0001 5834	Not enough time for deployment. Upgrade the package.	Not enough time for deployment. Upgrade the package.	Upgrade the package.
409	Deploy.0001 5840	Free trial unavailable. CodeArts package already exists.	Free trial unavailable. CodeArts package already exists.	Trial already enabled.
400	Deploy.0001 5841	Free trial unavailable. No single service package purchased yet.	Free trial unavailable. No single service package purchased yet.	Purchase a package first.

Status Codes	Error Codes	Error Message	Description	Solution
400	Deploy.00015842	Trial has expired.	Trial has expired.	Contact customer service.
403	Deploy.00015853	The tenant account is frozen and its functions are unavailable. To restore functionality, contact the tenant administrator to unfreeze it.	The tenant account is frozen and its functions are unavailable. To restore functionality, contact the tenant administrator to unfreeze it.	Contact the tenant administrator to unfreeze it.
400	Deploy.00016901	Max. 500 characters.	Max. 500 characters.	Confirm the custom parameter description first.
400	Deploy.00060013	Query permissions failed.	Query permissions failed.	Check whether you have the permission to perform this operation.
400	Deploy.00060014	Maintain permissions failed.	Maintain permissions failed.	Contact customer service.
400	Deploy.00060015	Query role information failed.	Query role information failed.	Perform the operation after confirmation.
403	Deploy.00060016	DevUC authentication failed.	DevUC authentication failed.	Contact customer service.
400	Deploy.00060017	Operation type not found.	Operation type not found.	Perform the operation after confirmation.
404	Deploy.00060021	No basic application information.	No basic application information.	Check whether the application exists.
404	Deploy.00060022	No deployed application.	No deployed application.	Check whether the application information is correct.

Status Codes	Error Codes	Error Message	Description	Solution
404	Deploy.0006 0023	No application orchestration information.	No application orchestration information.	Check whether the application information is correct.
403	Deploy.0006 0031	No modify permission.	No modify permission.	Disable the project permissions of the application first.
409	Deploy.0006 0032	Project-level permission not changed.	Project-level permission not changed.	Perform the operation after confirmation.
400	Deploy.0006 0103	Max. 128 characters.	Max. 128 characters.	Reduce the length of the application name.
400	Deploy.0006 0104	Max. 128 characters.	Max. 128 characters.	Reduce the length of the template name.
400	Deploy.0006 0108	Select an environment first.	Select an environment first.	Select an environment first.
400	Deploy.0006 0109	Select an application first.	Select an application first.	Select an application first.
400	Deploy.0006 0110	Select a component first.	Select a component first.	Select a component first.
400	Deploy.0006 0111	Select a component instance first.	Select a component instance first.	Select a component instance first.
400	Deploy.0006 0203	Duplicate name.	Duplicate name.	Check whether the name already exists.
400	Deploy.0006 0204	Too many groups (Max. 200)	Too many groups (Max. 200)	Delete unnecessary groups and try again.
400	Deploy.0006 0205	Max. 3 group layers.	Max. 3 group layers.	Delete unnecessary layers and try again.

Status Codes	Error Codes	Error Message	Description	Solution
404	Deploy.0006 0207	No such group.	No such group.	Confirm and then try again.
400	Deploy.0006 0209	Group cannot be moved.	Group cannot be moved.	Confirm and then try again.
403	Deploy.0006 0211	Insufficient permissions.	Insufficient permissions.	Contact your administrator.
400	Deploy.0006 0212	Invalid project ID.	Invalid project ID.	Check the project ID and try again.
404	Deploy.0006 0217	Requested path not found	Requested path not found	Confirm and then try again.
400	Deploy.0006 0218	The environment is being deployed. Stop this deployment or try again later.	The environment is being deployed. Stop this deployment or try again later.	Stop the deployment task that is being executed and try again.
403	Deploy.0006 0220	Application disabled.	Application disabled.	Check the application permission and try again.
400	Deploy.0006 0222	Some application permissions in this project are being updated. Try again later.	Some application permissions in this project are being updated. Try again later.	Try again later.
400	Deploy.0002 1102	Duplicate host cluster name.	Duplicate host cluster name.	Change the host cluster name and try again.
404	Deploy.0002 1104	The host cluster does not exist.	The host cluster does not exist.	Ensure that the host cluster exists and try again.
400	Deploy.0002 1106	Duplicate host name.	Duplicate host name.	Change the host name and try again.

Status Codes	Error Codes	Error Message	Description	Solution
404	Deploy.0002 1108	The host does not exist.	The host does not exist.	Ensure that the host to be queried exists in the host cluster.
400	Deploy.0002 1111	Delete host cluster failed. Host cluster contains host.	Delete host cluster failed. Host cluster contains host.	Delete host from host cluster first.
400	Deploy.0002 1112	Only host in this host cluster can be selected.	Only host in this host cluster can be selected.	Select host in this host cluster and try again.
400	Deploy.0002 1113	Too many host clusters are deployed in the project.	Too many host clusters are deployed in the project.	Delete unnecessary host clusters and try again.
400	Deploy.0002 1114	Inconsistent host OS and cluster OS.	Inconsistent host OS and cluster OS.	Ensure that the host and host cluster use the same OS and try again.
400	Deploy.0002 1115	Max. hosts in host cluster: 1,000	Max. hosts in host cluster: 1,000	Delete unnecessary hosts and try again.
400	Deploy.0002 1116	Duplicate IP addresses and port numbers in the host cluster.	Duplicate IP addresses and port numbers in the host cluster.	Ensure that the IP address is correct and try again.
400	Deploy.0002 1117	Host of this proxy not deleted.	Host of this proxy not deleted.	Delete the host of this proxy first.
404	Deploy.0002 1119	The proxies of some hosts do not exist.	The proxies of some hosts do not exist.	Ensure that the agent exists and try again.
404	Deploy.0002 1123	Host selected not found in current cluster.	Host selected not found in current cluster.	Ensure that the host to be modified is in the current host cluster and try again.



Status Codes	Error Codes	Error Message	Description	Solution
400	Deploy.0002 1124	Duplicate IP address.	Duplicate IP address.	Ensure all hosts have unique IP addresses in the host cluster and try again.
400	Deploy.0002 1132	Test up to 100 hosts at a time.	Test up to 100 hosts at a time.	Ensure that the number of hosts in a connectivity test does not exceed 100 and try again.
400	Deploy.0002 1135	The value of auth_region is inconsistent with the transferred region information.	The value of auth_region is inconsistent with the transferred region information.	Ensure that the transferred region information is correct.
403	Deploy.0002 1200	Insufficient permissions to create a host cluster.	Insufficient permissions to create a host cluster.	Confirm the permission and try again.
403	Deploy.0002 1201	Insufficient permissions to delete a host cluster.	Insufficient permissions to delete a host cluster.	Add the permission and try again.
403	Deploy.0002 1202	Insufficient permissions to modify host cluster.	Insufficient permissions to modify host cluster.	Add the permission and try again.
403	Deploy.0002 1203	Insufficient permissions.	Insufficient permissions.	Apply for the permission and try again.
401	Deploy.0002 1204	Real-time authentication incomplete.	Real-time authentication incomplete.	Authenticate your real name and try again.
403	Deploy.0002 1205	Insufficient permissions to create a host.	Insufficient permissions to create a host.	Apply for the permission and try again.

Status Codes	Error Codes	Error Message	Description	Solution
403	Deploy.0002 1206	Insufficient permissions to delete a host.	Insufficient permissions to delete a host.	Add the permission and try again.
403	Deploy.0002 1207	Insufficient permissions to update a host.	Insufficient permissions to update a host.	Add the permission and try again.
403	Deploy.0002 1209	Insufficient permissions to copy a host.	Insufficient permissions to copy a host.	Add the permission and try again.
403	Deploy.0002 1404	Insufficient permissions.	Insufficient permissions.	Add the permission and try again.
400	Deploy.0002 1412	Current host cluster not associated with any application.	Current host cluster not associated with any application.	Associate applications and try again.
400	Deploy.0002 1413	Duplicate host under the application.	Duplicate host under the application.	Ensure that no duplicate host exists in the application and try again.
404	Deploy.0002 1414	Query application information failed.	Query application information failed.	Ensure that the application exists and try again.
404	Deploy.0002 1415	No proxy host.	No proxy host.	Ensure that the proxy host exists and try again.
400	Deploy.0002 1419	Host cluster type and application resource pool type do not match.	Host cluster type and application resource pool type do not match.	Ensure that the type of the host cluster is the same as that of the application resource pool and try again.
404	Deploy.0002 1420	No application.	No application.	Ensure that the application exists and try again.

Status Codes	Error Codes	Error Message	Description	Solution
400	Deploy.0002 1421	Host cluster associated with applications.	Host cluster associated with applications.	Ensure that the host cluster is not associated with any application and try again.
400	Deploy.0002 1422	Duplicate host cluster name.	Duplicate host cluster name.	Change the host cluster name and try again.
404	Deploy.0002 1423	The host cluster does not exist.	The host cluster does not exist.	Ensure that the host cluster exists and try again.
403	Deploy.0002 1426	Insufficient permissions to update the host cluster.	Insufficient permissions to update the host cluster.	Add the permission and try again.
403	Deploy.0002 1427	Insufficient permissions to delete the host cluster.	Insufficient permissions to delete the host cluster.	Add the permission and try again.
400	Deploy.0002 1429	Only create proxy servers and bind hosts to proxy servers in a host cluster for proxy mode.	Only create proxy servers and bind hosts to proxy servers in a host cluster for proxy mode.	Ensure that the host type meets the requirements and try again.
400	Deploy.0002 1430	Cannot create proxy servers or bind hosts to proxy servers in a host cluster for non-proxy mode.	Cannot create proxy servers or bind hosts to proxy servers in a host cluster for non-proxy mode.	Ensure that the host type meets the requirements and try again.
400	Deploy.0002 1431	Delete host cluster failed. The host cluster is associated with environments.	Delete host cluster failed. The host cluster is associated with environments.	Ensure that the host cluster is not associated with any environment and try again.

Status Codes	Error Codes	Error Message	Description	Solution
400	Deploy.0002 1432	Delete host cluster failed. Host cluster contains host.	Delete host cluster failed. Host cluster contains host.	Delete all hosts from the host cluster and try again.
403	Deploy.0002 1435	Insufficient permissions to create an environment.	Insufficient permissions to create an environment.	Add the permission and try again.
403	Deploy.0002 1436	Insufficient permissions to edit an environment.	Insufficient permissions to edit an environment.	Add the permission and try again.
403	Deploy.0002 1437	Insufficient permissions to delete an environment.	Insufficient permissions to delete an environment.	Add the permission and try again.
404	Deploy.0002 1438	No environment.	No environment.	Ensure that the environment exists and try again.
400	Deploy.0002 1442	Max. 100 environments in application.	Max. 100 environments in application.	Ensure that the number of environments in the app does not exceed the upper limit and try again.
400	Deploy.0002 1443	Duplicate environment name.	Duplicate environment name.	Change the environment name and try again.
403	Deploy.0002 1445	Insufficient permissions to query an environment.	Insufficient permissions to query an environment.	Add the permission and try again.
400	Deploy.0002 1447	Host of this proxy not deleted.	Host of this proxy not deleted.	Delete the proxied host and try again.
403	Deploy.0002 1448	Insufficient permissions to import a host.	Insufficient permissions to import a host.	Add the permission and try again.

Status Codes	Error Codes	Error Message	Description	Solution
403	Deploy.0002 1452	Insufficient permissions to check an imported host.	Insufficient permissions to check an imported host.	Add the permission and try again.
400	Deploy.0002 1454	Duplicate data in imported host.	Duplicate data in imported host.	Ensure that no duplicate data exists and try again.
400	Deploy.0002 1455	Duplicate host in application.	Duplicate host in application.	Do not import data repeatedly.
400	Deploy.0002 1456	Import proxy failed.	Import proxy failed.	Import a non-proxy.
404	Deploy.0002 1457	No imported host.	No imported host.	Ensure that the host to be imported exists and try again.
400	Deploy.0002 1458	Max. 200 imported hosts in environment.	Max. 200 imported hosts in environment.	Ensure that the number of hosts in the environment does not reach the upper limit and try again.
400	Deploy.0002 1459	Different environment OS and the host cluster OS.	Different environment OS and the host cluster OS.	Ensure that the environment OS is the same as that of the host cluster and try again.
400	Deploy.0002 1461	The proxy is being used.	The proxy is being used.	Ensure that the proxy is not in use and try again.
400	Deploy.0002 1462	Proxy and host IP addresses must be different.	Proxy and host IP addresses must be different.	Ensure that the IP address of the proxy is different from that of the target host and try again.

Status Codes	Error Codes	Error Message	Description	Solution
403	Deploy.0002 1463	Insufficient permissions to create host in target cluster.	Insufficient permissions to create host in target cluster.	Add the permission and try again.
404	Deploy.0002 1464	Host selected not found in current cluster.	Host selected not found in current cluster.	Ensure that the host cluster contains hosts and try again.
400	Deploy.0002 1465	Duplicate hosts exist in the hosts (IP & port) to be copied.	Duplicate hosts exist in the hosts (IP & port) to be copied.	Ensure that the IP address and port number of the host to be copied are unique and try again.
400	Deploy.0002 1466	Inconsistent host OS and cluster OS.	Inconsistent host OS and cluster OS.	Ensure that the host OS is the same as that of the host cluster and try again.
400	Deploy.0002 1467	Duplicate host (same IP address, port number, and login user).	Duplicate host (same IP address, port number, and login user).	Ensure that the same host does not exist in the host cluster and try again.
400	Deploy.0002 1468	Hosts to be cloned do not meet requirements.	Hosts to be cloned do not meet requirements.	Ensure that the host to be cloned meets the requirements and try again.
400	Deploy.0002 1469	Host cluster has too many hosts.	Host cluster has too many hosts.	Ensure that the number of hosts in the host cluster does not exceed 200 and try again.
400	Deploy.0002 1470	Project's host cluster has too many (>1000) hosts.	Project's host cluster has too many (>1000) hosts.	Ensure that the number of host clusters in the project does not exceed 1,000 and try again.

Status Codes	Error Codes	Error Message	Description	Solution
403	Deploy.0002 1471	Insufficient permissions to view an application.	Insufficient permissions to view an application.	Add the permission and try again.
404	Deploy.0002 1472	Invalid region.	Invalid region.	Ensure that the region is normal and try again.
403	Deploy.0002 1473	Target project and current project do not belong to same tenant.	Target project and current project do not belong to same tenant.	Ensure that the target project and the current project belong to the same tenant and try again.
400	Deploy.0002 1474	Duplicate proxy name.	Duplicate proxy name.	Use a unique proxy name and try again.
403	Deploy.0002 1476	Intranet secure access enabled. Use executor from self-hosted resource pool.	Intranet secure access enabled. Use executor from self-hosted resource pool.	Use executor from self-hosted resource pool to try again.
404	Deploy.0002 1478	Project not found.	Project not found.	Use an existing project and try again.
404	Deploy.0002 1479	Role not found.	Role not found.	Use a normal role and try again.
409	Deploy.0002 1481	Cloning target hosts to the target cluster. Try again later.	Cloning target hosts to the target cluster. Try again later.	Try again later.
403	Deploy.0002 1482	Application disabled.	Application disabled.	Cancel the disabling and try again.
403	Deploy.0002 1484	Insufficient permissions for this self-hosted resource pool.	Insufficient permissions for this self-hosted resource pool.	Add the permission and try again.

Status Codes	Error Codes	Error Message	Description	Solution
403	Deploy.0001 5835	Your package is frozen since expiring.	Your package is frozen since expiring.	Renew it to restore functionality.
403	Deploy.0001 5836	Frozen resource for legal reasons. Related functions are unavailable.	Frozen resource for legal reasons. Related functions are unavailable.	Contact customer service.
403	Deploy.0001 5837	Frozen resource for security reasons. Related functions are unavailable.	Frozen resource for security reasons. Related functions are unavailable.	Contact customer service.
403	Deploy.0001 5838	Frozen tenant of this project. Related functions are unavailable.	Frozen tenant of this project. Related functions are unavailable.	Contact the tenant administrator to unfreeze the tenant and try again.
403	Deploy.0001 5839	Expired tenant package of current project. Related functions have been frozen.	Expired tenant package of current project. Related functions have been frozen.	Contact the tenant administrator to renew the subscription and try again.
403	Deploy.0001 5850	Frozen account for legal reasons. Related functions are unavailable.	Frozen account for legal reasons. Related functions are unavailable.	Contact customer service.
403	Deploy.0001 5851	Frozen account for security reasons. Related functions are unavailable.	Frozen account for security reasons. Related functions are unavailable.	Contact customer service.



Status Codes	Error Codes	Error Message	Description	Solution
403	Deploy.00015852	Frozen account due to no real-name authentication. Related functions are unavailable.	Frozen account due to no real-name authentication. Related functions are unavailable.	Authenticate your real name and try again.
404	Deploy.00021141	Target cluster not found.	Target cluster not found.	Ensure that the target host cluster exists and try again.

## 6.3 Obtaining a Project ID

### Obtaining a Project ID by Calling an API

You can obtain the project ID by calling the APIs used to [query the project list](#).

The API used to obtain a project ID is **GET https://{Endpoint}/v4/projects/**, where *{Endpoint}* indicates the Req endpoint. You can obtain the Req endpoint from [Regions and Endpoints](#). For details about API authentication, see [Authentication](#).

In the following example, **project\_id** indicates a project ID.

```
{
  "projects": [ {
    "project_num_id": 3183801,
    "project_id": "41bd3eab86544863b8fc92ffcd35e3c8",
    "project_name": "demo_project",
    "description": "demo",
    "created_time": 1576114296000,
    "updated_time": 1576114296000,
    "project_type": "xboard",
    "creator": {
      "user_num_id": 4097,
      "user_id": "c4bd39f0573a436589714bedbcca8536",
      "user_name": "modile_user",
      "domain_id": "2489d8cbba804db8bcd35384685ff3ac",
      "domain_name": "modile_user",
      "nick_name": "Tom.M.Riddle"
    }
  } ],
  "total": 10
}
```

## 6.4 Obtaining an Account ID

An account ID is required for some URLs when an API is called. To obtain an account ID, perform the following operations:

1. Log in to the management console.
2. Hover over the username and choose **My Credentials** from the drop-down list.

On the displayed **API Credentials** page, view **Account ID**.