

Object Storage Service(OBS)

API Reference

Issue 20
Date 2024-04-02



Copyright © Huawei Technologies Co., Ltd. 2024. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Security Declaration

Vulnerability

Huawei's regulations on product vulnerability management are subject to the *Vul. Response Process*. For details about this process, visit the following web page:

<https://www.huawei.com/en/psirt/vul-response-process>

For vulnerability information, enterprise customers can visit the following web page:

<https://securitybulletin.huawei.com/enterprise/en/security-advisory>

Contents

1 Before You Start.....	1
1.1 Overview.....	1
1.2 API Calling.....	1
1.3 Endpoints.....	1
1.4 Basic Concepts.....	2
2 API Overview.....	4
3 Calling APIs.....	11
3.1 Constructing a Request.....	11
3.2 Authentication.....	14
3.2.1 User Signature Authentication.....	14
3.2.2 Authentication of Signature in a Header.....	16
3.2.3 Authentication of Signature in a URL.....	25
3.2.4 Authentication of Signature Carried in the Table Uploaded Through a Browser.....	35
3.2.5 Signature Generators.....	46
3.3 Returned Values.....	46
4 Getting Started.....	49
4.1 Creating a Bucket.....	49
4.2 Listing Buckets.....	52
4.3 Uploading an Object.....	54
5 APIs.....	58
5.1 Operations on Buckets.....	58
5.1.1 Listing Buckets.....	58
5.1.2 Creating a Bucket.....	61
5.1.3 Listing Objects in a Bucket.....	70
5.1.4 Obtaining Bucket Metadata.....	83
5.1.5 Obtaining Bucket Location.....	86
5.1.6 Deleting Buckets.....	87
5.2 Advanced Bucket Settings.....	89
5.2.1 Configuring a Bucket Policy.....	89
5.2.2 Obtaining Bucket Policy Information.....	93
5.2.3 Deleting a Bucket Policy.....	95
5.2.4 Configuring a Bucket ACL.....	96

5.2.5 Obtaining Bucket ACL Information.....	99
5.2.6 Configuring Logging for a Bucket.....	102
5.2.7 Obtaining a Bucket Logging Configuration.....	109
5.2.8 Configuring Bucket Lifecycle Rules.....	111
5.2.9 Obtaining Bucket Lifecycle Configuration.....	122
5.2.10 Deleting Lifecycle Rules.....	127
5.2.11 Configuring Versioning for a Bucket.....	128
5.2.12 Obtaining Bucket Versioning Status.....	130
5.2.13 Configuring Storage Class for a Bucket.....	132
5.2.14 Obtaining Bucket Storage Class Information.....	134
5.2.15 Configuring Cross-Region Replication for a Bucket.....	135
5.2.16 Obtaining the Cross-Region Replication Configuration of a Bucket.....	139
5.2.17 Deleting the Cross-Region Replication Configuration of a Bucket.....	143
5.2.18 Configuring Tags for a Bucket.....	144
5.2.19 Obtaining Bucket Tags.....	148
5.2.20 Deleting Tags.....	150
5.2.21 Configuring Bucket Storage Quota.....	151
5.2.22 Querying Bucket Storage Quota.....	153
5.2.23 Obtaining Storage Information of a Bucket.....	154
5.2.24 Configuring Bucket Inventories.....	156
5.2.25 Obtaining a Specific Inventory of a Bucket.....	161
5.2.26 Listing All Inventories of a Bucket.....	166
5.2.27 Deleting Bucket Inventories.....	169
5.2.28 Configuring a Custom Domain Name for a Bucket.....	170
5.2.29 Obtaining the Custom Domain Name of a Bucket.....	172
5.2.30 Deleting the Custom Domain Name of a Bucket.....	174
5.2.31 Configuring Bucket Encryption.....	175
5.2.32 Obtaining Bucket Encryption Configuration.....	179
5.2.33 Deleting the Encryption Configuration of a Bucket.....	182
5.2.34 Setting the Direct Reading Policy for Archive Objects in a Bucket.....	183
5.2.35 Obtaining the Direct Reading Policy of Archive Objects in a Bucket.....	186
5.2.36 Deleting the Direct Reading Policy of Archive Objects in a Bucket.....	187
5.2.37 Configuring Mirroring Back-to-Source Rules.....	189
5.2.38 Obtaining Mirroring Back-to-Source Rules.....	196
5.2.39 Deleting Mirroring Back-to-Source Rules.....	198
5.2.40 Setting an Online Decompression Policy.....	199
5.2.41 Obtaining an Online Decompression Policy.....	202
5.2.42 Deleting an Online Decompression Policy.....	203
5.2.43 Configuring a Default WORM Policy for a Bucket.....	204
5.2.44 Obtaining the Default WORM Policy of a Bucket.....	208
5.3 Static Website Hosting.....	211
5.3.1 Configuring Static Website Hosting for a Bucket.....	211

5.3.2 Obtaining the Static Website Hosting Configuration of a Bucket.....	220
5.3.3 Deleting the Static Website Hosting Configuration of a Bucket.....	222
5.3.4 Configuring Bucket CORS.....	223
5.3.5 Obtaining the CORS Configuration of a Bucket.....	227
5.3.6 Deleting the CORS Configuration of a Bucket.....	230
5.3.7 OPTIONS Bucket.....	231
5.3.8 OPTIONS Object.....	235
5.4 Operations on Objects.....	238
5.4.1 Uploading an Object - PUT.....	238
5.4.2 Uploading an Object - POST.....	251
5.4.3 Copying an Object.....	270
5.4.4 Downloading an Object.....	284
5.4.5 Querying Object Metadata.....	297
5.4.6 Deleting an Object.....	303
5.4.7 Deleting Objects.....	306
5.4.8 Restoring Archive or Deep Archive Objects.....	311
5.4.9 Appending an Object.....	315
5.4.10 Configuring an Object ACL.....	325
5.4.11 Obtaining Object ACL Configuration.....	329
5.4.12 Modifying Object Metadata.....	333
5.4.13 Modifying an Object.....	338
5.4.14 Truncating an Object.....	340
5.4.15 Renaming an Object.....	341
5.4.16 Configuring WORM Retention for an Object.....	343
5.5 Operations on Multipart Upload.....	346
5.5.1 Listing Initiated Multipart Uploads in a Bucket.....	346
5.5.2 Initiating a Multipart Upload.....	352
5.5.3 Uploading Parts.....	362
5.5.4 Copying Parts.....	367
5.5.5 Listing Uploaded Parts.....	377
5.5.6 Completing a Multipart Upload.....	382
5.5.7 Canceling a Multipart Upload Task.....	388
5.6 Server-Side Encryption.....	389
5.6.1 Server-Side Encryption Overview.....	389
5.6.2 SSE-KMS.....	390
5.6.3 SSE-OBS.....	393
5.6.4 SSE-C.....	395
5.6.5 API Operations Related to Server-Side Encryption.....	398
6 Error Codes.....	402
7 Permissions and Supported Actions.....	417
7.1 Introduction.....	417
7.2 Bucket Actions.....	418

7.3 Object Actions.....	423
8 Appendixes.....	425
8.1 Status Codes.....	425
8.2 Obtaining Access Keys (AK/SK).....	425
8.3 Obtaining Account, IAM User, Project, User Group, Region, and Agency Information.....	426
8.4 Consistency of Concurrent Operations.....	427
A Change History.....	431

1 Before You Start

1.1 Overview

Welcome to the *Object Storage Service API Reference*. Object Storage Service (OBS) provides massive, secure, reliable, and cost-effective data storage capabilities for users to store data of any type and size. It is suitable for scenarios such as enterprise backup/archiving, video on demand (VoD), and video surveillance.

This document describes how to use application programming interfaces (APIs) to perform operations on OBS, such as creating, modifying, and deleting bucket, as well as uploading, downloading, and deleting objects. For details about all supported operations, see [API Overview](#).

Before calling OBS APIs, ensure that you have fully understood relevant concepts. For details, see [Service Overview](#).

1.2 API Calling

OBS provides Representational State Transfer (REST) APIs, allowing you to use HTTP or HTTPS requests to call them. For details, see [Calling APIs](#).

In addition, OBS provides SDKs in multiple programming languages for you to use. For details, see [SDK Overview](#).

It is recommended that international users use virtual hosts and regional domain names to access OBS. For details, see [Request URI](#).

1.3 Endpoints

An endpoint is the **request address** for calling an API. Endpoints vary depending on services and regions. For the endpoints of services, see [Regions and Endpoints](#).

OBS provides a second-level domain name for each region. You can use the domain name provided by OBS or a custom domain name to access OBS.

1.4 Basic Concepts

Basic Concepts Related to OBS APIs

- **Account**

You can register an account with Huawei Cloud. The account has full access permissions for all of its cloud services and resources. The account can also reset user passwords and grant permissions to users. An account is a payment entity. To keep the account secure, it is recommended that you create users under the account to perform routine management operations.
- **User**

A user is created using an account on Identity and Access Management (IAM) to use cloud services. Each IAM user has its own identity credentials (password and access keys).

On the **My Credentials** page on the console, you can view the account ID and user ID, and manage the access keys of the account or IAM users.

Access keys of the account and its IAM users are required for authentication when calling APIs.
- **Bucket**

A bucket is a container where objects are stored. It is the top namespace in OBS. Each object must reside in a bucket. For example, if the object named **picture.jpg** is stored in the **photo** bucket, you can use the following URL to access the object: **http://photo.obs.region.myhuaweicloud.com/picture.jpg**
- **Objects**

An object is a basic data unit on OBS. A bucket can store multiple objects, and OBS does not distinguish between object types. Objects are serialized in OBS. An object may be a text, a video, or any other types of files. In OBS, the size of a file can range from 0 bytes to 48.8 TB. However, when an object is uploaded through the **PutObject** operation, it cannot exceed the maximum size of 5 GB. Use the multipart upload method, if the object size is larger than 5 GB.
- **Region**

A region is a geographic area in which cloud resources are deployed. Availability zones (AZs) in the same region can communicate with each other over an intranet, while AZs in different regions are isolated from each other. Deploying cloud resources in different regions can better suit certain user requirements or comply with local laws or regulations.

Each bucket in OBS must reside in a region. You can specify the region when creating the bucket. Once a bucket is created, its region cannot be changed. Select the most appropriate region for a bucket based on the location, cost, and regulatory compliance requirements. For details about regions, see [Endpoints](#).
- **AZ**

An AZ comprises of one or more physical data centers equipped with independent ventilation, fire, water, and electricity facilities. Computing, network, storage, and other resources in an AZ are logically divided into

multiple clusters. AZs within a region are interconnected using high-speed optical fibers to allow you to build cross-AZ high-availability systems.

- Enterprise project

Enterprise projects group and manage resources across regions. Resources in one enterprise project are logically isolated from resources in another. An enterprise project can contain resources from multiple regions, and resources can be added to or removed from enterprise projects. For more information about enterprise projects and how to obtain enterprise project IDs, see [Enterprise Management User Guide](#).

Differences Between OBS 3.0 and OBS 2.0

OBS architecture has evolved for two generations, OBS 2.0 and OBS 3.0. Now, a newly created bucket and objects in the bucket are stored in the storage of OBS 3.0, but existing buckets in the storage of OBS 2.0 are still retained there.

Basic OBS features and functions are supported by both OBS 3.0 and OBS 2.0. However, some new features are supported only by OBS 3.0, such as object storage class, federated authentication, image processing, and cross-region replication.

You can check the bucket version information on OBS Console or use the **Head Bucket** API operation to check whether your bucket is in OBS 2.0 or OBS 3.0. The details are as follows:

Method 1: Log in to OBS Console and check the bucket basic information.

If the **Bucket Version** is **3.0**, the bucket is stored in OBS 3.0. If not, the bucket is stored in OBS 2.0.

Method 2: Perform the Head Bucket API operation to check the bucket version.

Sample Request:

```
HEAD / HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:23:25 GMT
Authorization: authorization string
```

Sample Response:

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF2600000163D80E4C5F20FDD5BD0085
x-obs-bucket-location: ap-southeast-1
Content-Type: application/xml
x-obs-version: 3.0
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCS8wS9I00l4oMWmdniV7XmdAvfewrQq
Date: WED, 01 Jul 2015 02:23:25 GMT
Content-Length: 0
```

In this response, **x-obs-version: 3.0** indicates that the bucket is stored in the OBS 3.0. If this header does not exist or the value of this header is displayed otherwise, the bucket is stored in the OBS 2.0.

For more information about the **Head Bucket** API, see [Obtaining Bucket Metadata](#).

2 API Overview

API Operations on Buckets

Table 2-1 API operations on buckets

Operation	Description
Listing Buckets	Queries the list of buckets created by the user.
Creating a Bucket	Creates a bucket. You can add different request headers to specify the region, storage class, and permission control policy.
Listing Objects in a Bucket	Lists objects in a bucket. You can add different request headers to obtain objects that match the specified prefix, identifier, and other requirements.
Obtaining Bucket Metadata	Checks whether the bucket metadata exists. You can query the information about the bucket region, storage class, OBS version number, enterprise project ID, and CORS configuration.
Obtaining Bucket Location	Obtains the bucket region information.
Deleting Buckets	Deletes a specified bucket. Before deleting a bucket, ensure that the bucket is empty.

API Operations on Advanced Bucket Settings

Table 2-2 API operations on advanced bucket settings

Operation	Description
Configuring a Bucket Policy	Creates or modifies a bucket policy. If the specified bucket already has a policy, the policy in the request will overwrite the existing one.
Obtaining Bucket Policy Information	Obtains the policy information of a specified bucket.
Deleting a Bucket Policy	Deletes the policy of a specified bucket.
Configuring a Bucket ACL	Configures the ACL of a specified bucket. You can control the read and write permissions of a bucket through ACL settings.
Obtaining Bucket ACL Information	Obtains the ACL information of a specified bucket.
Configuring Logging for a Bucket	Enables or disables the log management function of a bucket. When this function is enabled, a log record is generated for each operation on a bucket. Multiple log records are packed into a log file, which will be saved in a specified location.
Obtaining a Bucket Logging Configuration	Obtains the logging configuration of the current bucket.
Configuring Bucket Lifecycle Rules	Configures rules to automatically delete or migrate objects in a bucket.
Obtaining Bucket Lifecycle Configuration	Obtains the lifecycle rules configured for a specified bucket.
Deleting Lifecycle Rules	Deletes the lifecycle configuration of a bucket.
Configuring Versioning for a Bucket	Enables or disables versioning for a bucket. When this function is enabled, objects of different versions can be retrieved and restored, and data can be quickly restored in case of accidental operations or application faults.
Obtaining Bucket Versioning Status	Obtains the versioning status of a specified bucket.
Configuring Storage Class for a Bucket	Creates or updates the default storage class configuration of a bucket.
Obtaining Bucket Storage Class Information	Obtains the default storage class configuration of a bucket.

Operation	Description
Configuring Cross-Region Replication for a Bucket	Configures the cross-region replication function for a bucket. By activating cross-region replication, OBS can copy new objects and modified objects from a source bucket in one region to a destination bucket in a different region.
Obtaining the Cross-Region Replication Configuration of a Bucket	Obtains the cross-region replication configuration of a specified bucket.
Deleting the Cross-Region Replication Configuration of a Bucket	Deletes the cross-region replication configuration of a specified bucket.
Configuring Tags for a Bucket	Adds a tag to an existing bucket. After tags are added to a bucket, all service detail records (SDRs) generated by the requests for this bucket will have the same tags. You can categorize the SDRs for detailed cost analysis.
Obtaining Bucket Tags	Obtains the tags of a specified bucket.
Deleting Tags	Deletes the tags of a specified bucket.
Configuring Bucket Storage Quota	Sets the bucket space quota to limit the maximum storage capacity of the bucket.
Querying Bucket Storage Quota	Obtains the bucket space quota.
Obtaining Storage Information of a Bucket	Obtains the number of objects in a bucket and the space occupied by the objects.
Configuring Bucket Inventories	Configures an inventory rule for a bucket. OBS provides bucket inventories to facilitate your management of objects in a bucket. You can configure bucket inventories to periodically list objects in a bucket. During the listing of objects, object metadata is saved in a CSV file, which is uploaded to the specified bucket.
Obtaining a Specific Inventory of a Bucket	Obtains an inventory rule of a specified bucket.
Listing All Inventories of a Bucket	Obtains all inventory rules of a specified bucket.
Deleting Bucket Inventories	Deletes an inventory rule of a specified bucket.

Operation	Description
Configuring a Custom Domain Name for a Bucket	Configures a custom domain name for a bucket. Once a user-defined domain name is successfully configured, the bucket can be accessed through the user-defined domain name.
Obtaining the Custom Domain Name of a Bucket	Queries the custom domain name of a bucket.
Deleting the Custom Domain Name of a Bucket	Deletes the custom domain name of a bucket.
Configuring Bucket Encryption	Creates or updates the default server-side encryption configuration for a bucket. After encryption is enabled for a bucket, objects uploaded to the bucket are encrypted with the encryption configuration the bucket.
Obtaining Bucket Encryption Configuration	Queries the default server-side encryption configuration of a bucket.
Deleting the Encryption Configuration of a Bucket	Deletes the default server-side encryption configuration of a bucket.
Setting the Direct Reading Policy for Archive Objects in a Bucket	Enables or disables direct reading for Archive objects in a bucket. When direct reading is enabled, Archive objects can be downloaded without being restored first.
Obtaining the Direct Reading Policy of Archive Objects in a Bucket	Obtains the direct reading status of Archive objects in a specified bucket.
Deleting the Direct Reading Policy of Archive Objects in a Bucket	Deletes the direct reading configuration of Archive objects in a specified bucket.
Configuring Mirroring Back-to-Source Rules	Configures mirroring back-to-source rules for a bucket.
Obtaining Mirroring Back-to-Source Rules	Obtains mirroring back-to-source rules of a bucket.
Deleting Mirroring Back-to-Source Rules	Deletes mirroring back-to-source rules of a bucket.
Setting an Online Decompression Policy	Configures the decompression rules for ZIP files in a specified bucket.
Obtaining an Online Decompression Policy	Obtains the decompression rules for ZIP files in a specified bucket.
Deleting an Online Decompression Policy	Deletes the decompression rules for ZIP files in a specified bucket.

Operation	Description
Configuring a Default WORM Policy for a Bucket	Configures the default WORM policy and a retention period for a bucket.
Obtaining the Default WORM Policy of a Bucket	Returns the default WORM policy of a bucket.

API Operations for Static Website Hosting

Table 2-3 API Operations for Static Website Hosting

Operation	Description
Configuring Static Website Hosting for a Bucket	Creates or updates the website hosting configuration of a bucket. OBS allows you to store static web page resources such as HTML web pages, flash files, videos, and audios in a bucket. When a client accesses these resources from the website endpoint of the bucket, the browser can directly resolve and present the resources to the client.
Obtaining the Static Website Hosting Configuration of a Bucket	Obtains the website hosting configuration of a bucket.
Deleting the Static Website Hosting Configuration of a Bucket	Deletes the website hosting configuration of a bucket.
Configuring Bucket CORS	Configures the cross-origin resource sharing (CORS) configuration of a bucket. OBS allows static web page resources to be stored in buckets. The buckets can be used as website resources. A website hosted by OBS can respond to cross-domain requests from another website only after the CORS rule is configured.
Obtaining the CORS Configuration of a Bucket	Obtains the CORS configuration of a bucket.
Deleting the CORS Configuration of a Bucket	Deletes the CORS configuration of a bucket.
OPTIONS Bucket	Checks whether the client has the permission to perform operations on the server. It is usually performed before the cross-domain access.

Operation	Description
OPTIONS Object	Checks whether the client has the permission to perform operations on the server. It is usually performed before the cross-domain access.

API Operations on Objects

Table 2-4 API operations on objects

Operation	Description
Uploading an Object - PUT	Uploads an object to a specified bucket.
Uploading an Object - POST	Uploads an object to a specified bucket based on tables.
Copying an Object	Creates a copy for an existing object in OBS.
Downloading an Object	Downloads an object.
Querying Object Metadata	Obtains the object metadata. Information such as object expiration time, version number, and CORS configuration is the object metadata.
Deleting an Object	Deletes a specified object. You can also carry the versionId field to delete the specified object version.
Deleting Objects	Deletes a batch of objects from a bucket permanently. Objects deleted in this way cannot be recovered.
Restoring Archive or Deep Archive Objects	Restores objects in the Archive or Deep Archive (under limited beta testing) storage class. You can download these objects only after they are restored.
Appending an Object	Appends data to an object in a specified bucket. If no object with the same key value exists in the bucket, a new object will be created.
Configuring an Object ACL	Configures the ACL of a specified object. You can control the read and write permissions of objects through ACL settings.
Obtaining Object ACL Configuration	Obtains the ACL configuration of a specified object.
Modifying Object Metadata	Adds, modifies, or deletes metadata of uploaded objects.

Operation	Description
Modifying an Object	Modifies the content of an object in a specified parallel file system from the specified location.
Truncating an Object	Truncates an object in a specified parallel file system to the specified size.
Renaming an Object	Renames an object in a specified parallel file system.
Configuring WORM Retention for an Object	Configures or updates the retention period for objects uploaded to a bucket with WORM enabled.

API Operations for Multipart Tasks

Table 2-5 API operations for multipart tasks

Operation	Description
Listing Initiated Multipart Uploads in a Bucket	Queries all the multipart upload tasks that have not been merged or canceled in a bucket.
Initiating a Multipart Upload	Initiates a multipart upload task, and obtains the globally unique multipart upload task ID for subsequent operations, such as uploading, merging, and listing parts.
Uploading Parts	Uploads parts for a specific multipart task.
Copying Parts	Copies an object or a part of the object as a part of a multipart task.
Listing Uploaded Parts	Queries information about all parts of a multipart task.
Completing a Multipart Upload	Merges the specified parts into a complete object.
Canceling a Multipart Upload Task	Cancels a multipart upload task.

3 Calling APIs

3.1 Constructing a Request

This section describes the structure of a REST API request.

Request URI

OBS uses URI to locate specific buckets, objects, and their parameters. Use URIs when you want to operate resources.

The following provides a common URI format. The parameters in square brackets [] are optional.

protocol://[bucket.]domain[:port]/[object][?param]

Table 3-1 URI parameters

Parameter	Description	Mandatory
protocol	Protocol used for sending requests, which can be either HTTP or HTTPS. HTTPS is a protocol that ensures secure access to resources.	Yes
bucket	Resource path of a bucket, identifying only one bucket in OBS	No
domain	Domain name or IP address of the server for saving resources	Yes
port	Port enabled for protocols used for sending requests. The value varies with software server deployment. If no port number is specified, the protocol uses the default value. Each transmission protocol has its default port number. In OBS, the default HTTP port number is 80 and that of HTTPS is 443 .	No
object	An object path used in the request	No

Parameter	Description	Mandatory
param	A specific resource contained by a bucket or object. Default value of this parameter indicates that the bucket or object itself is obtained.	No

NOTICE

All API requests except those for the bucket list must contain the bucket name. Based on the DNS resolution performance and reliability, OBS requires that the bucket name must be placed in front of the **domain** when a request carrying a bucket name is constructed to form a third-level domain name, also mentioned as virtual hosting access domain name.

For example, you have a bucket named **test-bucket** in the **ap-southeast-1** region, and you want to access the ACL of an object named **test-object** in the bucket. The correct URL is **https://test-bucket.obs.ap-southeast-1.myhuaweicloud.com/test-object?acl**.

Request Method

HTTP methods, which are also called operations or actions, specify the type of operations that you are requesting.

Table 3-2 HTTP request methods supported by the OBS

Method	Description
GET	Requests the server to return a specific resource, for example, a bucket list or object.
PUT	Requests the server to update a specific resource, for example, creating a bucket or uploading an object.
POST	Requests the server to add a resource or perform a special operation, for example, part uploading or merging.
DELETE	Requests the server to delete specified resources, for example, an object.
HEAD	Requests the server to return the digest of a specific resource, for example, object metadata.
OPTIONS	The request server checks whether the user has the operation permission for a resource. The CORS needs to be configured for the bucket.

Request Headers

Refers to optional and additional request fields, for example a field required by a specific URI or HTTP method. For details about the fields of common request headers, see [Table 3-3](#).

Table 3-3 Common request headers

Header	Description	Mandatory
Authorization	Signature information contained in a request message Type: string No default value. Conditional: optional for anonymous requests and required for other requests.	Conditionally required
Content-Length	The message length (excluding headers) defined in RFC 2616 Type: string No default value. Conditional: optional for PUT requests, but mandatory for the requests that load XML content	Conditionally required
Content-Type	The content type of the requested resource, for example, text/plain Type: string No default value.	No
Date	Time when a request is initiated, for example, Wed, 27 Jun 2018 13:39:15 +0000 . Type: string No default value. Conditional: optional for anonymous requests or those requests containing header x-obs-date , required for other requests.	Conditionally required
Host	The host address. for example, <i>bucketname.obs.region.myhuaweicloud.com</i> . Type: string No default value.	Yes

(Optional) Request Body

A request body is generally sent in a structured format (for example, JSON or XML). It corresponds to **Content-Type** in the request header and is used to transfer content other than the request header. If the request body contains full-width characters, these characters must be coded using UTF-8.

The request body varies according to the APIs. Certain APIs do not require the request body, such as the GET and DELETE APIs.

Sending a Request

There are two methods to initiate requests based on the constructed request messages:

- cURL
cURL is a command-line tool used to perform URL operations and transmit information. cURL acts as an HTTP client that can send HTTP requests to the server and receive response messages. cURL is applicable to API debugging. For more information about cURL, visit <https://curl.haxx.se/>. cURL cannot calculate signatures. When cURL is used, only anonymous public OBS resources can be accessed.
- Coding
You can use code to make API calls, and to assemble, send, and process request messages. It can be implemented by using the SDK or coding.

3.2 Authentication

3.2.1 User Signature Authentication

OBS signs a request using AK/SK. When a client is sending a request to OBS, the message header must contain the SK, request time, request type, and other information of the signature.

- AK: access key ID, which is a unique identifier associated with a secret access key (SK). The AK and SK are used together to obtain an encrypted signature for a request.
- SK: secret access key, which is used together with the AK to sign requests, identify a request sender, and prevent the request from being modified.

A user can obtain the AK and SK from IAM. For details, see [Obtaining Access Keys \(AK/SK\)](#).

OBS provides three signature calculation methods based on application scenarios: [Authentication of Signature in a Header](#), [Authentication of Signature in a URL](#), and [Authentication of Signature Carried in the Table Uploaded Through a Browser](#).

The SDK provided by OBS integrates signature calculation. It is recommended that you use the SDK for development.

[Table 3-4](#) shows the user signature verification process in which a signature is carried in a header. For details about the parameters and code examples of authentication of signature in a header, see [Authentication of Signature in a Header](#).

Table 3-4 Signature calculation and verification procedure

Procedure		Example
Signature calculation	1. Construct an HTTP message.	PUT /object HTTP/1.1 Host: bucket.obs.region.myhuaweicloud.com Date: Tue, 04 Jun 2019 06:54:59 GMT Content-Type: text/plain Content-Length: 5913
	2. Calculate StringToSign based on the signature rule.	StringToSign = HTTP-Verb + "\n" + Content-MD5 + "\n" + Content-Type + "\n" + Date + "\n" + CanonicalizedHeaders + CanonicalizedResource
	3. Prepare the AK and SK.	AK: ***** SK: *****
	4. Calculate Signature .	Signature = Base64(HMAC-SHA1(SecretAccessKeyID , UTF-8-Encoding-Of(StringToSign)))
	5. Add a signature header and send the request to OBS.	PUT /object HTTP/1.1 Host: bucket.obs.region.myhuaweicloud.com Date: Tue, 04 Jun 2019 06:54:59 GMT Content-Type: text/plain Content-Length: 5913 Authorization: OBS AccessKeyID:Signature
Signature authentication	6. Receive the HTTP message.	PUT /object HTTP/1.1 Host: bucket.obs.region.myhuaweicloud.com Date: Tue, 04 Jun 2019 06:54:59 GMT Content-Type: text/plain Content-Length: 5913 Authorization: OBS AccessKeyID:Signature
	7. Obtain the SK based on the AK in the request.	Obtain the AK from the Authorization header and obtain the SK from IAM.
	8. Calculate StringToSign based on the signature rule.	StringToSign = HTTP-Verb + "\n" + Content-MD5 + "\n" + Content-Type + "\n" + Date + "\n" + CanonicalizedHeaders + CanonicalizedResource
	9. Calculate Signature .	Signature = Base64(HMAC-SHA1(SecretAccessKeyID , UTF-8-Encoding-Of(StringToSign)))

Procedure	Example
10. Authenticate the signature.	<p>Check whether the value of Signature in the Authorization header is the same as the value of Signature calculated by the server.</p> <p>If the two values are the same, the signature verification is successful.</p> <p>If the two values are different, the signature verification fails.</p>

3.2.2 Authentication of Signature in a Header

For all API operations, the most common identity authentication is to carry signatures in headers.

In the header, the signature is carried in the authorization header field of the HTTP message. The format of the message header is as follows:

```
Authorization: OBS AccessKeyID:signature
```

Authorization is an identifier (serving as a key). The value of **Authorization** consists of the service acronym, AK, and signature, with the service acronym and AK separated by a space and the AK and signature separated by a colon.

The process of calculating a signature is as follows:

1. Construct the StringToSign.
2. Encode the result of **1** in UTF-8.
3. Use the SK to calculate the HMAC-SHA1 signature on the result of **2**.
4. Encode the result of **3** in Base64 to obtain the signature.

The StringToSign is constructed according to the following rules. [Table 3-5](#) describes the parameters.

```
StringToSign =
  HTTP-Verb + "\n" +
  Content-MD5 + "\n" +
  Content-Type + "\n" +
  Date + "\n" +
  CanonicalizedHeaders + CanonicalizedResource
```

Table 3-5 Parameters required for constructing a StringToSign

Parameter	Description
HTTP-Verb	Indicates an HTTP request method supported by the OBS REST API. The value can be an HTTP verb such as PUT , GET , or DELETE .
Content-MD5	Base64-encoded 128-bit MD5 digest of the message according to RFC 1864. This parameter can be empty. For details, see Table 3-10 and the algorithm examples below the table.

Parameter	Description
Content-Type	<p>Specifies the message type, for example, text/plain. If a request does not contain this header field, this parameter is deemed as an empty string. For details, see Table 3-6.</p>
Date	<p>Time when a request is initiated. This parameter uses the RFC 1123 time format. If the deviation between the time specified by this parameter and the server time is over 15 minutes, the server returns error 403.</p> <p>This parameter is an empty string when the x-obs-date is specified. For details, see Table 3-10.</p> <p>If an operation (for example, obtaining an object content) is temporarily authorized, this parameter is not required.</p>
CanonicalizedHeaders	<p>OBS request header field in an HTTP request header, referring to header fields starting with x-obs-, such as, x-obs-date, x-obs-acl, and x-obs-meta-*. When calling an API, choose a header that is supported by the API as required.</p> <ol style="list-style-type: none"> 1. All characters of keywords in a request header field must be converted to lowercase letters (content values must be case sensitive, for example, x-obs-storage-class:STANDARD). If a request contains multiple header fields, these fields should be organized by keyword in the alphabetical order from a to z. 2. If multiple header fields in a request have the same prefix, combine the header fields into one. For example, x-obs-meta-name:name1 and x-obs-meta-name:name2 should be reorganized into x-obs-meta-name:name1,name2. Use comma to separate the values. 3. Keywords in the request header field cannot contain non-ASCII or unrecognizable characters, which are also not advisable for values in the request header field. If the two types of characters are necessary, they should be encoded and decoded on the client side. Either URL encoding or Base64 encoding is acceptable, but the server does not perform decoding. 4. Delete meaningless spaces and tabs in a header field. For example, x-obs-meta-name: name (with a meaningless space before name) must be changed to x-obs-meta-name:name. 5. Each header field occupies a separate line. See Table 3-8.

Parameter	Description
CanonicalizedResource	<p>Indicates the OBS resource specified by an HTTP request. This parameter is constructed as follows:</p> <p><Bucket name + Object name> + [Subresource 1] + [Subresource 2] + ...</p> <ol style="list-style-type: none"> 1. Bucket name and object name <ul style="list-style-type: none"> • If the bucket is bound to a user domain name, use the user domain name as the bucket name, for example, <i>/obs.ccc.com/object</i>. <i>obs.ccc.com</i> is the user domain name bound to the bucket. If no object name is specified, the entire bucket is listed, for example, <i>/obs.ccc.com/</i>. • If you do not access OBS using a user domain name, this field is in the format of <i>/bucket/object</i>. If no object name is specified, for example, <i>/bucket/</i>, the entire bucket is listed. If bucket name is not specified either, the value of this field is <i>/</i>. 2. If a subresource (such as ?acl and ?logging) exists, the subresource must be added. OBS supports a variety of sub-resources, including CDNNotifyConfiguration, acl, append, atname, backtosource, cors, customdomain, delete, deletebucket, directcoldaccess, encryption, inventory, length, lifecycle, location, logging, metadata, modify, name, notification, partNumber, policy, position, quota, rename, replication, response-cache-control, response-content-disposition, response-content-encoding, response-content-language, response-content-type, response-expires, restore, storageClass, storagePolicy, storageinfo, tagging, torrent, truncate, uploadId, uploads, versionId, versioning, versions, website, x-image-process, x-image-save-bucket, x-image-save-object, object-lock, retention, and x-obs-security-token. 3. If there are multiple subresources, sort them in the alphabetical order from a to z, and use & to combine the subresources. <p>NOTE</p> <ul style="list-style-type: none"> • A subresource is unique. Do not add subresources with the same keyword (for example, key=value1&key=value2) in the same request URL. In this case, signature is computed only based on the first subresource, and only the value of the first subresource takes effect on the actual service. • Using the GetObject API as an example, assume there is a bucket named bucket-test and an object named object-test in the bucket, and the object version is xxx. When obtaining the object, you need to rewrite Content-Type to text/plain. Then, the CanonicalizedResource calculated by the signature is /bucket-test/object-test?response-content-type=text/plain&versionId=xxx.

The following tables provide some examples of generating StringToSign.

Table 3-6 Obtaining an object

Request Header	StringToSign
GET /object.txt HTTP/1.1 Host: bucket.obs.region.myhuaweicloud.com Date: Sat, 12 Oct 2015 08:12:38 GMT	GET \n \n \n Sat, 12 Oct 2015 08:12:38 GMT\n /bucket/object.txt

Table 3-7 Using temporary AK/SK and security token to upload objects

Request Header	StringToSign
PUT /object.txt HTTP/1.1 User-Agent: curl/7.15.5 Host: bucket.obs.region.myhuaweicloud.com x-obs-date:Tue, 15 Oct 2015 07:20:09 GMT x-obs-security-token: YwkaRTbdY8g7q.... content-type: text/plain Content-Length: 5913339	PUT\n \n text/plain\n \n x-obs-date:Tue, 15 Oct 2015 07:20:09 GMT\n x-obs-security-token:YwkaRTbdY8g7q....\n /bucket/object.txt

Table 3-8 An object upload request containing header fields

Request Header	StringToSign
PUT /object.txt HTTP/1.1 User-Agent: curl/7.15.5 Host: bucket.obs.region.myhuaweicloud.com Date: Mon, 14 Oct 2015 12:08:34 GMT x-obs-acl: public-read content-type: text/plain Content-Length: 5913339	PUT\n \n text/plain\n Mon, 14 Oct 2015 12:08:34 GMT\n x-obs-acl:public-read\n /bucket/object.txt

Table 3-9 Obtaining an object ACL

Request Header	StringToSign
GET /object.txt?acl HTTP/1.1 Host: bucket.obs.region.myhuaweicloud.com Date: Sat, 12 Oct 2015 08:12:38 GMT	GET \n \n \n Sat, 12 Oct 2015 08:12:38 GMT\n /bucket/object.txt?acl

Table 3-10 An object upload request carrying the Content-MD5 header

Request Header	StringToSign
PUT /object.txt HTTP/1.1 Host: bucket.obs.region.myhuaweicloud.com x-obs-date:Tue, 15 Oct 2015 07:20:09 GMT Content-MD5: I5pU0r4+sgO9Emgl1KMQUg== Content-Length: 5913339	PUT\n I5pU0r4+sgO9Emgl1KMQUg==\n \n \n x-obs-date:Tue, 15 Oct 2015 07:20:09 GMT\n /bucket/object.txt

Table 3-11 Uploading an object through a user domain name

Request Header	StringToSign
PUT /object.txt HTTP/1.1 Host: obs.ccc.com x-obs-date:Tue, 15 Oct 2015 07:20:09 GMT Content-MD5: I5pU0r4+sgO9Emgl1KMQUg== Content-Length: 5913339	PUT\n I5pU0r4+sgO9Emgl1KMQUg==\n \n \n x-obs-date:Tue, 15 Oct 2015 07:20:09 GMT\n /obs.ccc.com/object.txt

Content-MD5 Algorithm in Java

```
import java.security.MessageDigest;
import sun.misc.BASE64Encoder;
import java.io.UnsupportedEncodingException;
import java.security.NoSuchAlgorithmException;

public class Md5{
    public static void main(String[] args) {
        try {
            String exampleString = "blog";
            MessageDigest messageDigest = MessageDigest.getInstance("MD5");
            BASE64Encoder encoder = new BASE64Encoder();
```

```
String contentMd5 = encoder.encode(messageDigest.digest(exampleString.getBytes("utf-8")));
System.out.println("Content-MD5:" + contentMd5);
} catch (NoSuchAlgorithmException | UnsupportedEncodingException e)
{
    e.printStackTrace();
}
}
```

The signature is generated as follows based on the StringToSign and SK. The hash-based message authentication code algorithm (HMAC algorithm) is used to generate the signature.

```
Signature = Base64( HMAC-SHA1( YourSecretAccessKeyID, UTF-8-Encoding-Of( StringToSign ) ) )
```

For example, to create a private bucket named **newbucketname2** in a region, the format of a client request is as follows:

```
PUT / HTTP/1.1
Host: newbucketname2.obs.region.myhuaweicloud.com
Content-Length: length
Date: Fri, 06 Jul 2018 03:45:51 GMT
x-obs-acl:private
x-obs-storage-class:STANDARD
Authorization: OBS UDSIAMSTUBTEST000254:ydH8ffpcbS6YpeOMcEZfn0wE90c=
<CreateBucketConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Location>region</Location>
</CreateBucketConfiguration>
```

Signature Calculation in Java

```
import java.io.UnsupportedEncodingException;
import java.net.URLEncoder;
import java.security.InvalidKeyException;
import java.security.NoSuchAlgorithmException;
import java.util.ArrayList;
import java.util.Arrays;
import java.util.Base64;
import java.util.Collections;
import java.util.HashMap;
import java.util.List;
import java.util.Locale;
import java.util.Map;
import java.util.TreeMap;

import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;

public class SignDemo {

    private static final String SIGN_SEP = "\n";

    private static final String OBS_PREFIX = "x-obs-";

    private static final String DEFAULT_ENCODING = "UTF-8";

    private static final List<String> SUB_RESOURCES = Collections.unmodifiableList(Arrays.asList(
        "CDNNotifyConfiguration", "acl", "append", "atname", "backtosource", "cors", "customdomain",
        "delete",
        "deletebucket", "directcoldaccess", "encryption", "inventory", "length", "lifecycle", "location", "logging",
        "metadata", "mirrorBackToSource", "modify", "name", "notification", "obscompresspolicy",
        "partNumber", "policy", "position", "quota", "rename", "replication", "response-cache-control",
        "response-content-disposition", "response-content-encoding", "response-content-language", "response-
        content-type",
        "response-expires", "restore", "storageClass", "storagePolicy", "storageinfo", "tagging", "torrent",
        "truncate",
        "uploadId", "uploads", "versionId", "versioning", "versions", "website", "x-image-process",
        "x-image-save-bucket", "x-image-save-object", "x-obs-security-token", "object-lock", "retention"));
```

```
private String ak;

private String sk;

public String urlEncode(String input) throws UnsupportedEncodingException {
    return URLEncoder.encode(input, DEFAULT_ENCODING)
        .replaceAll("%7E", "~") //for browser
        .replaceAll("%2F", "/")
        .replaceAll("%20", "+");
}

private String join(List<?> items, String delimiter) {
    StringBuilder sb = new StringBuilder();
    for (int i = 0; i < items.size(); i++) {
        String item = items.get(i).toString();
        sb.append(item);
        if (i < items.size() - 1) {
            sb.append(delimiter);
        }
    }
    return sb.toString();
}

private boolean isValid(String input) {
    return input != null && !input.equals("");
}

public String hmacSha1(String input) throws NoSuchAlgorithmException, InvalidKeyException,
UnsupportedEncodingException {
    SecretKeySpec signingKey = new SecretKeySpec(this.sk.getBytes(DEFAULT_ENCODING), "HmacSHA1");
    Mac mac = Mac.getInstance("HmacSHA1");
    mac.init(signingKey);
    return Base64.getEncoder().encodeToString(mac.doFinal(input.getBytes(DEFAULT_ENCODING)));
}

private String stringToSign(String httpMethod, Map<String, String[]> headers, Map<String, String>
queries,
    String bucketName, String objectName) throws Exception{
    String contentMd5 = "";
    String contentType = "";
    String date = "";

    TreeMap<String, String> canonicalizedHeaders = new TreeMap<String, String>();

    String key;
    List<String> temp = new ArrayList<String>();
    for(Map.Entry<String, String[]> entry : headers.entrySet()) {
        key = entry.getKey();
        if(key == null || entry.getValue() == null || entry.getValue().length == 0) {
            continue;
        }

        key = key.trim().toLowerCase(Locale.ENGLISH);
        if(key.equals("content-md5")) {
            contentMd5 = entry.getValue()[0];
            continue;
        }

        if(key.equals("content-type")) {
            contentType = entry.getValue()[0];
            continue;
        }

        if(key.equals("date")) {
            date = entry.getValue()[0];
            continue;
        }

        if(key.startsWith(OBS_PREFIX)) {
```

```
        for(String value : entry.getValue()) {
            if(value != null) {
                temp.add(value.trim());
            }
        }
        canonicalizedHeaders.put(key, this.join(temp, ","));
        temp.clear();
    }
}

if(canonicalizedHeaders.containsKey("x-obs-date")) {
    date = "";
}

// handle method/content-md5/content-type/date
StringBuilder stringToSign = new StringBuilder();
stringToSign.append(httpMethod).append(SIGN_SEP)
    .append(contentMd5).append(SIGN_SEP)
    .append(contentType).append(SIGN_SEP)
    .append(date).append(SIGN_SEP);

// handle canonicalizedHeaders
for(Map.Entry<String, String> entry : canonicalizedHeaders.entrySet()) {
    stringToSign.append(entry.getKey()).append(":").append(entry.getValue()).append(SIGN_SEP);
}

// handle CanonicalizedResource
stringToSign.append("/");
if(this.isValid(bucketName)) {
    stringToSign.append(bucketName).append("/");
    if(this.isValid(objectName)) {
        stringToSign.append(this.urlEncode(objectName));
    }
}

TreeMap<String, String> canonicalizedResource = new TreeMap<String, String>();
for(Map.Entry<String, String> entry : queries.entrySet()) {
    key = entry.getKey();
    if(key == null) {
        continue;
    }

    if(SUB_RESOURCES.contains(key)) {
        canonicalizedResource.put(key, entry.getValue());
    }
}

if(canonicalizedResource.size() > 0) {
    stringToSign.append("?");
    for(Map.Entry<String, String> entry : canonicalizedResource.entrySet()) {
        stringToSign.append(entry.getKey());
        if(this.isValid(entry.getValue())) {
            stringToSign.append("=").append(entry.getValue());
        }
    }
    stringToSign.append("&");
}
stringToSign.deleteCharAt(stringToSign.length()-1);
}

// System.out.println(String.format("StringToSign:%s%s", SIGN_SEP, stringToSign.toString()));

return stringToSign.toString();
}

public String headerSignature(String httpMethod, Map<String, String[]> headers, Map<String, String>
queries,
String bucketName, String objectName) throws Exception {
//1. stringToSign
```

```
String stringToSign = this.stringToSign(httpMethod, headers, queries, bucketName, objectName);

//2. signature
return String.format("OBS %s:%s", this.ak, this.hmacSha1(stringToSign));
}

public String querySignature(String httpMethod, Map<String, String[]> headers, Map<String, String>
queries,
String bucketName, String objectName, long expires) throws Exception {
if(headers.containsKey("x-obs-date")) {
headers.put("x-obs-date", new String[] {String.valueOf(expires)});
} else {
headers.put("date", new String[] {String.valueOf(expires)});
}
//1. stringToSign
String stringToSign = this.stringToSign(httpMethod, headers, queries, bucketName, objectName);

//2. signature
return this.urlEncode(this.hmacSha1(stringToSign));
}

public static void main(String[] args) throws Exception {
SignDemo demo = new SignDemo();

/* Hard-coded or plaintext AK and SK are risky. For security purposes, encrypt your AK and SK
and store them in the configuration file or environment variables.
In this example, the AK and SK are stored in environment variables for identity authentication. Before
running the code in this example, configure environment variables HUAWEICLOUD_SDK_AK and
HUAWEICLOUD_SDK_SK. */
demo.ak = System.getenv("HUAWEICLOUD_SDK_AK");
demo.sk = System.getenv("HUAWEICLOUD_SDK_SK");

String bucketName = "bucket-test";
String objectName = "hello.jpg";
Map<String, String[]> headers = new HashMap<String, String[]>();
headers.put("date", new String[] {"Sat, 12 Oct 2015 08:12:38 GMT"});
headers.put("x-obs-acl", new String[] {"public-read"});
headers.put("x-obs-meta-key1", new String[] {"value1"});
headers.put("x-obs-meta-key2", new String[] {"value2", "value3"});
Map<String, String> queries = new HashMap<String, String>();
queries.put("acl", null);

System.out.println(demo.headerSignature("PUT", headers, queries, bucketName, objectName));
}
}
```

The calculation result of the signature is **ydH8ffpcbS6YpeOMcEZfn0wE90c=**, which varies depending on the execution time.

Signature Algorithm in Python

```
import os
import sys
import hashlib
import hmac
import binascii
from datetime import datetime
IS_PYTHON2 = sys.version_info.major == 2 or sys.version < '3'

# Hard-coded or plaintext AK and SK are risky. For security purposes, encrypt your AK and SK and store
them in the configuration file or environment variables.
# In this example, the AK and SK are stored in environment variables for identity authentication. Before
running the code in this example, configure environment variables HUAWEICLOUD_SDK_AK and
HUAWEICLOUD_SDK_SK.
yourSecretAccessKeyID = os.getenv('HUAWEICLOUD_SDK_SK')
httpMethod = "PUT"
contentType = "application/xml"
# "date" is the time when the request was actually generated
```

```
date = datetime.utcnow().strftime('%a, %d %b %Y %H:%M:%S GMT')
canonicalizedHeaders = "x-obs-acl:private\n"
CanonicalizedResource = "/newbucketname2"
canonical_string = httpMethod + "\n" + "\n" + contentType + "\n" + date + "\n" + canonicalizedHeaders +
CanonicalizedResource
if IS_PYTHON2:
    hashed = hmac.new(yourSecretAccessKeyID, canonical_string, hashlib.sha1)
    encode_canonical = binascii.b2a_base64(hashed.digest())[:-1]
else:
    hashed = hmac.new(yourSecretAccessKeyID.encode('UTF-8'), canonical_string.encode('UTF-8'),
hashlib.sha1)
    encode_canonical = binascii.b2a_base64(hashed.digest())[:-1].decode('UTF-8')

print(encode_canonical)
```

The calculation result of the signature is **ydh8ffpcbS6YpeOMcEZfn0wE90c=**, which varies depending on the execution time.

Signature Algorithm in the C Programming Language

[Download the sample code](#) for calculating the signature in the C programming language.

1. The API for calculating the signature is contained in the **sign.h** header file.
2. The sample code for calculating the signature is contained in the **main.c** header file.

Signature Mismatch Error Handling

During an OBS API call, if the following error is reported:

Status code: 403 Forbidden

Error code: SignatureDoesNotMatch

Error message: The request signature we calculated does not match the signature you provided. Check your key and signing method.

Handle the problem by referring to [Why Don't the Signatures Match?](#)

3.2.3 Authentication of Signature in a URL

OBS allows users to construct a URL for a specific operation. The URL contains information such as the user's AK, signature, validity period, and resources. Any user who obtains the URL can perform the operation. After receiving the request, the OBS deems that the operation is performed by the user who issues the URL. For example, if the URL of an object download request carries signature information is constructed, the user who obtains the URL can download the object, but the URL is valid only within the expiration time specified by the parameter of **Expires**. The URL that carries the signature is used to allow others to use the pre-issued URL for identity authentication when the SK is not provided, and perform the predefined operation.

The format of the message where a signature is contained in the URL:

```
GET /ObjectKey?AccessKeyId=AccessKeyID&Expires=ExpiresValue&Signature=signature HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```

The format of the message where a temporary AK/SK pair and a security token are used in the URL for downloading objects:


```
GET /ObjectKey?AccessKeyId=AccessKeyID&Expires=ExpiresValue&Signature=signature&x-obs-security-token=securitytoken HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```

Table 3-12 describes the parameters.

Table 3-12 Request parameters

Parameter	Description	Mandatory
AccessKeyId	AK information of the issuer. OBS determines the identity of the issuer based on the AK and considers that the URL is accessed by the issuer. Type: string	Yes
Expires	Indicates when the temporarily authorized URL expires, in seconds. The time must be in Coordinated Universal Time (UTC) format and later than 00:00:00 on January 1, 1970. Type: string	Yes
Signature	The signature generated using the SK and the expiration time. Type: string	Yes
x-obs-security-token	During temporary authentication, the temporary AK/SK and security token must be used at the same time and the x-obs-security-token field must be added to the request header. For details about how to obtain a temporary AK/SK pair and security token, see Obtaining a Temporary AK/SK Pair and Security Token .	No

The process of calculating a signature is as follows:

1. Construct the StringToSign.
2. Encode the result of **1** in UTF-8.
3. Use the SK to calculate the HMAC-SHA1 signature on the result of **2**.
4. Encode the result of **3** in Base64.
5. Encode the result of **4** in URL to obtain the signature.

The StringToSign is constructed according to the following rules. **Table 3-13** describes the parameters.

```
StringToSign =
  HTTP-Verb + "\n" +
  Content-MD5 + "\n" +
  Content-Type + "\n" +
```

Expires + "\n" +
CanonicalizedHeaders + CanonicalizedResource;

Table 3-13 Parameters required for constructing a StringToSign

Parameter	Description
HTTP-Verb	Indicates an HTTP request method supported by the OBS REST API. The value can be an HTTP verb such as PUT, GET, or DELETE .
Content-MD5	Base64-encoded 128-bit MD5 digest of the message according to RFC 1864. This parameter can be empty.
Content-Type	Specifies the message type, for example, text/plain . If a request does not contain this header field, this parameter is deemed as an empty string.
Expires	Expiration time of the temporary authorization, that is, the value of parameter Expires in the request message: ExpiresValue .
CanonicalizedHeaders	<p>OBS request header field in an HTTP request header, referring to header fields starting with x-obs-, such as, x-obs-date, x-obs-acl, and x-obs-meta-*.</p> <ol style="list-style-type: none"> All characters of keywords in the header field must be converted to lower-case letters. If a request contains multiple header fields, these fields should be organized by keywords in the alphabetical order from a to z. If multiple header fields in a request have the same prefix, combine the header fields into one. For example, x-obs-meta-name:name1 and x-obs-meta-name:name2 should be reorganized into x-obs-meta-name:name1,name2. Use comma to separate the values. Keywords in the request header field cannot contain non-ASCII or unrecognizable characters, which are also not advisable for values in the request header field. If the two types of characters are necessary, they should be encoded and decoded on the client side. Either URL encoding or Base64 encoding is acceptable, but the server does not perform decoding. Delete meaningless spaces or tabs in a header field. For example, x-obs-meta-name: name (with a meaningless space before name) must be changed to x-obs-meta-name:name. Each header field occupies a separate line.

Parameter	Description
CanonicalizedResource	<p>Indicates the OBS resource specified by an HTTP request. This parameter is constructed as follows: <Bucket name + Object name> + [Subresource 1] + [Subresource 2] + ...</p> <ol style="list-style-type: none"> 1. Bucket name and object name <ul style="list-style-type: none"> • If the bucket is bound to a user domain name, use the user domain name as the bucket name, for example, <i>/obs.ccc.com/object</i>. <i>obs.ccc.com</i> is the user domain name bound to the bucket. If no object name is specified, the entire bucket is listed, for example, <i>/obs.ccc.com/</i>. • If you do not access OBS using a user domain name, this field is in the format of <i>/bucket/object</i>. If no object name is specified, for example, <i>/bucket/</i>, the entire bucket is listed. If bucket name is not specified either, the value of this field is <i>/</i>. 2. If a subresource (such as ?acl and ?logging) exists, the subresource must be added. OBS supports a variety of sub-resources, including CDNNotifyConfiguration, acl, append, atname, backtosource, cors, customdomain, delete, deletebucket, directcoldaccess, encryption, inventory, length, lifecycle, location, logging, metadata, modify, name, notification, partNumber, policy, position, quota, rename, replication, response-cache-control, response-content-disposition, response-content-encoding, response-content-language, response-content-type, response-expires, restore, storageClass, storagePolicy, storageinfo, tagging, torrent, truncate, uploadId, uploads, versionId, versioning, versions, website, x-image-process, x-image-save-bucket, x-image-save-object, object-lock, retention, and x-obs-security-token. 3. If there are multiple subresources, sort them in the alphabetical order from a to z, and use & to combine the subresources.

Parameter	Description
	<p>NOTE</p> <ul style="list-style-type: none"> A subresource is unique. Do not add subresources with the same keyword (for example, key=value1&key=value2) in the same request URL. In this case, signature is computed only based on the first subresource, and only the value of the first subresource takes effect on the actual service. Using the GetObject API as an example, assume there is a bucket named bucket-test and an object named object-test in the bucket, and the object version is xxx. When obtaining the object, you need to rewrite Content-Type to text/plain. Then, the CanonicalizedResource calculated by the signature is /bucket-test/object-test?response-content-type=text/plain&versionId=xxx.

The signature is generated as follows based on the StringToSign and SK. The hash-based message authentication code algorithm (HMAC algorithm) is used to generate the signature.

```
Signature = URL-Encode( Base64( HMAC-SHA1( YourSecretAccessKeyID, UTF-8-Encoding-Of( StringToSign ) ) ) )
```

The method for calculating the signature carried in the URL is different from that for calculating the authorization signature carried in a header.

- The signature in the URL must be encoded using the URL after Base64 encoding.
- Expires** in **StringToSign** corresponds to **Date** in the **Authorization** header.

Generate a predefined URL instance for the browser by carrying the signature in the URL.

Table 3-14 Request that has the signature carried in the URL and the StringToSign

Request Header	StringToSign
GET /objectkey? AccessKeyId=MFyfvK41ba2giqM7Uio6P znpdUKGpownRZlmVmHc&Expires=15 32779451&Signature=0Akylf43Bm3mD 1bh2rM3dmVp1Bo%3D HTTP/1.1 Host: examplebucket.obs.region.myhuaweicloud.com	GET \n \n \n 1532779451\n /examplebucket/objectkey

Table 3-15 Object download request that has the temporary AK/SK and security token carried in the URL and the StringToSign

Request Header	StringToSign
GET /objectkey? AccessKeyId=MFyfvK41ba2giqM7Uio6P znpdUKGpownRZlmVmHc&Expires=15 32779451&Signature=0Akylf43Bm3mD 1bh2rM3dmVp1Bo%3D&x-obs- security-token=YwkaRTbdY8g7q... HTTP/1.1 Host: examplebucket.obs.region.myhuaweicloud.com	GET \n \n \n 1532779451\n /examplebucket/objectkey?x-obs- security-token=YwkaRTbdY8g7q...

Calculation rule of the signature

Signature = URL-Encode(Base64(HMAC-SHA1(YourSecretAccessKeyID, UTF-8-Encoding-Of(StringToSign))))

Calculate the signature and use the host as the prefix of the URL to generate a predefined URL:

```
http(s)://examplebucket.obs.region.myhuaweicloud.com/objectkey?
AccessKeyId=AccessKeyID&Expires=1532779451&Signature=0Akylf43Bm3mD1bh2r
M3dmVp1Bo%3D
```

If you enter the address in the browser, then the object **objectkey** in the **examplebucket** bucket can be downloaded. The validity period of this link is **1532779451** (indicating Sat Jul 28 20:04:11 CST 2018).

In the Linux operating system, when running the **curl** command, you need to add a forward slash (\) to escape the character (&). The following command can download the **objectkey** object to the **output** file:

```
curl http(s)://examplebucket.obs.region.myhuaweicloud.com/objectkey?
AccessKeyId=AccessKeyID
\&Expires=1532779451\&Signature=0Akylf43Bm3mD1bh2rM3dmVp1Bo%3D -X
GET -o output
```

NOTE

If you want to use the pre-defined URL generated by the signature carried in the URL in the browser, do not use Content-MD5, Content-Type, or CanonicalizedHeaders that can only be carried in the header to calculate the signature. Otherwise, the browser cannot carry these parameters. After the request is sent to the server, a message is displayed indicating that the signature is incorrect.

Signature Calculation in Java

```
import java.io.UnsupportedEncodingException;
import java.net.URLEncoder;
import java.security.InvalidKeyException;
import java.security.NoSuchAlgorithmException;
import java.util.ArrayList;
import java.util.Arrays;
```

```
import java.util.Base64;
import java.util.Collections;
import java.util.HashMap;
import java.util.List;
import java.util.Locale;
import java.util.Map;
import java.util.TreeMap;
import java.util.regex.Pattern;

import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;

public class SignDemo {

    private static final String SIGN_SEP = "\n";

    private static final String OBS_PREFIX = "x-obs-";

    private static final String DEFAULT_ENCODING = "UTF-8";

    private static final List<String> SUB_RESOURCES = Collections.unmodifiableList(Arrays.asList(
        "delete",
        "deletebucket", "directcoldaccess", "encryption", "inventory", "length", "lifecycle", "location",
        "logging",
        "metadata", "mirrorBackToSource", "modify", "name", "notification", "obscompresspolicy",
        "partNumber", "policy", "position", "quota", "rename", "replication", "response-cache-control",
        "response-content-disposition", "response-content-encoding", "response-content-language",
        "response-content-type",
        "response-expires", "restore", "storageClass", "storagePolicy", "storageinfo", "tagging", "torrent",
        "truncate",
        "uploadId", "uploads", "versionId", "versioning", "versions", "website", "x-image-process",
        "x-image-save-bucket", "x-image-save-object", "x-obs-security-token", "object-lock", "retention"));

    private String ak;

    private String sk;

    private boolean isBucketNameValid(String bucketName) {
        if (bucketName == null || bucketName.length() > 63 || bucketName.length() < 3) {
            return false;
        }

        if (!Pattern.matches("[a-z0-9][a-z0-9-]+$", bucketName)) {
            return false;
        }

        if (Pattern.matches("(\\d{1,3}\\.){3}\\d{1,3}", bucketName)) {
            return false;
        }

        String[] fragments = bucketName.split("\\.");
        for (int i = 0; i < fragments.length; i++) {
            if (Pattern.matches("^-.*", fragments[i]) || Pattern.matches(".*-$", fragments[i])
                || Pattern.matches("^$", fragments[i])) {
                return false;
            }
        }

        return true;
    }

    public String encodeUrlString(String path) throws UnsupportedEncodingException {
        return URLEncoder.encode(path, DEFAULT_ENCODING)
            .replaceAll("\\+", "%20")
            .replaceAll("\\*", "%2A")
            .replaceAll("%7E", "~");
    }
}
```

```
public String encodeObjectName(String objectName) throws UnsupportedEncodingException {
    StringBuilder result = new StringBuilder();
    String[] tokens = objectName.split("/");
    for (int i = 0; i < tokens.length; i++) {
        result.append(this.encodeURIComponent(tokens[i]));
        if (i < tokens.length - 1) {
            result.append("/");
        }
    }
    return result.toString();
}

private String join(List<?> items, String delimiter) {
    StringBuilder sb = new StringBuilder();
    for (int i = 0; i < items.size(); i++) {
        String item = items.get(i).toString();
        sb.append(item);
        if (i < items.size() - 1) {
            sb.append(delimiter);
        }
    }
    return sb.toString();
}

private boolean isValid(String input) {
    return input != null && !input.equals("");
}

public String hmacSha1(String input) throws NoSuchAlgorithmException, InvalidKeyException,
UnsupportedEncodingException {
    SecretKeySpec signingKey = new SecretKeySpec(this.sk.getBytes(DEFAULT_ENCODING), "HmacSHA1");
    Mac mac = Mac.getInstance("HmacSHA1");
    mac.init(signingKey);
    return Base64.getEncoder().encodeToString(mac.doFinal(input.getBytes(DEFAULT_ENCODING)));
}

private String stringToSign(String httpMethod, Map<String, String[]> headers, Map<String, String>
queries,
    String bucketName, String objectName, long expires) throws Exception {
    String contentMd5 = "";
    String contentType = "";
    TreeMap<String, String> canonicalizedHeaders = new TreeMap<String, String>();
    String key;
    List<String> temp = new ArrayList<String>();
    for (Map.Entry<String, String[]> entry : headers.entrySet()) {
        key = entry.getKey();
        if (key == null || entry.getValue() == null || entry.getValue().length == 0) {
            continue;
        }
        key = key.trim().toLowerCase(Locale.ENGLISH);
        if (key.equals("content-md5")) {
            contentMd5 = entry.getValue()[0];
            continue;
        }
        if (key.equals("content-type")) {
            contentType = entry.getValue()[0];
            continue;
        }
        if (key.startsWith(OBS_PREFIX)) {
            for (String value : entry.getValue()) {
                if (value != null) {
                    temp.add(value.trim());
                }
            }
            canonicalizedHeaders.put(key, this.join(temp, ","));
            temp.clear();
        }
    }
}
// handle method/content-md5/content-type
```

```
StringBuilder stringToSign = new StringBuilder();
stringToSign.append(httpMethod).append(SIGN_SEP)
    .append(contentMd5).append(SIGN_SEP)
    .append(contentType).append(SIGN_SEP)
    .append(expires).append(SIGN_SEP);

// handle canonicalizedHeaders
for (Map.Entry<String, String> entry : canonicalizedHeaders.entrySet()) {
    stringToSign.append(entry.getKey()).append(":").append(entry.getValue()).append(SIGN_SEP);
}

// handle CanonicalizedResource
stringToSign.append("/");
if (this.isValid(bucketName)) {
    stringToSign.append(bucketName).append("/");
    if (this.isValid(objectName)) {
        stringToSign.append(this.encodeObjectName(objectName));
    }
}

TreeMap<String, String> canonicalizedResource = new TreeMap<String, String>();
for (Map.Entry<String, String> entry : queries.entrySet()) {
    key = entry.getKey();
    if (key == null) {
        continue;
    }

    if (SUB_RESOURCES.contains(key)) {
        canonicalizedResource.put(key, entry.getValue());
    }
}

if (canonicalizedResource.size() > 0) {
    stringToSign.append("?");
    for (Map.Entry<String, String> entry : canonicalizedResource.entrySet()) {
        stringToSign.append(entry.getKey());
        if (this.isValid(entry.getValue())) {
            stringToSign.append("=").append(entry.getValue());
        }
    }
    stringToSign.append("&");
}
stringToSign.deleteCharAt(stringToSign.length() - 1);
}
// System.out.println(String.format("StringToSign:%s%s", SIGN_SEP, stringToSign.toString()));

return stringToSign.toString();
}

public String querySignature(String httpMethod, Map<String, String[]> headers, Map<String, String>
queries,
    String bucketName, String objectName, long expires) throws Exception {
    if (!isBucketNameValid(bucketName)) {
        throw new IllegalArgumentException("the bucketName is illegal");
    }
    //1. stringToSign
    String stringToSign = this.stringToSign(httpMethod, headers, queries, bucketName, objectName,
expires);

    //2. signature
    return this.encodeUrlString(this.hmacSha1(stringToSign));
}

public String getURL(String endpoint, Map<String, String> queries,
    String bucketName, String objectName, String signature, long expires) throws
UnsupportedEncodingException {
    StringBuilder URL = new StringBuilder();
    URL.append("https://").append(bucketName).append(".").append(endpoint).append("/").
```



```
        append(this.encodeObjectName(objectName)).append("?");
        String key;
        for (Map.Entry<String, String> entry : queries.entrySet()) {
            key = entry.getKey();
            if (key == null) {
                continue;
            }
            if (SUB_RESOURCES.contains(key)) {
                String value = entry.getValue();
                URL.append(key);
                if (value != null) {
                    URL.append("=").append(value).append("&");
                } else {
                    URL.append("&");
                }
            }
        }
        URL.append("AccessKeyId=").append(this.ak).append("&Expires=").append(expires).
            append("&Signature=").append(signature);
        return URL.toString();
    }

    public static void main(String[] args) throws Exception {
        SignDemo demo = new SignDemo();

        /* Hard-coded or plaintext AK and SK are risky. For security purposes, encrypt your AK and SK and
        store them in the configuration file or environment variables.
        In this example, the AK and SK are stored in environment variables for identity authentication. Before
        running the code in this example, configure environment variables HUAWEICLOUD_SDK_AK and
HUAWEICLOUD_SDK_SK. */
        demo.ak = System.getenv("HUAWEICLOUD_SDK_AK");
        demo.sk = System.getenv("HUAWEICLOUD_SDK_SK");
        String endpoint = "<your-endpoint>";

        String bucketName = "bucket-test";
        String objectName = "hello.jpg";

        // A header cannot be included if you want to use a URL to access OBS with a browser. If a header is
        added to headers, the signature does not match. To use headers, it must be processed by the client.
        Map<String, String[]> headers = new HashMap<String, String[]>();
        Map<String, String> queries = new HashMap<String, String>();

        // Expiration time. Set it to expire in 24 hours.
        long expires = (System.currentTimeMillis() + 86400000L) / 1000;
        String signature = demo.querySignature("GET", headers, queries, bucketName, objectName, expires);
        System.out.println(signature);
        String URL = demo.getURL(endpoint, queries, bucketName, objectName, signature, expires);
        System.out.println(URL);
    }
}
```

Signature Algorithm in the C Programming Language

[Download the sample code](#) for calculating the signature in the C programming language.

1. The API for calculating the signature is contained in the **sign.h** header file.
2. The sample code for calculating the signature is contained in the **main.c** header file.

Signature Mismatch Error Handling

During an OBS API call, if the following error is reported:

Status code: 403 Forbidden

Error code: SignatureDoesNotMatch

Error message: The request signature we calculated does not match the signature you provided. Check your key and signing method.

Handle the problem by referring to [Why Don't the Signatures Match?](#)

3.2.4 Authentication of Signature Carried in the Table Uploaded Through a Browser

OBS supports browser-based object upload using the POST method. Signatures of such requests are uploaded in tables. First, create a security policy and specify the requirements in the request, for example, bucket name and object name prefix. Then, create a signature based on this policy. The request form to be signed must contain valid signature and policy. Finally, create a table to upload the object to the bucket.

The process of calculating a signature is as follows:

1. Encode the policy content in UTF-8.
2. Encode the result of **1** in Base64.
3. Use the SK to calculate the HMAC-SHA1 signature on the result of **2**.
4. Encode the result of **3** in Base64 to obtain the signature.

```
StringToSign = Base64( UTF-8-Encoding-Of( policy ) )  
Signature = Base64( HMAC-SHA1( YourSecretAccessKeyID, StringToSign ) )
```

The content of the policy is as follows:

```
{ "expiration": "2017-12-31T12:00:00.000Z",  
  "conditions": [  
    {"x-obs-acl": "public-read" },  
    {"x-obs-security-token": "YwkaRTbdY8g7q...." },  
    {"bucket": "book" },  
    ["starts-with", "$key", "user/"]  
  ]  
}
```

The policy contains the validity period (see [Expiration](#)) and conditions (see [Conditions](#)).

Expiration

The **expiration** field describes when the signature will expire, which is expressed in the format according to ISO 8601 UTC. For example, **expiration: 2017-12-31T12:00:00.000Z** in the example means that the request becomes invalid after 12:00:00 on December 31, 2017. This field must be specified in a policy. It can only be in the **yyyy-MM-dd'T'HH:mm:ss'Z'** or **yyyy-MM-dd'T'HH:mm:ss.SSS'Z'** format.

Conditions

A mechanism used to verify the validity of a request. Conditions are used to define the content that must be contained in a request. In the example, the requested bucket name is **book**, the object name is prefixed with **user/**, and the ACL of the object is public read. All items in the form, excluding **AccessKeyId**, **signature**, **file**, **policy**, **token**, **field names**, and the prefix **x-ignore-**, must be included in the policy. The following table lists the items that should be contained in **Conditions**.

Table 3-16 Conditions contained in a policy

Element	Description
x-obs-acl	ACL in the request. Supports exact match and conditional match such as starts-with .
content-length-range	Maximum and minimum length of an object to be uploaded. The value can be a range.
Cache-Control, Content-Type, Content-Disposition, Content-Encoding, Expires	Headers specially for REST requests Supports exact match and conditional match such as starts-with .
key	Name of an object to be uploaded. Supports exact match and conditional match such as starts-with .
bucket	Name of the requested bucket. Supports exact match.
success_action_redirect	Redirection address after the upload is successful. For details, see Uploading an Object - POST . Supports exact match and conditional match such as starts-with .
success_action_status	If success_action_redirect is not specified, the status code is returned to the client when the upload is successful. For details, see Uploading an Object - POST . Supports exact match.
x-obs-meta-*	User-defined metadata. Keywords in an element cannot contain non-ASCII or unrecognizable characters. If non-ASCII or unrecognizable characters are necessary, they should be encoded and decoded on the client side. Either URL encoding or Base64 encoding is acceptable, but the server does not perform decoding. Supports exact match and conditional match such as starts-with .
x-obs-*	Other header fields with prefix x-obs- . Supports exact match and conditional match such as starts-with .

Element	Description
x-obs-security-token	Field name in the request header. Mandatory field for the temporary AK/SK and security token authentication.

The table below describes how policy conditions can be matched.

Table 3-17 Policy condition matching methods

Matching Method	Description
Exact Matches	Exact match by default. The value in the POST table must be the same as that in the policy. For example, if object ACL is set to public-read when the object is uploaded, the value of the x-obs-acl element in the table is public-read . Therefore, the conditions in the policy can be set to <code>{"x-obs-acl": "public-read"}</code> or <code>["eq", "\$x-obs-acl", "public-read"]</code> , which are equivalent.
Starts With	If this condition is used, the value set in the POST table must start with a fixed character string. For example, if the name of uploaded objects must be prefixed with user/ , the value of the key element in the table can be user/test1 , user/test2 , and so on. Therefore, conditions in the policy can be set to: <code>["starts-with", "\$key", "user/"]</code>
Matching Any Content	The corresponding element in the POST table can be any value. For example, if the redirection address upon request success can be any address, the value of the success_action_redirect element in the table can be any value. Therefore, conditions in the policy can be set to: <code>["starts-with", "\$success_action_redirect", ""]</code>

Matching Method	Description
Specifying Ranges	The content length of the file element in the POST table can be a specified range and is used only to limit the object size. For example, if the size of the uploaded object is between 1 MB to 10 MB, the content length of the file element in the table can be from 1048576 to 10485760 . Therefore, conditions in the policy can be set to (the value does not contain quotation marks) ["content-length-range", 1048576, 10485760]

 **NOTE**

A policy is in the JSON format. Conditions can be put in curly brackets {} and square brackets []. The key and value elements of the table are written in the curly brackets {}, which are separated by colons (:). The square brackets [] contain the condition type, key, and value. These three items are separated by commas (,). The dollar sign (\$) in front of the key indicates that the key is a variable.

The table below lists the characters that must be escaped in a policy.

Table 3-18 Characters that must be escaped in a policy

Character After Escape	Real Character
\\	Backslash (\)
\\$	Dollar symbol (\$)
\b	Backspace
\f	Page up and down
\n	Newline characters
\r	Enter
\t	Horizontal table
\v	Vertical table
\uxxxx	All Unicode characters

Request and Policy Examples

The following tables provide examples of requests and policies.

Example 1: Upload the **testfile.txt** object to bucket **examplebucket** and set the object ACL to **public-read**.

Request	Policy
<p>POST / HTTP/1.1</p> <p>Host: examplebucket.obs.<i>region</i>.myhuaweicloud.com</p> <p>Content-Type: multipart/form-data; boundary=7e32233530b26</p> <p>Content-Length: 1250</p> <p>--7e32233530b26</p> <p>Content-Disposition: form-data; name="key"</p> <p>testfile.txt</p> <p>--7e32233530b26</p> <p>Content-Disposition: form-data; name="x-obs-acl"</p> <p>public-read</p> <p>--7e32233530b26</p> <p>Content-Disposition: form-data; name="content-type"</p> <p>text/plain</p> <p>--7e32233530b26</p> <p>Content-Disposition: form-data; name="AccessKeyId"</p> <p>UDSIAMSTUBTEST000002</p> <p>--7e32233530b26</p> <p>Content-Disposition: form-data; name="policy"</p> <p>ewogICJleHBpcmF0aW9uJjogJlJwMTktMDctMDFUMTI6MDA6MDAuMDAwWiIsCiAgImNvbmlkbnRpdGlbnMiOiBbCiAgglCB7ImJ1Y2tldCI6ICJleGFtcGxlYnVja2V0liB9LAogICAgWyJlcSIsIChka2V5liwgInRlc3RmaWxlnR4dCjJLAoJeyJ4LW9icy1hY2wiOiAicHVibGljLXJlYWQiIH0sCiAgICBblmVxliwgliRDb250ZW50LVR5cGUlLCAidGV4dC9wbGFpbiJdLAogICAgWyJjb250ZW50LWxlbmd0aC1yYW5nZSIsIDYsIDF0aW9uXQogIF0kFkF0o=</p> <p>--7e32233530b26</p> <p>Content-Disposition: form-data; name="signature"</p> <p>xxl7bZs/5FgtBUggOdQ88DPZUo0=</p>	<pre>{ "expiration": "2019-07-01T12:00:00.000Z", "conditions": [{"bucket": "examplebucket" }, ["eq", "\$key", "testfile.txt"], {"x-obs-acl": "public-read" }, ["eq", "\$Content-Type", "text/plain"]] }</pre>

Request	Policy
--7e32233530b26 Content-Disposition: form-data; name="file"; filename="E:\TEST_FILE \TEST.txt" Content-Type: text/plain 123456 --7e32233530b26 Content-Disposition: form-data; name="submit" Upload --7e32233530b26--	

Example 2: Upload the **file/obj1** object to bucket **examplebucket** and configure the four custom metadata items of the object.

Request	Policy
<pre> POST / HTTP/1.1 Host: examplebucket.obs.region.myhuaweicloud.com Content-Type: multipart/form-data; boundary=7e329d630b26 Content-Length: 1597 --7e3542930b26 Content-Disposition: form-data; name="key" file/obj1 --7e3542930b26 Content-Disposition: form-data; name="AccessKeyId" UDSIAMSTUBTEST000002 --7e3542930b26 Content-Disposition: form-data; name="policy" ewogICJleHBpcmF0aW9uljogIjIwMTktMDctMDFUMTI6MDA6MDAuMDAwWlIsCiAgImNvbRpdGlbnMiOiBbCiAgglCB7ImJ1Y2tldCI6ICJleGFtcGxlYnVja2V0liB9LAogICAgWyJzdGFydHMtd2l0aCIsIklka2V5liwglmZpbGUvll0sCiAgICB7Ingtb2JzLW1ldGEtdGVzdDEiOiJ2YWx1ZTEifSwKICAgIFsiZXEiLCAiJHgtb2JzLW1ldGEtdGVzdDliLCAidmFsdWUyIl0sCiAgICBbInN0YXJ0cy13aXRoliwglIR4LW9icy1tZXRhLXRlc3QzliwglmRvYyJdLAogICAgWyJzdGFydHMtd2l0aCIsIklkeC1vYnMtbWV0YS10ZXN0NCIsIiXQogIF0KfQo= --7e3542930b26 Content-Disposition: form-data; name="signature" HTId8hcaisn6FfdWKqSJP9RN4Oo= --7e3542930b26 Content-Disposition: form-data; name="x-obs-meta-test1" value1 --7e3542930b26 </pre>	<pre> { "expiration": "2019-07-01T12:00:00.000Z", "conditions": [{"bucket": "examplebucket" }, ["starts-with", "\$key", "file/"], {"x-obs-meta-test1": "value1"}, ["eq", "\$x-obs-meta-test2", "value2"], ["starts-with", "\$x-obs-meta-test3", "doc"], ["starts-with", "\$x-obs-meta-test4", ""]] } </pre>

Request	Policy
<pre>Content-Disposition: form-data; name="x-obs-meta-test2" value2 --7e3542930b26 Content-Disposition: form-data; name="x-obs-meta-test3" doc123 --7e3542930b26 Content-Disposition: form-data; name="x-obs-meta-test4" my --7e3542930b26 Content-Disposition: form-data; name="file"; filename="E:\TEST_FILE \TEST.txt" Content-Type: text/plain 123456 --7e3542930b26 Content-Disposition: form-data; name="submit" Upload --7e3542930b26--</pre>	

Signature calculation in Java:

```
import java.text.SimpleDateFormat;
import java.util.ArrayList;
import java.util.Base64;
import java.util.Collections;
import java.util.Date;
import java.util.List;
import java.util.TimeZone;

import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;

public class SignDemo {

    private static final String DEFAULT_ENCODING = "UTF-8";

    private static final String EXPIRATION_DATE_FORMATTER = "yyyy-MM-dd'T'HH:mm:ss.SSS'Z'";

    private static final TimeZone GMT_TIMEZONE = TimeZone.getTimeZone("GMT");

    private static final long DEFAULT_EXPIRE_SECONDS = 300;

    private String ak;

    private String sk;
```

```
private String join(List<?> items) {
    StringBuilder sb = new StringBuilder();
    for (int i = 0; i < items.size(); i++) {
        String item = items.get(i).toString();
        sb.append(item);
        if (i < items.size() - 1) {
            sb.append(",");
        }
    }
    return sb.toString();
}

private String stringToSign(String[] tmpConditions, String expiration) {
    List<String> conditions = new ArrayList<>();
    Collections.addAll(conditions, tmpConditions);
    return "{\expiration\":" + "\"" + expiration + "\",\" + "\"conditions\":" + join(conditions) + "\"}";
}

private String getFormatExpiration(Date requestDate, long expires) {
    requestDate = requestDate != null ? requestDate : new Date();
    SimpleDateFormat expirationDateFormat = new SimpleDateFormat(EXPIRATION_DATE_FORMATTER);
    expirationDateFormat.setTimeZone(GMT_TIMEZONE);
    Date expiryDate = new Date(requestDate.getTime() + (expires <= 0 ? DEFAULT_EXPIRE_SECONDS :
expires) * 1000);
    return expirationDateFormat.format(expiryDate);
}

public String postSignature(String policy) throws Exception {
    byte[] policyBase64 = Base64.getEncoder().encode(policy.getBytes(DEFAULT_ENCODING));
    SecretKeySpec signingKey = new SecretKeySpec(this.sk.getBytes(DEFAULT_ENCODING), "HmacSHA1");
    Mac mac = Mac.getInstance("HmacSHA1");
    mac.init(signingKey);
    return Base64.getEncoder().encodeToString(mac.doFinal(policyBase64));
}

public static void main(String[] args) throws Exception {
    SignDemo demo = new SignDemo();

    /* Hard-coded or plaintext AK and SK are risky. For security purposes, encrypt your AK and SK and
store them in the configuration file or environment variables.
In this example, the AK and SK are stored in environment variables for identity authentication. Before
running the code in this example, configure environment variables HUAWEICLOUD_SDK_AK and
HUAWEICLOUD_SDK_SK. */
    demo.ak = System.getenv("HUAWEICLOUD_SDK_AK");
    demo.sk = System.getenv("HUAWEICLOUD_SDK_SK");

    String authExpiration = demo.getFormatExpiration(null, 0);

    String[] tmpConditions = {
        "{\bucket\":" + "\"bucketName\"" + "}",
        "[\starts-with\"," + "\"$key\"," + "\"obj\"" + "]"
    };
    String policy = demo.stringToSign(tmpConditions, authExpiration);
    String policyBase64 = Base64.getEncoder().encodeToString(policy.getBytes(DEFAULT_ENCODING));

    String signature = demo.postSignature(policy);

    // The table carries signed AccessKeyId, policy, and signature.
    System.out.println("authExpiration=" + authExpiration);
    System.out.println("policy=" + policy);
    System.out.println("policyBase64=" + policyBase64);
    System.out.println("signature=" + signature);

    // The table carries signed token.
    System.out.println("token=" + demo.ak + ":" + signature + ":" + policyBase64);
}
}
```

Signature calculation in Python:

```
# coding=utf-8
import binascii
import hashlib
import hmac
import os
import time
from datetime import datetime

import pytz

class SignatureDemo:
    EXPIRATION_DATE_FORMATTER = "%Y-%m-%dT%H:%M:%S.%f"

    DEFAULT_ENCODING = "UTF-8"

    # The default expiration time is 5 minutes.
    DEFAULT_EXPIRE_SECONDS = 300

    GMT_TIMEZONE = "GMT"

    def __init__(self, ak=None, sk=None):
        self.ak = ak
        self.sk = sk

    # request_date and expires should be set to timestamps, for example, 1675651495.979.
    def get_format_expiration(self, request_date, expires):
        request_date = request_date if request_date else time.time()
        expiry_date = request_date + (expires if expires > 0 else self.DEFAULT_EXPIRE_SECONDS)
        expiration = datetime.fromtimestamp(expiry_date, pytz.timezone(self.GMT_TIMEZONE)).strftime(
            self.EXPIRATION_DATE_FORMATTER)[-3] + "Z"
        return expiration

    def post_signature(self, policy):
        # If binascii or encode("base64") is used, newline characters must be removed.
        policy_base64 = binascii.b2a_base64(policy.encode(self.DEFAULT_ENCODING)).rstrip()
        hashed = hmac.new(self.sk.encode(self.DEFAULT_ENCODING), policy_base64, hashlib.sha1)
        return binascii.b2a_base64(hashed.digest()).rstrip()

    @staticmethod
    def string_to_sign(conditions, expiration):
        return "{\expiration\":" + "\"" + expiration + "\",\" + \"{conditions\":[\" + \",\".join(conditions) + "]"

if __name__ == "__main__":
    demo = SignatureDemo()

    # Hard-coded or plaintext AK and SK are risky. For security purposes, encrypt your AK and SK and store
    # them in the configuration file or environment variables.
    # In this example, the AK and SK are stored in environment variables for identity authentication. Before
    # running the code in this example, configure environment variables HUAWEICLOUD_SDK_AK and
    # HUAWEICLOUD_SDK_SK.
    demo.ak = os.getenv('HUAWEICLOUD_SDK_AK')
    demo.sk = os.getenv('HUAWEICLOUD_SDK_SK')

    auth_expiration = demo.get_format_expiration(None, 0)
    conditions_example = [
        "{\bucket\":" + "\"bucketName\" }",
        "[\starts-with\", \"$key\", \"obj\"]"
    ]

    post_policy = demo.string_to_sign(conditions_example, auth_expiration)
    policy_base64 = binascii.b2a_base64(post_policy.encode(demo.DEFAULT_ENCODING)).rstrip()

    signature = demo.post_signature(post_policy)

    # The table carries signed AccessKeyId, policy, and signature.
    print("authExpiration=" + auth_expiration)
```

```
print("policy=" + post_policy)
print("policyBase64=" + policy_base64)
print("signature=" + signature)

# The table carries signed token.
print("token=" + demo.ak + ":" + signature + ":" + policy_base64)
```

3.2.5 Signature Generators

OBS offers visualized tools for you to easily generate signatures.

Table 3-19 Signature generators

Calculation Method	How to Obtain
Authenticating the signature in a header	Generate Signed Authorization Header
Authenticating the signature in a URL	Generate Signed Query URL

During an OBS API call, if the following error is reported:

Status code: 403 Forbidden

Error code: SignatureDoesNotMatch

Error message: The request signature we calculated does not match the signature you provided. Check your key and signing method.

Handle the problem by referring to [Why Don't the Signatures Match?](#)

3.3 Returned Values

After sending a request, you will receive a response, including the status code, response header, and response body.

Status Codes

A status code is a group of digits ranging from 2xx (indicating successes) to 4xx or 5xx (indicating errors). It indicates the status of a response. For more information, see [Status Codes](#).

Response Headers

A response header corresponds to a request header, for example, Content-Type.

For details about common response headers, see [Table 3-20](#).

Table 3-20 Common response headers

Header	Description
Content-Length	The length (in bytes) of the response body. Type: string Default value: none
Connection	Indicates whether the connection to the server is a long connection or a short connection. Type: string Value options: keep-alive, close Default value: none
Date	The date and time at which OBS responds to the request. Type: string Default value: none
ETag	128-bit MD5 digest of the Base64 code of an object. ETag is the unique identifier of the object content. It can be used to determine whether the object content is changed. For example, if ETag value is A when an object is uploaded and the ETag value has changed to B when the object is downloaded, it indicates that the object content is changed. The actual ETag is the hash value of the object, which only reflects the changed content rather than the metadata. An uploaded object or copied object has a unique ETag after being encrypted using MD5. If an object is uploaded in the multipart mode, the MD5 splits ETag regardless of the encryption method. In this case, the ETag is not an MD5 digest. Type: string
x-obs-id-2	A special symbol that helps troubleshoot faults. Type: string Default value: none
x-reserved-indicator	A special symbol that helps troubleshoot faults. Type: string Default value: none
x-obs-request-id	The value created by OBS to uniquely identify the request. OBS uses this value to troubleshoot faults. Type: string Default value: none

(Optional) Response Body

A response body is generally returned in a structured format (for example, JSON or XML), corresponding to **Content-Type** in the response header, and is used to transfer content other than the response header.

4 Getting Started

4.1 Creating a Bucket

Scenarios

A bucket is a container that stores objects in OBS. You need to create a bucket before storing data in OBS.

The following describes how to call the API for [creating a bucket](#) in a specified region. For details about how to call an API, see [Calling APIs](#).

Prerequisites

- You have obtained the AK and SK. For details about how to obtain the AK and SK, see [Obtaining Access Keys \(AK/SK\)](#).
- You have planned the region where you want to create a bucket and obtained the endpoint required for API calls. For details, see [Regions and Endpoints](#).

Once a region is determined, it cannot be modified after the bucket is created.

Creating a Bucket Named bucket001 in the a1 Region

In this example, an Apache HttpClient is used.

```
package com.obsclient;

import java.io.*;

import org.apache.http.Header;
import org.apache.http.client.methods.CloseableHttpResponse;
import org.apache.http.client.methods.HttpPut;
import org.apache.http.entity.StringEntity;
import org.apache.http.impl.client.CloseableHttpClient;
import org.apache.http.impl.client.HttpClients;

public class TestMain {
    /* Hard-coded or plaintext AK and SK are risky. For security purposes, encrypt your AK and SK and store
    them in the configuration file or environment variables.
    In this example, the AK and SK are stored in environment variables for identity authentication. Before
    running the code in this example, configure environment variables HUAWEICLOUD_SDK_AK and
HUAWEICLOUD_SDK_SK. */
    public static String accessKey = System.getenv("HUAWEICLOUD_SDK_AK"); //The value is the AK
```



```
obtained.
public static String securityKey = System.getenv("HUAWAICLOUD_SDK_SK"); //The value is the SK
obtained.
public static String region = "a1"; // The value is the region where the planned bucket resides.
public static String createBucketTemplate =
    "<CreateBucketConfiguration " +
    "xmlns=\"http://obs.a1.myhuaweicloud.com/doc/2015-06-30/\">\n" +
    "<Location>" + region + "</Location>\n" +
    "</CreateBucketConfiguration>";

public static void main(String[] str) {

    createBucket();

}

private static void createBucket() {
    CloseableHttpClient httpClient = HttpClients.createDefault();
    String requesttime = DateUtils.formatDate(System.currentTimeMillis());
    String contentType = "application/xml";
    HttpPut httpPut = new HttpPut("http://bucket001.obs.a1.myhuaweicloud.com");
    httpPut.addHeader("Date", requesttime);
    httpPut.addHeader("Content-Type", contentType);

    /**Calculate the signature based on the request.**/
    String contentMD5 = "";
    String canonicalizedHeaders = "";
    String canonicalizedResource = "/bucket001/";
    // Content-MD5 and Content-Type fields do not contain line breaks. The data format is RFC 1123,
    which is the same as the time in the request.
    String canonicalString = "PUT" + "\n" + contentMD5 + "\n" + contentType + "\n" + requesttime + "\n"
+ canonicalizedHeaders + canonicalizedResource;
    System.out.println("StringToSign:[" + canonicalString + "]);
    String signature = null;
    CloseableHttpResponse httpResponse = null;
    try {
        signature = Signature.signWithHmacSha1(securityKey, canonicalString);

        // Added the Authorization: OBS AccessKeyID:signature field to the header.
        httpPut.addHeader("Authorization", "OBS " + accessKey + ":" + signature);

        // Add a body.
        httpPut.setEntity(new StringEntity(createBucketTemplate));

        httpResponse = httpClient.execute(httpPut);

        // Prints the sending request information and the received response message.
        System.out.println("Request Message:");
        System.out.println(httpPut.getRequestLine());
        for (Header header : httpPut.getAllHeaders()) {
            System.out.println(header.getName() + ":" + header.getValue());
        }

        System.out.println("Response Message:");
        System.out.println(httpResponse.getStatusLine());
        for (Header header : httpResponse.getAllHeaders()) {
            System.out.println(header.getName() + ":" + header.getValue());
        }
        BufferedReader reader = new BufferedReader(new InputStreamReader(
            httpResponse.getEntity().getContent()));

        String inputLine;
        StringBuffer response = new StringBuffer();

        while ((inputLine = reader.readLine()) != null) {
            response.append(inputLine);
        }
        reader.close();
    }
}
```

```
        // print result
        System.out.println(response.toString());
    } catch (UnsupportedEncodingException e) {
        e.printStackTrace();
    } catch (IOException e) {
        e.printStackTrace();
    } finally {
        try {
            httpClient.close();
        } catch (IOException e) {
            e.printStackTrace();
        }
    }
}
}
```

The format of the **Date** header field **DateUtils** is as follows:

```
package com.obsclient;

import java.text.DateFormat;
import java.text.SimpleDateFormat;
import java.util.Locale;
import java.util.TimeZone;

public class DateUtils {

    public static String formatDate(long time)
    {
        DateFormat serverDateFormat = new SimpleDateFormat("EEE, dd MMM yyyy HH:mm:ss z",
Locale.ENGLISH);
        serverDateFormat.setTimeZone(TimeZone.getTimeZone("GMT"));
        return serverDateFormat.format(time);
    }
}
```

The method of calculating the signature character string is as follows:

```
package com.obsclient;

import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;
import java.io.UnsupportedEncodingException;
import java.security.NoSuchAlgorithmException;
import java.security.InvalidKeyException;
import java.util.Base64;

public class Signature {
    public static String signWithHmacSha1(String sk, String canonicalString) throws
UnsupportedEncodingException {

        try {
            SecretKeySpec signingKey = new SecretKeySpec(sk.getBytes("UTF-8"), "HmacSHA1");
            Mac mac = Mac.getInstance("HmacSHA1");
            mac.init(signingKey);
            return Base64.getEncoder().encodeToString(mac.doFinal(canonicalString.getBytes("UTF-8")));
        } catch (NoSuchAlgorithmException | InvalidKeyException | UnsupportedEncodingException e) {
            e.printStackTrace();
        }
        return null;
    }
}
```

4.2 Listing Buckets

Scenarios

If you want to view information about all buckets created by yourself, you can call the API for listing buckets.

The following describes how to call the API for [listing buckets](#). For details about how to call an API, see [Calling APIs](#).

Prerequisites

- You have obtained the AK and SK. For details about how to obtain the AK and SK, see [Obtaining Access Keys \(AK/SK\)](#).
- You have specified the region where you want to list buckets and obtained the endpoint required for API calls. For details, see [Regions and Endpoints](#).

Obtaining the Bucket List in the a1 Region

In this example, an Apache HttpClient is used.

```
package com.obsclient;

import java.io.*;
import java.util.ArrayList;
import java.util.List;

import org.apache.http.Header;
import org.apache.http.HttpEntity;
import org.apache.http.NameValuePair;
import org.apache.http.client.entity.UrlEncodedFormEntity;
import org.apache.http.client.methods.CloseableHttpResponse;
import org.apache.http.client.methods.HttpGet;
import org.apache.http.client.methods.HttpPost;
import org.apache.http.client.methods.HttpPut;
import org.apache.http.entity.InputStreamEntity;
import org.apache.http.entity.StringEntity;
import org.apache.http.impl.client.CloseableHttpClient;
import org.apache.http.impl.client.HttpClients;
import org.apache.http.message.BasicNameValuePair;

public class TestMain {

    /* Hard-coded or plaintext AK and SK are risky. For security purposes, encrypt your AK and SK and store them in the configuration file or environment variables.
    In this example, the AK and SK are stored in environment variables for identity authentication. Before running the code in this example, configure environment variables HUAWEICLOUD_SDK_AK and HUAWEICLOUD_SDK_SK. */
    public static String accessKey = System.getenv("HUAWEICLOUD_SDK_AK"); //The value is the AK obtained.
    public static String securityKey = System.getenv("HUAWEICLOUD_SDK_SK"); //The value is the SK obtained.

    public static void main(String[] str) {

        listAllMyBuckets();

    }
}
```

```
private static void listAllMyBuckets() {
    CloseableHttpClient httpClient = HttpClients.createDefault();
    String requesttime = DateUtils.formatDate(System.currentTimeMillis());
    HttpPut httpPut = new HttpPut("http://bucket001.obs.a1.myhuaweicloud.com");
    httpGet.addHeader("Date", requesttime);

    /**Calculate the signature based on the request.**/
    String contentMD5 = "";
    String contentType = "";
    String canonicalizedHeaders = "";
    String canonicalizedResource = "/";
    // Content-MD5 and Content-Type fields do not contain line breaks. The data format is RFC 1123,
    which is the same as the time in the request.
    String canonicalString = "GET" + "\n" + contentMD5 + "\n" + contentType + "\n" + requesttime + "\n"
+ canonicalizedHeaders + canonicalizedResource;
    System.out.println("StringToSign:[" + canonicalString + "]");
    String signature = null;
    try {
        signature = Signature.signWithHmacSha1(securityKey, canonicalString);

        // Added the Authorization: OBS AccessKeyID:signature field to the header.
        httpGet.addHeader("Authorization", "OBS " + accessKey + ":" + signature);
        CloseableHttpResponse httpResponse = httpClient.execute(httpGet);

        // Prints the sending request information and the received response message.
        System.out.println("Request Message:");
        System.out.println(httpGet.getRequestLine());
        for (Header header : httpGet.getAllHeaders()) {
            System.out.println(header.getName() + ":" + header.getValue());
        }

        System.out.println("Response Message:");
        System.out.println(httpResponse.getStatusLine());
        for (Header header : httpResponse.getAllHeaders()) {
            System.out.println(header.getName() + ":" + header.getValue());
        }
        BufferedReader reader = new BufferedReader(new InputStreamReader(
            httpResponse.getEntity().getContent()));

        String inputLine;
        StringBuffer response = new StringBuffer();

        while ((inputLine = reader.readLine()) != null) {
            response.append(inputLine);
        }
        reader.close();
        // print result
        System.out.println(response.toString());
    } catch (UnsupportedEncodingException e) {
        e.printStackTrace();
    } catch (IOException e) {
        e.printStackTrace();
    } finally {
        try {
            httpClient.close();
        } catch (IOException e) {
            e.printStackTrace();
        }
    }
}
}
```

The format of the **Date** header field **DateUtils** is as follows:

```
package com.obsclient;
```

```
import java.text.DateFormat;
import java.text.SimpleDateFormat;
import java.util.Locale;
import java.util.TimeZone;

public class DateUtils {

    public static String formatDate(long time)
    {
        DateFormat serverDateFormat = new SimpleDateFormat("EEE, dd MMM yyyy HH:mm:ss z",
Locale.ENGLISH);
        serverDateFormat.setTimeZone(TimeZone.getTimeZone("GMT"));
        return serverDateFormat.format(time);
    }
}
```

The method of calculating the signature character string is as follows:

```
package com.obsclient;

import javax.crypto.Mac;
import javax.crypto.spec.SecretKeySpec;
import java.io.UnsupportedEncodingException;
import java.security.NoSuchAlgorithmException;
import java.security.InvalidKeyException;
import java.util.Base64;

public class Signature {
    public static String signWithHmacSha1(String sk, String canonicalString) throws
UnsupportedEncodingException {

        try {
            SecretKeySpec signingKey = new SecretKeySpec(sk.getBytes("UTF-8"), "HmacSHA1");
            Mac mac = Mac.getInstance("HmacSHA1");
            mac.init(signingKey);
            return Base64.getEncoder().encodeToString(mac.doFinal(canonicalString.getBytes("UTF-8")));
        } catch (NoSuchAlgorithmException | InvalidKeyException | UnsupportedEncodingException e) {
            e.printStackTrace();
        }
        return null;
    }
}
```

4.3 Uploading an Object

Scenarios

You can upload files of any type to OBS buckets for storage.

The following describes how to call the API for [uploading objects using the PUT method](#) to a specified bucket. For details about how to call an API, see [Calling APIs](#).

Prerequisites

- You have obtained the AK and SK. For details, see [Obtaining Access Keys \(AK/SK\)](#).
- At least one bucket is available.
- The file to be uploaded has been prepared and you know the complete local path of the file.

- You have obtained the region of the bucket which you want to upload files to and determined the endpoint required for API calls. For details, see [Regions and Endpoints](#).

Uploading the Object objecttest1 to Bucket bucket001 in the a1 Region

In this example, an Apache HttpClient is used.

```
package com.obsclient;

import java.io.*;
import java.util.ArrayList;
import java.util.List;

import org.apache.http.Header;
import org.apache.http.HttpEntity;
import org.apache.http.NameValuePair;
import org.apache.http.client.entity.UrlEncodedFormEntity;
import org.apache.http.client.methods.CloseableHttpResponse;
import org.apache.http.client.methods.HttpGet;
import org.apache.http.client.methods.HttpPost;
import org.apache.http.client.methods.HttpPut;
import org.apache.http.entity.InputStreamEntity;
import org.apache.http.entity.StringEntity;
import org.apache.http.impl.client.CloseableHttpClient;
import org.apache.http.impl.client.HttpClients;
import org.apache.http.message.BasicNameValuePair;

public class TestMain {

    /* Hard-coded or plaintext AK and SK are risky. For security purposes, encrypt your AK and SK and store
    them in the configuration file or environment variables.
    In this example, the AK and SK are stored in environment variables for identity authentication. Before
    running the code in this example, configure environment variables HUAWEICLOUD_SDK_AK and
HUAWEICLOUD_SDK_SK. */
    public static String accessKey = System.getenv("HUAWEICLOUD_SDK_AK"); //The value is the AK
    obtained.
    public static String securityKey = System.getenv("HUAWEICLOUD_SDK_SK"); //The value is the SK
    obtained.

    public static void main(String[] str) {

        putObjectToBucket();

    }

    private static void putObjectToBucket() {

        InputStream inputStream = null;
        CloseableHttpClient httpClient = HttpClients.createDefault();
        CloseableHttpResponse httpResponse = null;
        String requestTime = DateUtils.formatDate(System.currentTimeMillis());
        HttpPut httpPut = new HttpPut("http://bucket001.obs.a1.myhuaweicloud.com/objecttest1");
        httpPut.addHeader("Date", requestTime);

        /**Calculate the signature based on the request.**/
        String contentMD5 = "";
        String contentType = "";
        String canonicalizedHeaders = "";
        String canonicalizedResource = "/bucket001/objecttest1";
        // Content-MD5 and Content-Type fields do not contain line breaks. The data format is RFC 1123,
        which is the same as the time in the request.
        String canonicalString = "PUT" + "\n" + contentMD5 + "\n" + contentType + "\n" + requestTime + "\n"
        + canonicalizedHeaders + canonicalizedResource;
        System.out.println("StringToSign:[" + canonicalString + "]");
        String signature = null;
```

```
try {
    signature = Signature.signWithHmacSha1 (securityKey, canonicalString);
    // Directory for storing uploaded files
    inputStream = new FileInputStream("D:\\OBSobject\\text01.txt");
    InputStreamEntity entity = new InputStreamEntity(inputStream);
    httpPut.setEntity(entity);

    // Added the Authorization: OBS AccessKeyID:signature field to the header.
    httpPut.addHeader("Authorization", "OBS " + accessKey + ":" + signature);
    httpResponse = httpClient.execute(httpPut);

    // Prints the sending request information and the received response message.
    System.out.println("Request Message:");
    System.out.println(httpPut.getRequestLine());
    for (Header header : httpPut.getAllHeaders()) {
        System.out.println(header.getName() + ":" + header.getValue());
    }

    System.out.println("Response Message:");
    System.out.println(httpResponse.getStatusLine());
    for (Header header : httpResponse.getAllHeaders()) {
        System.out.println(header.getName() + ":" + header.getValue());
    }
    BufferedReader reader = new BufferedReader(new InputStreamReader(
        httpResponse.getEntity().getContent()));

    String inputLine;
    StringBuffer response = new StringBuffer();

    while ((inputLine = reader.readLine()) != null) {
        response.append(inputLine);
    }
    reader.close();

    // print result
    System.out.println(response.toString());

} catch (UnsupportedEncodingException e) {
    e.printStackTrace();

} catch (IOException e) {
    e.printStackTrace();
} finally {
    try {
        httpClient.close();
    } catch (IOException e) {
        e.printStackTrace();
    }
}
}
```

The format of the Date header field DateUtils is as follows:

```
package com.obsclient;

import java.text.DateFormat;
import java.text.SimpleDateFormat;
import java.util.Locale;
import java.util.TimeZone;

public class DateUtils {

    public static String formatDate(long time)
    {
        DateFormat serverDateFormat = new SimpleDateFormat("EEE, dd MMM yyyy HH:mm:ss z",
        Locale.ENGLISH);
```

```
serverDateFormat.setTimeZone(TimeZone.getTimeZone("GMT"));  
return serverDateFormat.format(time);  
}  
}
```

The method of calculating the signature character string is as follows:

```
package com.obsclient;  
  
import javax.crypto.Mac;  
import javax.crypto.spec.SecretKeySpec;  
import java.io.UnsupportedEncodingException;  
import java.security.NoSuchAlgorithmException;  
import java.security.InvalidKeyException;  
import java.util.Base64;  
  
public class Signature {  
    public static String signWithHmacSha1(String sk, String canonicalString) throws  
    UnsupportedEncodingException {  
        try {  
            SecretKeySpec signingKey = new SecretKeySpec(sk.getBytes("UTF-8"), "HmacSHA1");  
            Mac mac = Mac.getInstance("HmacSHA1");  
            mac.init(signingKey);  
            return Base64.getEncoder().encodeToString(mac.doFinal(canonicalString.getBytes("UTF-8")));  
        } catch (NoSuchAlgorithmException | InvalidKeyException | UnsupportedEncodingException e) {  
            e.printStackTrace();  
        }  
        return null;  
    }  
}
```


5 APIs

5.1 Operations on Buckets

5.1.1 Listing Buckets

Functions

You can perform this operation to list all buckets that you have created.

Request Syntax

```
GET / HTTP/1.1  
Host: obs.region.myhuaweicloud.com  
Date: date  
Authorization: authorization
```

Request Parameters

This request contains no parameters.

Request Headers

The operation message header is the same as that of a common request. For details, see [Table 3-3](#). However, this request can contain additional headers. The following table describes the additional headers for this request.

Table 5-1 Additional request headers

Header	Description	Mandatory
x-obs-bucket-type	<p>This header field is used to specify the content to be obtained.</p> <p>Value:</p> <ul style="list-style-type: none"> OBJECT: Obtain the list of all buckets. POSIX: Obtain the list of all parallel file systems. <p>If this header is not carried, the list of all buckets and parallel file systems is obtained.</p> <p>Example: x-obs-bucket-type: POSIX</p>	No

Request Elements

The request does not use request elements.

Response Syntax

```

GET HTTP/1.1 status_code
Content-Type: type
Date: date
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListAllMyBucketsResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>id</ID>
  </Owner>
  <Buckets>
    <Bucket>
      <Name>bucketName</Name>
      <CreationDate>date</CreationDate>
      <Location>region</Location>
      <BucketType>buckettype</BucketType>
    </Bucket>
    ...
  </Buckets>
</ListAllMyBucketsResult>

```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains the XML list of buckets owned by the user. [Table 5-2](#) describes the elements.

Table 5-2 Response elements

Element	Description
ListAllMyBucketsResult	List of buckets created by the user Type: XML
Owner	Bucket owner information, including the tenant ID. Type: XML
ID	Domain ID (account ID) of a user. Type: string
Buckets	Buckets owned by the user Type: XML
Bucket	Details about a bucket Type: XML
Name	Bucket name Type: string
CreationDate	Creation time of the bucket Type: string
Location	Location of the bucket Type: string
BucketType	Bucket type Type: string <ul style="list-style-type: none"> • OBJECT: indicates a bucket. • POSIX: indicates a parallel file system.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET / HTTP/1.1
User-Agent: curl/7.29.0
Host: obs.region.myhuaweicloud.com
Accept: */*
Date: Mon, 25 Jun 2018 05:37:12 +0000
Authorization: OBS GKDF4C7Q6SI0IPGTXJN:9HXkVQliQKw33UEmyBI4rWrzmic=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
```

```
x-obs-request-id: BF260000016435722C11379647A8A00A
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSGGDRUM62QZi3hGP8Fz3gOloYcfZ39U
Content-Type: application/xml
Date: Mon, 25 Jun 2018 05:37:12 GMT
Content-Length: 460

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListAllMyBucketsResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>783fc6652cf246c096ea836694f71855</ID>
  </Owner>
  <Buckets>
    <Bucket>
      <Name>examplebucket01</Name>
      <CreationDate>2018-06-21T09:15:01.032Z</CreationDate>
      <Location>region</Location>
      <BucketType>OBJECT</BucketType>
    </Bucket>
    <Bucket>
      <Name>examplebucket02</Name>
      <CreationDate>2018-06-22T03:56:33.700Z</CreationDate>
      <Location>region</Location>
      <BucketType>OBJECT</BucketType>
    </Bucket>
  </Buckets>
</ListAllMyBucketsResult>
```

5.1.2 Creating a Bucket

Functions

This operation is used to create a bucket with a specified name.

NOTE

- By default, a user can have a maximum of 100 buckets.
- The name of a deleted bucket can be reused for a bucket or a parallel file system at least 30 minutes after the deletion.
- When creating a bucket in OBS, you can enable the multi-AZ mode for the bucket or disable it. With the multi-AZ mode disabled, data in a bucket is stored in a single AZ by default. With the multi-AZ mode enabled, data in a bucket is stored redundantly in multiple AZs, improving reliability. However, buckets created before are still in the single AZ mode.
- You can enable WORM when you create a bucket, but you cannot enable WORM for an existing bucket. In a bucket with WORM enabled, you can further configure retention policies for objects you upload to this bucket. For more information, see [Configuring a Default WORM Policy for a Bucket](#). Once enabled, WORM cannot be disabled for a bucket. When you create a bucket with WORM enabled, OBS automatically enables versioning for the bucket and the versioning cannot be suspended for that bucket. When you create a parallel file system, you cannot enable WORM for it.

A bucket name must be unique in OBS. If a user creates a bucket with the same name as that of an existing bucket under the same account and in the same region, a 200 code (indicating success) is returned. In scenarios other than the preceding one, the request for creating a bucket with the same name as that of an existing one will receive the 409 code (indicating that a namesake bucket already exists). To set an access control policy for the bucket to be created, you can add the **x-obs-acl** parameter to request headers.

Storage Class

You can create buckets with different storage classes. The **x-obs-storage-class** header in a bucket creation request specifies the bucket's storage class. If you do not specify a storage class when you upload an object to the bucket, the object inherits the storage class of the bucket. The storage class options are as follows: **STANDARD** (Standard), **WARM** (Infrequent Access), **COLD** (Archive), **DEEP_ARCHIVE** (Deep Archive). If the **x-obs-storage-class** header is not in the request, a Standard bucket will be created.

If the storage class of an object is not specified when it is uploaded to a bucket (see [Uploading an Object - PUT](#)), the object will be stored in the default storage class of the bucket.

- OBS Standard features low access latency and high throughput. It is most suitable for storing frequently accessed (multiple times per month) hot files. Potential application scenarios include big data, mobile applications, trending videos, and social media images.
- OBS Infrequent Access is most suitable for storing semi-frequently accessed (less than 12 times a year) data requiring quick response. Potential application scenarios include file synchronization or sharing and enterprise-level backup. It provides the same durability, access latency, and throughput as the Standard but at a lower price. The main drawback, however, is that it has lower availability than the Standard.
- OBS Archive is most suitable for archiving rarely-accessed (averagely once a year) data. Potential application scenarios include data archiving and long-term data retention for backup. It provides secure, durable, and inexpensive storage, which can replace tape libraries. However, the low cost comes at the cost of minutes to hours needed to restore data from the Archive storage class.
- Deep Archive: The Deep Archive storage class (under limited beta testing) is suitable for storing data that is barely (once every few years) accessed. This storage class costs less than the Archive storage class, but takes longer time (usually several hours) to restore data.

Request Syntax

```
PUT / HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Content-Length: length
Date: date
Authorization: authorization
x-obs-az-redundancy: 3az
<CreateBucketConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Location>location</Location>
</CreateBucketConfiguration>
```

Request Parameters

This request contains no parameters.

Request Headers

The operation message header is the same as that of a common request. For details, see [Table 3-3](#). However, this request can contain additional headers. The following table describes the additional headers for this request.

Table 5-3 Additional request headers

Header	Description	Mandatory
x-obs-acl	When creating a bucket, you can add this header to set the permission control policy for the bucket. The predefined common policies are as follows: private , public-read , public-read-write , public-read-delivered , and public-read-write-delivered (for details about the policies, see the ACL configuration using header fields in ACLs). Type: string	No
x-obs-storage-class	When creating a bucket, you can add this header to specify the default storage class for the bucket. The storage class options are as follows: STANDARD (Standard), WARM (Infrequent Access), COLD (Archive), DEEP_ARCHIVE (Deep Archive). If this header is not in the request, the storage class of the bucket created is Standard. Type: string	No
x-obs-grant-read	This header grants the read permission to all users under an account. It allows you to list objects in a bucket, list multipart tasks in a bucket, list multi-version objects in a bucket, and obtain bucket metadata. Type: string Example: x-obs-grant-read:id= <i>Tenant ID</i>	No
x-obs-grant-write	This header grants the write permission to all users under an account. Therefore, the users can create, delete, and overwrite all objects in a bucket, and can initialize parts, upload parts, copy parts, merge parts, and cancel multipart upload tasks. Type: string Example: x-obs-grant-write:id= <i>Tenant ID</i>	No

Header	Description	Mandatory
x-obs-grant-read-acp	This header grants the ACL read permission to all users under an account. Therefore, the users can read the bucket ACL information. Type: string Example: x-obs-grant-read-acp:id=Account ID	No
x-obs-grant-write-acp	This header grants the ACL write permission to all users under an account. Therefore, the users can modify the ACL of the bucket. Type: string Example: x-obs-grant-write-acp:id=Account ID	No
x-obs-grant-full-control	This header grants the full control permission to all users under an account. Type: string Example: x-obs-grant-full-control:id=Account ID	No
x-obs-grant-read-delivered	This header grants the read permission to all users under an account. By default, the read permission is applied to all objects in the bucket. Type: string Example: x-obs-grant-read-delivered:id=Account ID	No
x-obs-grant-full-control-delivered	This header grants the full control permission to all users under an account. By default, the FULL_CONTROL permission is applied to all objects in the bucket. Type: string Example: x-obs-grant-full-control-delivered:id=Account ID	No
x-obs-az-redundancy	This header is carried in the request when creating a bucket to enable the multi-AZ mode for the bucket. If this header is not carried, the bucket is in the single AZ mode by default. This header is carried to specify that a newly created bucket uses multi-AZ storage. If the region where the bucket resides does not support multi-AZ storage, the bucket still uses the single-AZ storage. Type: string Example: x-obs-az-redundancy:3az	No

Header	Description	Mandatory
x-obs-fs-file-interface	<p>This header can be carried when you create a bucket as a parallel file system.</p> <p>Type: string</p> <p>Example: x-obs-fs-file-interface:Enabled</p>	No
x-obs-epid	<p>Enterprise project ID, which can be obtained from the enterprise project service. The value is a universally unique identifier (UUID). The value of a default enterprise project is 0 or does not contain this header. Users who have not enabled the enterprise project service do not need to carry this header either.</p> <p>Type: string</p> <p>Example: x-obs-epid:9892d768-2d13-450f-aac7-ed0e44c2585f</p>	No
x-obs-bucket-type	<p>You can add this header to specify what type of bucket you will create. You can choose to create a bucket or a parallel file system.</p> <p>Type: string</p> <p>OBJECT: a bucket</p> <p>POSIX: a parallel file system.</p> <p>Example: x-obs-bucket-type:OBJECT</p>	No
x-obs-bucket-object-lock-enabled	<p>When creating a bucket, you can use this header to enable WORM for the bucket.</p> <p>Type: string</p> <p>Example: x-obs-bucket-object-lock-enabled:true</p>	No
x-obs-server-side-encryption	<p>When creating a bucket, you can use this header to specify an encryption method for the bucket.</p> <p>Type: string</p> <p>Value options: kms, obs</p> <p>Example: x-obs-server-side-encryption: kms</p>	No

Header	Description	Mandatory
x-obs-server-side-data-encryption	<p>When creating a bucket, you can use this header to specify an encryption algorithm for server-side encryption.</p> <p>Type: string</p> <p>Value options: AES256</p> <p>You can set this header to AES256 if x-obs-server-side-encryption:kms is used.</p> <p>You can set this header to AES256 if x-obs-server-side-encryption:obs is used.</p> <p>Example: x-obs-server-side-data-encryption: AES256</p>	No
x-obs-server-side-encryption-kms-key-id	<p>Customer master key (CMK) used in SSE-KMS encryption mode. If you do not specify this header, the default master key will be used.</p> <p>Type: string</p> <p>Valid value formats are as follows:</p> <ol style="list-style-type: none"> <i>regionID:domainID:key/key_id</i> <i>key_id</i> <p>Where:</p> <p><i>regionID</i> indicates the ID of the region where the key belongs. You can obtain this ID from Regions and Endpoints.</p> <ol style="list-style-type: none"> <i>domainID</i> indicates the ID of the account where the key belongs. To obtain the ID, see section "Obtaining the Account ID and User ID." <i>key_id</i> is the ID of a key created from DEW. You can obtain this ID by referring to Viewing a CMK. 	Optional if x-obs-server-side-encryption:kms is included.
x-obs-sse-kms-key-project-id	<p>ID of the project (not an enterprise project) where the KMS CMK belongs when SSE-KMS is used</p> <p>Type: string</p> <p>Value options: a project ID (not an enterprise project ID) that matches the KMSMasterKeyID specified by x-obs-server-side-encryption-kms-key-id</p>	This field can be used only when x-obs-server-side-encryption-kms-key-id is included.

Request Elements

This request can use additional elements. For details about additional elements, see [Table 5-4](#).

Table 5-4 Additional request elements

Element	Description	Mandatory
Location	<p>Specifies the region where a bucket will be created.</p> <ul style="list-style-type: none"> When the endpoint of the CN North-Beijing1 region is used for bucket creation, <ul style="list-style-type: none"> if location is not included, the bucket will be created in CN North-Beijing1 (cn-north-1) by default. if another region, for example, CN-Hong Kong (ap-southeast-1), is specified for location, the bucket will be created in the CN-Hong Kong region. When the endpoint of a region other than CN North-Beijing1 is used for bucket creation, location must be set to the region that the used endpoint corresponds to. For example, if obs.ap-southeast-1.myhuaweicloud.com is used, you must set location to ap-southeast-1. <p>For details about OBS regions and endpoints, see Regions and Endpoints.</p> <p>Type: string</p>	No

Response Syntax

HTTP/1.1 *status_code*
Location: *location*
Date: *date*
Content-Length: *length*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Creating a Bucket

```
PUT / HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:25:05 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=
Content-Length: 157

<CreateBucketConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Location>region</Location>
</CreateBucketConfiguration>
```

Sample Response: Creating a Bucket

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435CE298386946AE4C482
Location: /examplebucket
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCT9W2tvcLmMJ+plfdopaD62S0npbaRUz
Date: WED, 01 Jul 2015 02:25:06 GMT
Content-Length: 0
```

Sample Request: Creating a Bucket (with the ACL and Storage Class Specified)

```
PUT / HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:25:05 GMT
x-obs-acl:public-read
x-obs-storage-class:STANDARD
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=
Content-Length: 157

<CreateBucketConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Location>region</Location>
</CreateBucketConfiguration>
```

Sample Response: Creating a Bucket (with the ACL and Storage Class Specified)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435CE298386946AE4C482
Location: /examplebucket
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCT9W2tvcLmMJ+plfdopaD62S0npbaRUz
```

```
Date: WED, 01 Jul 2015 02:25:06 GMT  
Content-Length: 0
```

Sample Request: Creating a Bucket with Multi-AZ Storage

```
PUT / HTTP/1.1  
Host: examplebucket.obs.region.myhuaweicloud.com  
Content-Length: length  
Date: date  
Authorization: authorization  
x-obs-az-redundancy:3az  
<CreateBucketConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">  
<Location>region</Location>  
</CreateBucketConfiguration>
```

Sample Response: Creating a Bucket with Multi-AZ Storage

```
HTTP/1.1 200 OK  
Server: OBS  
x-obs-request-id: BF260000016435CE298386946AE4C482  
Location: /examplebucket  
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCT9W2tcvLmMJ+plfdopaD62S0npbaRUz  
Date: WED, 01 Jul 2015 02:25:06 GMT  
x-obs-az-redundancy:3az  
Content-Length: 0
```

Sample Request: Creating a Parallel File System

```
PUT / HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: /*/*  
Date: WED, 01 Jul 2015 02:25:05 GMT  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=  
Content-Length: 157  
x-obs-fs-file-interface: Enabled  
  
<CreateBucketConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">  
<Location>region</Location>  
</CreateBucketConfiguration>
```

Sample Response: Creating a Parallel File System

```
HTTP/1.1 200 OK  
Server: OBS  
x-obs-request-id: BF260000016435CE298386946AE4C482  
Location: /examplebucket  
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCT9W2tcvLmMJ+plfdopaD62S0npbaRUz  
Date: WED, 01 Jul 2015 02:25:06 GMT  
Content-Length: 0
```

Sample Request: Creating a Bucket with WORM Enabled

```
PUT / HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: /*/*  
Date: WED, 01 Jul 2015 02:25:05 GMT  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=  
x-obs-bucket-object-lock-enabled:true  
Content-Length: 0
```

Sample Response: Creating a Bucket with WORM Enabled

```
HTTP/1.1 200 OK  
Server: OBS
```

```
x-obs-request-id: 00000184C11AC7A6809F881341842C02
x-reserved-indicator: Unauthorized
Location: /examplebucket
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCT9W2tcvLmMJ+plfdopaD62S0npbaRUz
Date: WED, 01 Jul 2015 02:25:06 GMT
Content-Length: 0
```

Sample Request: Creating a Bucket with Explicitly Configured Access Permissions

```
PUT / HTTP/1.1
Authorization: OBS H4IPJX0TQTHTEBQQCEC:iqSPeUBl66PwXDApxjRk6hlcN4=
x-obs-grant-read: id=783fc6vz2cf2442c096evxxxxxxxxxxxx
x-obs-grant-write: id=3u3fc6vz2cf24mc830fhsxxxxxxxxxxxx
x-obs-grant-read-acp: id=902su2vz2cf2vire.239caxxxxxxxxxxxxx
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<CreateBucketConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Location>region</Location>
</CreateBucketConfiguration>
```

Sample Response: Creating a Bucket with Explicitly Configured Access Permissions

```
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCTeau73DIKTh4wPYzoZf5w3KacolerP4
x-obs-request-id: 0000018A2A22B72447CF01A99F32E2B0
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
Location: /examplebucket
```

5.1.3 Listing Objects in a Bucket

Functions

This operation lists objects in a bucket. To use this operation, you must have the permission to read the bucket.

If you specify only the bucket name in the request, OBS returns descriptions for some or all of the objects (a maximum of 1,000 objects) in the bucket. If you also specify one or more parameters among **prefix**, **marker**, **max-keys**, and **delimiter** in the request, OBS returns a list of objects based on the semantics specified in [Table 5-5](#).

You can also add the **versions** parameter to the request to list multiple versions of an object in a bucket.

Request Syntax

```
GET / HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com

Date: date
Authorization: authorization
```

Request Syntax (for multi-version objects)

```
GET /?versions HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```

Date: *date*
Authorization: *authorization*

Request Parameters

This request uses parameters to list some objects in a bucket. [Table 5-5](#) describes the parameters.

Table 5-5 Request parameters

Parameter	Description	Mandatory
prefix	Lists objects that begin with the specified prefix. Type: string	No
marker	Specifies a marker when listing objects in a bucket. With a marker configured, objects after this marker will be returned in alphabetical order. This field is used only for listing objects. Type: string	No
max-keys	Specifies the maximum number (from 1 to 1000) of objects returned (in alphabetical order) in the response. If the value is beyond this range, only 1,000 objects are returned by default. Type: integer	No
delimiter	Separator used to group object names. If a prefix is specified, objects with the same string from the prefix to the first delimiter are grouped into one CommonPrefixes . If no prefix is specified, objects with the same string from the first character to the first delimiter are grouped into one CommonPrefixes . For example, there are three objects (abcd , abcde , and bbcde) in a bucket. If delimiter is set to d and prefix is set to a , objects abcd and abcde are grouped into a CommonPrefixes with abcd as the prefix. If only delimiter is set to d , objects abcd and abcde are grouped into a CommonPrefixes with abcd as the prefix, and bbcde is grouped separately into another CommonPrefixes with bbcd as the prefix. For a parallel file system, if this parameter is not specified, all the content in the directory is recursively listed by default, and subdirectories are also listed. In big data scenarios, parallel file systems usually have deep directory levels and each directory has a large number of files. In such case, you are advised to configure [delimiter=/] to list the content in the current directory, but not list subdirectories, thereby improving the listing efficiency. Type: string	No

Parameter	Description	Mandatory
key-marker	Position to start with when objects are listed. This field is used only for listing versioned objects. Type: string Valid value: value of NextKeyMarker in the response body of the last request	No
version-id-marker	This parameter applies only when versioning is enabled. Specifies the version ID to start with when objects in a bucket are listed. Objects are listed in alphabetical order (a maximum of 1,000 objects are displayed at a time). This parameter is used together with the key-marker in the request. If the value of version-id-marker is not a version ID specified by key-marker , version-id-marker is invalid. Type: string Valid value: object version ID, that is, the value of NextVersionIdMarker in the response body of the last request	No
encoding-type	Encodes some elements in the response based on the specified type. If Delimiter, Marker (or KeyMarker), Prefix, NextMarker (or NextKeyMarker), and Key contain control characters that are not supported by XML 1.0 standards, you can configure encoding-type to encode Delimiter, Marker (or KeyMarker), Prefix (including the Prefix in CommonPrefixes), NextMarker (or NextKeyMarker), and Key in the response. Type: string Value option: url	No

Request Headers

This request uses common request headers. For details, see [Table 3-3](#).

Request Elements

This request contains no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
x-obs-bucket-location: region
Content-Type: application/xml
Content-Length: length
<Response Body>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response lists objects in XML format. Specific elements are described in [Table 5-6](#).

Table 5-6 Response elements

Element	Description
ListBucketResult	A list of objects in a bucket Type: XML
Contents	Object metadata Type: XML Parent: ListBucketResult
CommonPrefixes	Group information. If you specify a delimiter in the request, the response contains group information in CommonPrefixes . Type: XML Parent: ListBucketResult
Delimiter	The delimiter parameter specified in a request Type: string Parent: ListBucketResult
EncodingType	Encodes some elements in the response based on the specified type. If encoding-type is specified in the request, Delimiter, Marker, Prefix (including the Prefix in CommonPrefixes), NextMarker, and Key in the response will be encoded. Type: string Parent: ListBucketResult

Element	Description
ETag	<p>Base64-encoded 128-bit MD5 digest of an object. ETag is the unique identifier of the object content. It can be used to determine whether the object content is changed. For example, if the ETag value is A when an object is uploaded, but this value has changed to B when the object is downloaded, it indicates that the object content has been changed. The ETag value is a hash of the object. The ETag reflects changes to the object content, rather than the object metadata. An uploaded object or copied object has a unique ETag after being encrypted using MD5. (If the object is encrypted on the server side, the ETag value is not the MD5 digest of the object, but the unique identifier calculated through server-side encryption.)</p> <p>Type: string Parent: ListBucketResult.Contents</p>
Type	<p>Object type. This parameter is returned when the object type is not Normal.</p> <p>Type: string Parent: ListBucketResult.Contents</p>
ID	<p>Domain ID of the object owner</p> <p>Type: string Parent: ListBucketResult.Contents.Owner</p>
IsTruncated	<p>Determines whether the returned list of objects is truncated. The value true indicates that the list was truncated and false indicates that the list was not truncated.</p> <p>Type: boolean Parent: ListBucketResult</p>
Key	<p>Object name</p> <p>Type: string Parent: ListBucketResult.Contents</p>

Element	Description
LastModified	Time (UTC) when an object was last modified Type: date Parent: ListBucketResult.Contents
Marker	Marker for the position from which objects in a bucket will be listed Type: string Parent: ListBucketResult
NextMarker	A marker for the last returned object in the list. NextMarker is returned when not all the objects are listed. You can set the Marker value to list the remaining objects in follow-up requests. Type: string Parent: ListBucketResult
MaxKeys	Maximum number of objects returned Type: string Parent: ListBucketResult
Name	Name of the requested bucket Type: string Parent: ListBucketResult
Owner	User information, including the domain ID and name of the object owner Type: XML Parent: ListBucketResult.Contents
DisplayName	Name of the object owner Type: string Parent: ListBucketResult.Contents.Owner
Prefix	Prefix of an object name. Only objects whose names have this prefix are listed. Type: string Parent: ListBucketResult
Size	Object size in bytes Type: string Parent: ListBucketResult.Contents

Element	Description
StorageClass	Storage class of an object Type: string Value options: STANDARD, WARM, COLD Parent: ListBucketResult.Contents

Table 5-7 Elements in the response message for listing multi-version objects.

Element	Description
ListVersionsResult	Container for the list of objects (including objects with multiple version IDs) Type: container
Name	Bucket name Type: string Parent: ListVersionsResult
EncodingType	Encodes some elements in the response based on the specified type. If encoding-type is specified in the request, Delimiter, KeyMarker, Prefix (including the Prefix in CommonPrefixes), NextKeyMarker, and Key in the response will be encoded. Type: string Parent: ListVersionsResult
Prefix	Prefix of an object name. Only objects whose names have this prefix are listed. Type: string Parent: ListVersionsResult
KeyMarker	Marker for the object key from which objects will be listed Type: string Parent: ListVersionsResult
VersionIdMarker	Object version ID to start with when objects are listed Type: string Parent: ListVersionsResult

Element	Description
NextKeyMarker	<p>Key marker for the last returned object in the list. NextKeyMarker is returned when not all the objects are listed. You can set the KeyMarker value to list the remaining objects in follow-up requests.</p> <p>Type: string Parent: ListVersionsResult</p>
NextVersionIdMarker	<p>Version ID marker for the last returned object in the list. NextVersionIdMarker is returned when not all the objects are listed. You can set the VersionIdMarker value to list the remaining objects in follow-up requests.</p> <p>Type: string Parent: ListVersionsResult</p>
MaxKeys	<p>Maximum number of objects returned</p> <p>Type: string Parent: ListVersionsResult</p>
IsTruncated	<p>Indicates whether the returned list of objects is truncated. The value true indicates that the list was truncated and false indicates that the list was not truncated.</p> <p>Type: boolean Parent: ListVersionsResult</p>
Version	<p>Container of version information</p> <p>Type: container Parent: ListVersionsResult</p>
DeleteMarker	<p>Container for objects with delete markers</p> <p>Type: container Parent: ListVersionsResult</p>
Key	<p>Object name</p> <p>Type: string Parent: ListVersionsResult.Version ListVersionsResult.DeleteMarker</p>

Element	Description
VersionId	Object version ID Type: string Parent: ListVersionsResult.Version ListVersionsResult.DeleteMarker
IsLatest	Whether the object is the latest version. If the parameter value is true , the object is the latest version. Type: boolean Parent: ListVersionsResult.Version ListVersionsResult.DeleteMarker
LastModified	Time (UTC) when an object was last modified Type: date Parent: ListVersionsResult.Version ListVersionsResult.DeleteMarker
ETag	Base64-encoded 128-bit MD5 digest of an object. ETag is the unique identifier of the object content. It can be used to determine whether the object content is changed. The actual ETag is the hash value of the object. For example, if the ETag value is A when an object is uploaded, but this value has changed to B when the object is downloaded, it indicates that the object content has been changed. The ETag reflects changes to the object content, rather than the object metadata. An uploaded object or copied object has a unique ETag after being encrypted using MD5. Type: string Parent: ListVersionsResult.Version
Type	Object type. This parameter is returned when the object type is not Normal . Type: string Parent: ListVersionsResult.Version
Size	Object size in bytes Type: string Parent: ListVersionsResult.Version

Element	Description
Owner	User information, including the domain ID and name of the object owner Type: container Parent: ListVersionsResult.Version ListVersionsResult.DeleteMarker
ID	Domain ID of the object owner Type: string Parent: ListVersionsResult.Version.Owner ListVersionsResult.DeleteMarker.Owner
DisplayName	Name of the object owner Type: string Parent: ListVersionsResult.Version.Owner ListVersionsResult.DeleteMarker.Owner
StorageClass	Storage class of an object Type: string Value options: STANDARD, WARM, COLD Parent: ListVersionsResult.Version
CommonPrefixes	Group information. If you specify a delimiter in the request, the response contains group information in CommonPrefixes . Type: container Parent: ListVersionsResult
Prefix	Indicates a different prefix in the group information in CommonPrefixes . Type: string Parent: ListVersionsResult.CommonPrefixes

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Listing All Objects

```
GET / HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
```

```
Accept: /*/*
Date: WED, 01 Jul 2015 02:28:25 GMT
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:Kiyoyze4pmRNPYfmlXBfRTVxt8c=
```

Sample Response: Listing All Objects

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435D34E379ABD93320CB9
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSXIN7GPL/yXM6OSBaYCUV1zcY5OelWp
Content-Type: application/xml
Date: WED, 01 Jul 2015 02:23:30 GMT
Content-Length: 586

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListBucketResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Name>examplebucket</Name>
  <Prefix/>
  <Marker/>
  <MaxKeys>1000</MaxKeys>
  <IsTruncated>false</IsTruncated>
  <Contents>
    <Key>object001</Key>
    <LastModified>2015-07-01T00:32:16.482Z</LastModified>
    <ETag>"2fa3bcaaec668adc5da177e67a122d7c"</ETag>
    <Size>12041</Size>
    <Owner>
      <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
      <DisplayName>ObjectOwnerName</DisplayName>
    </Owner>
    <StorageClass>STANDARD</StorageClass>
  </Contents>
</ListBucketResult>
```

Sample Request: Listing Some Objects

Assume that you have a bucket **examplebucket** that contains objects **newfile**, **obj001**, **obj002**, and **obs001**. If you want to list only object **obj002**, the request message is as follows:

```
GET /?marker=obj001&prefix=obj HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: /*/*
Date: WED, 01 Jul 2015 02:28:25 GMT
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:Kiyoyze4pmRNPYfmlXBfRTVxt8c=
```

Sample Response: Listing Some Objects

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435D758FBA857E0801874
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSXn/xAyk/xHBX6qgGSB36WXRbco0X80
Content-Type: application/xml
Date: WED, 01 Jul 2015 02:29:48 GMT
Content-Length: 707

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListBucketResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Name>examplebucket</Name>
  <Prefix>obj</Prefix>
  <Marker>obj001</Marker>
  <MaxKeys>1000</MaxKeys>
  <IsTruncated>false</IsTruncated>
  <Contents>
    <Key>obj002</Key>
    <LastModified>2015-07-01T02:11:19.775Z</LastModified>
```

```
<ETag>"a72e382246ac83e86bd203389849e71d"</ETag>
<Size>9</Size>
<Owner>
  <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
  <DisplayName>ObjectOwnerName</DisplayName>
</Owner>
<StorageClass>STANDARD</StorageClass>
</Contents>
</ListBucketResult>
```

Sample Request: Listing Some Objects

Assume that bucket **examplebucket** contains three objects: **abcd**, **abcde**, and **bbcde**. Set the prefix and the delimiter to **a** and **d** respectively to define a CommonPrefixes of **abcd**. The specific request format is as follows:

```
GET /?prefix=a&delimiter=d HTTP/1.1
Authorization: OBS H4IPJX0TQTHTEBQQCEC:iqSPeUBL66PwXDApxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml;charset=UTF-8
```

Sample Response: Listing Some Objects

```
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSsokG49mPTa0cU5U/4gjFYLmYPgfYs/
x-obs-request-id: 0000018A2A563686D2C61543407D6ABF
Server: OBS
x-obs-bucket-location: region
Content-Length: 333
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListBucketResult xmlns="http://obs.myhwclouds.com/doc/2015-06-30/">
  <Name>examplebucket</Name>
  <Prefix>a</Prefix>
  <Marker>
</Marker>
  <MaxKeys>1000</MaxKeys>
  <Delimiter>d</Delimiter>
  <IsTruncated>>false</IsTruncated>
  <CommonPrefixes>
    <Prefix>abcd</Prefix>
  </CommonPrefixes>
</ListBucketResult>
```

Sample Request: Listing Object Versions

```
GET /?versions HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:29:45 GMT
Authorization: OBS H4IPJX0TQTHTEBQQCEC:iZeDESIMxBK2YODk7vleVpyO8DI=
```

Sample Response: Listing Object Versions

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435D758FBA857E0801874
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSshn/xAyk/xHBX6qqGSB36Wxrbco0X80
Content-Type: application/xml
Date: WED, 01 Jul 2015 02:29:48 GMT
Content-Length: 707
```



```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListVersionsResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Name>bucket02</Name>
  <Prefix/>
  <KeyMarker/>
  <VersionIdMarker/>
  <MaxKeys>1000</MaxKeys>
  <IsTruncated>>false</IsTruncated>
  <Version>
    <Key>object001</Key>
    <VersionId>00011000000000013F16000001643A22E476FFF9046024ECA3655445346485a</VersionId>
    <IsLatest>>true</IsLatest>
    <LastModified>2015-07-01T00:32:16.482Z</LastModified>
    <ETag>"2fa3bcaaec668adc5da177e67a122d7c"</ETag>
    <Size>12041</Size>
    <Owner>
      <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
      <DisplayName>ObjectOwnerName</DisplayName>
    </Owner>
    <StorageClass>STANDARD</StorageClass>
  </Version>
</ListVersionsResult>
```

Sample Request: Listing Objects (Including Archive Objects) in a Bucket

```
GET / HTTP/1.1
Authorization: OBS H4lPJX0TQTHHEBQQCEC:iqSPeUBl66PwXDApxjRk6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml;charset=UTF-8
```

Sample Response: Listing Objects (Including Archive Objects) in a Bucket

```
HTTP/1.1 200 OK
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSWqA48YKdA2aExVAgcpwubHQO5wd9ww
x-obs-request-id: 0000018A2A5FE372D308213442F9065F
Server: OBS
x-obs-bucket-location: region
Content-Length: 497
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListBucketResult xmlns="http://obs.myhwclouds.com/doc/2015-06-30/">
  <Name>examplebucket</Name>
  <Prefix/>
  <Marker/>
  </Marker>
  <MaxKeys>1000</MaxKeys>
  <IsTruncated>>false</IsTruncated>
  <Contents>
    <Key>abcd.txt</Key>
    <LastModified>2014-08-25T01:47:00.838Z</LastModified>
    <ETag>"d41d8cd98f00b204e9800998ecf8427e"</ETag>
    <Size>0</Size>
    <Owner>
      <ID>d029cb567d464a93pdl9v800575ee4cf</ID>
    </Owner>
    <StorageClass>COLD</StorageClass>
  </Contents>
</ListBucketResult>
```

5.1.4 Obtaining Bucket Metadata

Functions

This operation queries the metadata of a bucket. To use this operation, you must have the permission to read the bucket.

Request Syntax

```
HEAD / HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

[Table 5-8](#) lists the header fields required when obtaining CORS configuration information.

Table 5-8 Request headers for obtaining CORS configuration

Header	Description	Mandatory
Origin	Origin of the cross-domain request specified by the pre-request. Generally, it is a domain name. Type: string	Yes
Access-Control-Request-Headers	HTTP headers of a request. The request can use multiple HTTP headers. Type: string	No

Request Elements

This request contains no elements.

Response Syntax

```
HTTP/1.1 status_code
x-obs-bucket-location: region
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the headers listed in [Table 5-9](#) may be used.

Table 5-9 Additional response headers

Header	Description
x-obs-bucket-location	The region where the bucket resides. Type: string
x-obs-storage-class	Default storage class of the bucket. The options are as follows: STANDARD (Standard), WARM (Infrequent Access), COLD (Archive), DEEP_ARCHIVE (Deep Archive). Type: string
x-obs-version	OBS version of the bucket. Type: string
x-obs-fs-file-interface	Indicates whether the bucket is a parallel file system. The value can be Enabled (parallel file system). If this header field is not carried, the bucket is not a parallel file system. Type: string
x-obs-epid	Enterprise project ID of the current bucket. Type: string
x-obs-az-redundancy	Data redundancy policy of a bucket, which determines whether data is stored in a single AZ or multiple AZs. Value 3az indicates that data is stored in multiple AZs in the same region. If this header field is not carried, data is stored in a single AZ. Type: string
Access-Control-Allow-Origin	Indicates that the origin is included in the response if the origin in the request meets the CORS configuration requirements when CORS is configured for buckets. Type: string
Access-Control-Allow-Headers	Indicates that the headers are included in the response if headers in the request meet the CORS configuration requirements when CORS is configured for buckets. Type: string

Header	Description
Access-Control-Max-Age	Value of MaxAgeSeconds in the CORS configuration of the server when CORS is configured for buckets. Type: integer
Access-Control-Allow-Methods	Indicates that methods in the rule are included in the response if Access-Control-Request-Method in the request meets the CORS configuration requirements when CORS is configured for buckets. Type: string Value options: GET, PUT, HEAD, POST, DELETE
Access-Control-Expose-Headers	Value of ExposeHeader in the CORS configuration of a server when CORS is configured for buckets. Type: string

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Getting CORS Configuration (with No Headers Specified)

```
HEAD / HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:30:25 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:niCQCuGiZpETKlyx1datxHZyYlk=
```

Sample Response: Getting CORS Configuration (with No Headers Specified)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016439C734E0788404623FA8
Content-Type: application/xml
x-obs-storage-class: STANDARD
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSxwLpq9Hzf3OnaXr+pl/OPLKdrtiQAF
Date: WED, 01 Jul 2015 02:30:25 GMT
x-obs-bucket-location: region
x-obs-version: 3.0
Content-Length: 0
```

Sample Request: Getting Bucket Metadata and CORS Configuration

```
HEAD / HTTP/1.1
User-Agent: curl/7.29.0
```

```
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:30:25 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:niCQCuGIZpETKlyx1datxHZyYlk=
Origin:www.example.com
Access-Control-Request-Headers:AllowedHeader_1
```

Sample Response: Getting Bucket Metadata and CORS Configuration

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016439C734E0788404623FA8
Content-Type: application/xml
x-obs-storage-class: STANDARD
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSxwLpq9Hzf3OnaXr+pl/OPLKdrtiQAF
Date: WED, 01 Jul 2015 02:30:25 GMT
x-obs-bucket-location: region
Access-Control-Allow-Origin: www.example.com
Access-Control-Allow-Methods: POST,GET,HEAD,PUT
Access-Control-Allow-Headers: AllowedHeader_1
Access-Control-Max-Age: 100
Access-Control-Expose-Headers: ExposeHeader_1
x-obs-version: 3.0
Content-Length: 0
```

5.1.5 Obtaining Bucket Location

Functions

This operation obtains the location of a bucket. To use this operation, you must have the permission to read the bucket.

Request Syntax

```
GET /?location HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request contains no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: type
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Location xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">region</Location>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements of information about a bucket's region. [Table 5-10](#) describes the elements.

Table 5-10 Response elements

Element	Description
Location	Indicates the region where the bucket resides. Type: string

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?location HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:30:25 GMT
Authorization: OBS H4IPJX0TQTHHEBQQCEC:1DrmbCV+lh3zV7uywlj7lrh0MY=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435D9F27CB2758E9B41A5
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSKWojmaMyRXqofHgapbETDyI2LM9rUw
Content-Type: application/xml
Date: WED, 01 Jul 2015 02:30:25 GMT
Content-Length: 128

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Location xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">region</Location>
```

5.1.6 Deleting Buckets

Functions

This operation deletes specified buckets. This operation can be performed only by the bucket owner and users who have been authorized (via a policy) with the permission to delete the bucket. The bucket to be deleted must be an empty bucket. If a bucket has an object or a multipart task, the bucket is not empty. You can list objects and multipart upload tasks in a bucket to check whether the bucket is empty.

Note:

If the server returns a **5XX** error or times out when a bucket is being deleted, the system needs to synchronize the bucket information. During this period, the bucket information may be inaccurate. Therefore, wait a while and then check whether the bucket is successfully deleted. If the bucket can still be queried, send the deletion request again.

Request Syntax

```
DELETE / HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Date: date  
Authorization: authorization
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common request headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE / HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: */*  
Date: WED, 01 Jul 2015 02:31:25 GMT  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:jZiAT8Vx4azWEvPRMWi0X5BpJMA=
```

Sample Response

```
HTTP/1.1 204 No Content  
Server: OBS  
x-obs-request-id: BF260000016435DE6D67C35F9B969C47
```

```
x-obs-id-2: 32AAAQAAEAABKAAQAAEAABAAAQAAEAABCTukraCnXLsb7lEw4ZKjzDWWhzXdgme3  
Date: WED, 01 Jul 2015 02:31:25 GMT
```

Sample Request: Deleting a Bucket That Does Not Exist

```
DELETE / HTTP/1.1  
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:iqSPeUBL66PwXDAPxjRkK6hlcN4=User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Date: WED, 01 Jul 2015 02:37:22 GMT  
Content-Type: application/xml;charset=UTF-8
```

Sample Response: Deleting a Bucket That Does Not Exist

```
x-obs-id-2: "32AAAQAAEAABAAAQAAEAABAAAQAAEAABCTBZPaontVN8iyR2NNEeTPRDdcmPVNFm  
x-obs-request-id: "0000018A4E4567BD47CF110EE1B2A4DF  
Server: OBS  
Content-Length: 314  
Date: WED, 01 Jul 2015 02:37:22 GMT  
Content-Type: application/xml
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<Error>  
  <Code>NoSuchBucket</Code>  
  <Message>The specified bucket does not exist</Message>  
  <RequestId>0000018A4E4567BD47CF110EE1B2A4DF</RequestId>  
  <HostId>DRmhM6VfpWGBYYGrx6tpvbs8yoGi+uvlu5/20rpZ/Y2kTuq9mRuCXeA84734xs0+</HostId>  
  <BucketName>examplebucket</BucketName>  
</Error>
```

Sample Request: Deleting a Non-Empty Bucket

```
DELETE / HTTP/1.1  
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:iqSPeUBL66PwXDAPxjRkK6hlcN4=User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Date: WED, 01 Jul 2015 02:37:22 GMT  
Content-Type: application/xml;charset=UTF-8
```

Sample Response: Deleting a Non-Empty Bucket

```
x-obs-id-2: "32AAAQAAEAABAAAQAAEAABAAAQAAEAABCTBZPaontVN8iyR2NNEeTPRDdcmPVNFm  
x-obs-request-id: "0000018A4E4567BD47CF110EE1B2A4DF  
Server: OBS  
Content-Length: 314  
Date: WED, 01 Jul 2015 02:37:22 GMT  
Content-Type: application/xml
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<Error>  
  <Code>BucketNotEmpty</Code>  
  <Message>The bucket you tried to delete is not empty</Message>  
  <RequestId>0000018A4E4D04BBD304AD8E409873EC</RequestId>  
  <HostId>hME9234LDBKRFuubDsmyUiP5Oq71oYo1vEL348QzfXHUoGs1RU1TgrOMUKTEMtA</HostId>  
  <BucketName>examplebucket</BucketName>  
</Error>
```

5.2 Advanced Bucket Settings

5.2.1 Configuring a Bucket Policy

Functions

This operation creates or modifies policies for buckets. If the specified bucket already has a policy, the policy in the request will overwrite the existing one. There

is no limit on the number of bucket policies (statements) for a bucket. However, the total size of JSON descriptions of all bucket policies in a bucket cannot exceed 20 KB.

To perform this operation, the user must be the bucket owner or the bucket owner's IAM user that has permissions required for configuring bucket policies.

For details about how to use bucket policies to manage permissions, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax

```
PUT /?policy HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: signatureValue
Policy written in JSON
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

The request body is a JSON string that contains the bucket policy information. For details, see [Bucket Policy Parameters](#).

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details, see [Table 6-2](#).

Sample Request 1

Grant permissions to an OBS tenant.

Grant permissions to the tenant whose ID is **783fc6652cf246c096ea836694f71855**.

For details about how to obtain the tenant ID, see [Obtaining Account, IAM User, Project, User Group, Region, and Agency Information](#).

```
PUT /?policy HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:32:25 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:jZiAT8Vx4azWEvPRMWi0X5BpJMA=

{
  "Statement": [
    {
      "Sid": "Stmt1375240018061",
      "Action": [
        "GetBucketLogging"
      ],
      "Effect": "Allow",
      "Resource": "logging.bucket",
      "Principal": {
        "ID": [
          "domain/783fc6652cf246c096ea836694f71855:user/*"
        ]
      }
    }
  ]
}
```

Sample Response 1

```
HTTP/1.1 204 No Content
x-obs-request-id: 7B6DFC9BC71DD58B061285551605709
x-obs-id-2: NOI2REZDOUJDNzFERDU4QjA2MTI4NTU1MTYwNTcwOUFBQUFBQUFBYmJiYmJiYmJD
Date: WED, 01 Jul 2015 02:32:25 GMT
Content-Length: 0
Server: OBS
```

Sample Request 2

Grant permissions to an OBS user.

The user ID is **71f3901173514e6988115ea2c26d1999**, and the account ID is **783fc6652cf246c096ea836694f71855**.

For details about how to obtain the account ID and user ID, see [Obtaining Account, IAM User, Project, User Group, Region, and Agency Information](#).

```
PUT /?policy HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:33:28 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:jZiAT8Vx4azWEvPRMWi0X5BpJMA=

{
  "Statement": [
    {
      "Sid": "Stmt1375240018062",
      "Action": [
        "PutBucketLogging"
      ],
      "Effect": "Allow",
      "Resource": "examplebucket",
      "Principal": {
        "ID": [
          "domain/783fc6652cf246c096ea836694f71855:user/71f3901173514e6988115ea2c26d1999"
        ]
      }
    }
  ]
}
```

Sample Response 2

```
HTTP/1.1 204 No Content
x-obs-request-id: 7B6DFC9BC71DD58B061285551605709
x-obs-id-2: N0I2REZDOUJDnZFERDU4QjA2MTI4NTU1MTYwNTcwOUFBQUBQUBFYmJiYmJiYmJD
Date: WED, 01 Jul 2015 02:33:28 GMT
Content-Length: 0
Server: OBS
```

Sample Request 3

Deny all users except the specified one all the operation permissions.

The user ID is **71f3901173514e6988115ea2c26d1999**, and the account ID is **783fc6652cf246c096ea836694f71855**.

For details about how to obtain the account ID and user ID, see [Obtaining Account, IAM User, Project, User Group, Region, and Agency Information](#).

```
PUT /?policy HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:34:34 GMT
Authorization: OBS H4lPJX0TQTHHEBQQCEC:jZiAT8Vx4azWEvPRMWi0X5BpJMA=

{
  "Statement": [
    {
      "Effect": "Deny",
      "Action": ["*"],
      "Resource": [
        "examplebucket/*",
        "examplebucket"
      ],
      "NotPrincipal": {
        "ID": [
          "domain/783fc6652cf246c096ea836694f71855:user/71f3901173514e6988115ea2c26d1999",
          "domain/783fc6652cf246c096ea836694f71855"
        ]
      }
    }
  ]
}
```

Sample Response 3

```
HTTP/1.1 204 No Content
x-obs-request-id: A603000001604A7DFE4A4AF31E301891
x-obs-id-2: BK0vGmTlt6sda5X4G89PuMO4fabObGYmnpRGkaMba1LqPt0fCACEuCMIIAObRK1n
Date: WED, 01 Jul 2015 02:34:34 GMT
Content-Length: 0
Server: OBS
```

Sample Request 4

Request to allow only the specified domain name and external link requests that have no referer headers by using the URL validation whitelist.

URL validation whitelist: <http://console.huaweicloud.com>

```
PUT /?policy HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:34:34 GMT
Authorization: OBS H4lPJX0TQTHHEBQQCEC:jZiAT8Vx4azWEvPRMWi0X5BpJMA=

{
  "Statement": [{
```

```
"Effect": "Deny",
"Action": [
  "GetObject",
  "GetObjectVersion"
],
"Principal": {
  "ID": ["*"]
},
"Resource": ["examplebucket/*"],
"Condition": {
  "StringNotLike": {
    "Referer": [
      "http://console.huaweicloud.com*",
      "${null}"
    ]
  }
}
}]
}
```

Sample Response 4

```
HTTP/1.1 204 No Content
x-obs-request-id: A603000001604A7DFE4A4AF31E301891
x-obs-id-2: BKOVGmTlt6sda5X4G89PuMO4fabObGYmnpRGkaMba1LqPt0fCACEuCMllAObRK1n
Date: WED, 01 Jul 2015 02:34:34 GMT
Content-Length: 0
Server: OBS
```

5.2.2 Obtaining Bucket Policy Information

Functions

This operation uses the sub-resources of policy to return the policy information of a specified bucket.

To perform this operation, the user must be the bucket owner or the bucket owner's IAM user that has permissions required for obtaining bucket policies.

This operation cannot be performed in the following scenarios, and the 404 error code "NoSuchBucketPolicy" is returned:

- The specified bucket policy does not exist.
- The standard bucket policy is set to **Private** and no custom bucket policy is configured.

Request Syntax

```
GET /?policy HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Content-Type: application/xml  
Date: date  
Policy Content
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

The response body is a JSON string that contains the bucket policy information. For details, see [Bucket Policy Parameters](#).

Error Responses

No special error responses are returned. For details, see [Table 6-2](#).

Sample Request

```
GET /?policy HTTP/1.1  
Host: examplebucket.obs.region.myhuaweicloud.com  
Date: WED, 01 Jul 2015 02:35:46 GMT  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:jZiAT8Vx4azWEvPRMWi0X5BpJMA=
```

Sample Response

```
HTTP/1.1 200 OK  
x-obs-request-id: A603000001604A7DFE4A4AF31E301891  
x-obs-id-2: BKOVGmTlt6sda5X4G89PuMO4fabObGYmnpRGkaMba1LqPt0fCACEuCMIIAObRK1n  
Date: WED, 01 Jul 2015 02:35:46 GMT  
Content-Length: 509  
Server: OBS  
  
{  
  "Statement": [  
    {  
      "Sid": "Stmt1375240018061",  
      "Effect": "Allow",  
      "Principal": {  
        "ID": [  
          "domain/domainiddomainiddomainiddo006666:user/useriduseriduseridus004001",  
          "domain/domainiddomainiddomainiddo006667:user/*"  
        ]  
      },  
      "Action": [  
        "*" ]  
      "Resource": [  
        "examplebucket"  
      ]  
    }  
  ]  
}
```

5.2.3 Deleting a Bucket Policy

Functions

This operation uses the policy sub-resources to delete the policy of a specified bucket.

To perform this operation, the user must be the bucket owner or the bucket owner's IAM user that has permissions required for deleting bucket policies.

The 204 error code "No Content" is returned regardless of whether a requested bucket policy exists or not.

Request Syntax

```
DELETE /?policy HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: text/xml
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details, see [Table 6-2](#).

Sample Request

```
DELETE /?policy HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:36:06 GMT
Authorization: OBS H4lPJX0TQTHHEBQQCEC;jZiAT8Vx4azWEvPRMWi0X5BpJMA=
```

Sample Response

```
HTTP/1.1 204 No Content
x-obs-request-id: 9006000001643AAAF70BF6152D71BE8A
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCSB4oWmNX3gVGGLr1cRPWjOhffEbq1XV
Date: WED, 01 Jul 2015 02:36:06 GMT
Server: OBS
```

5.2.4 Configuring a Bucket ACL

Functions

This operation controls access permissions for buckets. By default, only the creator of a bucket has the permission to read and write the bucket. You can also set other access permissions. For example, you can set a public read policy to grant the read permission to all users.

You can configure an ACL when creating a bucket, and modify or obtain the ACLs of existing buckets using the API operations. A bucket ACL supports a maximum of 100 grants. The PUT method is idempotent. With this method, a new bucket ACL will overwrite the previous bucket ACL. To modify or delete an ACL, you just need to create a new one using the PUT method.

For details about how to use bucket ACLs to manage permissions, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax

```
PUT /?acl HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
Content-Type: application/xml
Content-Length: length

<AccessControlPolicy>
  <Owner>
    <ID>ID</ID>
  </Owner>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>domainId</ID>
      </Grantee>
      <Permission>permission</Permission>
      <Delivered>>false</Delivered>
    </Grant>
  </AccessControlList>
</AccessControlPolicy>
```

Request Parameters

This request contains no parameters.

Request Headers

You can change the ACL of a bucket by using the header settings. Each ACL configured with the header setting has a set of predefined grantees and authorized permissions. If you want to authorize access permissions by adding the header to a request, you must add the following header and specify the value.

Table 5-11 Optional header for specifying canned ACLs

Name	Description	Mandatory
x-obs-acl	Uses the canned ACL for a bucket. Value options: private , public-read , public-read-write , public-read-delivered , public-read-write-delivered Type: string	No

Request Elements

This request carries ACL information in elements to specify an ACL. [Table 3-3](#) describes the elements.

Table 5-12 Additional request elements

Element	Description	Mandatory
Owner	Bucket owner information, including the ID Type: XML	Yes
ID	Account ID of the authorized user Type: string	Yes
Grant	Container for the grantee and the granted permissions A single bucket ACL can contain no more than 100 grants. Type: XML	No
Grantee	Grantee information Type: XML	No
Canned	Grants permissions to all users. Value range: Everyone Type: string	No
Delivered	Indicates whether the bucket ACL is applied to all objects in the bucket. Type: boolean Default value: false	No

Element	Description	Mandatory
Permission	Permissions to be granted. For details, see access permissions controlled by a bucket ACL . Value options: READ , READ_ACP , WRITE , WRITE_ACP , FULL_CONTROL Type: string	No
AccessControllist	Indicates an ACL, which consists of three elements: Grant , Grantee , and Permission . Type: XML	Yes

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?acl HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:37:22 GMT
Authorization: OBS H4IPJX0TQTHTEBQQCEC:iqSPeUBl66PwXDAPxjRk6hlcN4=
Content-Length: 727

<AccessControlPolicy xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
  </Owner>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
      </Grantee>
      <Permission>FULL_CONTROL</Permission>
    </Grant>
  </AccessControlList>
</AccessControlPolicy>
```

```
<Grantee>
  <ID>783fc6652cf246c096ea836694f71855</ID>
</Grantee>
<Permission>READ</Permission>
<Delivered>>false</Delivered>
</Grant>
<Grant>
  <Grantee>
    <Canned>Everyone</Canned>
  </Grantee>
  <Permission>READ_ACP</Permission>
</Grant>
</AccessControlList>
</AccessControlPolicy>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF2600000164361F2954B4D063164704
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCT78HTIBuhe0FbtSptrb/akwELtwyPKs
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Length: 0
```

Sample Request: Specifying Access Permissions Using Headers

```
PUT /?acl HTTP/1.1
Authorization: OBS H4IPJX0TQTHTEBQQCEC:iqSPeUBl66PwXDAPxjRk6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
x-obs-acl: private
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
```

Sample Response: Specifying Access Permissions Using Headers

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSmpL2dv6zZLM2HmUrXKTAi258MPqmrp
x-obs-request-id: 0000018A2A73AF59D3085C8F8ABF0C65
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

5.2.5 Obtaining Bucket ACL Information

Functions

This operation returns the ACL information of a bucket. To obtain the ACL of a bucket, you need to have the **READ_ACP** or **FULL_CONTROL** permission for the bucket.

Request Syntax

```
GET /?acl HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<AccessControlPolicy xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>id</ID>
  </Owner>
  <AccessControllist>
    <Grant>
      <Grantee>
        <ID>id</ID>
      </Grantee>
      <Permission>permission</Permission>
      <Delivered>>false</Delivered>
    </Grant>
  </AccessControllist>
</AccessControlPolicy>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response returns information (in the form of elements) about the bucket ACL. [Table 5-13](#) describes the elements.

Table 5-13 Response elements

Element	Description
Owner	Bucket owner Type: XML
ID	Account ID Type: string
AccessControllist	Indicates the ACL that records all users who have permissions to access the bucket and the permissions granted to the users. Type: XML

Element	Description
Grant	Container for the grantee and the granted permissions Type: XML
Grantee	Grantee information Type: XML
Canned	Grants permissions to all users. Type: string. The value can only be Everyone .
Delivered	Indicates whether the bucket ACL is applied to objects in the bucket. Type: boolean
Permission	Grantee's permission for a bucket Type: string

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?acl HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:39:28 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:X7HtzGsIEkzJbd8vo1DRu30Vrs=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016436B69D82F14E93528658
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSjTh8661+HF5y8uAnTOBipNO133hji+
Content-Type: application/xml
Date: WED, 01 Jul 2015 02:39:28 GMT
Content-Length: 784

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<AccessControlPolicy xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
  </Owner>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
      </Grantee>
      <Permission>FULL_CONTROL</Permission>
    </Grant>
    <Grant>
      <Grantee>
```

```
<ID>783fc6652cf246c096ea836694f71855</ID>
</Grantee>
<Permission>READ</Permission>
<Delivered>>false</Delivered>
</Grant>
<Grant>
  <Grantee>
    <Canned>Everyone</Canned>
  </Grantee>
  <Permission>READ_ACP</Permission>
</Grant>
</AccessControlList>
</AccessControlPolicy>
```

5.2.6 Configuring Logging for a Bucket

Functions

When a bucket is created, the logging function is not enabled by default. To generate logs recording operations on buckets, you need to enable the logging function for the bucket. After the logging function is enabled, a log is generated for each operation on a bucket and multiple logs are packed into a log file. When enabling the logging function, you need to specify a location where log files are stored. They can be stored in the bucket for which the logging is enabled, or in other buckets that you have the required permissions. However, the bucket where log files are stored and the bucket for which the logging is enabled must be in the same region.

Log files are generated by OBS and uploaded to the bucket where logs are stored. Therefore, OBS needs to be authorized to upload generated log files. Before configuring the logging function, you need to create an agency for OBS in IAM, the agency name is configured as a parameter of the bucket, and the logging function must be configured under the **LoggingEnabled** tag in the XML file. You only need to authorize the agency with the upload permissions for the target bucket.

Example of agency permissions

```
{
  "Version": "1.1",
  "Statement": [
    {
      "Action": [
        "obs:object:PutObject"
      ],
      "Resource": [
        "OBS-*:object:mybucketlogs/*"
      ],
      "Effect": "Allow"
    }
  ]
}
```

To disable the bucket logging function, upload a logging file with an empty **BucketLoggingStatus** tag.

Buckets in the Infrequent Access and Archive storage classes cannot be used to store log files. Stored log files occupy storage space in a bucket. Therefore, users are charged for the logging service based on the pricing for data storage.

 **CAUTION**

If the target bucket has KMS encryption enabled, grant the agency access to KMS.

Request Syntax

```
PUT /?logging HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: signatureValue
<?xml version="1.0" encoding="UTF-8"?>
<BucketLoggingStatus>
  <Agency>agency-name</Agency>
  <LoggingEnabled>
    <TargetBucket>mybucketlogs</TargetBucket>
    <TargetPrefix>mybucket-access_log-/</TargetPrefix>
    <TargetGrants>
      <Grant>
        <Grantee>
          <ID>domainID</ID>
        </Grantee>
        <Permission>READ</Permission>
      </Grant>
    </TargetGrants>
  </LoggingEnabled>
</BucketLoggingStatus>
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

Table 5-14 Request elements

Element	Description	Mandatory
BucketLoggingStatus	Container for logging status information Type: container	Yes
Agency	Name of the IAM agency created by the owner of the target bucket on IAM. Type: string	Yes only when you need to enable the logging function

Element	Description	Mandatory
LoggingEnabled	Container for logging information. Present this element when enabling the logging function. Otherwise, absent it. You can add specific logging information in this element. Type: container	Yes only when you need to enable the logging function
Grant	Container for the grantee and the grantee's logging permissions. It describes who has the permission to access the generated log files. Type: container	No
Grantee	Container for the user that is granted with the logging permission. Type: container	No
ID	Account ID of the authorized user, which is globally unique. Type: string	No
Permission	Permissions of the grantee to the generated logs. Type: string Value options: FULL_CONTROL, READ, WRITE	No

Element	Description	Mandatory
TargetBucket	When enabling the logging function, the owner of the bucket being logged can specify a target bucket to store the generated log files. Ensure that the bucket owner who configures the logging function has the FULL_CONTROL permission for the bucket that stores log files. Log files generated for multiple buckets can be stored in the same target bucket. If you do so, you need to specify different TargetPrefixes to classify logs for different buckets. Type: string	Yes only when you need to enable the logging function
TargetPrefix	You can specify a prefix using this element so that log files are named with this prefix. Type: string	Yes only when you need to enable the logging function
TargetGrants	Container for granting information. Type: container	No

Naming rules for access logs

<TargetPrefix>YYYY-mm-DD-HH-MM-SS-<UniqueString>

- <TargetPrefix> is the log name prefix specified by the user.
- YYYY-mm-DD-HH-MM-SS indicates the date and time when the log is generated.
- <UniqueString> indicates a character string generated by OBS.

The following is an example of a log file name:

bucket-log2015-06-29-12-22-07-N7MXLAF1BDG7MPDV

- **bucket-log** is the target prefix specified by the user.
- **2015-06-29-12-22-07** indicates the time when the log is generated.
- **N7MXLAF1BDG7MPDV** is a string automatically generated by OBS

Format of bucket access logs

The following shows an access log delivered to the target bucket:

```
787f2f92b20943998a4fe2ab75eb09b8 bucket [13/Aug/2015:01:43:42 +0000] xx.xx.xx.xx
787f2f92b20943998a4fe2ab75eb09b8 281599BACAD9376ECE141B842B94535B
REST.GET.BUCKET.LOCATION - "GET /bucket?location HTTP/1.1" 200 - 211 - 6 6 "-" "HttpClient" - -
```

Each access log contains the following information:

Table 5-15 Format of bucket access logs

Parameter	Example	Description
BucketOwner	787f2f92b20943998a4fe2ab75eb09b8	ID of the bucket owner
Bucket	bucket	Bucket name
Time	[13/Aug/2015:14:43:42 +0000]	Request timestamp in the <i>[dd/MMM/yyyy:HH:mm:ss Z]</i> format
Remote IP	xx.xx.xx.xx	Request IP address
Requester	787f2f92b20943998a4fe2ab75eb09b8	ID of the requester <ul style="list-style-type: none"> When an account initiates a request, this parameter value is the account ID. When an IAM user initiates a request, this parameter value is the ID of the account where the IAM user belongs. When an anonymous user initiates a request, this parameter value is Anonymous.
RequestID	281599BACAD9376ECE141B842B94535B	Request ID
Operation	REST.GET.BUCKET.LOCATION	Operation
Key	-	Object name
Request-URI	GET /bucket?location HTTP/1.1	Request URI
HTTPStatus	200	Response code
ErrorCode	-	Error code
BytesSent	211	Size of the HTTP response, expressed in bytes

Parameter	Example	Description
ObjectSize	-	Object size
TotalTime	6	Processing time on the server Unit: ms
Turn-AroundTime	6	Total request processing time Unit: ms
Referer	-	Referer header of the request
User-Agent	HttpClient	User-Agent header of the request
VersionID	-	Version ID contained in a request
STSLogUrn	-	Federated authentication and agency information
StorageClass	STANDARD_IA	Current object storage class
TargetStorageClass	GLACIER	Storage class that the object will be transitioned to
DentryName	12456%2Ffile.txt	<ul style="list-style-type: none">For a parallel file system, this field represents an internal identifier of a file or directory. Its value consists of a parent directory's inode number and a file or directory name and is displayed in the URL-encoded format.For a bucket, the value of this field is -.

Response Syntax

HTTP/1.1 *status_code*
Date: *date*
Content-Length: *length*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?logging HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:40:06 GMT
Authorization: OBS H4IPJX0TQTHHEBQQCEC:mCOjER/L4ZZUY9qr6AOnkEiwVk=
Content-Length: 528

<?xml version="1.0" encoding="UTF-8"?>
<BucketLoggingStatus>
  <Agency>agencyGrantPutLogging</Agency>
  <LoggingEnabled>
    <TargetBucket>log-bucket</TargetBucket>
    <TargetPrefix>mybucket-access_log-/</TargetPrefix>
    <TargetGrants>
      <Grant>
        <Grantee>
          <ID>783fc6652cf246c096ea836694f71855</ID>
        </Grantee>
        <Permission>READ</Permission>
      </Grant>
    </TargetGrants>
  </LoggingEnabled>
</BucketLoggingStatus>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF26000001643663CE53B6AF31C619FD
x-obs-id-2: 32AAAQAAEAABSAAkpAIAABAAAQAAEAABCT9CjuOx8cETSRbqkm35s1dL/tLhRNdZ
Date: WED, 01 Jul 2015 02:40:06 GMT
Content-Length: 0
```

Sample Request: Disabling Bucket Log Dump

```
PUT /?logging HTTP/1.1
Authorization: OBS H4IPJX0TQTHHEBQQCEC:iqSPeUBl66PwXDAPxjRkK6hlcn4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<BucketLoggingStatus>
</BucketLoggingStatus>
```

Sample Response: Disabling Bucket Log Dump

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSalxuWjLa91ewuXRolcCKZFjFgCrYn0
x-obs-request-id: 0000018A2BC32FB6D2C62C9689DD14B3
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

5.2.7 Obtaining a Bucket Logging Configuration

Functions

This operation queries the logging status of a bucket. It uses the logging sub-resource to return the logging status of a bucket.

Only the bucket owner or users granted the **GetBucketLogging** permission can query the bucket logging status.

Request Syntax

```
GET /?logging HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Content-Type: application/xml
Date: date
Content-Length: length

<?xml version="1.0" encoding="UTF-8"?>
<BucketLoggingStatus xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Agency>agency-name</Agency>
  <LoggingEnabled>
    <TargetBucket>bucketName</TargetBucket>
    <TargetPrefix>prefix</TargetPrefix>
    <TargetGrants>
      <Grant>
        <Grantee>
          <ID>id</ID>
        </Grantee>
        <Permission>permission</Permission>
      </Grant>
    </TargetGrants>
  </LoggingEnabled>
</BucketLoggingStatus>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements to specify the bucket logging status. [Table 5-16](#) describes the elements.

Table 5-16 Response elements

Element	Description
BucketLoggingStatus	Container for logging status information Type: container
Agency	Name of the agency created by the owner of the logging bucket for uploading log files by OBS Type: string
LoggingEnabled	Container for logging information. This element enables or disables the logging function. Present this element when enabling the logging. Otherwise, absent it. Type: container
Grant	Container for the grantee and the granted permissions Type: container
Grantee	Container for the user that is granted with the logging permission Type: container
ID	Grantee domain ID, a globally unique ID Type: string
Permission	Logging permission granted to the grantee for a bucket. The bucket owner is automatically granted the FULL_CONTROL permission when creating the bucket. Logging permissions control access to different logs. Type: string Value options: FULL_CONTROL, READ, WRITE
TargetBucket	When enabling the logging function, the owner of the bucket being logged can specify a target bucket to store the generated log files. Log files generated for multiple buckets can be stored in the same target bucket. If you do so, you need to specify different TargetPrefixes to classify logs for different buckets. Type: string

Element	Description
TargetPrefix	You can specify a prefix using this element so that log files are named with this prefix. Type: string
TargetGrants	Container for granting information Type: container

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?logging HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:42:46 GMT
Authorization: OBS H4IPJX0TQTHTEBQQCEC:hUk+jTnR07hcKwJh4ousF2E1U3E=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016436B8EEE7FBA2AA3335E3
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCShuQJowFpS77C8bOv1mqURv0UY+0ejx
Content-Type: application/xml
Date: WED, 01 Jul 2015 02:42:46 GMT
Content-Length: 429

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<BucketLoggingStatus xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Agency>agency-name</Agency>
  <LoggingEnabled>
    <TargetBucket>log-bucket</TargetBucket>
    <TargetPrefix>mybucket-access_log-/</TargetPrefix>
    <TargetGrants>
      <Grant>
        <Grantee>
          <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
        </Grantee>
        <Permission>READ</Permission>
      </Grant>
    </TargetGrants>
  </LoggingEnabled>
</BucketLoggingStatus>
```

5.2.8 Configuring Bucket Lifecycle Rules

Functions

This operation configures lifecycle rules that can delete or migrate objects from a bucket at a specified time. Typical application scenarios:

- Delete periodically uploaded files. Some files uploaded periodically need only to be retained for only one week or one month.

- Delete files that are frequently accessed within a certain period of time but are seldom accessed afterward. You can archive these files and then schedule the time for deletion.
- The minimum time for the transition of the bucket storage to Infrequent Access or Archive can be configured. The value ranges from **24** to **8640**.

You can perform this operation to create or update the lifecycle configuration of a bucket.

NOTE

- Expired objects deleted based on a lifecycle rule cannot be recovered.
- Multi-AZ storage is not available to the Archive or Deep Archive storage class. For this reason, buckets or objects with multi-AZ redundancy cannot be transitioned to the Archive or Deep Archive storage class based on a lifecycle rule.

To perform this operation, you must have the **PutLifecycleConfiguration** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

The lifecycle configuration enables OBS to delete objects and transition object storage classes at a scheduled time. To prevent a user from doing so, the following permissions granted to the user must be revoked:

- DeleteObject
- DeleteObjectVersion
- PutLifecycleConfiguration

If you want to forbid a user to set the bucket lifecycle configuration, revoke the **PutLifecycleConfiguration** permission from the user.

Request Syntax

```
PUT /?lifecycle HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Content-Length: length
Date: date
Authorization: authorization
Content-SHA256: SHA256
<?xml version="1.0" encoding="UTF-8"?>
<LifecycleConfiguration>
  <Rule>
    <ID>id</ID>
    <Prefix>prefix</Prefix>
    <Status>status</Status>
    <Expiration>
      <Days>days</Days>
    </Expiration>
    <NoncurrentVersionExpiration>
      <NoncurrentDays>days</NoncurrentDays>
    </NoncurrentVersionExpiration>
    <Transition>
      <Days>30</Days>
      <StorageClass>WARM</StorageClass>
    </Transition>
    <Transition>
      <Days>60</Days>
      <StorageClass>COLD</StorageClass>
    </Transition>
    <NoncurrentVersionTransition>
      <NoncurrentDays>30</NoncurrentDays>
```

```
<StorageClass>WARM</StorageClass>
</NoncurrentVersionTransition>
<NoncurrentVersionTransition>
  <NoncurrentDays>60</NoncurrentDays>
  <StorageClass>COLD</StorageClass>
</NoncurrentVersionTransition>
<AbortIncompleteMultipartUpload>
  <DaysAfterInitiation>10</DaysAfterInitiation>
</AbortIncompleteMultipartUpload>
</Rule>
</LifecycleConfiguration>
```

Request Parameters

This request contains no parameters.

Request Headers

[Table 5-17](#) lists the request header.

Table 5-17 Request headers

Header	Description	Mandatory
Content-SHA256	Base64-encoded 256-bit SHA-256 digest of the message according to SHA. Type: string Example: ogX9qClMrVJUBiUSIKDFM0qO41jJM0I5SCN55/OtMyl=	Yes

Request Elements

In this request body, you need to specify the lifecycle configuration in XML format. [Table 5-18](#) describes the specific configuration elements.

- If the versioning of a bucket is enabled or suspended, you can set **NoncurrentVersionTransition** or **NoncurrentVersionExpiration** to control the lifecycle of historical object versions. The lifecycle of a historical version depends on the time when it becomes a historical one (time when the version is replaced by a new version) and the value of **NoncurrentDays**. If **NoncurrentDays** is set to **1** in an object deletion scenario, an object version will be deleted one day after it becomes historical. If the version V1 of object A is created on the first date of a month and new version V2 is uploaded on the fifth date of the month, V1 becomes a historical version. At 00:00 on the seventh date of the month, V1 will expire. If an object version does not meet the deletion conditions, but **NoncurrentDays** is set to **1** and **StorageClass** is set to **WARM**, the version transitions to the **Infrequent Access** storage class one day after it has become a historical version. For example, the V1 version of object A is created on the first day of a month, and its new version V2 is uploaded on the fifth day of the month. Then V1 becomes a historical version. One day later, that is, at 0 o'clock of the seventh day, V1 transitions to the **Infrequent Access** storage class. The deletion or transition of the object after the expiration time may be delayed. The delay is within 48 hours.

- Objects are processed according to the following procedures, if their latest versions meet the expiration rule and versioning is enabled or suspended for the bucket.
 - Versioning enabled:
 - If the latest object version is not a delete marker, a new delete marker will be inserted for the object.
 - If the latest object version is a delete marker and is the only version of the object, this latest version will be deleted.
 - If the object of the latest version has the DeleteMarker and the object has other versions, all versions of the object remain unchanged.
 - Versioning suspended:
 - If the latest version of the object does not have the DeleteMarker and is not the null version, the object generates a new DeleteMarker for the null version.
 - If the latest version of the object does not have the DeleteMarker but is the null version, this null version is overwritten by a new DeleteMarker generated for the null version.
 - If the latest object version is a delete marker and is the only version of the object, this latest version will be deleted.
 - If the object of the latest version has the DeleteMarker and the object has other versions, all versions of the object remain unchanged.
- The following lists the processing when the versioning is enabled or suspended for a bucket and objects of the latest versions meet the transition rules:
 - If the latest version of the object has the DeleteMarker, the storage class of this version will not be transitioned.
 - If the latest version of the object does not have the DeleteMarker and meets the transition rule, the storage class of this version will be transitioned.

Table 5-18 Response elements for lifecycle configuration

Name	Description	Mandatory
Date	<p>Specifies that OBS executes lifecycle rules for objects before the specified date. The date must be compliant with the ISO8601 format, and the time must be compliant with the UTC format of 00:00:00. For example, 2018-01-01T00:00:00.000Z indicates that objects whose last modification time is earlier than 2018-01-01T00:00:00.000Z are deleted or transitioned to another storage class. Objects whose last modification time is equal to or later than the specified time are not deleted or transitioned to another storage class.</p> <p>Type: string Parent: Expiration, Transition</p>	<p>Required if the Days element is absent.</p>
Days	<p>Specifies the number of days (since the latest update to the latest object version) after which the lifecycle rule takes effect.</p> <p>Type: integer Parent: Expiration, Transition</p>	<p>Required if the Date element is absent.</p>
StorageClass	<p>The storage class to which the object is transitioned.</p> <p>Type: string Value options: WARM, COLD Parent: Transition, NoncurrentVersion-Transition</p>	<p>Required if the Transition or NoncurrentVersionTransition element is present.</p>
Transition	<p>Transition time and the object storage class after transition (valid only for the latest object version).</p> <p>Type: XML Child: Date or Days, StorageClass Parent: Rule</p>	<p>Required if the NoncurrentVersionTransition, Expiration, AbortIncompleteMultipartUpload, or NoncurrentVersionExpiration element is absent.</p>

Name	Description	Mandatory
Expiration	Container for the object expiration rule (only applicable to the latest versions of objects). Type: XML Child: Date or Days Parent: Rule	Required if Transition , NoncurrentVersionTransition , AbortIncompleteMultipartUpload , or NoncurrentVersionExpiration is absent.
ID	Unique identifier of a rule. The value can contain a maximum of 255 characters. Type: string Parent: Rule	No
LifecycleConfiguration	Container for lifecycle rules. You can add multiple rules. The total size of the rules cannot exceed 20 KB. Type: XML Child: Rule Parent: none	Yes
NoncurrentDays	Number of days when the specified rule takes effect after the object becomes a historical version (only applicable to an object's historical version). Type: integer Parent: NoncurrentVersionExpiration, NoncurrentVersionTransition	Required if the NoncurrentVersionExpiration or NoncurrentVersionTransition element is present.
NoncurrentVersionTransition	Transition time of historical object versions and the object storage class after transition. Type: XML Child: NoncurrentDays, StorageClass Parent: Rule	Required if the Transition , Expiration , AbortIncompleteMultipartUpload , or NoncurrentVersionExpiration element is absent.

Name	Description	Mandatory
NoncurrentVersionExpiration	<p>Container for the expiration time of objects' historical versions. If versioning is enabled or suspended for a bucket, you can set NoncurrentVersionExpiration to delete historical versions of objects that match the lifecycle rule (only applicable to the historical versions of objects).</p> <p>Type: XML Child: NoncurrentDays Parent: Rule</p>	No
AbortIncompleteMultipartUpload	<p>Container for specifying when the not merged parts (fragments) in an incomplete upload will be deleted.</p> <p>Type: XML Child: DaysAfterInitiation Parent: Rule</p>	<p>Required if the Transition, Expiration, NoncurrentVersionExpiration, or NoncurrentVersionTransition element is absent.</p>
DaysAfterInitiation	<p>Specifies the number of days since the initiation of an incomplete multipart upload that OBS will wait before deleting the not merged parts (fragments) of the upload.</p> <p>Type: integer Parent: AbortIncompleteMultipartUpload</p>	<p>Required if the AbortIncompleteMultipartUpload element is present.</p>

Name	Description	Mandatory
Prefix	Object name prefix that identifies one or more objects to which the rule applies. Type: string Parent: Rule Constraints: <ol style="list-style-type: none"> 1. When you configure a lifecycle rule by specifying a prefix, if the specified prefix and the prefix of an existing lifecycle rule overlap, OBS regards these two rules as one and forbids you to configure this rule. For example, if there is a rule with the object prefix abc configured in the system, another rule with the object prefix starting with abc cannot be configured. 2. If there is already a lifecycle rule that is based on an object prefix, you are not allowed to configure another rule that is applied to the entire bucket. 	Yes
Rule	Container for a specific lifecycle rule. Type: container Parent: LifecycleConfiguration	Yes
Status	Indicates whether the rule is enabled. Type: string Parent: Rule Value options: Enabled, Disabled	Yes

Response Syntax

HTTP/1.1 *status_code*
Date: *date*
Content-Length: *length*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?lifecycle HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:05:34 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:DpSAlmLX/BTdJxU5HOEwflhM0WI=
Content-SHA256: ogX9qClMrVJUBiUSIKDFM0qO41jJM0I5SCN55/OtMyl=
Content-Length: 919

<?xml version="1.0" encoding="utf-8"?>
<LifecycleConfiguration>
  <Rule>
    <ID>delete-2-days</ID>
    <Prefix>test</Prefix>
    <Status>Enabled</Status>
    <Expiration>
      <Days>70</Days>
    </Expiration>
    <NoncurrentVersionExpiration>
      <NoncurrentDays>70</NoncurrentDays>
    </NoncurrentVersionExpiration>
    <Transition>
      <Days>30</Days>
      <StorageClass>WARM</StorageClass>
    </Transition>
    <Transition>
      <Days>60</Days>
      <StorageClass>COLD</StorageClass>
    </Transition>
    <NoncurrentVersionTransition>
      <NoncurrentDays>30</NoncurrentDays>
      <StorageClass>WARM</StorageClass>
    </NoncurrentVersionTransition>
    <NoncurrentVersionTransition>
      <NoncurrentDays>60</NoncurrentDays>
      <StorageClass>COLD</StorageClass>
    </NoncurrentVersionTransition>
    <AbortIncompleteMultipartUpload>
      <DaysAfterInitiation>10</DaysAfterInitiation>
    </AbortIncompleteMultipartUpload>
  </Rule>
</LifecycleConfiguration>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF26000001643670AC06E7B9A7767921
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSvK6z8HV6nrJh49gsB5vqzpgtohkifm
Date: WED, 01 Jul 2015 03:05:34 GMT
Content-Length: 0
```

Sample Request: Transitioning the Objects' Storage Class Only

```
PUT /?lifecycle HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBl66PwXDApxjRk6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
Content-MD5: b67aDumlm/b+5iev6+sRYw==

<LifecycleConfiguration>
  <Rule>
    <ID>delete-2-days</ID>
    <Prefix>test</Prefix>
    <Status>Enabled</Status>
```

```
<Transition>
  <Days>30</Days>
  <StorageClass>WARM</StorageClass>
</Transition>
<Transition>
  <Days>60</Days>
  <StorageClass>COLD</StorageClass>
</Transition>
</Rule>
</LifecycleConfiguration>
```

Sample Response: Transitioning the Objects' Storage Class Only

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSZbDadL1f7fYU44bvRLvc0l6D10+wzG
x-obs-request-id: 0000018A2BCBB3ABD3046B99E3ED2E30
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

Sample Request: Deleting Expired Objects Only

```
PUT /?lifecycle HTTP/1.1
Authorization: OBS H4lPjX0TQTHHEBQQCEC:iqSPeUBl66PwXDAPxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
Content-MD5: tt0lizQ7YSTFtMJ3sie6qA==
```

```
<LifecycleConfiguration>
  <Rule>
    <ID>delete-2-days</ID>
    <Prefix>test</Prefix>
    <Status>Enabled</Status>
    <Expiration>
      <Days>70</Days>
    </Expiration>
  </Rule>
</LifecycleConfiguration>
```

Sample Response: Deleting Expired Objects Only

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSfpG6nArWY7cM7rB3+GbvO13XJPx9g4
x-obs-request-id: 0000018A2BD6BB02D30426F6E4A1FBA2
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

Sample Request: Transitioning the Objects' Storage Class and Then Deleting the Objects

```
PUT /?lifecycle HTTP/1.1
Authorization: OBS H4lPjX0TQTHHEBQQCEC:iqSPeUBl66PwXDAPxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
Content-MD5: 9CJYqNUbXEVhhawEx0ICRw==
```

```
<LifecycleConfiguration>
  <Rule>
    <ID>delete-2-days</ID>
    <Prefix>test</Prefix>
    <Status>Enabled</Status>
    <Expiration>
      <Days>70</Days>
    </Expiration>
  </Rule>
</LifecycleConfiguration>
```

```
<Transition>
  <Days>30</Days>
  <StorageClass>WARM</StorageClass>
</Transition>
<Transition>
  <Days>60</Days>
  <StorageClass>COLD</StorageClass>
</Transition>
</Rule>
</LifecycleConfiguration>
```

Sample Response: Transitioning the Objects' Storage Class and Then Deleting the Objects

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSMYkLcGTyUsgSJe2Rdsg2P8JwMsJV6n
x-obs-request-id: 0000018A2BDA0816D2877F5D5622F0BA
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

Sample Request: Deleting Historical Object Versions and Delete Markers

```
PUT /?lifecycle HTTP/1.1
Authorization: OBS H4IPJX0TQTHHEBQQCEC:iqSPeUBI66PwXDApxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
Content-MD5: SGAUB+2hLUAWV5IJ69xU+Q==

<LifecycleConfiguration>
  <Rule>
    <ID>delete-2-days</ID>
    <Prefix>test</Prefix>
    <Status>Enabled</Status>
    <NoncurrentVersionExpiration>
      <NoncurrentDays>70</NoncurrentDays>
    </NoncurrentVersionExpiration>
  </Rule>
</LifecycleConfiguration>
```

Sample Response: Deleting Historical Object Versions and Delete Markers

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSZbDadL1f7fYU44bvRLvc0l6D10+wzG
x-obs-request-id: 0000018A2BCBB3ABD3046B99E3ED2E30
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

Sample Request: Deleting Fragments

```
PUT /?lifecycle HTTP/1.1
Authorization: OBS H4IPJX0TQTHHEBQQCEC:iqSPeUBI66PwXDApxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
Content-MD5: PBgGafte2ACjUwYxdJA47Q==

<LifecycleConfiguration>
  <Rule>
    <ID>delete-2-days</ID>
    <Prefix>test</Prefix>
    <Status>Enabled</Status>
    <AbortIncompleteMultipartUpload>
      <DaysAfterInitiation>10</DaysAfterInitiation>
    </AbortIncompleteMultipartUpload>
  </Rule>
</LifecycleConfiguration>
```



```
</Rule>  
</LifecycleConfiguration>
```

Sample Response: Deleting Fragments

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCTIN+gINMVGtTicAnVXkTVDjR5xKSLuH  
x-obs-request-id: 0000018A2BE86742D2C6989CA79E136C  
Server: OBS  
Content-Length: 0  
Date: WED, 01 Jul 2015 02:37:22 GMT
```

5.2.9 Obtaining Bucket Lifecycle Configuration

Functions

This operation obtains the bucket lifecycle configuration.

To perform this operation, you must have the **GetLifecycleConfiguration** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
GET /?lifecycle HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Date: date  
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Date: date  
Content-Type: application/xml  
Date: date  
Content-Length: length  
  
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<LifecycleConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">  
  <Rule>  
    <ID>id</ID>  
    <Prefix>prefix</Prefix>  
    <Status>status</Status>  
    <Expiration>  
      <Date>date</Date>  
    </Expiration>  
    <NoncurrentVersionExpiration>  
      <NoncurrentDays>days</NoncurrentDays>  
    </NoncurrentVersionExpiration>
```

```

<Transition>
  <Date>date</Date>
  <StorageClass>WARM</StorageClass>
</Transition>
<Transition>
  <Date>date</Date>
  <StorageClass>COLD</StorageClass>
</Transition>
<NoncurrentVersionTransition>
  <NoncurrentDays>30</NoncurrentDays>
  <StorageClass>WARM</StorageClass>
</NoncurrentVersionTransition>
<NoncurrentVersionTransition>
  <NoncurrentDays>60</NoncurrentDays>
  <StorageClass>COLD</StorageClass>
</NoncurrentVersionTransition>
<AbortIncompleteMultipartUpload>
  <DaysAfterInitiation>10</DaysAfterInitiation>
</AbortIncompleteMultipartUpload>
</Rule>
</LifecycleConfiguration>

```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements to detail the configuration. [Table 5-19](#) describes the elements.

Table 5-19 Response elements for lifecycle configuration

Element	Description
Date	<p>Specifies that OBS executes lifecycle rules for objects before the specified date. The date must be compliant with the ISO8601 format, and the time must be compliant with the UTC format of 00:00:00. For example, 2018-01-01T00:00:00.000Z indicates that objects whose last modification time is earlier than 2018-01-01T00:00:00.000Z are deleted or transitioned to another storage class. Objects whose last modification time is equal to or later than the specified time are not deleted or transitioned to another storage class.</p> <p>Type: string Parent: Expiration, Transition</p>
Days	<p>Specifies the number of days (since the latest update to the latest object version) after which the lifecycle rule is executed.</p> <p>Type: integer Parent: Expiration, Transition</p>

Element	Description
StorageClass	The storage class to which the object is transitioned. Type: string Value options: WARM, COLD Parent: Transition, NoncurrentVersionTransition
Transition	Transition time and the object storage class after transition (valid only for the latest object version). Type: XML Child: Date or Days Parent: Rule
Expiration	Container for the object expiration rule. Type: XML Child: Date or Days Parent: Rule
ID	Unique identifier of a rule. The value can contain a maximum of 255 characters. Type: string Parent: Rule
LifecycleConfiguration	Container for lifecycle rules. You can add multiple rules. The total size of the rules cannot exceed 20 KB. Type: XML Child: Rule Parent: none
NoncurrentDays	Number of days when the specified rule takes effect after the object becomes a historical version. Type: integer Parent: NoncurrentVersionExpiration, NoncurrentVersionTransition
NoncurrentVersionTransition	Transition time of historical object versions and the object storage class after transition. Type: XML Child: NoncurrentDays, StorageClass Parent: Rule

Element	Description
NoncurrentVersionExpiration	Container for the expiration time of objects' historical versions. If versioning is enabled or suspended for a bucket, you can set NoncurrentVersionExpiration to delete objects whose life cycles have expired. Type: XML Child: NoncurrentDays Parent: Rule
AbortIncompleteMultipartUpload	Container for specifying when the not merged parts (fragments) in an incomplete upload will be deleted. Type: XML Child: DaysAfterInitiation Parent: Rule
DaysAfterInitiation	Specifies the number of days since the initiation of an incomplete multipart upload that OBS will wait before deleting the not merged parts (fragments) of the upload. Type: integer Parent: AbortIncompleteMultipartUpload
Prefix	Object name prefix identifying one or more objects to which the rule applies. Type: string Parent: Rule
Rule	Container for a specific lifecycle rule. Type: container Parent: LifecycleConfiguration
Status	Indicates whether the rule is enabled. Type: string Parent: Rule Value options: Enabled, Disabled

Error Responses

[Table 5-20](#) describes possible special errors in the request.

Table 5-20 Special error

Error Code	Description	HTTP Status Code
NoSuchLifecycleConfiguration	The bucket lifecycle configuration does not exist.	404 Not Found

For other errors, see [Table 6-2](#).

Sample Request

```
GET /?lifecycle HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:06:56 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:/Nof9FCNANfzIXDS0NDp1IfDu8I=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016436BA5684FF5A10370EDB
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSEMKZSleboCA1eAukgYOOAd7oX3ZONn
Content-Type: application/xml
Date: WED, 01 Jul 2015 03:06:56 GMT
Content-Length: 919

<?xml version="1.0" encoding="utf-8"?>
<LifecycleConfiguration>
  <Rule>
    <ID>delete-2-days</ID>
    <Status>Enabled</Status>
    <Expiration>
      <Days>2</Days>
    </Expiration>
    <NoncurrentVersionExpiration>
      <NoncurrentDays>5</NoncurrentDays>
    </NoncurrentVersionExpiration>
    <Transition>
      <Days>30</Days>
      <StorageClass>WARM</StorageClass>
    </Transition>
    <Transition>
      <Days>60</Days>
      <StorageClass>COLD</StorageClass>
    </Transition>
    <NoncurrentVersionTransition>
      <NoncurrentDays>30</NoncurrentDays>
      <StorageClass>WARM</StorageClass>
    </NoncurrentVersionTransition>
    <NoncurrentVersionTransition>
      <NoncurrentDays>60</NoncurrentDays>
      <StorageClass>COLD</StorageClass>
    </NoncurrentVersionTransition>
    <AbortIncompleteMultipartUpload>
      <DaysAfterInitiation>10</DaysAfterInitiation>
    </AbortIncompleteMultipartUpload>
  </Rule>
</LifecycleConfiguration>
```

5.2.10 Deleting Lifecycle Rules

Functions

This operation deletes the lifecycle configuration of a bucket. After the lifecycle configuration of a bucket is deleted, OBS will not automatically delete objects in that bucket.

To perform this operation, you must have the **PutLifecycleConfiguration** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
DELETE /?lifecycle HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Date: date  
Authorization: Authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Date: date  
Content-Type: text/xml  
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /?lifecycle HTTP/1.1  
User-Agent: curl/7.29.0
```

```
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:12:22 GMT
Authorization: OBS H4lPIX0TQTHTHEBQQCEC:5DGAS7SBbMC1YTC4tNXy57Zl2Fo=
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: BF260000016436C2550A1EEA97614A98
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSB7A0KZEBOCutgcfZvaGVthTGOJSuyk
Date: WED, 01 Jul 2015 03:12:22 GMT
```

5.2.11 Configuring Versioning for a Bucket

Functions

This operation restores an object that is mistakenly overwritten or deleted. You can use versioning to save, query, and restore objects of different versions. Versioning allows you to easily recover lost data due to misoperations or program faults. Versioning can also be used for retaining and archiving data.

By default, versioning is disabled for a bucket.

Once WORM is enabled for a bucket, OBS automatically enables versioning for the bucket and the versioning cannot be suspended for that bucket.

You can perform this operation to enable or suspend versioning for a bucket.

After versioning is enabled for a bucket:

- OBS creates a unique version ID for each uploaded object. Namesake objects are not overwritten and are distinguished by their own version IDs.
- You can download objects by specifying version IDs. By default, the latest object is downloaded if the version ID is not specified.
- You can specify a version ID to permanently delete a specific object. If an object is deleted with no version ID specified, only a delete marker with a unique version ID is generated, but the object is not physically deleted.
- The latest objects in a bucket are returned by default after a GET Object request. You can also send a request to obtain a bucket's objects with all version IDs.
- Except delete markers, storage space occupied by objects with all version IDs, excluding object metadata, is billed.

After versioning is suspended for a bucket:

- Existing objects with version IDs are not affected.
- The system creates version ID **null** to an uploaded object and the object will be overwritten after a namesake one is uploaded.
- You can download objects by specifying version IDs. By default, the latest object is downloaded if the version ID is not specified.
- You can specify a version ID to delete a specific object. If an object is deleted with no version ID specified, OBS creates a delete marker with a version ID of **null** and deletes the object whose version ID is **null**.
- Except delete markers, storage space occupied by objects with all version IDs, excluding object metadata, is billed.

Only the bucket owner can set versioning for the bucket.

Request Syntax

```
PUT /?versioning HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
Content-Length: length

<VersioningConfiguration>
  <Status>status</Status>
</VersioningConfiguration>
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request contains elements to configure the bucket versioning in XML format. [Table 5-21](#) lists the request elements.

Table 5-21 Elements for configuring bucket versioning

Element	Description	Mandatory
VersioningConfiguration	Root node for configuring versioning Parent: none	Yes
Status	Versioning status of the bucket Type: string Parent: VersioningConfiguration Value options: Enabled , Suspended	Yes

Response Syntax

```
HTTP/1.1 status_code
Date: date

Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?versioning HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:14:18 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:sc2PM13Wlfcoc/YZLK0Mwsl2Zpo=
Content-Length: 89

<VersioningConfiguration>
  <Status>Enabled</Status>
</VersioningConfiguration>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF26000001643672B973EEBC5FBBF909
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSH6rPRHjQCa62fcNpCCPs7+1Aq/hKzE
Date: Date: WED, 01 Jul 2015 03:14:18 GMT
Content-Length: 0
```

Sample Request: Suspending Versioning

```
PUT /?versioning HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBl66PwXDApxjRk6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<VersioningConfiguration>
  <Status>Suspended</Status>
</VersioningConfiguration>
```

Sample Response: Suspending Versioning

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSjqfl2JttwovZb7kTM+xkyQQyhNyOOC
x-obs-request-id: 0000018A2C044BC6D24722440C5EC81C
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

5.2.12 Obtaining Bucket Versioning Status

Functions

This operation allows a bucket owner to get the versioning status of the bucket.

If versioning is not configured for a bucket, no versioning status information will be returned following this operation.

Request Syntax

```
GET /?versioning HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: type
Content-Length: length

<VersioningConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Status>status</Status>
</VersioningConfiguration>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements to specify the bucket versioning status. [Table 5-22](#) describes the elements.

Table 5-22 Response elements

Element	Description
VersioningConfiguration	Element of versioning status information. Type: container
Status	Versioning status of the bucket. Type: string Value options: Enabled , Suspended

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?versioning HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
```

```
Date: WED, 01 Jul 2015 03:15:20 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:4N5qQloluLO9xMY0m+8Iln/UWXM=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016436BBA4930622B4FC9F17
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSQIrNJ5/Ag6EPN8DAwWIPWgBc/xfBnx
Content-Type: application/xml
Date: WED, 01 Jul 2015 03:15:20 GMT
Content-Length: 180

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<VersioningConfiguration xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Status>Enabled</Status>
</VersioningConfiguration>
```

5.2.13 Configuring Storage Class for a Bucket

Functions

This operation sets or updates the default storage class of a bucket.

To perform this operation, you must have the **PutBucketStoragePolicy** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

If you do not specify a storage class when uploading or copying an object, or initiating a multipart upload, the object inherits the bucket's storage class.

The default storage class of a bucket is Standard.

Request Syntax

```
PUT /?storageClass HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Content-Type: type
Content-Length: length
Authorization: authorization

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<StorageClass xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">STANDARD</StorageClass>
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request needs an additional element to specify the default bucket storage class. For details, see [Table 5-23](#).

Table 5-23 Additional request elements

Element	Description	Mandatory
StorageClass	<p>Specifies the default storage class for a bucket.</p> <p>Type: string</p> <p>Value options: STANDARD, WARM, COLD, DEEP_ARCHIVE</p> <p>The available storage classes are as follows: Standard (STANDARD), Infrequent Access (WARM), Archive (COLD), Deep Archive (DEEP_ARCHIVE).</p>	Yes

Response Syntax

```
HTTP/1.1 status_code
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?storageClass HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:18:19 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:Tf6XbndPx/yNgfAVQ6KIXr7tMj4=
Content-Length: 87

<StorageClass xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">STANDARD</StorageClass>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF2600000164368E704B571F328A8797
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSIsW3tPtUn6damTI5acQmQAcEfmTwl3
Date: WED, 01 Jul 2015 03:18:19 GMT
Content-Length: 0
```

5.2.14 Obtaining Bucket Storage Class Information

Functions

This operation obtains the default storage class of a bucket.

To perform this operation, you must have the **GetBucketStoragePolicy** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
GET /?storageClass HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request contains no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: type
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<StorageClass xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">STANDARD</StorageClass>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements to provide details about the storage class information of a bucket. [Table 5-24](#) describes the elements.

Table 5-24 Response elements

Element	Description
StorageClass	Default storage class of the bucket. Type: string. For details about the enumeration types, see Table 5-23 .

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?storageClass HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:20:28 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:0zVTSdKG6OFClH2dKvmsVGyCQyw=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016436BE45820FDF3A65B42C
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSCju1Czy3ZfRVW5hiNd024IRFdUoqWy
Content-Type: application/xml
Date: WED, 01 Jul 2015 03:20:28 GMT
Content-Length: 142

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<StorageClass xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">STANDARD</StorageClass>
```

5.2.15 Configuring Cross-Region Replication for a Bucket

Functions

Cross-region replication refers to the automatic and asynchronous replication of objects across buckets in different regions. By activating cross-region replication, OBS can copy new objects and modified objects from a source bucket in one region to a destination bucket in a different region.

NOTE

An IAM agency is required for configuring cross-region replication. For details, see [Creating an Agency for Cross-Region Replication](#).

To configure cross-region replication for a bucket, the following two requirements must be met:

1. The versioning statuses of the source and destination buckets are the same. For details, see [Configuring Versioning for a Bucket](#).

2. The source bucket's owner and agency (OBS) have the write permission for the destination bucket (with a bucket policy configured), and the agency (OBS) also has the read permission for the source bucket. This permission delegation needs to be implemented by using a bucket policy.

For details about how to configure the bucket policy, see [Configuring a Bucket Policy](#). After the bucket policy is set, the agency (OBS) can read objects from the source bucket and copy objects to the destination bucket.

Request Syntax

```
PUT /?replication HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
x-obs-date: date
Content-SHA256: SHA256
Authorization: authorization string
Content-Length: contentlength

<ReplicationConfiguration>
  <Agency>testAcy</Agency>
  <Rule>
    <ID>rule1</ID>
    <Prefix>key-prefix</Prefix>
    <Status>rule-status</Status>
    <Destination>
      <Bucket>targetbucketname</Bucket>
      <StorageClass>STANDARD</StorageClass>
      <DeleteData>Enabled</DeleteData>
    </Destination>
    <HistoricalObjectReplication>Enabled</HistoricalObjectReplication>
  </Rule>
</ReplicationConfiguration>
```

Request Parameters

This request contains no message parameters.

Request Headers

The request uses one header, as described in the following table.

Table 5-25 Request header for cross-region replication

Element	Description	Mandatory
Content-SHA256	Base64-encoded 256-bit SHA256 digest of the message according to SHA.	Yes

Request Elements

This request contains elements to specify the replication configuration for the bucket in XML format. The following table lists request elements:

Table 5-26 Bucket replication configuration elements

Element	Description	Mandatory
ReplicationConfiguration	Container for the replication rules. A maximum of 100 rules can be configured. The size of the XML file can reach 50 KB. Type: container Child: Rule Parent: none	Yes
Agency	Name of the agency, which can have a maximum of 64 characters. Type: string Parent: ReplicationConfiguration	Yes
Rule	Container of a specified replication rule. The replication configuration must contain at least one rule. The maximum number of rules is 100. Type: container Parent: ReplicationConfiguration	Yes
ID	Unique identifier of a rule, with a maximum length of 255 characters. Type: string Parent: Rule	No
Status	If the value of this element is Disabled , this rule will be ignored. Type: string Parent: Rule Value options: Enabled, Disabled	Yes
Prefix	Prefix of an object key name, applicable to one or more objects. If the Prefix is left blank, the cross-region replication rule is applied to the whole bucket. The maximum length of a prefix is 1,024 bytes. Duplicated prefixes are not supported. Type: string Parent: Rule	Yes

Element	Description	Mandatory
Destination	Container for the destination bucket information. Type: container Parent: Rule	Yes
Bucket	Bucket used to store object copies that are marked by rules. If the replication configuration contains multiple rules, the rules must specify the same bucket as the destination bucket. Type: string Parent: Destination	Yes
StorageClass	Storage class of an object Type: string Parent: Destination Value options: STANDARD, WARM, COLD	No
DeleteData	Keyword for synchronizing object deletion operations. If the value is Enabled , the object deletion for the source bucket will be replicated to the destination bucket. Type: string Parent: Destination Value options: Enabled and Disabled (If this element is absent from the request, Disabled is applied by default.)	No
HistoricalObjectReplication	Keyword for copying a historical object. If the value is Enabled , historical objects meeting this rule are copied. Type: string Parent: Rule Value options: Enabled and Disabled (If this element is absent from the request, Disabled is applied by default.)	No

Response Syntax

```
HTTP/1.1 status_code
Server: OBS
Date:date
Content-Length: contentlength
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned for this request.

Sample Request

```
PUT /?replication HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 27 Jun 2018 13:39:15 +0000
Authorization: OBS H4IPJX0TQTHHEBQQCEC:CdeqU0Vg9xNdJMZ0PGPgh5EnkO0=
Content-SHA256: ogX9qClMrVJUBiUSIKDFM0qO41jJM0I5SCN55/OtMyl=
Content-Length: 330

<ReplicationConfiguration>
  <Agency>testAcy</Agency>
  <Rule>
    <ID>Rule-1</ID>
    <Status>Enabled</Status>
    <Prefix></Prefix>
    <Destination>
      <Bucket>dstbucket</Bucket>
      <StorageClass>STANDARD</StorageClass>
      <DeleteData>Enabled</DeleteData>
    </Destination>
    <HistoricalObjectReplication>Enabled</HistoricalObjectReplication>
  </Rule>
</ReplicationConfiguration>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: B59500000164417839932E5A2295674C
x-obs-id-2: 32AAAQAAEAABKAAQAAEAABAAAQAAEAABCStv51t2NMMx+Ou+ow7IWW4Sxo231fKe
Date: Wed, 27 Jun 2018 13:39:15 GMT
Content-Length: 0
```

5.2.16 Obtaining the Cross-Region Replication Configuration of a Bucket

Functions

This operation obtains the replication configuration information of a specified bucket. To perform this operation, you must have the **GetReplicationConfiguration** permission.

Request Syntax

```
GET /?replication HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```

```
Date: date  
Authorization:authorization string
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Date: date  
Server:OBS  
Content-Length: contentlength  
  
<?xml version="1.0" encoding="UTF-8"?>  
<ReplicationConfiguration xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2006-03-01/">  
  
  <Agency>testAcy</Agency>  
  <Rule>  
    <ID>rule1</ID>  
    <Status>Enabled</Status>  
    <Prefix></Prefix>  
    <Destination>  
      <Bucket>exampletargetbucket</Bucket>  
      <StorageClass>WARM</StorageClass>  
      <DeleteData>Enabled</DeleteData>  
    </Destination>  
    <HistoricalObjectReplication>Enabled</HistoricalObjectReplication>  
  </Rule>  
</ReplicationConfiguration>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements to detail the configuration. The following table describes the elements.

Table 5-27 Bucket replication configuration elements

Element	Description
ReplicationConfigura- tion	<p>Container for the replication rules. A maximum of 100 rules can be configured. The size of the XML file can reach 50 KB.</p> <p>Type: container Child: Rule Parent: none</p>
Agency	<p>Name of the agency, which can have a maximum of 64 characters.</p> <p>Type: string Parent: ReplicationConfiguration</p>
Rule	<p>Container of a specified replication rule.</p> <p>The replication configuration must contain at least one rule. The maximum number of rules is 100.</p> <p>Type: container Parent: ReplicationConfiguration</p>
ID	<p>Unique identifier of a rule, with a maximum length of 255 characters.</p> <p>Type: string Parent: Rule</p>
Status	<p>If the value of this element is Disabled, this rule will be ignored.</p> <p>Type: string Parent: Rule Value options: Enabled, Disabled</p>
Prefix	<p>Prefix of an object key name, applicable to one or more objects. If the Prefix is left blank, the cross-region replication rule is applied to the whole bucket.</p> <p>The maximum length of a prefix is 1,024 bytes. Duplicated prefixes are not supported.</p> <p>Type: string Parent: Rule</p>
Destination	<p>Container for the destination bucket information.</p> <p>Type: container Parent: Rule</p>

Element	Description
Bucket	<p>Bucket used to store object copies that are marked by rules.</p> <p>If the replication configuration contains multiple rules, the rules must specify the same bucket as the destination bucket.</p> <p>Type: string Parent: Destination</p>
StorageClass	<p>Storage class of an object.</p> <p>Type: string Parent: Destination Value options: STANDARD, WARM, COLD</p>
DeleteData	<p>Keyword for synchronizing object deletion operations. If the value is Enabled, the object deletion for the source bucket will be replicated to the destination bucket.</p> <p>Type: string Parent: Destination Value options: Enabled and Disabled (If this element is absent from the request, Disabled is applied by default.)</p>
HistoricalObjectReplication	<p>Keyword for copying a historical object. If the value is Enabled, historical objects meeting this rule are copied.</p> <p>Type: string Parent: Rule Value options: Enabled and Disabled (If this element is absent from the request, Disabled is applied by default.)</p>

Error Responses

The following table describes the error response for this request.

Table 5-28 Error response elements

Error Code	Description	HTTP Response Code	SOAP Error Code Prefix
NoSuchReplication-Configuration	Cross-region replication configuration does not exist.	404 not found	Client

Sample Request

```
GET /?replication HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 27 Jun 2018 13:42:40 +0000
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:jGHvilnfRyOkT/EpySpua1hIBuY=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: B59500000164417B57D02F7EF8823152
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSHu6lz4vgk5G3E32OFclPEZZgdOEYE/
Content-Type: application/xml
Date: Wed, 27 Jun 2018 13:42:39 GMT
Content-Length: 337

<?xml version="1.0" encoding="utf-8"?>
<ReplicationConfiguration xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2006-03-01/">
  <Rule>
    <ID>Rule-1</ID>
    <Status>Enabled</Status>
    <Prefix></Prefix>
    <Destination>
      <Bucket>dstbucket</Bucket>
      <StorageClass>STANDARD</StorageClass>
      <DeleteData>Enabled</DeleteData>
    </Destination>
    <HistoricalObjectReplication>Enabled</HistoricalObjectReplication>
  </Rule>
  <Agency>testAcy</Agency>
</ReplicationConfiguration>
```

5.2.17 Deleting the Cross-Region Replication Configuration of a Bucket

Functions

You can perform this operation to delete the bucket replication configuration. To perform this operation, you must have the **DeleteReplicationConfiguration** permission.

Request Syntax

```
DELETE /?replication HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization string
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 204 No Content
Server: OBS
Date: date
Connection: keep-alive
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned for this request.

Sample Request

```
DELETE /?replication HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 27 Jun 2018 13:45:50 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:3ycNYD0CfMf0gOmmXzdGJ58KjHU=
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: 900B000001643FE6BBCC9C9F54FA7A7E
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCS8Exs52zCf9duxPLnBircmGa/JOCjec
Date: Wed, 27 Jun 2018 13:45:50 GMT
```

5.2.18 Configuring Tags for a Bucket

Functions

This operation adds tags to a bucket.

After tags are added to a bucket, all service detail records (SDRs) generated by the requests for this bucket will have the same tags. You can categorize the SDRs for detailed cost analysis. For example, if a running application uploads data to a bucket, you can tag the bucket with the application name. In this manner, the costs on the application can be analyzed using tags in SDRs.

To perform this operation, you must have the **PutBucketTagging** permission. By default, only the bucket owner can delete the tags of a bucket. The bucket owner can allow other users to perform this operation by setting a bucket policy or granting them the permission.

Restrictions

- A bucket can have up to 10 tags.

Request Syntax

```
PUT /?tagging HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization string
Content-SHA256: SHA256
<Tagging>
  <TagSet>
    <Tag>
      <Key> Tag Name</Key>
      <Value> Tag Value</Value>
    </Tag>
  </TagSet>
</Tagging>
```

Request Parameters

This request contains no message parameters.

Request Headers

[Table 5-29](#) lists the request header.

Table 5-29 Request headers

Header	Description	Mandatory
Content-SHA256	Base64-encoded 256-bit SHA256 digest of the message according to SHA. Type: string Example: ogX9qClMrVJUBiUSIKDFM0qO41jJM0I5SCN55/OtMyl=	Yes

Request Elements

In this request, you must configure bucket tags in the request body. The tag configuration is uploaded in XML format. [Table 5-30](#) describes the configuration elements.

Table 5-30 Bucket tag configuration elements

Header	Description	Mandatory
Tagging	Root element for TagSet and Tag Type: container Parent: none	Yes

Header	Description	Mandatory
TagSet	Element of the tag set Type: container Parent: Tagging	Yes
Tag	Information element of Tag Type: container Parent: TagSet	Yes
Key	<p>Explanation: Name of a tag. Type: string. Parent: Tag.</p> <p>Restrictions:</p> <ul style="list-style-type: none"> • A tag key can contain a maximum of 36 characters. • Tag keys and values cannot contain commas (,), asterisks (*), vertical bars (), slashes (/), less-than signs (<), greater-than signs (>), equal signs (=), backslashes (\), or ASCII control characters (0x00 to 0x1F). Tag keys and values must be URL encoded before being sent to a server. <p>Value range: A string between 0 and 36 characters long.</p> <p>Default value: None</p>	Yes
Value	<p>Explanation: Tag value. Type: string. Parent: Tag.</p> <p>Restrictions:</p> <ul style="list-style-type: none"> • A key value can contain a maximum of 43 characters. • Tag keys and values cannot contain commas (,), asterisks (*), vertical bars (), slashes (/), less-than signs (<), greater-than signs (>), equal signs (=), backslashes (\), or ASCII control characters (0x00 to 0x1F). Tag keys and values must be URL encoded before being sent to a server. <p>Value range: A string of 0 to 42 characters.</p> <p>Default value: None</p>	Yes

Response Syntax

```
HTTP/1.1 status_code
x-obs-request-id: request_id
x-obs-id-2: id
Content-Length: length
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

In addition to common error codes, this API also returns other error codes. The following table lists common errors and possible causes. For details, see [Table 5-31](#).

Table 5-31 Bucket tag configuration errors

Error Code	Description	HTTP Status Code
InvalidTagError	An invalid tag is provided when configuring bucket tags.	400 Bad Request
MalformedXMLError	An incorrect XML format is provided when configuring bucket tags.	400 Bad Request

Sample Request

This example adds a tag whose key is **TagKey(Name1)** and value is **TagValue(Value1)** to bucket **examplebucket**.

```
PUT /?tagging HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 27 Jun 2018 13:22:50 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:Pf1ZyGvVYg2BzOjokZ/BAeR1mEQ=
Content-SHA256: ogX9qClMrvJUBiUSIKDFM0qO41jJM015SCN55/OtMyl=
Content-Length: 182

<Tagging xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <TagSet>
    <Tag>
      <Key>TagKey%28Name1%29</Key>
      <Value>TagValue%28Value1%29</Value>
    </Tag>
  </TagSet>
</Tagging>
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: BF26000001643FEBA09B1ED46932CD07
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSEZp87iEirC6DggPB5cN49pSvHBWClg
Date: Wed, 27 Jun 2018 13:22:50 GMT
```

5.2.19 Obtaining Bucket Tags

Functions

This operation obtains information about tags of a bucket.

To perform this operation, you must have the **GetBucketTagging** permission. By default, only the bucket owner can obtain the tags of a bucket. The bucket owner can allow other users to perform this operation by setting a bucket policy or granting them the permission.

Request Syntax

```
GET /?tagging HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization string
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
x-obs-request-id: request id
x-obs-id-2: id
Content-Type: application/xml
Content-Length: length
Date: date
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Tagging xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <TagSet>
    <Tag>
      <Key>key</Key>
      <Value>value</Value>
    </Tag>
  </TagSet>
</Tagging>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements to detail bucket tag configuration. [Table 5-32](#) describes the elements.

Table 5-32 Elements for configuring bucket tags

Element	Description
Tagging	Element of the tag set and tag. Type: container Parent: none
TagSet	Element of the tag set. Type: container Parent: Tagging
Tag	Element of the tag information. Type: container Parent: TagSet
Key	Tag name. Type: string Parent: Tag
Value	Tag value. Type: string Parent: Tag

Error Responses

In addition to common error codes, this API also returns other error codes. The following table lists common errors and possible causes. For details, see [Table 5-33](#).

Table 5-33 Bucket tag configuration errors

Error Code	Description	HTTP Status Code
NoSuchTagSet	The specified bucket does not have any tags.	404 Not Found

Sample Request

```
GET /?tagging HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
```

```
Accept: */*
Date: Wed, 27 Jun 2018 13:25:44 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:H1INcyc5i0XlHqYTFuzkPxLZUPM=
```

Sample Response

```
HTTP/1.1 200 OK
x-obs-request-id: 0002B7532E0000015BEB35330C5884X1
x-obs-id-2: s12w20LYNQqSb7moq4ibgJwmQRSmVQV+rFBqplOGYkXUpXeS/nOmbkyD+E35K79j
Content-Type: application/xml
Date: Wed, 27 Jun 2018 13:25:44 GMT
Content-Length: 441

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Tagging xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <TagSet>
    <Tag>
      <Key>TagName1</Key>
      <Value>TageSetVaule1</Value>
    </Tag>
  </TagSet>
</Tagging>
```

5.2.20 Deleting Tags

Functions

This operation deletes the tags of a bucket.

To perform this operation, you must have the **DeleteBucketTagging** permission. By default, only the bucket owner can delete the tags of a bucket. The bucket owner can allow other users to perform this operation by setting a bucket policy or granting them the permission.

Request Syntax

```
DELETE /?tagging HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization string
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
x-obs-request-id: request id
x-obs-id-2: id
Content-Length: length
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /?tagging HTTP/1.1
User-Agent: curl/7.19.7
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 27 Jun 2018 13:46:58 GMT
Authorization: authorization string
```

Sample Response

```
HTTP/1.1 204 No Content
x-obs-request-id: 0002B7532E0000015BEB2C212E53A17L
x-obs-id-2: CqT+86nnOkB+Cv9KZoVgZ28pSgMF+uGQBUC68flvkQeq6CxoCz65wWFMNBpXvea4
Content-Length: 0
Date: Wed, 27 Jun 2018 13:46:58 GMT
```

5.2.21 Configuring Bucket Storage Quota

Functions

The bucket storage quota must be a positive integer in the unit of byte. The maximum storage quota is $2^{63} - 1$ bytes. The default bucket storage quota is **0**, indicating that the bucket storage quota is not limited.

NOTE

1. For a bucket that has a specified storage quota, you can change the quota to **0** to cancel the quota limitation.
2. The bucket storage quota verification depends on how much space is used in the bucket. However, the used storage space is measured at the background. Therefore, bucket storage quotas may not take effect immediately, and delay is expected. The used storage space in a bucket may exceed the bucket storage quota, or the used storage space may remain unchanged after data is deleted from the bucket.
3. For details about the API for querying used storage space, see [Obtaining Storage Information of a Bucket](#).
4. If the used storage space in a bucket reaches the upper limit of the bucket storage quota, object upload will fail and the HTTP status code 403 Forbidden will be returned, indicating **InsufficientStorageSpace**. In this case, you can increase the quota, cancel the quota limitation (by changing the quota to **0**), or delete unwanted objects from the bucket.

Request Syntax

```
PUT /?quota HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```

```
Date: date  
Content-Length: length  
Authorization: authorization  
  
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<Quota xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">  
  <StorageQuota>value</StorageQuota>  
</Quota>
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request uses an additional element to specify a bucket quota. [Table 5-34](#) describes the element.

Table 5-34 Additional request elements

Element	Description	Mandatory
StorageQuota	Specifies the bucket storage quota. The unit is byte. Type: integer	Yes

Response Syntax

```
HTTP/1.1 status_code  
Date: date  
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?quota HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: /*/*
```

```
Date: WED, 01 Jul 2015 03:24:37 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:k/rbwnYaqYf0Ae6F0M3OJQ0dmI8=
Content-Length: 106

<Quota xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <StorageQuota>10240000</StorageQuota>
</Quota>
```

Sample Response

```
HTTP/1.1 100 Continue
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435E09A2BCA388688AA08
x-obs-id-2: 32AAAQAAEAABSAAgAAEAAABAAAQAAEAABCSHbmBecv7ohDSvqaRObpxzgzJ9+l8xT
Date: WED, 01 Jul 2015 03:24:37 GMT
Content-Length: 0
```

5.2.22 Querying Bucket Storage Quota

Functions

A bucket owner can query the bucket storage quota, but a bucket owner who is frozen due to arrears cannot. The bucket storage quota is measured by byte. **0** indicates that no upper limit is set.

Request Syntax

```
GET /?quota HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request contains no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: application/xml
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Quota xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <StorageQuota>quota</StorageQuota>
</Quota>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements of information about the bucket quota. [Table 5-35](#) describes the elements.

Table 5-35 Response elements

Element	Description
Quota	Bucket storage quota. This element contains the StorageQuota element. Type: XML
StorageQuota	Bucket storage quota quantity. The unit is byte. Type: string

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?quota HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:27:45 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:8m4bW1gFCNeXQIfu45uO2gpo7l8=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016436B55D8DED9AE26C4D18
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSS2Q5vz5AfpAJ/CMNgCfo2hmDowp7M9
Content-Type: application/xml
Date: WED, 01 Jul 2015 03:27:45 GMT
Content-Length: 150

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Quota xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <StorageQuota>0</StorageQuota>
</Quota>
```

5.2.23 Obtaining Storage Information of a Bucket

Functions

This operation queries the number of bucket objects and the space occupied by the objects. The size of the object space is a positive integer, measured by bytes.

NOTE

Because OBS bucket storage statistics are measured in the background, the storage information is not updated in real time. For this reason, you are advised not to perform real-time verification on the storage information.

Request Syntax

```
GET /?storageinfo HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request contains no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: type
Content-Length: length
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<GetBucketStorageInfoResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Size>size</Size>
  <ObjectNumber>number</ObjectNumber>
</GetBucketStorageInfoResult>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements of information about the used storage capacity of a bucket. [Table 5-36](#) describes the elements.

Table 5-36 Response elements

Element	Description
GetBucketStorageInfoResult	Request result that saves bucket storage information, including the stored data size and the number of objects Type: XML
Size	Size of stored data Type: long
ObjectNumber	Number of objects returned Type: integer

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?storageinfo HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:31:18 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:bLcdeJGYWw/eEEjMhPZx2MK5R9U=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435DD2958BFDCDB86B55E
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSitZctaPYVnat49fVMd1O+OWIP1yrg3
Content-Type: application/xml
WED, 01 Jul 2015 03:31:18 GMT
Content-Length: 206

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<GetBucketStorageInfoResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Size>25490</Size>
  <ObjectNumber>24</ObjectNumber>
</GetBucketStorageInfoResult>
```

5.2.24 Configuring Bucket Inventories

Functions

OBS uses the PUT method to configure bucket inventories. Each bucket can have a maximum of 10 inventories. For more information about the use and limitations of bucket inventories, see [Bucket Inventory](#) in the *Object Storage Service User Guide*.

To perform this operation, ensure that you have the **PutBucketInventoryConfiguration** permission. By default, the bucket owner has this permission and can grant it to others.

For more information about permission control, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax

```
PUT /?inventory&id=configuration-id HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
Content-Length: length
Expect: 100-continue

<InventoryConfiguration>
  <Id>configuration-id</Id>
  <IsEnabled>true</IsEnabled>
  <Filter>
    <Prefix>inventoryTestPrefix</Prefix>
  </Filter>
```

```
<Destination>
  <Format>CSV</Format>
  <Bucket>destbucket</Bucket>
  <Prefix>dest-prefix</Prefix>
</Destination>
<Schedule>
  <Frequency>Daily</Frequency>
</Schedule>
<IncludedObjectVersions>All</IncludedObjectVersions>
<OptionalFields>
  <Field>Size</Field>
  <Field>LastModifiedDate</Field>
  <Field>ETag</Field>
  <Field>StorageClass</Field>
  <Field>IsMultipartUploaded</Field>
  <Field>ReplicationStatus</Field>
  <Field>EncryptionStatus</Field>
</OptionalFields>
</InventoryConfiguration>
```

Request Parameters

Table 5-37 Request parameters

Parameter	Description	Mandatory
id	<p>ID of the inventory configuration, which must be consistent with the inventory configuration ID in the message body.</p> <p>Type: string</p> <p>Specifications: A maximum of 64 characters</p> <p>There is no default value.</p> <p>Valid characters: letters, digits, hyphens (-), periods (.) and underscores (_)</p>	Yes

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

In this request, you must configure the bucket inventory in the request body. Upload the inventory configuration information in an XML file. [Table 5-38](#) lists the configuration elements.

Table 5-38 Bucket inventory configuration elements

Element	Description	Mandatory
InventoryConfiguration	Inventory configuration. Type: container Parent: none Child: Id, IsEnabled, Filter, Destination, Schedule, IncludedObjectVersions, and OptionalFields	Yes
Id	ID of an inventory configuration, which must be consistent with the inventory configuration ID specified in the request. Type: string Specifications: A maximum of 64 characters There is no default value. Valid characters: letters, digits, hyphens (-), periods (.) and underscores (_) Parent: InventoryConfiguration	Yes
IsEnabled	Indicates whether the rule is enabled. If this parameter is set to true , the inventory is generated. If not, the inventory will not be generated. Type: boolean Value options: true , false Parent: InventoryConfiguration	Yes
Filter	Inventory filter configuration. The inventory contains only objects that meet the filter criteria (filtering by object name prefix). If no filter criteria is configured, all objects are included. Type: container Parent: InventoryConfiguration Child: Prefix	No
Prefix	Filtering by name prefix. Only objects with the specified name prefix are included in the inventory. Type: string Parent: Filter	No
Schedule	Time scheduled for generation of inventories. Type: container Parent: InventoryConfiguration Child: Frequency	Yes

Element	Description	Mandatory
Frequency	<p>Intervals when inventories are generated. You can set this parameter to Daily or Weekly. An inventory is generated within one hour after it is configured for the first time. Then it is generated at the specified intervals.</p> <p>Type: string Parent: Schedule Value options: Daily, Weekly</p>	Yes
Destination	<p>Destination bucket of an inventory.</p> <p>Type: container Parent: InventoryConfiguration</p>	Yes
Format	<p>Inventory format. Only the CSV format is supported.</p> <p>Type: string Parent: Destination Value options: CSV</p>	Yes
Bucket	<p>Name of the bucket for saving inventories.</p> <p>Type: string Parent: Destination</p>	Yes
Prefix	<p>The name prefix of inventory files. If no prefix is configured, the names of inventory files will start with the BucketInventory by default.</p> <p>Type: string Parent: Destination</p>	No
IncludedObjectVersions	<p>Indicates whether versions of objects are included in an inventory.</p> <ul style="list-style-type: none"> • If this parameter is set to All, all the versions of objects are included in the inventory, and versioning related fields are added to the inventory, including: VersionId, IsLatest, and DeleteMarker. • If this parameter is set to Current, the inventory contains only the current objects versions at the time when the inventory is generated. No versioning fields are displayed in the inventory. <p>Type: string Parent: InventoryConfiguration Value options: All, Current</p>	Yes

Element	Description	Mandatory
OptionalFields	Extra metadata fields that can be added to an inventory. If this parameter is configured, fields specified in this parameter are contained in the inventory. Type: container Parent: InventoryConfiguration Child: Field	No
Field	Optional fields. The OptionalFields can contain multiple field elements. Type: string Parent: OptionalFields Value options: Size, LastModifiedDate, StorageClass, ETag, IsMultipartUploaded, ReplicationStatus, EncryptionStatus	No

Response Syntax

```
HTTP/1.1 status_code
x-obs-request-id: request id
x-obs-id-2: id
Date: date
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

In addition to common error codes, this API also returns other error codes. The following lists some common errors and possible causes of this API. For details, see [Table 5-39](#).

Table 5-39 Inventory configuration error codes

Error Code	Description	HTTP Status Code
MalformedXML	Incorrect XML format of the inventory.	400 Bad Request
InvalidArgument	Invalid parameter.	400 Bad Request

Error Code	Description	HTTP Status Code
InventoryCountOverLimit	The number of inventories reached the upper limit.	400 Bad Request
PrefixExistInclusionRelationship	The prefix configured for this inventory overlaps with prefixes of existing inventories.	400 Bad Request

Sample Request

```
PUT /?inventory&id=test_id HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Tue, 08 Jan 2019 08:17:10 +0000
Authorization: OBS UDSIAMSTUBTEST000001:/e2fqSfzLDb+0M36D4Op/s5Kkr0=
Content-Length: 600
Expect: 100-continue

<InventoryConfiguration>
  <Id>test_id</Id>
  <IsEnabled>true</IsEnabled>
  <Filter>
    <Prefix>inventoryTestPrefix</Prefix>
  </Filter>
  <Destination>
    <Format>CSV</Format>
    <Bucket>destbucket</Bucket>
    <Prefix>dest-prefix</Prefix>
  </Destination>
  <Schedule>
    <Frequency>Daily</Frequency>
  </Schedule>
  <IncludedObjectVersions>All</IncludedObjectVersions>
  <OptionalFields>
    <Field>Size</Field>
    <Field>LastModifiedDate</Field>
    <Field>ETag</Field>
    <Field>StorageClass</Field>
    <Field>IsMultipartUploaded</Field>
    <Field>ReplicationStatus</Field>
    <Field>EncryptionStatus</Field>
  </OptionalFields>
</InventoryConfiguration>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 000001682C8545B0680893425D60AB83
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSIGTuRtBfo7lpHSt0ZknhdDHmlwd/p
Date: Tue, 08 Jan 2019 08:12:38 GMT
Content-Length: 0
```

5.2.25 Obtaining a Specific Inventory of a Bucket

Functions

OBS uses the GET method to obtain a specific inventory of a bucket.

To perform this operation, you must have the **GetBucketInventoryConfiguration** permission. By default, the bucket owner has this permission and can grant it to others.

For more information about permission control, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax

```
GET /?inventory&id=configuration-id HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
```

Request Parameters

Table 5-40 Request parameters

Parameter	Description	Mandatory
id	<p>ID of the inventory configuration that you want to obtain.</p> <p>Type: string</p> <p>Specifications: A maximum of 64 characters</p> <p>There is no default value.</p> <p>Valid characters: letters, digits, hyphens (-), periods (.) and underscores (_)</p>	Yes

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Server: OBS
x-obs-request-id: request id
x-obs-id-2: id
Content-Type: application/xml
Date: date
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<InventoryConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Id>configuration-id</Id>
  <IsEnabled>true</IsEnabled>
  <Destination>
    <Format>CSV</Format>
    <Bucket>destbucket</Bucket>
    <Prefix>prefix</Prefix>
```

```

</Destination>
<Schedule>
  <Frequency>Daily</Frequency>
</Schedule>
<IncludedObjectVersions>Current</IncludedObjectVersions>
<OptionalFields>
  <Field>Size</Field>
  <Field>LastModifiedDate</Field>
  <Field>ETag</Field>
  <Field>StorageClass</Field>
  <Field>IsMultipartUploaded</Field>
  <Field>ReplicationStatus</Field>
  <Field>EncryptionStatus</Field>
</OptionalFields>
</InventoryConfiguration>

```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

[Table 5-41](#) lists elements contained in the response body.

Table 5-41 Elements in a response body to the request for bucket inventory configurations

Element	Description
InventoryConfigura- tion	Inventory configuration. Type: container Parent: none Child: Id, IsEnabled, Filter, Destination, Schedule, IncludedObjectVersions, and OptionalFields
Id	ID of an inventory configuration, which must be consistent with the inventory configuration ID specified in the request. Type: string Specifications: A maximum of 64 characters There is no default value. Valid characters: letters, digits, hyphens (-), periods (.) and underscores (_) Parent: InventoryConfiguration
IsEnabled	Indicates whether the rule is enabled. If this parameter is set to true , the inventory is generated. If not, the inventory will not be generated. Type: boolean Value options: true , false Parent: InventoryConfiguration

Element	Description
Filter	<p>Inventory filter configuration. The inventory contains only objects that meet the filter criteria (filtering by object name prefix). If no filter criteria is configured, all objects are included.</p> <p>Type: container Parent: InventoryConfiguration Child: Prefix</p>
Prefix	<p>Filtering by name prefix. Only objects with the specified name prefix are included in the inventory.</p> <p>Type: string Parent: Filter</p>
Schedule	<p>Time scheduled for generation of inventories.</p> <p>Type: container Parent: InventoryConfiguration Child: Frequency</p>
Frequency	<p>Intervals when inventories are generated. You can set this parameter to Daily or Weekly. An inventory is generated within one hour after it is configured for the first time. Then it is generated at the specified intervals.</p> <p>Type: string Parent: Schedule Value options: Daily, Weekly</p>
Destination	<p>Destination bucket of an inventory.</p> <p>Type: container Parent: InventoryConfiguration</p>
Format	<p>Inventory format. Only the CSV format is supported.</p> <p>Type: string Parent: Destination Value options: CSV</p>
Bucket	<p>Name of the bucket for saving inventories.</p> <p>Type: string Parent: Destination</p>
Prefix	<p>The name prefix of inventory files. If no prefix is configured, the names of inventory files will start with the BucketInventory by default.</p> <p>Type: string Parent: Destination</p>

Element	Description
IncludedObjectVersions	<p>Indicates whether versions of objects are included in an inventory.</p> <ul style="list-style-type: none"> If this parameter is set to All, all the versions of objects are included in the inventory, and versioning related fields are added to the inventory, including: VersionId, IsLatest, and DeleteMarker. If this parameter is set to Current, the inventory contains only the current objects versions at the time when the inventory is generated. No versioning fields are displayed in the inventory. <p>Type: string Parent: InventoryConfiguration Value options: All, Current</p>
OptionalFields	<p>Extra metadata fields that can be added to an inventory. If this parameter is configured, fields specified in this parameter are contained in the inventory.</p> <p>Type: container Parent: InventoryConfiguration Child: Field</p>
Field	<p>Optional fields. The OptionalFields can contain multiple field elements.</p> <p>Type: string Parent: OptionalFields Value options: Size, LastModifiedDate, StorageClass, ETag, IsMultipartUploaded, ReplicationStatus, EncryptionStatus</p>

Error Responses

In addition to common error codes, this API also returns other error codes. The following table lists common errors and possible causes. For details, see [Table 5-42](#).

Table 5-42 Error codes related to obtaining inventory configurations

Error Code	Description	HTTP Status Code
NoSuchInventoryConfiguration	No inventory configuration found matching the specified ID.	404 Not Found

Sample Request

```
GET /?inventory&id=id1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Tue, 08 Jan 2019 09:32:24 +0000
Authorization: OBS UDSIAMSTUBTEST000001:ySWncC9M08jNsyXdJLSMJkpi7XM=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 000001682CB4C2EE6808A0D8DF9F3D00
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSBjn5O7Jv9CqvUMO0BenehRdil1n8rR
Content-Type: application/xml
Date: Tue, 08 Jan 2019 09:04:30 GMT
Content-Length: 626

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<InventoryConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Id>id1</Id>
  <IsEnabled>true</IsEnabled>
  <Destination>
    <Format>CSV</Format>
    <Bucket>bucket</Bucket>
    <Prefix>prefix</Prefix>
  </Destination>
  <Schedule>
    <Frequency>Daily</Frequency>
  </Schedule>
  <IncludedObjectVersions>Current</IncludedObjectVersions>
  <OptionalFields>
    <Field>Size</Field>
    <Field>LastModifiedDate</Field>
    <Field>ETag</Field>
    <Field>StorageClass</Field>
    <Field>IsMultipartUploaded</Field>
    <Field>ReplicationStatus</Field>
    <Field>EncryptionStatus</Field>
  </OptionalFields>
</InventoryConfiguration>
```

5.2.26 Listing All Inventories of a Bucket

Functions

OBS uses the GET method without inventory IDs to obtain all inventories of a specified bucket. Obtained inventories are returned together on only one page.

For more information about permission control, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax

```
GET /?inventory HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
```

Request Parameters

This request message does not contain the request parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Server: OBS
x-obs-request-id: request id
x-obs-id-2: id
Content-Type: application/xml
Date: date
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListInventoryConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
<InventoryConfiguration>
  <Id>id</Id>
  <IsEnabled>true</IsEnabled>
  <Destination>
    <Format>CSV</Format>
    <Bucket>bucket</Bucket>
    <Prefix>prefix</Prefix>
  </Destination>
  <Schedule>
    <Frequency>Daily</Frequency>
  </Schedule>
  <IncludedObjectVersions>Current</IncludedObjectVersions>
  <OptionalFields>
    <Field>Size</Field>
    <Field>LastModifiedDate</Field>
    <Field>ETag</Field>
    <Field>StorageClass</Field>
    <Field>IsMultipartUploaded</Field>
    <Field>ReplicationStatus</Field>
    <Field>EncryptionStatus</Field>
  </OptionalFields>
</InventoryConfiguration>
</ListInventoryConfiguration>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

[Table 5-43](#) lists elements contained in the response body.

Table 5-43 Bucket inventory configuration elements

Element	Description
ListInventoryConfigu- ration	List of bucket inventories. Type: container

Element	Description
InventoryConfigura-tion	Bucket inventory configuration. For details about the configuration elements, see Table 5-41 . Type: container Parent: ListInventoryConfiguration

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?inventory HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Tue, 08 Jan 2019 09:32:24 +0000
Authorization: OBS UDSIAMSTUBTEST000001:ySWncC9M08jNsyXdJLSMJkpi7XM=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 000001682CB4C2EE6808A0D8DF9F3D00
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSBjn5O7Jv9CqvUMO0BenehRdil1n8rR
Content-Type: application/xml
Date: Tue, 08 Jan 2019 09:04:30 GMT
Content-Length: 626

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListInventoryConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <InventoryConfiguration>
    <Id>id1</Id>
    <IsEnabled>true</IsEnabled>
    <Destination>
      <Format>CSV</Format>
      <Bucket>bucket</Bucket>
      <Prefix>prefix</Prefix>
    </Destination>
    <Schedule>
      <Frequency>Daily</Frequency>
    </Schedule>
    <IncludedObjectVersions>Current</IncludedObjectVersions>
    <OptionalFields>
      <Field>Size</Field>
      <Field>LastModifiedDate</Field>
      <Field>ETag</Field>
      <Field>StorageClass</Field>
      <Field>IsMultipartUploaded</Field>
      <Field>ReplicationStatus</Field>
      <Field>EncryptionStatus</Field>
    </OptionalFields>
  </InventoryConfiguration>
</ListInventoryConfiguration>
```

5.2.27 Deleting Bucket Inventories

Functions

OBS uses the DELETE method to delete inventories (identified by inventory IDs) of a specified bucket.

For more information about permission control, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax

```
DELETE /?inventory&id=configuration-id HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
```

Request Parameters

Table 5-44 Request parameters

Parameter	Description	Mandatory
id	ID of the inventory to be deleted. Type: string Specifications: A maximum of 64 characters There is no default value. Valid characters: letters, digits, hyphens (-), periods (.) and underscores (_)	Yes

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Server: OBS
x-obs-request-id: request id
x-obs-id-2: id
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /test?inventory&id=id1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Tue, 08 Jan 2019 13:18:35 +0000
Authorization: OBS UDSIAMSTUBTEST000001:UT9F2YUgaFu9uFGMmxFj2CBgQHs=
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: 000001682D993B666808E265A3F6361D
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSyB46jGSQsu06m1nyleKxTu+H27ooC
Date: Tue, 08 Jan 2019 13:14:03 GMT
```

5.2.28 Configuring a Custom Domain Name for a Bucket

Functions

OBS uses the PUT method to configure a custom domain name for a bucket. After the configuration is successful, you can access the bucket through the domain name.

Ensure that the custom domain name can correctly resolve to the OBS service through DNS.

Request Syntax

```
PUT /?customdomain=domainname HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
Content-Length: 0
```

Request Parameters

Table 5-45 Request parameters

Parameter	Description	Mandatory
customdomain	Custom domain name of a bucket. Type: string, which must meet the naming conventions of domain names. Specifications: The value contains a maximum of 256 characters. No default value. Constraints: A bucket can have a maximum of 30 domain names. A custom domain name can be used for only one bucket.	Yes

Request Header

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: request id
x-obs-id-2: id
Date: date
Content-Length: 0
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?customdomain=obs.ccc.com HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: /*/*
```

```
Date: Mon, 14 Jan 2019 08:31:36 +0000
Authorization: OBS UDSIAMSTUBTEST000094:u2kJF4kENs6KlIDcAZpAKSKPtnc=
Content-Length: 0
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 000001697692CC5380E9D272E6D8F830
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSsfu2GXj9gScHhFnrrTPY2cFOEZuvta
Date: Wed, 13 Mar 2019 10:22:05 GMT
Content-Length: 0
```

5.2.29 Obtaining the Custom Domain Name of a Bucket

Functions

OBS uses the GET method to obtain the custom domain name of a bucket.

Request Syntax

```
GET /?customdomain HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
```

Request Parameters

This request message does not contain the request parameters.

Request Header

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: request id
x-obs-id-2: id
Content-Type: application/xml
Date: date
Content-Length: 272

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListBucketCustomDomainsResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Domains>
    <DomainName>domainname</DomainName>
    <CreateTime>createtime</CreateTime>
  </Domains>
</ListBucketCustomDomainsResult>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

The response returns the custom domain name of the bucket in the form of message elements. [Table 5-46](#) lists details about each element.

Table 5-46 Response elements

Element	Description
ListBucketCustomDomainsResult	Container of the returned result Type: container Child: Domains Parent: none
Domains	Element indicating the custom domain name Type: container Child: DomainName and CreateTime Parent: ListBucketCustomDomainsResult
DomainName	Custom domain name Type: string Child: none Parent: Domains
CreateTime	Time when a custom domain name is created Type: string, which must be a UTC time. Child: none Parent: Domains

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?customdomain HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Mon, 14 Jan 2019 08:31:45 +0000
Authorization: OBS UDSIAMSTUBTEST000094:veTm8B18MPLFqNyGh2wmQqovZ2U=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 000001697693130C80E9D2D29FA84FC2
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSM80AI9weqGUsIFJScVxSKIG4DmYPX9
Content-Type: application/xml
Date: Wed, 13 Mar 2019 10:22:24 GMT
Content-Length: 272
```

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListBucketCustomDomainsResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Domains>
    <DomainName>obs.ccc.com</DomainName>
    <CreateTime>2019-03-13T10:22:05.912Z</CreateTime>
  </Domains>
</ListBucketCustomDomainsResult>
```

5.2.30 Deleting the Custom Domain Name of a Bucket

Functions

OBS uses the DELETE method to delete the custom domain name of a bucket.

Request Syntax

```
DELETE /?customdomain=domainname HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
```

Request Parameters

Table 5-47 Request parameters

Parameter	Description	Mandatory
customdomain	Specifies the custom domain name to be deleted. Type: string, which must meet the naming conventions of domain names. Specifications: The value contains a maximum of 256 characters. No default value.	Yes

Request Header

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: request id
x-obs-id-2: id
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /?customdomain=obs.ccc.com HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: Mon, 14 Jan 2019 08:27:50 +0000
Authorization: OBS UDSIAMSTUBTEST000094:ACgHHA1z+dqZhqS7D2SbU8ugluw=
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: 000001697694073F80E9D3D43BB10B8F
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSyjWyxNRPSnFymJW0AI59GKpW0Qm9UJ
Date: Wed, 13 Mar 2019 10:23:26 GMT
```

5.2.31 Configuring Bucket Encryption

Functions

OBS uses the PUT method to create or update the default server-side encryption for a bucket.

After you configure encryption for a bucket, objects uploaded to this bucket will be encrypted with the bucket encryption settings you specified. Currently, OBS supports server-side encryption with KMS-managed keys (SSE-KMS) and OBS-managed keys (SSE-OBS). For details, see [Server-Side Encryption](#).

To perform this operation, you must have the **PutEncryptionConfiguration** permission. By default, the bucket owner has this permission and can grant it to others.

For more information about permission control, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax (SSE-KMS AES256)

```
PUT /?encryption HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
Content-Length: length
```

```
<ServerSideEncryptionConfiguration>
  <Rule>
    <ApplyServerSideEncryptionByDefault>
      <SSEAlgorithm>kms</SSEAlgorithm>
      <KMSMasterKeyID>kmskeyid-value</KMSMasterKeyID>
    </ApplyServerSideEncryptionByDefault>
  </Rule>
</ServerSideEncryptionConfiguration>
```

Request Syntax (SSE-OBS)

```
PUT /?encryption HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
Content-Length: length

<ServerSideEncryptionConfiguration>
  <Rule>
    <ApplyServerSideEncryptionByDefault>
      <SSEAlgorithm>AES256</SSEAlgorithm>
    </ApplyServerSideEncryptionByDefault>
  </Rule>
</ServerSideEncryptionConfiguration>
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

In this request, you need to carry the bucket encryption configuration in the request body. The bucket encryption configuration information is uploaded in the XML format. [Table 5-48](#) lists the configuration elements.

Table 5-48 Configuration elements of bucket encryption

Header	Description	Mandatory
ServerSideEncryption-Configuration	Root element of the default encryption configuration of a bucket. Type: container Parent: none Child: Rule	Yes
Rule	Sub-element of the default encryption configuration of a bucket. Type: container Parent: ServerSideEncryptionConfiguration Child: ApplyServerSideEncryptionByDefault	Yes

Header	Description	Mandatory
ApplyServerSideEncryptionByDefault	<p>Sub-element of the default encryption configuration of a bucket.</p> <p>Type: container</p> <p>Parent: Rule</p> <p>Child: SSEAlgorithm and KMSMasterKeyID</p>	Yes
SSEAlgorithm	<p>Server-side encryption algorithm used for the default encryption configuration of a bucket.</p> <p>Type: string</p> <p>Value options: kms</p> <p>Parent: ApplyServerSideEncryptionByDefault</p>	Yes
KMSMasterKeyID	<p>Customer master key (CMK) used in SSE-KMS encryption mode. If you do not specify this header, the default master key will be used.</p> <p>Type: string</p> <p>Valid value formats are as follows:</p> <ol style="list-style-type: none"> 1. <i>regionID.domainID:key/key_id</i> 2. <i>key_id</i> <p>In the preceding formats:</p> <ul style="list-style-type: none"> • <i>regionID</i> indicates the ID of the region where the key belongs. You can obtain the ID from Regions and Endpoints. • <i>domainID</i> indicates the ID of the account to which the key belongs. For details, see Obtaining Account, IAM User, Project, User Group, Region, and Agency Information. • <i>key_id</i> indicates the ID of the key created in DEW. For details about how to obtain the key ID, see Viewing a CMK. <p>Parent: ApplyServerSideEncryptionByDefault</p>	No

Header	Description	Mandatory
ProjectID	<p>ID of the project where the KMS master key belongs when SSE-KMS is used. If the project is not the default one, you must use this parameter to specify the project ID.</p> <p>Type: string</p> <p>Value options:</p> <ol style="list-style-type: none"> Project ID that matches KMSMasterKeyID. If KMSMasterKeyID is not specified, do not set the project ID. <p>Parent: ApplyServerSideEncryptionByDefault</p> <p>NOTE When a custom key in a non-default IAM project is used to encrypt objects, only the key owner can upload or download the encrypted objects.</p>	No

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request (SSE-KMS AES256)

```
PUT /?encryption HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Thu, 21 Feb 2019 03:05:34 GMT
Authorization: OBS H4IPJX0TQTHHEBQQCEC:DpSAlmLX/BTdjxU5HOEwflhM0WI=
Content-Length: 778

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ServerSideEncryptionConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Rule>
    <ApplyServerSideEncryptionByDefault>
      <SSEAlgorithm>kms</SSEAlgorithm>
      <KMSMasterKeyID>4f1cd4de-ab64-4807-920a-47fc42e7f0d0</KMSMasterKeyID>
```

```
</ApplyServerSideEncryptionByDefault>
</Rule>
</ServerSideEncryptionConfiguration>
```

Sample Response (SSE-KMS AES256)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF26000001643670AC06E7B9A7767921
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCSvK6z8HV6nrJh49gsB5vzpgtohkiFm
Date: Thu, 21 Feb 2019 03:05:34 GMT
Content-Length: 0
```

Sample Request (SSE-OBS)

```
PUT /?encryption HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: /*/*
Date: Thu, 21 Feb 2019 03:05:34 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:DpSAlmLX/BTdjxU5HOEwflhM0WI=
Content-Length: 778

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ServerSideEncryptionConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Rule>
    <ApplyServerSideEncryptionByDefault>
      <SSEAlgorithm>AES256</SSEAlgorithm>
    </ApplyServerSideEncryptionByDefault>
  </Rule>
</ServerSideEncryptionConfiguration>
```

Sample Response (SSE-OBS)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF26000001643670AC06E7B9A7767921
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCSvK6z8HV6nrJh49gsB5vzpgtohkiFm
Date: Thu, 21 Feb 2019 03:05:34 GMT
Content-Length: 0
```

5.2.32 Obtaining Bucket Encryption Configuration

Functions

OBS uses the GET method to obtain the encryption configuration of a specified bucket.

To perform this operation, you must have the **GetEncryptionConfiguration** permission. By default, only the bucket owner can delete the tags of a bucket. The bucket owner can allow other users to perform this operation by setting a bucket policy or granting them the permission.

For more information about permission control, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax

```
GET /?encryption HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: /*/*
Date: date
Authorization: authorization string
```

Request parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
x-obs-request-id: request id
x-obs-id-2: id
Content-Type: application/xml
Content-Length: length
Date: date

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ServerSideEncryptionConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Rule>
    <ApplyServerSideEncryptionByDefault>
      <SSEAlgorithm>kms</SSEAlgorithm>
      <KMSMasterKeyID>kmskeyid-value</KMSMasterKeyID>
      <ProjectID>projectid</ProjectID>
    </ApplyServerSideEncryptionByDefault>
  </Rule>
</ServerSideEncryptionConfiguration>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains the following elements to detail bucket encryption configuration:

Table 5-49 Configuration elements of bucket encryption

Header	Description
ServerSideEncryptionConfiguration	Root element of the default encryption configuration of a bucket. Type: container Parent: none Child: Rule

Header	Description
Rule	Sub-element of the default encryption configuration of a bucket. Type: container Parent: ServerSideEncryptionConfiguration Child: ApplyServerSideEncryptionByDefault
ApplyServerSideEncryptionByDefault	Sub-element of the default encryption configuration of a bucket. Type: container Parent: Rule Child: SSEAlgorithm and KMSMasterKeyID
SSEAlgorithm	The server-side encryption algorithm used for encryption configuration of a bucket. Type: string Value options: kms Parent: ApplyServerSideEncryptionByDefault
KMSMasterKeyID	ID of the customer master key (CMK) used for SSE-KMS. Type: string Parent: ApplyServerSideEncryptionByDefault
ProjectID	ID of the project where the KMS master key belongs when SSE-KMS is used. Type: string Parent: ApplyServerSideEncryptionByDefault NOTE When a custom key in a non-default IAM project is used to encrypt objects, only the key owner can upload or download the encrypted objects.

Error Responses

In addition to common error codes, this API also returns others. The following table lists common errors and possible causes. For details, see [Table 5-50](#).

Table 5-50 Error codes related to getting bucket encryption configuration

Error Code	Description	HTTP Status Code
NoSuchEncryptionConfiguration	The specified bucket does not have any encryption configurations	404 Not Found

Sample Request

```
GET /?encryption HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Thu, 21 Feb 2019 03:05:34 GMT
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:DpSAlmLX/BTdjxU5HOEwflhM0WI=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF26000001643670AC06E7B9A7767921
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSvK6z8HV6nrJh49gsB5vqzpgtohkiFm
Date: Thu, 21 Feb 2019 03:05:34 GMT
Content-Length: 788

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ServerSideEncryptionConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Rule>
    <ApplyServerSideEncryptionByDefault>
      <SSEAlgorithm>kms</SSEAlgorithm>
      <KMSMasterKeyID>4f1cd4de-ab64-4807-920a-47fc42e7f0d0</KMSMasterKeyID>
    </ApplyServerSideEncryptionByDefault>
  </Rule>
</ServerSideEncryptionConfiguration>
```

5.2.33 Deleting the Encryption Configuration of a Bucket

Functions

OBS uses the DELETE method to delete the encryption configuration of a specified bucket.

To perform this operation, you must have the **PutEncryptionConfiguration** permission. By default, only the bucket owner can delete the tags of a bucket. The bucket owner can allow other users to perform this operation by setting a bucket policy or granting them the permission.

For more information about permission control, see the [permission control](#) in the *OBS Permission Configuration Guide*.

Request Syntax

```
DELETE /?encryption HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: date
Authorization: authorization string
```

Request parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Server: OBS  
x-obs-request-id: request id  
x-obs-id-2: id  
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /examplebucket?encryption HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: */*  
Date: Tue, 08 Jan 2019 13:18:35 +0000  
Authorization: OBS UDSIAMSTUBTEST000001:UT9F2YUgaFu9uFGMmxFj2CBgQHs=
```

Sample Response

```
HTTP/1.1 204 No Content  
Server: OBS  
x-obs-request-id: 000001682D993B666808E265A3F6361D  
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSyB46jGSQsu06m1nyleKxTuJ+H27ooC  
Date: Tue, 08 Jan 2019 13:14:03 GMT
```

5.2.34 Setting the Direct Reading Policy for Archive Objects in a Bucket

Functions

The direct reading function means that you can directly perform operations on Archive objects without restoring them.

By default, the direct reading is disabled on a bucket.

You can use this API to enable or disable the direct reading for a bucket.

- When direct reading is enabled on a bucket:
 - You can directly perform operations on the Archive objects in the bucket regardless of whether they have been restored.

- If the Archive objects are not restored, your operations on them will be charged separately.
- When direct reading is disabled on a bucket:
 - You need to restore the Archive objects in the bucket before you can operate them.

To perform this operation, you must have the **PutDirectColdAccessConfiguration** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

 **NOTE**

Direct reading is now available in the following regions: CN North-Beijing4, CN East-Shanghai1, CN South-Guangzhou, CN Southwest-Guiyang1, and AF-Johannesburg.

Request Syntax

```
PUT /?directcoldaccess HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
Content-SHA256: SHA256
Content-Length: length

<DirectColdAccessConfiguration>
  <Status>status</Status>
</DirectColdAccessConfiguration>
```

Request Parameters

This request contains no message parameters.

Request Headers

[Table 5-51](#) lists the request header.

Table 5-51 Request headers

Header	Description	Mandatory
Content-SHA256	Base64-encoded 256-bit SHA256 digest of the message according to SHA. Type: string Example: ogX9qClMrVJUBiUSIKDFM0qO41jJM0I5SCN55/OtMyl=	Yes

Request Elements

This request contains elements to configure the direct reading status in XML format for Archive objects. [Table 5-52](#) lists the request elements.

Table 5-52 Elements required to configure the direct reading status for Archive objects

Element	Description	Mandatory
DirectColdAccessConfiguration	Root node for the configuration of the direct reading for Archive objects. Parent: none	Yes
Status	Direct reading status of Archive objects in a bucket. Type: string Parent: DirectColdAccessConfiguration Value options: Enabled, Disabled	Yes

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?directcoldaccess HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: Fri, 26 Apr 2019 07:37:36 GMT
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:sc2PM13Wlfcoc/YZLK0Mwsl2Zpo=
Content-SHA256: ogX9qClMrVJUBiUSIKDFM0qO41jJM0I5SCN55/OtMyI=
Content-Length: 92

<DirectColdAccessConfiguration>
  <Status>Enabled</Status>
</DirectColdAccessConfiguration>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 0000016A58940244809DEF00122E6802
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCStOlo1yxthHHo2GIS3WGgt1ekAlh3Vy
```


Date: Fri, 26 Apr 2019 07:37:36 GMT
Content-Length: 0

5.2.35 Obtaining the Direct Reading Policy of Archive Objects in a Bucket

Functions

The owner of a bucket can obtain the direct reading status of Archive objects in the bucket.

If the direct reading has never been configured for Archive objects or the configured direct reading policy has been deleted, no status will be returned after this operation.

To perform this operation, you must have the **GetDirectColdAccessConfiguration** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
GET /?directcoldaccess HTTP/1.1  
Host: examplebucket.obs.region.myhuaweicloud.com  
Date: date  
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Date: date  
Content-Type: type  
Content-Length: length  
  
<DirectColdAccessConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">  
  <Status>Enabled</Status>  
</DirectColdAccessConfiguration>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements to indicate the direct reading status of Archive objects. [Table 5-53](#) describes the elements.

Table 5-53 Response elements

Element	Description
DirectColdAccessConfiguration	Indicates the direct reading information of Archive objects. Type: container
Status	Indicates the direct reading status for a bucket. If direct reading has never been configured for Archive objects or the direct reading configuration has been deleted, no direct reading status will be returned. Type: string Value options: Enabled, Disabled

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /?directcoldaccess HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:15:20 GMT
Authorization: OBS H4lPIX0TQTHTHEBQQCEC:4N5qQloluLO9xMY0m+8lIn/UWXM=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 0000016A6C21AD79654C09D9AA45EB5D
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSmfq4hegf1QZv8/ewfveE4B566v5DZ8
Content-Type: application/xml
Date: Tue, 30 Apr 2019 02:45:07 GMT
Content-Length: 192

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<DirectColdAccessConfiguration xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Status>Enabled</Status>
</DirectColdAccessConfiguration>
```

5.2.36 Deleting the Direct Reading Policy of Archive Objects in a Bucket

Functions

This API deletes the direct reading configurations of Archive objects in a bucket.

After the direct reading configurations are deleted, Archive objects in the bucket cannot be read directly. If you then perform operations on Archive objects that have not been restored or are being restored, a **403 Forbidden** error will be returned.

To delete such configurations, you must have the **DeleteDirectColdAccessConfiguration** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
DELETE /?directcoldaccess HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Date: date  
Authorization: Authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Date: date  
Content-Type: text/xml  
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /?directcoldaccess HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: */*  
Date: Tue, 30 Apr 2019 03:04:48 GMT  
Authorization: OBS H4IPJX0TQHTHEBQQCEC:5DGAS7SBbMC1YTC4tNXy57Zl2Fo=
```

5.2.37 Configuring Mirroring Back-to-Source Rules

Functions

This operation configures mirroring back-to-source rules for a specified bucket. The API is idempotent. If there is already an identical rule for the bucket, a success message is returned with status code 200. Otherwise, status code 201 is returned.

Request Syntax

```
PUT /?mirrorBackToSource HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: authorization
Content-Type: application/json
Content-Length: length
Date: date

policy json body
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

Table 5-54 Request elements

Element	Description	Mandatory
rules	<p>Number of rules.</p> <p>Type: container</p> <p>Value range: array size ranging from 1 to 10</p> <p>NOTE</p> <p>For the same bucket, prefixes of different rules cannot contain each other or have duplicate beginning characters. The same agency is recommended.</p>	Yes

Table 5-55 Rule parameters

Parameter	Description	Mandatory
id	Rule ID. Unique ID of a back-to-source rule configured for the current bucket. Type: string Value range: 1 to 256. The value must be within the range of ^[a-zA-Z0-9_-]{1,256}\$.	Yes
condition	Condition for triggering back-to-source. Type: container	Yes
httpErrorCodeReturnedEquals	Error code that triggers the back-to-source function. When this error is returned for a download request, the back-to-source function is triggered. Type: integer Value range: 404	Yes
objectKeyPrefixEquals	Prefix of the object name that triggers the back-to-source function. Back-to-source is performed only when the specified object name prefix is contained in the request. If this parameter is left blank, all objects are matched by default. For the same bucket, prefixes of different rules cannot contain each other or have duplicate beginning characters. Type: string Valid value: a string of 0 to 1023 characters	No
redirect	Main parameters of back-to-source. Type: container	Yes
agency	Agency name With an agency, the customer can grant OBS the permissions to query whether a specified object exists in the bucket and upload objects to the bucket. Type: string	Yes
publicSource	Configuration of the source site that can be publicly accessed. This parameter is mandatory when the source site is a public accessible resource. Type: container	No

Parameter	Description	Mandatory
sourceEndpoint	Source site address that can be publicly accessed. Type: container	No
master	<p>Primary source address. If the source is a bucket that can be accessed over HTTP network, the address is the bucket domain name. If the source is a private bucket provided by other cloud vendors, the address is a region domain name address.</p> <p>Type: array</p> <p>Valid value: A single source site address is in the format of https http://xxx.yyy.zzz, containing 10 to 255 characters.</p> <p>NOTE</p> <p>The primary source site address is preferentially used during the back-to-source process. If multiple primary addresses are configured, all primary addresses are accessed in polling mode. If two or more primary addresses are configured, when the first request to the primary address fails and the retry conditions are met, the request will retry another primary address.</p> <p>At least one primary address must be configured.</p> <p>A maximum of five primary addresses can be configured.</p>	No
slave	<p>Secondary source site address. If the source is a bucket that can be accessed over HTTP network, the address is the bucket domain name. If the source is a private bucket provided by other cloud vendors, the address is a region domain name address.</p> <p>Type: array</p> <p>Valid value: A single source site address is in the format of https http://xxx.yyy.zzz, containing 10 to 255 characters.</p> <p>NOTE</p> <p>A back-to-source request will retry the secondary source site address when primary source site address is not available.</p> <p>A maximum of five secondary addresses can be configured.</p>	No

Parameter	Description	Mandatory
retryConditions	<p>Condition for switching the source site address.</p> <p>Type: array</p> <p>Value range: 4XX, 5XX, 400-499, and 500-599 error codes</p> <p>NOTE</p> <p>Error codes starting with 4XX and 4 cannot be configured together. Error codes starting with 5XX and 5 cannot be configured together.</p> <p>A maximum of 20 error codes can be configured.</p>	No
passQueryString	<p>Indicates whether to carry the request character string. If the value is true, the queryString value in the OBS request is passed to the source site. Otherwise, the queryString value will not be passed to the source site.</p> <p>The default value is false. Value false indicates that the parameter is ignored.</p> <p>Type: boolean</p> <p>Value range: false or true</p> <p>NOTE</p> <p>If the value is true but the query contains signature information, delete the signature information and pass the remaining parameters.</p>	Yes
mirrorFollowRedirect	<p>Indicates whether to obtain resources following the 3xx redirection request from the redirected source site. If the value is true, obtain resources following the 3xx redirection request from the redirected source site. Otherwise, OBS transparently passes the 3XX response and does not obtain resources. The default value is false. Value false indicates that the parameter is ignored.</p> <p>Type: boolean</p> <p>Value range: false or true</p>	Yes
mirrorHTTPHeader	<p>HTTP header pass rule</p> <p>Type: container</p>	No

Parameter	Description	Mandatory
passAll	<p>Indicates whether to pass all HTTP headers through the source site.</p> <p>The following HTTP header types do not support passthrough:</p> <ol style="list-style-type: none"> 1. Headers starting with the following prefixes: x-obs- x-amz- 2. All standard HTTP headers, for example: Content-Length Authorization Date <p>passAll and pass are mutually exclusive. Value type: BOOL Value range: false or true</p>	No
pass	<p>Specifies the list of HTTP headers to be passed through.</p> <p>Type: list</p> <p>Value range: a maximum of 10 lists. The length of each list ranges from 1 to 63 characters. The key can contain only letters (both upper and lower cases), digits, hyphens (-), and underscores (_).</p>	No
remove	<p>List of HTTP headers that cannot be passed through.</p> <p>The remove operation takes precedence over the pass and passAll operations.</p> <p>Type: list</p> <p>Value range: a maximum of 10 lists. The length of each list ranges from 1 to 63 characters. The key can contain only letters (both upper and lower cases), digits, hyphens (-), and underscores (_).</p>	No

Parameter	Description	Mandatory
set	<p>Configuration of list of HTTP headers to be passed through.</p> <p>The set operation has a higher priority than the remove, pass, and passAll operations.</p> <p>If the user-defined header contains Referer, redirectWithoutReferer must be set to true. Otherwise, Referer will be overwritten.</p> <p>Type: list</p> <p>Value range: a maximum of 10 lists</p>	No
key	<p>Keyword of the HTTP header that needs to be passed through.</p> <p>Each key is unique.</p> <p>Type: string</p> <p>Value range: a string of 1 to 63 characters. Only letters (both upper and lower cases), digits, hyphens (-), and underscores (_) are allowed.</p>	No
value	<p>Value of the HTTP header that needs to be passed through.</p> <p>Type: string</p> <p>Value range: a string of 0 to 2048 characters</p>	No
replaceKeyWith	<p>Adds prefix or suffix. If you need to add a prefix or suffix when downloading objects from the source site, set this parameter to prefix\${key}suffix. If no prefix or suffix needs to be added, set this parameter to \${key}.</p> <p>Type: string</p> <p>Value range: prefix\${key}suffix</p> <p>\${key} is the keyword, prefix and suffix are the ones to be added. Total length of the prefix and suffix. The value ranges from 0 to 1023 characters.</p>	No

Parameter	Description	Mandatory
replaceKeyPrefixWith	Character string used to replace the prefix objectKeyPrefixEquals . If you need to replace the current object name prefix when downloading objects from the source site, modify this configuration item. If both replaceKeyWith and ReplaceKeyPrefixWith are empty, ReplaceKeyPrefixWith takes effect. The request is invalid if both the parameters are specified. Type: string Value range: a string of 0 to 1023 characters	No
vpcEndpointURN	URN of VPC Endpoint service. Type: string Value range: a string of 0 to 127 characters	No
redirectWithoutReferer	Indicates whether to carry the original host as the referer header to the destination address for redirection. Value false indicates that the original host will be carried, and true indicates that the original host will not be carried. Type: boolean Default value: false	No
mirrorAllowHttpMethod	If HEAD is added for a public bucket, you can use HEAD requests to retrieve objects' metadata, rather than objects, from the origin server. Type: list	No

Response Syntax

```
HTTP/1.1 status  
Server: OBS  
Date: date  
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#) and [Table 6-3](#).

Sample Request

```
PUT /?mirrorBackToSource HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: OBS H4IPJX0TQHTHEBQQCEC:sc2PM13Wlfcoc/YZLK0Mwsl2Zpo=
Content-Type: application/json
Content-Length: 1049
Date: Tue, 21 Jul 2020 15:38:30 GMT

{
  "rules": [{
    "id": "abc123",
    "condition": {
      "httpErrorCodeReturnedEquals": "404",
      "objectKeyPrefixEquals": "video/"
    },
    "redirect": {
      "agency": "agency",
      "publicSource": {
        "sourceEndpoint": {
          "master": ["http://bucket1.xxx.yyy.com", "https://bucket2.xxx.yyy.com"],
          "slave": ["http://bucket3.xxx.yyy.com", "https://bucket4.xxx.yyy.com"]
        }
      },
      "retryConditions": ["4XX", "5XX"],
      "passQueryString": true,
      "mirrorFollowRedirect": true,
      "redirectWithoutReferer": true,
      "mirrorAllowHttpMethod": ["HEAD"],
      "mirrorHttpHeader": {
        "passAll": false,
        "pass": ["content-encoding"],
        "remove": ["content-type"],
        "set": [{
          "key": "helloworld",
          "value": "2222"
        }]
      },
      "replaceKeyWith": "prefix${key}suffix",
      "replaceKeyPrefixWith": "picture/",
      "vpcEndpointURN": "001"
    }
  ]
}
```

Sample Response

```
HTTP/1.1 201 Created
Server: OBS
Date: Tue, 07 Jul 2020 07:29:13 GMT
Content-Length: 0
```

5.2.38 Obtaining Mirroring Back-to-Source Rules

Functions

This operation queries the back-to-source rules of a specified bucket. If such a rule exists, a success message is returned with status code 200.

Request Syntax

```
GET /?mirrorBackToSource HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: authorization
Date: date
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Server: OBS
Date: date
Content-Type: type
Content-Length: length

policy json body
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#) and [Table 6-3](#).

Sample Request

```
GET /?mirrorBackToSource HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:sc2PM13Wlfcoc/YZLK0Mwsl2Zpo=
Date: Tue, 21 Jul 2020 22:28:46 GMT
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
Date: Tue, 07 Jul 2020 07:28:46 GMT
Content-Type: application/json
Content-Length: 1063
{
  "rules": [{
    "id": "abc123",
    "condition": {
```

```
    "httpErrorReturnedEquals": 404,
    "objectKeyPrefixEquals": "video/"
  },
  "redirect": {
    "agency": "agency",
    "publicSource": {
      "sourceEndpoint": {
        "master": ["http://bucket1.xxx.yyy.com", "https://bucket2.xxx.yyy.com"],
        "slave": ["http://bucket3.xxx.yyy.com", "https://bucket4.xxx.yyy.com"]
      }
    }
  },
  "retryConditions": ["4XX", "5XX"],
  "passQueryString": true,
  "mirrorFollowRedirect": true,
  "redirectWithoutReferer": true,
  "mirrorHttpHeader": {
    "passAll": false,
    "pass": ["content-encoding"],
    "remove": ["content-type"],
    "set": [{
      "key": "helloworld",
      "value": "2222"
    }]
  },
  "replaceKeyWith": "prefix${key}suffix",
  "replaceKeyPrefixWith": "picture/",
  "vpcEndpointURN": "001"
}
}}
```

5.2.39 Deleting Mirroring Back-to-Source Rules

Functions

This operation deletes mirroring back-to-source rules for a specified bucket. When the deletion succeeds, a success message is returned with the status code of 204.

Request Syntax

```
DELETE /?mirrorBackToSource HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: authorization
Date: date
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Server: OBS
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#) and [Table 6-3](#).

Sample Request

```
DELETE /?mirrorBackToSource HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:sc2PM13Wlfcoc/YZLK0Mwsl2Zpo=
Date: Tue, 21 Jul 2020 17:28:46 GMT
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
Date: Tue, 07 Jul 2020 07:38:30 GMT
```

5.2.40 Setting an Online Decompression Policy

Functions

Sets the policy for decompressing ZIP files in a bucket. The API is idempotent. If there is already the same rule for the bucket, a success message is returned with status code 200, or status code 201 is returned.

Request Syntax

```
PUT /?obscompresspolicy HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: authorization
Content-Type: application/json
Content-Length: length
Date: date

policy json body
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

Table 5-56 Request elements

Parameter	Description	Mandatory
rules	<p>Number of rules.</p> <p>Type: container</p> <p>Value range: [1, 10]</p> <p>NOTE For the same bucket, prefixes of different rules cannot contain each other or have duplicate beginning characters. The same agency is recommended.</p>	Yes

Table 5-57 Rule parameters

Parameter	Description	Mandatory
id	<p>Name of a decompression policy. It is the unique ID of the decompression policy configured for the current bucket.</p> <p>Type: string</p> <p>The value can contain 1 to 256 characters, matching the regular expression of <code>^[a-zA-Z0-9_-]{1, 256}\$</code>. It consists of only uppercase letters, lowercase letters, digits, underscores (_), and hyphens (-), for example, event_0001.</p>	Yes
project	<p>Project ID.</p> <p>Type: string</p>	Yes
agency	<p>Agency name. With an agency, the customer can grant OBS the permissions to query whether a specified object exists in the bucket and upload objects to the bucket.</p> <p>Type: string</p>	Yes
events	<p>Trigger event type.</p> <p>Type: string</p> <p>Supported event types:</p> <ul style="list-style-type: none"> ["ObjectCreated:*"] ["ObjectCreated:Put"] ["ObjectCreated:Post"] ["ObjectCreated:Copy"] ["ObjectCreated:CompleteMultipartUpload"] 	Yes

Parameter	Description	Mandatory
prefix	Rule prefix. Type: string Value range: [0, 1023]	No
suffix	Rule suffix. Type: string Fixed value: .zip	Yes
overwrite	Method of processing the unzipped file if it has the same name as an existing file. Type: integer 0 : Skip without overwriting; 1 : Do not overwrite (rename the file with the CRC32 value); 2 : Overwrite the existing file.	Yes
decompresspath	Path for storing decompressed files. This parameter must end with a slash (/) if it is not empty. Type: string Value range: [0, 800]	No
policytype	Type of the decompression policy. Type: string Fixed value: decompress	Yes

 **NOTE**

The total length of the decompression policy name, decompression path, and IAM agency name cannot exceed 800 characters.

Response Syntax

HTTP/1.1 *status*
Server: OBS
Date: *date*
Content-Length: *length*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#) and [Table 6-3](#).

Sample Request

```
PUT /?obscompresspolicy HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:sc2PM13Wlfcoc/YZLK0Mwsl2Zpo=
Content-Type: application/json
Content-Length: 497
Date: Tue, 21 Jul 2020 15:38:30 GMT

{
  "rules": [{
    "id": "ruleid",
    "project": "your project id",
    "agency": "testagency",
    "events": ["ObjectCreated:*"],
    "prefix": "decompress",
    "suffix": ".zip",
    "overwrite": 0,
    "decompresspath": "after-decompress/",
    "policytype": "decompress"
  }]
}
```

Sample Response

```
HTTP/1.1 201 Created
Server: OBS
Date: Tue, 07 Jul 2020 07:29:13 GMT
Content-Length: 0
```

5.2.41 Obtaining an Online Decompression Policy

Functions

Queries the decompression policy of ZIP files in a specified bucket. If such a rule exists, a success message is returned with status code 200.

Request Syntax

```
GET /?obscompresspolicy HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: authorization
Date: date
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Server: OBS  
Date: date  
Content-Type: type  
Content-Length: length  
  
policy json body
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#) and [Table 6-3](#).

Sample Request

```
GET /?obscompresspolicy HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Authorization: OBS H4lPjX0TQTHtHEBQQCEC:sc2PM13Wlfcoc/YZLK0Mwsl2Zpo=  
Date: Tue, 21 Jul 2020 22:28:46 GMT
```

Sample Response

```
HTTP/1.1 200 OK  
Server: OBS  
Date: Tue, 07 Jul 2020 07:28:46 GMT  
Content-Type: application/json  
Content-Length: 497  
  
{  
  "rules": [{  
    "id": "ruleid",  
    "project": "your project id",  
    "agency": "testagency",  
    "events": ["ObjectCreated:*"],  
    "prefix": "decompress",  
    "suffix": ".zip",  
    "overwrite": 0,  
    "decompresspath": "after-decompress/"  
  }]  
}
```

5.2.42 Deleting an Online Decompression Policy

Functions

Deletes the ZIP file decompression policy for a bucket. When the deletion succeeds, a success message is returned with the status code of 204.

Request Syntax

```
DELETE /?obscompresspolicy HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com
```

```
Authorization: authorization  
Date: date
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Server: OBS  
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#) and [Table 6-3](#).

Sample Request

```
DELETE /?obscompresspolicy HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:sc2PM13Wlfcoc/YZLK0Mwsl2Zpo=  
Date: Tue, 21 Jul 2020 17:28:46 GMT
```

Sample Response

```
HTTP/1.1 204 No Content  
Server: OBS  
Date: Tue, 07 Jul 2020 07:38:30 GMT
```

5.2.43 Configuring a Default WORM Policy for a Bucket

Functions

This operation allows you to configure the default WORM policy and a retention period for a bucket.

With the bucket's default WORM policy, if you do not specify a WORM policy or a retention period when you upload an object to the bucket, the default policy will be automatically applied to the newly uploaded object. An object-level WORM

policy requires configuring a specific date, which indicates an object will be protected until that date. For a default bucket-level WORM policy, a retention period is required, and the protection for an object starts when the object is uploaded to the bucket.

To perform this operation, you must have the PutBucketObjectLockConfiguration permission. The bucket owner can perform this operation by default and can grant this permission to others by using a bucket policy or a user policy.

NOTE

- You can modify or even delete the default WORM policy of a bucket. The change applies only to the objects uploaded after the change, but not to those uploaded before.
- During a multipart upload, the object parts uploaded are not protected before they are assembled. After object parts are assembled, the new object is protected by the default bucket-level WORM policy. You can also configure an object-level WORM policy for the new object.

Other restrictions on the WORM retention configuration:

- The WORM mode can only be **COMPLIANCE**.
- The retention period can be set to **1** to **36500** days or **1** to **100** years.

Request Syntax

```
PUT /?object-lock HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
Content-Type: application/xml
Content-Length: length
<ObjectLockConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <ObjectLockEnabled>Enabled</ObjectLockEnabled>
  <Rule>
    <DefaultRetention>
      <Days>integer</Days>
      <Mode>COMPLIANCE</Mode>
      <Years>integer</Years>
    </DefaultRetention>
  </Rule>
</ObjectLockConfiguration>
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

Table 5-58 Request elements

Element	Description	Mandatory
ObjectLockConfiguration	Container for configuring WORM for a bucket. Type: container	Yes
ObjectLockEnabled	Indicates whether the bucket has WORM enabled. The value can only be Enabled . Type: string Example: Enabled	No
Rule	Rule container for the default bucket-level WORM policy. Type: container	This header is mandatory for configuring the default WORM policy for a bucket. If it is not contained, the existing default WORM policy will be deleted.
DefaultRetention	Container for the default WORM retention policy for the bucket. Type: container	Mandatory if the Rule container is included.
Mode	Default protection mode. It can only be set to COMPLIANCE now. Type: string Example: COMPLIANCE	Mandatory if the DefaultRetention container is included.
Days	Default protection period, in days. The value is from 1 to 36500 . Type: integer Example: 1	If the DefaultRetention container is included, you must specify either Days or Years , but you cannot specify both at the same time.
Years	Default protection period, in years. The value is from 1 to 100 . In a leap year, only 365 days are calculated. Type: integer Example: 1	If the DefaultRetention container is included, you must specify either Years or Days , but you cannot specify both at the same time.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
```

Response Headers

This response uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

[Table 5-59](#) describes possible special errors in this request.

Table 5-59

Error Code	Description	HTTP Status Code
InvalidRequest	The object lock is disabled for the bucket.	400
MalformedXML	Invalid format of the Object Lock configuration.	400

For other errors, see [Table 6-2](#).

Sample Request 1

Configure the default bucket-level WORM policy with a retention period of 2 years.

```
PUT /?object-lock HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:25:05 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=
Content-Type: application/xml
Content-Length: 157
<ObjectLockConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <ObjectLockEnabled>Enabled</ObjectLockEnabled>
  <Rule>
    <DefaultRetention>
      <Mode>COMPLIANCE</Mode>
      <Years>2</Years>
    </DefaultRetention>
  </Rule>
</ObjectLockConfiguration>
```

Sample Response 1

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435CE298386946AE4C482
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCT9W2tcvLmMJ+plfdopaD62S0npbaRUz
```

```
Date: WED, 01 Jul 2015 02:25:06 GMT  
Content-Length: 0
```

Sample Request 2

Delete the configuration of the default bucket-level WORM policy.

```
PUT /?object-lock HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Date: WED, 01 Jul 2015 02:25:05 GMT  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=  
Content-Type: application/xml  
Content-Length: 157  
<ObjectLockConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">  
</ObjectLockConfiguration>
```

Sample Response 2

```
HTTP/1.1 200 OK  
Server: OBS  
x-obs-request-id: BF260000016435CE298386946AE4C482  
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCT9W2tcvLmMJ+plfdopaD62S0npbaRUz  
Date: WED, 01 Jul 2015 02:25:06 GMT  
Content-Length: 0
```

5.2.44 Obtaining the Default WORM Policy of a Bucket

Functions

This operation returns the default WORM policy of a bucket.

To perform this operation, you must have the `GetBucketObjectLockConfiguration` permission. The bucket owner can perform this operation by default and can grant this permission to others by using a bucket policy or a user policy.

NOTE

If you have never configured the default bucket-level retention policy after you enable WORM for a bucket, you can still use this API to check whether WORM is enabled.

Request Syntax

```
GET /?object-lock HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Date: date  
Authorization: authorization  
Content-Type: application/xml  
Content-Length: length
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: application/xml
Content-Length: length

<?xml version="1.0" encoding="UTF-8"?>
<ObjectLockConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <ObjectLockEnabled>Enabled</ObjectLockEnabled>
  <Rule>
    <DefaultRetention>
      <Days>integer</Days>
      <Mode>COMPLIANCE</Mode>
      <Years>integer</Years>
    </DefaultRetention>
  </Rule>
</ObjectLockConfiguration>
```

Response Headers

This response uses common headers. For details, see [Table 3-20](#).

Response Elements

[Table 5-60](#) describes the elements of the default bucket-level WORM policy in the response.

Table 5-60 Elements of the default bucket-level WORM policy

Element	Description
ObjectLockConfigura-tion	Container for configuring for a bucket. Type: container
ObjectLockEnabled	Indicates whether WORM is enabled for the bucket. The value can only be Enabled . Type: string Example: Enabled
Rule	Container for the default bucket-level WORM policy. If you have never configured the default policy, this header will not be included in the response. Type: container
DefaultRetention	Container for the default bucket-level WORM policy. Type: container
Mode	Default protection mode. It can only be set to COMPLIANCE now. Type: string Example: COMPLIANCE

Element	Description
Days	Default protection period, in days. The value is from 1 to 36500. Type: integer Example: 1
Years	Default protection period, in years. The value is from 1 to 100. In a leap year, only 365 days are calculated. Type: integer Example: 1

Error Responses

[Table 5-61](#) describes possible special errors in this request.

Table 5-61

Error Code	Description	HTTP Status Code
InvalidRequest	The object lock is disabled for the bucket.	400

For other errors, see [Table 6-2](#).

Sample Request 1

Get the configuration where the bucket has WORM enabled, but has no default retention policy configured.

```
GET /?object-lock HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:25:05 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvc1nTGxpMXTE6ynw=
Content-Length: 0
```

Sample Response 1

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435CE298386946AE4C482
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCT9W2tcvLmMJ+plfdopaD62S0npbaRUz
Date: WED, 01 Jul 2015 02:25:06 GMT
Content-Length: 157

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ObjectLockConfiguration xmlns="http://obs.myhwclouds.com/doc/2015-06-30/">
  <ObjectLockEnabled>Enabled</ObjectLockEnabled>
</ObjectLockConfiguration>
```

Sample Request 2

Get the configuration where the bucket has WORM enabled and has the default retention policy configured.

```
GET /?object-lock HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:25:05 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=
Content-Length: 0
```

Sample Response 2

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435CE298386946AE4C482
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCT9W2tcvLmMJ+plfdopaD62S0npbaRUz
Date: WED, 01 Jul 2015 02:25:06 GMT
Content-Length: 157

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ObjectLockConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <ObjectLockEnabled>Enabled</ObjectLockEnabled>
  <Rule>
    <DefaultRetention>
      <Mode>COMPLIANCE</Mode>
      <Days>10</Days>
      <Years>0</Years>
    </DefaultRetention>
  </Rule>
</ObjectLockConfiguration>
```

5.3 Static Website Hosting

5.3.1 Configuring Static Website Hosting for a Bucket

Functions

OBS allows you to store static web page resources such as HTML web pages, flash files, videos, and audios in a bucket. When a client accesses these resources from the website endpoint of the bucket, the browser can directly resolve and present the resources to the client. This operation is applicable to:

- Redirecting all requests to a website endpoint.
- Adding routing rules that redirect specific requests.

You can perform this operation to create or update the website configuration of a bucket.

To perform this operation, you must have the **PutBucketWebsite** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

 **NOTE**

Avoid using periods (.) in the destination bucket name. Otherwise, failures in client authentication certificate may occur when users use HTTPS for access.

The maximum size of a network configuration request for a bucket is 10 KB.

Request Syntax

```
PUT /?website HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Content-Length: length
Date: date
Authorization: authorization
<WebsiteConfiguration>
  <RedirectAllRequestsTo>
    <HostName>hostName</HostName>
  </RedirectAllRequestsTo>
</WebsiteConfiguration>
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request contains elements to specify the website configuration in XML format.

- To redirect all website requests sent to the bucket's website endpoint, add the elements as described in [Table 5-62](#).

Table 5-62 Elements for redirecting all website requests

Element	Description	Mandatory
WebsiteConfiguration	Root node configured on the website Type: container Parent: none	Yes
RedirectAllRequestsTo	Describes the redirection behavior for every request to this bucket's website endpoint. If this element is present, no other siblings are allowed. Type: container Parent: WebsiteConfiguration	Yes

Element	Description	Mandatory
HostName	Name of the host where requests will be redirected Type: string Parent: RedirectAllRequestsTo	Yes
Protocol	The HTTP or HTTPS protocol used in redirecting requests. The default protocol is HTTP. Type: string Parent: RedirectAllRequestsTo	No

- To configure redirection rules, add the elements as described in [Table 5-63](#).

Table 5-63 Elements for adding rules that redirect requests

Element	Description	Mandatory
WebsiteConfiguration	Root element for the website configuration Type: container Parent: none	Yes
IndexDocument	Suff element Type: container Parent: WebsiteConfiguration	Yes
Suffix	<i>Suffix</i> that is appended to a request initiated for a directory on the website endpoint. For example, if the <i>suffix</i> is index.html and you request for samplebucket/images/ , the data that is returned will be for the object with the key name images/index.html in the samplebucket bucket. <i>Suffix</i> cannot be empty or contain slashes (/). Type: string Parent: IndexDocument	Yes

Element	Description	Mandatory
ErrorDocument	<p><i>Key</i> element</p> <p>Type: container</p> <p>Parent: WebsiteConfiguration</p>	No
Key	<p>Object key that is used when a 4XX error occurs. This element identifies the page that is returned when a 4XX error occurs.</p> <p>Type: string</p> <p>Parent: ErrorDocument</p> <p>Condition: Required when ErrorDocument is specified.</p>	No
RoutingRules	<p><i>Routing</i> element</p> <p>Type: container</p> <p>Parent: WebsiteConfiguration</p>	No
RoutingRule	<p>Element of a redirection rule. A redirection rule contains a Condition and a Redirect. When the Condition is matched, Redirect takes effect.</p> <p>Type: container</p> <p>Parent: RoutingRules</p> <p>At least the <i>RoutingRule</i> element is required.</p>	Yes
Condition	<p>Element for describing a condition that must be met for the specified redirection to apply.</p> <p>Type: container</p> <p>Parent: RoutingRule</p>	No

Element	Description	Mandatory
KeyPrefixEquals	<p>Object key name prefix when the redirection is applied.</p> <p>Example:</p> <ul style="list-style-type: none"> To redirect the request for object ExamplePage.html, the KeyPrefixEquals is set to ExamplePage.html. <p>Type: string</p> <p>Parent: Condition</p> <p>Condition: Required when the ancestor element Condition is specified and sibling HttpErrorCodeReturnedEquals is not specified. If two conditions are specified, both conditions must be true for the Redirect to be applied.</p>	No
HttpErrorCodeReturnedEquals	<p>HTTP error code returned after the Redirect has taken effect. The specified Redirect is applied only when the error code returned equals this value.</p> <p>Example:</p> <ul style="list-style-type: none"> If you want to redirect requests to NotFound.html when HTTP error code 404 is returned, set HttpErrorCodeReturnedEquals to 404 in Condition, and set ReplaceKeyWith to NotFound.html in Redirect. <p>Type: string</p> <p>Parent: Condition</p> <p>Condition: Required when ancestor element Condition is specified and sibling KeyPrefixEquals is not specified. If multiple conditions are specified, the Redirect takes effect only after all conditions are met.</p>	No

Element	Description	Mandatory
Redirect	<p>Element for redirection information. You can redirect requests to another host, to another web page, or with another protocol. You can specify an error code to be returned after an error.</p> <p>Type: container Parent: RoutingRule</p>	Yes
Protocol	<p>Protocol used in the redirection request</p> <p>Type: string Parent: Redirect Value options: http, https Condition: Not required if one of the siblings is present.</p>	No
HostName	<p>Host name used in the redirection request.</p> <p>Type: string Parent: Redirect Condition: Not required if one of the siblings is present.</p>	No
ReplaceKeyPrefixWith	<p>The object name prefix used in the redirection request. OBS replaces the value of KeyPrefixEquals with the value you specified here for ReplaceKeyPrefixWith.</p> <p>Example: To redirect all requests for docs (objects in the docs directory) to documents (objects in the documents directory), set KeyPrefixEquals to docs under Condition and ReplaceKeyPrefixWith to documents under Redirect. This way, requests for object docs/a.html will be redirected to documents/a.html.</p> <p>Type: string Parent: Redirect Condition: Not required if one of the siblings is present. Can be present only if ReplaceKeyWith is not provided.</p>	No

Element	Description	Mandatory
ReplaceKeyWith	<p>The object name used in the redirection request. OBS replaces the entire object name in the request with the value you specified here for ReplaceKeyWith.</p> <p>Example:</p> <p>To redirect requests for all objects in the docs directory to documents/error.html, set KeyPrefixEquals to docs under Condition and ReplaceKeyWith to documents/error.html under Redirect. This way, requests for both objects docs/a.html and docs/b.html will be redirected to documents/error.html.</p> <p>Type: string Parent: Redirect Condition: Not required if one of the siblings is present. Can be present only if ReplaceKeyPrefixWith is not provided.</p>	No
HttpRedirectCode	<p>HTTP status code returned after the redirection request</p> <p>Type: string Parent: Redirect Condition: Not required if one of the siblings is present.</p>	No

Response Syntax

HTTP/1.1 *status_code*
Date: *date*
Content-Length: *length*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Redirecting All Requests for a Bucket to Another Bucket or URL

```
PUT /?website HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:40:29 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:pUK7Yp0yebnq4P6gqzVjoS7whoM=
Content-Length: 194

<WebsiteConfiguration xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <RedirectAllRequestsTo>
    <HostName>www.huaweicloud.com</HostName>
  </RedirectAllRequestsTo>
</WebsiteConfiguration>
```

Sample Response: Redirecting All Requests for a Bucket to Another Bucket or URL

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF2600000164360D144670B9D02AABC6
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCSItqMZ/AoFUX971lxx8s67V3cCQtXWk
Date: WED, 01 Jul 2015 03:40:29 GMT
Content-Length: 0
```

Sample Request: Configuring a Bucket to Host a Static Website

```
PUT /?website HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBI66PwXDApxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<WebsiteConfiguration xmlns='http://obs.region.myhuaweicloud.com/doc/2015-06-30/'>
  <IndexDocument>
    <Suffix>index.html</Suffix>
  </IndexDocument>
  <ErrorDocument>
    <Key>SomeErrorDocument.html</Key>
  </ErrorDocument>
</WebsiteConfiguration>
```

Sample Response: Configuring a Bucket to Host a Static Website

```
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCSfxlr+FrXuJzYpLod1lrlK45tVx+GPR
x-obs-request-id: 0000018A39F07D0DD3888442DC29719E
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

Sample Request: Configuring a Bucket to Host a Static Website, with an Optional Redirection Rule Specified

```
PUT /?website HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBI66PwXDApxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<WebsiteConfiguration xmlns='http://obs.region.myhuaweicloud.com/doc/2015-06-30/'>
  <IndexDocument>
    <Suffix>index.html</Suffix>
```

```
</IndexDocument>
<ErrorDocument>
  <Key>Error.html</Key>
</ErrorDocument>
<RoutingRules>
  <RoutingRule>
    <Condition>
      <KeyPrefixEquals>docs/</KeyPrefixEquals>
    </Condition>
    <Redirect>
      <ReplaceKeyPrefixWith>documents/</ReplaceKeyPrefixWith>
    </Redirect>
  </RoutingRule>
</RoutingRules>
</WebsiteConfiguration>
```

Sample Response: Configuring a Bucket to Host a Static Website, with an Optional Redirection Rule Specified

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSxixo46vLYhGrY/zwgqIM0fMNpeFthi
x-obs-request-id: 0000018A39F2E328D3888F46DB9BB5A2
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

Sample Request: Configuring a Bucket to Host a Static Website and Redirecting Errors

```
PUT /?website HTTP/1.1
Authorization: OBS H4lPJX0TQHTHEBQQCEC:iqSPeUBL66PwXDApxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<WebsiteConfiguration xmlns='http://obs.region.myhuaweicloud.com/doc/2015-06-30/'>
  <IndexDocument>
    <Suffix>index.html</Suffix>
  </IndexDocument>
  <ErrorDocument>
    <Key>Error.html</Key>
  </ErrorDocument>
  <RoutingRules>
    <RoutingRule>
      <Condition>
        <HttpErrorCodeReturnedEquals>404</HttpErrorCodeReturnedEquals >
      </Condition>
      <Redirect>
        <HostName>www.huaweicloud.com</HostName>
        <ReplaceKeyPrefixWith>report-404/</ReplaceKeyPrefixWith>
      </Redirect>
    </RoutingRule>
  </RoutingRules>
</WebsiteConfiguration>
```

Sample Response: Configuring a Bucket to Host a Static Website and Redirecting Errors

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCS/xBBLGZwRUiL439eWMw1v/vphFB6JY
x-obs-request-id: 0000018A3A06C048D38610C04366B2F5
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

Sample Request: Configuring a Bucket to Host a Static Website and Redirecting Requests for Folders to Another Page

```
PUT /?website HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBl66PwXDApxjRk6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<WebsiteConfiguration xmlns='http://obs.region.myhuaweicloud.com/doc/2015-06-30/'>
  <IndexDocument>
    <Suffix>index.html</Suffix>
  </IndexDocument>
  <ErrorDocument>
    <Key>Error.html</Key>
  </ErrorDocument>
  <RoutingRules>
    <RoutingRule>
      <Condition>
        <KeyPrefixEquals>images/</KeyPrefixEquals>
      </Condition>
      <Redirect>
        <ReplaceKeyWith>errorpage.html</ReplaceKeyWith>
      </Redirect>
    </RoutingRule>
  </RoutingRules>
</WebsiteConfiguration>
```

Sample Response: Configuring a Bucket to Host a Static Website and Redirecting Requests for Folders to Another Page

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSLjAKDDyha8LY/HcoFNfbLBeAKCAYcv
x-obs-request-id: 0000018A3A09D30CD306902FC7572429
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

5.3.2 Obtaining the Static Website Hosting Configuration of a Bucket

Functions

You can perform this operation to get the static website hosting configuration of a bucket.

To perform this operation, you must have the **GetBucketWebsite** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
GET /?website HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: type
Content-Length: length
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<WebsiteConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <RedirectAllRequestsTo>
    <HostName>hostName</HostName>
  </RedirectAllRequestsTo>
</WebsiteConfiguration>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements the same as those used by the PutBucketWebsite request. For details, see [Request Elements](#).

Error Responses

[Table 5-64](#) describes possible special errors in this request.

Table 5-64 Special error

Error Code	Description	HTTP Status Code
NoSuchWebsiteConfiguration	The website configuration does not exist.	404 Not Found

For other errors, see [Table 6-2](#).

Sample Request

```
GET /?website HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:41:54 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:Yxt1Ru+feHE0S94R7dcBp+hflnl=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
```

```
x-obs-request-id: BF2600000164363442EC03A8CA3DD7F5
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSFbGOMlN0BVp1kbwN3har8jbVvtKEKN
Content-Type: application/xml
Date: WED, 01 Jul 2015 03:41:54 GMT
Content-Length: 250

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<WebsiteConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">

  <RedirectAllRequestsTo>
    <HostName>www.huaweicloud.com</HostName>
  </RedirectAllRequestsTo>
</WebsiteConfiguration>
```

5.3.3 Deleting the Static Website Hosting Configuration of a Bucket

Functions

You can perform this operation to delete the website configuration of a bucket.

To perform this operation, you must have the **DeleteBucketWebsite** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
DELETE /?website HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Type: type
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /?website HTTP/1.1
User-Agent: curl/7.29.0
Host: bucketname.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:44:37 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:AZ1b0N5eLknxNOe/c0BISV1bEqc=
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: BF2600000164363786230E2001DC0807
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSFUG4fEyDRgzUIEY2i71bJndBCy+wUZ
Date: WED, 01 Jul 2015 03:44:37 GMT
```

5.3.4 Configuring Bucket CORS

Functions

Cross-origin resource sharing (CORS) is a standard mechanism proposed by World Wide Web Consortium (W3C) and allows cross-origin requests from clients. For standard web page requests, the scripts and contents at one website cannot interact with those at another website due to the existence of the Same Origin Policy (SOP).

OBS allows buckets to store static web resources. The buckets of OBS can serve as website resources if the buckets are properly used (for details, see [Configuring Static Website Hosting for a Bucket](#)). A website in OBS can respond to requests of another websites only after CORS is properly configured.

Typical application scenarios are as follows:

- With the support of CORS, you can use JavaScript and HTML5 to construct web applications and directly access the resources in OBS without the need to use proxy servers for transfer.
- You can enable the dragging function of HTML 5 to directly upload files to the OBS (with the upload progress displayed) or update the OBS contents using web applications.
- Hosts external web pages, style sheets, and HTML 5 applications in different origins. Web fonts or pictures on OBS can be shared by multiple websites.

To perform this operation, you must have the **PutBucketCORS** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
PUT /?cors HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Content-Length: length
Date: date
Authorization: authorization
Content-SHA256: SHA256
<?xml version="1.0" encoding="UTF-8"?>
<CORSConfiguration>
  <CORSRule>
    <ID>id</ID>
    <AllowedMethod>method</AllowedMethod>
    <AllowedOrigin>origin</AllowedOrigin>
    <AllowedHeader>header</AllowedHeader>
    <MaxAgeSeconds>seconds</MaxAgeSeconds>
    <ExposeHeader>header</ExposeHeader>
  </CORSRule>
</CORSConfiguration>
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers and CORS request headers. For details, see [Table 3-3](#) and [Table 5-65](#).

Table 5-65 CORS request header

Header	Description	Mandatory
Content-SHA256	Base64-encoded 256-bit SHA256 digest of the message according to SHA. Type: string Example: ogX9qClMrVJUBiUSIKDFM0qO41jJM0I5SCN55/OtMyl=	Yes

Request Elements

In this request body, you must configure the CORS rules for a bucket in XML format. [Table 5-66](#) describes the specific configuration elements.

Table 5-66 CORS configuration elements

Element	Description	Mandatory
CORSConfiguration	Root node of CORSRule and its capacity cannot exceed 64 KB. Type: container Parent: none	Yes

Element	Description	Mandatory
CORSRule	CORS rules. CORSConfiguration can contain a maximum of 100 rules. Type: container Parent: CORSConfiguration	Yes
ID	Unique identifier of a rule. The value can contain a maximum of 255 characters. Type: string Parent: CORSRule	No
AllowedMethod	Method allowed by a CORS rule Type: string Value options: GET, PUT, HEAD, POST, DELETE Parent: CORSRule	Yes
AllowedOrigin	Origins that are allowed in the CORS rule. Only English domain names are supported for configuring origins, and regular expressions can be used for matching origins. Each AllowedOrigin allows one wildcard character (*) at most. Type: string Parent: CORSRule	Yes
AllowedHeader	Headers that are allowed in a PutBucketCORS request via the Access-Control-Request-Headers header. If a CORS request contains Access-Control-Request-Headers , this request is considered valid only when it matches the configuration of AllowedHeader . The match is based on regular expressions. Each AllowedHeader can contain at most one wildcard (*) and cannot contain spaces. Type: string Parent: CORSRule	No
MaxAgeSeconds	The time in seconds that the client can cache CORS responses. Each CORSRule can contain only one MaxAgeSeconds. It can be set to a negative value. Type: integer Parent: CORSRule	No

Element	Description	Mandatory
ExposeHeader	An additional header in CORS responses. The header provides additional information for clients. It cannot contain spaces. Type: string Parent: CORSRule	No

Response Syntax

HTTP/1.1 *status_code*

Date: *date*

Content-Length: *length*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /?cors HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:51:52 GMT
Authorization: OBS H4lPJX0TQTHHEBQQCEC:lq7BG0qE9yyhdEwE6KojJ7ysVxU=
Content-SHA256: ogX9qClMrVJUBiUSIKDFM0qO41jJM0I5SCN55/OtMyI=
Content-Length: 617
```

```
<?xml version="1.0" encoding="utf-8"?>
<CORSConfiguration>
  <CORSRule>
    <AllowedMethod>POST</AllowedMethod>
    <AllowedMethod>GET</AllowedMethod>
    <AllowedMethod>HEAD</AllowedMethod>
    <AllowedMethod>PUT</AllowedMethod>
    <AllowedMethod>DELETE</AllowedMethod>
    <AllowedOrigin>www.example.com</AllowedOrigin>
    <AllowedHeader>AllowedHeader_1</AllowedHeader>
    <AllowedHeader>AllowedHeader_2</AllowedHeader>
    <MaxAgeSeconds>100</MaxAgeSeconds>
    <ExposeHeader>ExposeHeader_1</ExposeHeader>
    <ExposeHeader>ExposeHeader_2</ExposeHeader>
  </CORSRule>
</CORSConfiguration>
```

Sample Response

```
HTTP/1.1 100 Continue
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF26000001643627112BD03512FC94A4
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSYi6wLC4bkrvuS9sqnlRjxK2a5Fe3ry
Date: WED, 01 Jul 2015 03:51:52 GMT
Content-Length: 0
```

Sample Request: Configuring Two CORS Rules for a Bucket

```
PUT /?cors HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBl66PwXDapjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
Content-MD5: HwVUAzsyD0rroMp/eldwQ==

<CORSConfiguration>
  <CORSRule>
    <AllowedOrigin>http://www.example.com</AllowedOrigin>
    <AllowedMethod>PUT</AllowedMethod>
    <AllowedMethod>POST</AllowedMethod>
    <AllowedMethod>DELETE</AllowedMethod>
    <AllowedHeader>*</AllowedHeader>
  </CORSRule>
  <CORSRule>
    <AllowedOrigin>*</AllowedOrigin>
    <AllowedMethod>GET</AllowedMethod>
  </CORSRule>
</CORSConfiguration>
```

Sample Response: Configuring Two CORS Rules for a Bucket

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCTPXg+yj9IXC9r6mgmWgfSfqQGvHM3rS
x-obs-request-id: 0000018A3A14051AD2886D166EE13D98
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
```

5.3.5 Obtaining the CORS Configuration of a Bucket

Functions

You can perform this operation to obtain CORS configuration information about a specified bucket.

To perform this operation, you must have the **GetBucketCORS** permission. By default, only the bucket owner can perform this operation. The bucket owner can grant the permission to other users by configuring the bucket policy or user policy.

Request Syntax

```
GET /?cors HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Content-Type: application/xml
Date: date
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<CORSSConfiguration xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <CORSSRule>
    ...
  </CORSSRule>
</CORSSConfiguration>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements to detail the configuration. [Table 5-67](#) describes the elements.

Table 5-67 CORS configuration elements

Element	Description
CORSSConfiguration	Root node of CORSSRules and its capacity cannot exceed 64 KB. Type: container Parent: none
CORSSRule	CORS rule. CORSSConfiguration can contain a maximum of 100 rules. Type: container Parent: CORSSConfiguration
ID	Unique identifier of a rule. The value can contain a maximum of 255 characters. Type: string Parent: CORSSRule
AllowedMethod	Method allowed by a CORS rule. Type: string Value options: GET, PUT, HEAD, POST, DELETE Parent: CORSSRule

Element	Description
AllowedOrigin	Indicates an origin that is allowed by a CORS rule. It is a character string and can contain a wildcard (*), and allows one wildcard character (*) at most. Type: string Parent: CORSRule
AllowedHeader	Indicates which headers are allowed in a PUT Bucket CORS request via the Access-Control-Request-Headers header. If a request contains Access-Control-Request-Headers , only a CORS request that matches the configuration of AllowedHeader is considered as a valid request. Each AllowedHeader can contain at most one wildcard (*) and cannot contain spaces. Type: string Parent: CORSRule
MaxAgeSeconds	Response time of CORS that can be cached by a client. It is expressed in seconds. Each CORSRule can contain only one MaxAgeSeconds. It can be set to a negative value. Type: integer Parent: CORSRule
ExposeHeader	Indicates a supplemented header in CORS responses. The header provides additional information for clients. It cannot contain spaces. Type: string Parent: CORSRule

Error Responses

[Table 5-68](#) describes possible special errors in this request.

Table 5-68 Special error

Error Code	Description	HTTP Status Code
NoSuchCORSConfigura-tion	Indicates that the CORS configuration of buckets does not exist.	404 Not Found

For other errors, see [Table 6-2](#).

Sample Request

```
GET /?cors HTTP/1.1
User-Agent: curl/7.29.0
```

```
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 03:54:36 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:WJGghTrPQQXRuCx5go1fHyE+Wwg=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF2600000164363593F10738B80CACBE
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSpngvwC5TskcLGh7Fz5KRmCFIayuY8p
Content-Type: application/xml
Date: WED, 01 Jul 2015 03:54:36 GMT
Content-Length: 825

<?xml version="1.0" encoding="utf-8"?>
<CORSCONFIGURATION xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <CORSRULE>
    <ID>783fc6652cf246c096ea836694f71855</ID>
    <ALLOWEDMETHOD>POST</ALLOWEDMETHOD>
    <ALLOWEDMETHOD>GET</ALLOWEDMETHOD>
    <ALLOWEDMETHOD>HEAD</ALLOWEDMETHOD>
    <ALLOWEDMETHOD>PUT</ALLOWEDMETHOD>
    <ALLOWEDMETHOD>DELETE</ALLOWEDMETHOD>

    <ALLOWEDORIGIN>obs.ap-southeast-1.myhuaweicloud.com</ALLOWEDORIGIN>
    <ALLOWEDORIGIN>obs.example.com</ALLOWEDORIGIN>
    <ALLOWEDORIGIN>www.example.com</ALLOWEDORIGIN>
    <ALLOWEDHEADER>AllowedHeader_1</ALLOWEDHEADER>
    <ALLOWEDHEADER>AllowedHeader_2</ALLOWEDHEADER>
    <MAXAGESECONDS>100</MAXAGESECONDS>
    <EXPOSEHEADER>ExposeHeader_1</EXPOSEHEADER>
    <EXPOSEHEADER>ExposeHeader_2</EXPOSEHEADER>
  </CORSRULE>
</CORSCONFIGURATION>
```

5.3.6 Deleting the CORS Configuration of a Bucket

Functions

This operation is used to delete the CORS configuration of a bucket. After the CORS configuration is deleted, the bucket and objects in it cannot be accessed by requests from other websites.

To perform this operation, you must have the **PutBucketCORS** permission.

Request Syntax

```
DELETE /?cors HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Date: date  
Content-Type: application/xml  
Content-Length: length
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /?cors HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: */*  
Date: WED, 01 Jul 2015 03:56:41 GMT  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:mKUs/uIPb8BP0ZhvMd4wEy+Ebil=
```

Sample Response

```
HTTP/1.1 204 No Content  
Server: OBS  
x-obs-request-id: BF26000001643639F290185BB27F793A  
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABC SLWMRFJfckapW+kt/+1AnAz7XINU0b  
Date: WED, 01 Jul 2015 03:56:41 GMT
```

5.3.7 OPTIONS Bucket

Functions

OPTIONS refers to pre-requests that are sent to servers by clients. Generally, the requests are used to check whether clients have permissions to perform operations on servers. Only after a pre-request is returned successfully, clients start to execute the follow-up requests.

OBS allows static web resources to be stored in buckets with appropriate configurations. In this scenario, buckets in the OBS serve as servers to process OPTIONS pre-requests from clients.

OBS can process OPTIONS pre-requests only after CORS is configured for buckets in OBS. For details about CORS, see [Configuring Bucket CORS](#).

Differences Between OPTIONS Bucket and OPTIONS Object

With the OPTIONS Object, you need to specify an object name in the URL, but an object name is not required with the OPTIONS Bucket, which uses the bucket domain name as the URL. The request lines of the two methods are as follows:

```
OPTIONS /object HTTP/1.1
OPTIONS / HTTP/1.1
```

Request Syntax

```
OPTIONS / HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
Origin: origin
Access-Control-Request-Method: method
```

Request Parameters

This request contains no message parameters.

Request Headers

This request uses the headers described in [Table 5-69](#).

Table 5-69 OPTIONS request headers

Header	Description	Mandatory
Origin	Origin of the cross-domain request specified by the pre-request. Generally, it is a domain name set in CORS. Type: string	Yes
Access-Control-Request-Method	An HTTP method that can be used by a request. The request can use multiple method headers. Type: string Value options: GET, PUT, HEAD, POST, DELETE	Yes
Access-Control-Request-Headers	HTTP headers of a request. The request can use multiple HTTP headers. Type: string	No

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Content-Type: application/xml
Access-Control-Allow-Origin: origin
Access-Control-Allow-Methods: method
```

Access-Control-Allow-Header: *header*
 Access-Control-Max-Age: *time*
 Access-Control-Expose-Headers: *header*
 Date: *date*
 Content-Length: *length*

Response Headers

The response uses the following headers as described in [Table 5-70](#).

Table 5-70 CORS response headers

Header	Description
Access-Control-Allow-Origin	If the origin of a request meets server CORS configuration requirements, the response contains the origin. Type: string
Access-Control-Allow-Headers	If the headers of a request meet server CORS configuration requirements, the response contains the headers. Type: string
Access-Control-Max-Age	Value of MaxAgeSeconds in the CORS configuration of a server Type: integer
Access-Control-Allow-Methods	If the Access-Control-Request-Method of a request meets server CORS configuration requirements, the response contains the methods in the rule. Type: string Value options: GET, PUT, HEAD, POST, DELETE
Access-Control-Expose-Headers	Value of ExposeHeader in the CORS configuration of a server Type: string

Response Elements

This response contains no elements.

Error Responses

[Table 5-71](#) describes possible special errors in the request.

Table 5-71 Special error

Error Code	Description	HTTP Status Code
Bad Request	Invalid Access-Control-Request-Method: null When CORS and OPTIONS are configured for a bucket, no method header is added.	400 BadRequest
Bad Request	Insufficient information. Origin request header needed. When CORS and OPTIONS are configured for a bucket, no origin header is added.	400 BadRequest
AccessForbidden	CORSResponse: This CORS request is not allowed. This is usually because the evaluation of Origin, request method / Access-Control-Request-Method or Access-Control-Request-Headers are not whitelisted by the resource's CORS specification. When CORS and OPTIONS are configured for a bucket, origin, method, and headers do not match any rule.	403 Forbidden

For other errors, see [Table 6-2](#).

Sample Request

```
OPTIONS / HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:02:15 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:7RqP1vjemo6U+Adv9/Y6eGzWrzA=
Origin: www.example.com
Access-Control-Request-Method: PUT
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016436314E8FF936946DBC9C
Access-Control-Allow-Origin: www.example.com
Access-Control-Allow-Methods: POST,GET,HEAD,PUT,DELETE
Access-Control-Max-Age: 100
Access-Control-Expose-Headers: ExposeHeader_1,ExposeHeader_2
Access-Control-Allow-Credentials: true
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCTIYimJvOyJncCLNm5y/iz6MAGLNxTuS
Date: WED, 01 Jul 2015 04:02:15 GMT
Content-Length: 0
```

5.3.8 OPTIONS Object

Functions

For details, see [OPTIONS Bucket](#).

Differences Between OPTIONS Bucket and OPTIONS Object

With the OPTIONS Object, you need to specify an object name in the URL, but an object name is not required with the OPTIONS Bucket, which uses the bucket domain name as the URL. The request lines of the two methods are as follows:

```
OPTIONS /object HTTP/1.1
OPTIONS / HTTP/1.1
```

Request Syntax

```
OPTIONS /object HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
Origin: origin
Access-Control-Request-Method: method
```

Request Parameters

This request contains no message parameters.

Request Headers

[Table 5-72](#) describes headers used by this request.

Table 5-72 OPTIONS request headers

Header	Description	Mandatory
Origin	Origin of the cross-domain request specified by the pre-request. Generally, it is a domain name set in CORS. Type: string	Yes
Access-Control-Request-Method	Indicates an HTTP method that can be used by a request. The request can use multiple method headers. Type: string Value options: GET, PUT, HEAD, POST, DELETE	Yes
Access-Control-Request-Headers	Indicates the HTTP headers of a request. The request can use multiple HTTP headers. Type: string	No

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Content-Type: type
Access-Control-Allow-Origin: origin
Access-Control-Allow-Methods: method
Access-Control-Allow-Header: header
Access-Control-Max-Age: time
Access-Control-Expose-Headers: header
Date: date
Content-Length: length
```

Response Headers

The request uses the headers described in [Table 5-73](#).

Table 5-73 CORS request headers

Header	Description
Access-Control-Allow-Origin	If the origin of a request meets server CORS configuration requirements, the response contains the origin. Type: string
Access-Control-Allow-Headers	If the headers of a request meet server CORS configuration requirements, the response contains the headers. Type: string
Access-Control-Max-Age	Value of MaxAgeSeconds in the CORS configuration of a server. Type: integer
Access-Control-Allow-Methods	If the Access-Control-Request-Method of a request meets server CORS configuration requirements, the response contains the methods in the rule. Type: string Value options: GET, PUT, HEAD, POST, DELETE
Access-Control-Expose-Headers	Indicates ExposeHeader in the CORS configuration of a server. Type: string

Response Elements

This response contains no elements.

Error Responses

[Table 5-74](#) describes possible special errors in the request.

Table 5-74 Special error

Error Code	Description	HTTP Status Code
Bad Request	Invalid Access-Control-Request-Method: null When CORS and OPTIONS are configured for a bucket, no method header is added.	400 BadRequest
Bad Request	Insufficient information. Origin request header needed. When CORS and OPTIONS are configured for a bucket, no origin header is added.	400 BadRequest
AccessForbidden	CORSResponse: This CORS request is not allowed. This is usually because the evaluation of Origin, request method/Access-Control-Request-Method or Access-Control-Request-Headers are not whitelisted by the resource's CORS spec. When CORS and OPTIONS are configured for a bucket, origin, method, and headers do not match any rule.	403 Forbidden

For other errors, see [Table 6-2](#).

Sample Request

```
OPTIONS /object_1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:02:19 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:bQZG9c2aokAJsHOOkuVBK6cHZZQ=
Origin: www.example.com
Access-Control-Request-Method: PUT
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF26000001643632D12EFCE1C1294555
Access-Control-Allow-Origin: www.example.com
Access-Control-Allow-Methods: POST,GET,HEAD,PUT,DELETE
Access-Control-Max-Age: 100
Access-Control-Expose-Headers: ExposeHeader_1,ExposeHeader_2
Access-Control-Allow-Credentials: true
```

```
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCS+DXV4zZetbTqFehhEcuXywTa/mi3T3  
Date: WED, 01 Jul 2015 04:02:19 GMT  
Content-Length: 0
```

5.4 Operations on Objects

5.4.1 Uploading an Object - PUT

Functions

After creating a bucket in OBS, you can use this operation to upload an object to the bucket. This operation uploads an object to a bucket. To use this operation, you must have the write permission for the bucket.

NOTE

The name of each object in a bucket must be unique.

With versioning not enabled, if an object to be uploaded has the same name as an existing object in the bucket, the newly uploaded object will overwrite the existing one. To protect data from being corrupted during transmission, you can add the **Content-MD5** header in the request. After receiving the uploaded object, OBS compares the provided MD5 value to the MD5 value it calculates. If the two values do not match, OBS reports an error.

You can also specify the value of the **x-obs-acl** parameter to configure an access control policy for the object. If the **x-obs-acl** parameter is not specified when an anonymous user uploads an object, the object can be accessed by all OBS users by default.

This operation supports server-side encryption.

For a single upload, the size of the object to be uploaded ranges [0, 5 GB]. To upload a file greater than 5 GB, see [Operations on Multipart Upload](#).

OBS does not have real folders. To facilitate data management, OBS provides a method to simulate a folder by adding a slash (/) to the object name, for example, **test/123.jpg**. You can simulate **test** as a folder and **123.jpg** as the name of a file under the **test** folder. However, the object key remains **test/123.jpg**. Objects named in this format appear as folders on the console. When you upload an object larger than 0 in size using this format, an empty folder will be displayed on the console, but the occupied storage capacity is the actual object size.

An object name containing [special characters](#) must be URL encoded. For example, **#obj** must be encoded as **%23obj**.

Differences Between PUT and POST Methods

Parameters are passed through the request header if the PUT method is used to upload objects; if the POST method is used to upload objects, parameters are passed through the form field in the message body.

With the PUT method, you need to specify the object name in the URL, but object name is not required with the POST method, which uses the bucket domain name as the URL. Request lines of these two methods are given as follows:

```
PUT /ObjectName HTTP/1.1  
POST / HTTP/1.1
```

For details about POST upload, see [Uploading an Object - POST](#).

Versioning

If versioning is enabled for a bucket, the system automatically generates a unique version ID for the requested object in this bucket and returns the version ID in response header **x-obs-version-id**. If versioning is suspended for the bucket, the object version ID is **null**. For details about the versioning statuses of a bucket, see [Configuring Versioning for a Bucket](#).

WORM

If a bucket has WORM enabled, you can configure retention policies for objects in the bucket. You can specify the **x-obs-object-lock-mode** and **x-obs-object-lock-retain-until-date** headers to configure a retention policy when you upload an object. If you do not specify these two headers but have configured a default bucket-level WORM policy, this default policy automatically applies to the object newly uploaded. You can also configure or update a WORM retention policy for an existing object.

NOTE

When you enable WORM for a bucket, OBS automatically enables versioning for the bucket. WORM protects objects based on the object version IDs. Only object versions with any WORM retention policy configured will be protected. Assume that object **test.txt 001** is protected by WORM. If another file with the same name is uploaded, a new object version **test.txt 002** with no WORM policy configured will be generated. In such case, **test.txt 002** is not protected and can be deleted. When you download an object without specifying a version ID, the current object version (**test.txt 002**) will be downloaded.

Request Syntax

```
PUT /ObjectName HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Content-Type: application/xml  
Content-Length: length  
Authorization: authorization  
Date: date  
<Optional Additional Header>  
<object Content>
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#). The request can use additional headers, as listed in [Table 5-75](#).

 NOTE

OBS supports the six HTTP request headers: Cache-Control, Expires, Content-Encoding, Content-Disposition, Content-Type, and Content-Language. If these headers are carried in an object upload request, their values are saved. You can also call the metadata modification API, provided by OBS, to change the values of the six headers. When the object is downloaded or queried, the saved values are set for corresponding HTTP headers and returned to the client.

Table 5-75 Request headers

Header	Description	Mandatory
Content-MD5	Base64-encoded 128-bit MD5 digest of the message according to RFC 1864. Type: string Example: n58IG6hfm7vql4K0vnWpog==	No
x-obs-acl	When creating an object, you can add this header to set the permission control policy for the object. The predefined common policies are as follows: private , public-read , and public-read-write . For details about each policy, see the ACL configuration using header fields in ACLs . Type: string Note: This header is a predefined policy expressed in a character string. Example: x-obs-acl: public-read	No
x-obs-grant-read	When creating an object, you can use this header to grant all users in an account the permissions to read the object and obtain the object metadata. Type: string Example: x-obs-grant-read: id=domainID . If multiple accounts are authorized, separate them with commas (,).	No
x-obs-grant-read-acp	When creating an object, you can use this header to grant all users in an account the permissions to obtain the object ACL. Type: string Example: x-obs-grant-read-acp: id=domainID . If multiple accounts are authorized, separate them with commas (,).	No

Header	Description	Mandatory
x-obs-grant-write-acp	<p>When creating an object, you can use this header to grant all users in an account the permission to write the object ACL.</p> <p>Type: string</p> <p>Example: x-obs-grant-write-acp: id=domainID. If multiple accounts are authorized, separate them with commas (,).</p>	No
x-obs-grant-full-control	<p>When creating an object, you can use this header to grant all users in an account the permissions to read the object, obtain the object metadata and ACL, and write the object ACL.</p> <p>Type: string</p> <p>Example: x-obs-grant-full-control: id=domainID. If multiple accounts are authorized, separate them with commas (,).</p>	No
x-obs-storage-class	<p>When creating an object, you can use this header to specify the storage class for the object. If you do not use this header, the object storage class is the default storage class of the bucket.</p> <p>Type: string</p> <p>Storage class options: STANDARD (Standard), WARM (Infrequent Access), COLD (Archive), DEEP_ARCHIVE (Deep Archive). These values are case sensitive.</p> <p>Example: x-obs-storage-class: STANDARD</p>	No
x-obs-meta-*	<p>When creating an object, you can use a header starting with x-obs-meta- to define object metadata in an HTTP request. The user-defined metadata will be returned in the response when you retrieve the object or query the object metadata. For details, see User-Defined Object Metadata.</p> <p>Type: string</p> <p>Example: x-obs-meta-test: test metadata</p> <p>Constraint: Both user-defined metadata keys and their values must conform to US-ASCII standards.</p>	No

Header	Description	Mandatory
x-obs-persistent-headers	<p>When creating an object, you can add the x-obs-persistent-headers header in an HTTP request to specify one or more user-defined response headers. User-defined response headers will be returned in the response header when you retrieve the object or query the object metadata.</p> <p>Type: string</p> <p>Format: x-obs-persistent-headers: key1:base64_encode(<i>value1</i>),key2:base64_encode(<i>value2</i>)...</p> <p>Note: Items, such as key1 and key2, are user-defined headers. If they contain non-ASCII or unrecognizable characters, they can be URL or Base64 encoded. The server processes these headers as strings, but does not decode them. Items, such as <i>value1</i> and <i>value2</i> are the values of the corresponding headers. base64_encode indicates that the value is encoded using Base64. A user-defined header and its Base64-encoded value are connected using a colon (:) to form a key-value pair. All key-value pairs are separated with a comma (,) and are placed in the x-obs-persistent-headers header. The server then decodes the uploaded value.</p> <p>Example: x-obs-persistent-headers: key1:dmFsdWUx,key2:dmFsdWUy</p> <p>The returned header for downloading the object or obtaining the object metadata is key1:value1 or key2:value2 respectively.</p> <p>Constraints:</p> <ol style="list-style-type: none"> Response headers customized in this way cannot be prefixed with x-obs-. For example, you should use key1, instead of x-obs-key1. Standard HTTP headers, such as host, content-md5, origin, range, and Content-Disposition, cannot be specified as custom headers. The total length of this header and the custom metadata cannot exceed 8 KB. If the same keys are passed, values are separated with commas (,) and then returned in one key. If the decoded value contains non-US-ASCII or unrecognizable characters, the server processes the value as a string and encapsulates it using ? UTF-8?B?<(str)>?=, but does not decode the 	No

Header	Description	Mandatory
	<p>value. For instance, value key1:abbc will be returned as key1: =?UTF-8?B?abbc?=.</p> <p>6. The values cannot contain spaces, equal signs (=), commas (,), semicolons (;), colons (:), or periods (.). If such characters are required, use URL or Base64 encoding.</p>	
<p>x-obs-website-redirect-location</p>	<p>If a bucket is configured with the static website hosting function, it will redirect requests for this object to another object in the same bucket or to an external URL. OBS stores the value of this header in the object metadata.</p> <p>In the following example, the request header sets the redirection to an object (anotherPage.html) in the same bucket:</p> <p>x-obs-website-redirect-location:/anotherPage.html</p> <p>In the following example, the request header sets the object redirection to an external URL:</p> <p>x-obs-website-redirect-location:http://www.example.com/</p> <p>Type: string</p> <p>Default value: none</p> <p>Constraint: The value must be prefixed by a slash (/), http://, or https://. The length of the value cannot exceed 2 KB.</p>	<p>No</p>
<p>x-obs-server-side-encryption</p>	<p>Indicates that SSE-KMS is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption: kms</p>	<p>No. This header is required when SSE-KMS is used.</p>

Header	Description	Mandatory
x-obs-server-side-encryption-kms-key-id	<p>Explanation:</p> <p>The key used to encrypt objects. This header can be specified using either of the following formats:</p> <ol style="list-style-type: none"> <i>regionID:domainID:key/key_id</i>. <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the ID of the key created in KMS on the DEW console. An example is given as follows: x-obs-server-side-encryption-kms-key-id: region:exampledomainid: key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0. <i>key_id</i>: It indicates the ID of the key created in KMS on the DEW console. An example is given as follows: x-obs-server-side-encryption-kms-key-id: 4f1cd4de-ab64-4807-920a-47fc42e7f0d0. <p>Restrictions:</p> <p>This header can be used only when you set the x-obs-server-side-encryption header to kms.</p> <p>Default value:</p> <p>If you choose the KMS encryption but do not specify this header, the default master key will be used. If there is no such a default master key, OBS will create one and use it by default.</p>	No
x-obs-server-side-encryption-customer-algorithm	<p>Indicates the encryption algorithm when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-algorithm: AES256</p> <p>Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5.</p>	No. This header is required when SSE-C is used.
x-obs-server-side-encryption-customer-key	<p>Indicates the key for encrypting objects when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5.</p>	No. This header is required when SSE-C is used.

Header	Description	Mandatory
x-obs-server-side-encryption-customer-key-MD5	<p>Indicates the MD5 value of the encryption key when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key.</p>	No. This header is required when SSE-C is used.
success-action-redirect	<p>Indicates the address (URL) to which a successfully responded request is redirected.</p> <ul style="list-style-type: none"> • If the value is valid and the request is successful, OBS returns status code 303. Location contains success_action_redirect as well as the bucket name, object name, and object ETag. • If this parameter value is invalid, OBS ignores this parameter. In such case, the Location header is the object address, and OBS returns the response code based on whether the operation succeeds or fails. <p>Type: string</p>	No
x-obs-expires	<p>Specifies when an object expires. It is measured in days. Once the object expires, it is automatically deleted. (The validity calculates from the object's creation time.)</p> <p>You can configure this field when uploading an object or modify this field by using the metadata modification API after the object is uploaded.</p> <p>Type: integer</p> <p>Example: x-obs-expires:3</p>	No

Header	Description	Mandatory
x-obs-object-lock-mode	<p>WORM mode that will be applied to the object. Currently, only COMPLIANCE is supported. This header must be used together with x-obs-object-lock-retain-until-date.</p> <p>Type: string Example: x-obs-object-lock-mode:COMPLIANCE</p>	No, but required when x-obs-object-lock-retain-until-date is present.
x-obs-object-lock-retain-until-date	<p>Indicates the expiration time of the Object Lock retention. The value must be a UTC time that complies with ISO 8601, for example, 2015-07-01T04:11:15Z. This header must be used together with x-obs-object-lock-mode.</p> <p>Type: string Example: x-obs-object-lock-retain-until-date:2015-07-01T04:11:15Z</p>	No, but required when x-obs-object-lock-mode is present.

Request Elements

This request contains no elements. Its body contains only the content of the requested object.

Response Syntax

HTTP/1.1 *status_code*
Content-Length: *length*
Content-Type: *type*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the headers listed in [Table 5-76](#) may be used.

Table 5-76 Additional response headers

Header	Description
x-obs-version-id	Object version ID. If versioning is enabled for the bucket, the object version ID will be returned. Type: string
x-obs-server-side-encryption	This header is included in a response if SSE-KMS is used. Type: string Example: x-obs-server-side-encryption:kms
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response when SSE-KMS is used. Type: string Format: <i>regionID:domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id:region:domainiddomainiddomainid-doma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0
x-obs-server-side-encryption-customer-algorithm	Indicates the encryption algorithm. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm: AES256
x-obs-server-side-encryption-customer-key-MD5	Indicates the MD5 value of the key for encrypting objects. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==
x-obs-storage-class	This header is returned when the storage class of an object is not Standard. The value can be WARM or COLD or DEEP_ARCHIVE . Type: string

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Uploading an Object

```
PUT /object01 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:11:15 GMT
Authorization: OBS H4IPJX0TQTHHEBQQCEC:gYqplLq30dEX7GMi2qFWyjdFsyw=
Content-Length: 10240
Expect: 100-continue

[1024 Byte data content]
```

Sample Response: Uploading an Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF2600000164364C10805D385E1E3C67
ETag: "d41d8cd98f00b204e9800998ecf8427e"
x-obs-id-2: 32AAAWJAMAABAAAQAAEAABAAAQAAEAABCTzu4Jp2lquWuXsjnLyPPi3cfGhqPoY
Date: WED, 01 Jul 2015 04:11:15 GMT
Content-Length: 0
```

Sample Request: Uploading an Object (with the ACL Configured)

```
PUT /object01 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:13:55 GMT
x-obs-grant-read:id=52f24s3593as5730ea4f722483579ai7,id=a93fcas852f24s3596ea8366794f7224
Authorization: OBS H4IPJX0TQTHHEBQQCEC:gYqplLq30dEX7GMi2qFWyjdFsyw=
Content-Length: 10240
Expect: 100-continue

[1024 Byte data content]
```

Sample Response: Uploading an Object (with the ACL Configured)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BB7800000164845759E4F3B39ABEE55E
ETag: "d41d8cd98f00b204e9800998ecf8427e"
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSReVRNuas0knl+Y96iXrZA7BLUgj06Z
Date: WED, 01 Jul 2015 04:13:55 GMT
Content-Length: 0
```

Sample Request: Uploading an Object to a Versioned Bucket

```
PUT /object01 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:17:12 GMT
x-obs-storage-class: WARM
Authorization: OBS H4IPJX0TQTHHEBQQCEC:uFVJhp/dJqj/CJIVLrSZ0gpw3ng=
```

```
Content-Length: 10240
Expect: 100-continue

[1024 Byte data content]
```

Sample Response: Uploading an Object to a Versioned Bucket

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: DCD2FC9CAB78000001439A51DB2B2577
ETag: "d41d8cd98f00b204e9800998ecf8427e"
X-OBS-ID-2: GcVgfeOJHx8JZHThRqkPsbKdB583fYbr3RBbHT6mMrBstReVILBZbMAdLiBYy1l
Date: WED, 01 Jul 2015 04:17:12 GMT
x-obs-version-id: AAABQ4q2M9_c0vycq3gAAAAVURTRkha
Content-Length: 0
```

Sample Request: Uploading an Object (with Its MD5 Specified)

```
PUT /object01 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: /*/*
Date: WED, 01 Jul 2015 04:17:50 GMT
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:uFVJhp/dJqj/CJIVLrSZ0gpw3ng=
Content-Length: 10
Content-MD5: 6Afx/PgtEy+bsBjKZzihnw==
Expect: 100-continue

1234567890
```

Sample Response: Uploading an Object (with Its MD5 Specified)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BB7800000164B165971F91D82217D105
X-OBS-ID-2: 32AAAUJAJAABAAAQAAEAABAAAQAAEAABCSEKhBpS4BB3dSMNqMtuNxQDD9XvOw5h
ETag: "1072e1b96b47d7ec859710068aa70d57"
Date: WED, 01 Jul 2015 04:17:50 GMT
Content-Length: 0
```

Sample Request: Uploading an Object (with Website Hosting Configured)

If static website hosting has been configured for a bucket, you can configure parameters as follows when you upload an object. Then, users will be redirected when they download the object.

```
PUT /object01 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: /*/*
Date: WED, 01 Jul 2015 04:17:12 GMT
x-obs-website-redirect-location: http://www.example.com/
Authorization: OBS H4lPJX0TQTHTHEBQQCEC:uFVJhp/dJqj/CJIVLrSZ0gpw3ng=
Content-Length: 10240
Expect: 100-continue

[1024 Byte data content]
```

Sample Response: Uploading an Object (with Website Hosting Configured)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: DCD2FC9CAB78000001439A51DB2B2577
x-obs-id-2: 32AAAUJAJAABAAAQAAEAABAAAQAAEAABCtmxB5ufMj/7/GzP8TFwTbp33u0xhn2Z
ETag: "1072e1b96b47d7ec859710068aa70d57"
Date: WED, 01 Jul 2015 04:17:12 GMT
```



```
x-obs-version-id: AAABQ4q2M9_c0vycq3gAAAAVURTRkha  
Content-Length: 0
```

Sample Request: Uploading an Object Using a Signed URL

```
PUT /object02?  
AccessKeyId=H4IPJX0TQTHTHEBQQCEC&Expires=1532688887&Signature=EQmDuOhaLUrzzRNzXwS72CXeX  
M%3D HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: /*/*  
Content-Length: 1024  
  
[1024 Byte data content]
```

Sample Response: Uploading an Object Using a Signed URL

```
HTTP/1.1 200 OK  
Server: OBS  
x-obs-request-id: DCD2FC9CAB7800001439A51DB2B2577  
x-obs-id-2: 32AAAUJAIABAAAQAAEAABAAAQAAEAABCTmxB5ufMj/7/GzP8TFwTbp33u0xhnZZ  
ETag: "1072e1b96b47d7ec859710068aa70d57"  
Date: Fri, 27 Jul 2018 10:52:31 GMT  
x-obs-version-id: AAABQ4q2M9_c0vycq3gAAAAVURTRkha  
Content-Length: 0
```

Sample Request: Uploading an Object (with a Storage Class Specified)

```
PUT /object01 HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: /*/*  
Date: WED, 01 Jul 2015 04:15:07 GMT  
x-obs-storage-class: WARM  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:uFVJhp/dJqj/CJIVLrSZ0gpw3ng=  
Content-Length: 10240  
Expect: 100-continue  
  
[1024 Byte data content]
```

Sample Response: Uploading an Object (with a Storage Class Specified)

```
HTTP/1.1 200 OK  
Server: OBS  
x-obs-request-id: BB7800000164846A2112F98BF970AA7E  
ETag: "d41d8cd98f00b204e9800998ecf8427e"  
x-obs-id-2: a39E0UgAIAABAAAQAAEAABAAAQAAEAABCTPOUJu5XINyU32fvKjM/92MQZK2gtoB  
Date: WED, 01 Jul 2015 04:15:07 GMT  
Content-Length: 0
```

Sample Request: Uploading an Object (with a WORM Retention Policy Configured)

```
PUT /object01 HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: /*/*  
Date: WED, 01 Jul 2015 04:11:15 GMT  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:gYqplLq30dEX7GMI2qFWyjdFsyw=  
Content-Length: 10240  
x-obs-object-lock-mode: COMPLIANCE  
x-obs-object-lock-retain-until-date: 2022-09-24T16:10:25Z  
Expect: 100-continue  
  
[1024 Byte data content]
```

Sample Response: Uploading an Object (with a WORM Retention Policy Configured)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF2600000164364C10805D385E1E3C67
ETag: "d41d8cd98f00b204e9800998ecf8427e"
x-obs-id-2: 32AAAWJAMAAABAAAQAAEAABAAAQAAEAABCTzu4Jp2lquWuXsjnLyPPIT3cfGhqPoY
Date: WED, 01 Jul 2015 04:11:15 GMT
Content-Length: 0
```

5.4.2 Uploading an Object - POST

Functions

This operation uploads an object to a bucket. To use this operation, you must have the write permission for the bucket.

NOTE

The name of each object in a bucket must be unique.

With versioning not enabled, if an object to be uploaded has the same name as an existing object in the bucket, the newly uploaded object will overwrite the existing one. To protect data from being corrupted during transmission, you can add the **Content-MD5** parameter in the form field. After receiving the uploaded object, OBS compares the provided MD5 value to the MD5 value it calculates. If the two values do not match, OBS reports an error. You can also specify the value of the **x-obs-acl** parameter to configure an access control policy for the object.

You can also upload an object using the POST method.

For a single upload, the size of the object to be uploaded ranges [0, 5 GB]. To upload a file greater than 5 GB, see [Operations on Multipart Upload](#).

This operation supports server-side encryption.

Differences Between PUT and POST Methods

Parameters are passed through the request header if the PUT method is used to upload objects; if the POST method is used to upload objects, parameters are passed through the form field in the message body.

With the PUT method, you need to specify the object name in the URL, but object name is not required with the POST method, which uses the bucket domain name as the URL. Request lines of these two methods are given as follows:

```
PUT /ObjectName HTTP/1.1
POST / HTTP/1.1
```

For details about PUT upload, see [Uploading an Object - PUT](#).

Versioning

If versioning is enabled for a bucket, the system automatically generates a unique version ID for the requested object in this bucket and returns the version ID in response header **x-obs-version-id**. If versioning is suspended for a bucket, the version ID of the requested object in this bucket is **null**. For details about the versioning statuses of a bucket, see [Configuring Versioning for a Bucket](#).

WORM

If a bucket has WORM enabled, you can configure retention policies for objects in the bucket. You can specify the **x-obs-object-lock-mode** and **x-obs-object-lock-retain-until-date** headers to configure a retention policy when you upload an object. If you do not specify these two headers but have configured a default bucket-level WORM policy, this default policy automatically applies to the object newly uploaded. You can also configure or update a WORM retention policy for an existing object.

NOTE

When you enable WORM for a bucket, OBS automatically enables versioning for the bucket. WORM protects objects based on the object version IDs. Only object versions with any WORM retention policy configured will be protected. Assume that object **test.txt 001** is protected by WORM. If another file with the same name is uploaded, a new object version **test.txt 002** with no WORM policy configured will be generated. In such case, **test.txt 002** is not protected and can be deleted. When you download an object without specifying a version ID, the current object version (**test.txt 002**) will be downloaded.

Request Syntax

```
POST / HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
User-Agent: browser_data
Accept: file_types
Accept-Language: Regions
Accept-Encoding: encoding
Accept-Charset: character_set
Keep-Alive: 300
Connection: keep-alive
Content-Type: multipart/form-data; boundary=9431149156168
Content-Length: length

--9431149156168
Content-Disposition: form-data; name="key"

acl
--9431149156168
Content-Disposition: form-data; name="success_action_redirect"

success_redirect
--9431149156168
Content-Disposition: form-data; name="content-Type"

content_type
--9431149156168
Content-Disposition: form-data; name="x-obs-meta-uuid"

uuid
--9431149156168
Content-Disposition: form-data; name="x-obs-meta-tag"

metadata
--9431149156168
Content-Disposition: form-data; name="AccessKeyId"

access-key-id
--9431149156168
Content-Disposition: form-data; name="policy"

encoded_policy
--9431149156168
Content-Disposition: form-data; name="signature"
```

```
signature=
--9431149156168
Content-Disposition: form-data; name="file"; filename="MyFilename"
Content-Type: image/jpeg

file_content
--9431149156168
Content-Disposition: form-data; name="submit"

Upload to OBS
--9431149156168--
```

Request Parameters

This request contains no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

If you want to get CORS configuration information, you must use the headers in [Table 5-77](#).

Table 5-77 Request headers for obtaining CORS configuration

Header	Description	Mandatory
Origin	Origin of the cross-domain request specified by the pre-request. Generally, it is a domain name. Type: string	Yes
Access-Control-Request-Headers	Indicates the HTTP headers of a request. The request can use multiple HTTP headers. Type: string	No

NOTE

If an error message is still displayed after CORS has been configured, rectify the fault by referring to [Why Is an Error Reported Even If CORS Has Been Configured?](#)

Request Elements

This request uses form elements. [Table 5-78](#) describes the form elements.

Table 5-78 Form elements

Parameter	Description	Mandatory
file	Specifies the object content uploaded. Both the file name and file path are ignored and will not be used as the object name. The object name is the value of parameter key . Type: binary content or text Constraint: This parameter must be the last parameter in a form. Otherwise, parameters after this parameter will be all discarded. Additionally, each request contains only one file parameter.	Yes
key	Indicates the name of the object to be created. Type: string	Yes
AccessKeyId	Access key ID (AK) of the requester. Type: string Constraint: This parameter is mandatory if there is security policy parameter policy or signature in the request.	Yes when the constraint is met.
policy	Indicates the security policy in the request. For details about the policy format, see the policy format in Authentication of Signature Carried in the Table Uploaded Through a Browser . Type: string Constraint: This parameter is mandatory if the bucket provides the AccessKeyId (or signature).	Yes when the constraint is met.
signature	Indicates a signature string calculated based on StringToSign. Type: string Constraint: This parameter is mandatory if the bucket provides the AccessKeyId (or policy).	Yes when the constraint is met.

Parameter	Description	Mandatory
token	<p>Specifies the AK, signature, and security policy of the request initiator. The priority of a token is higher than that of a specified AK, the request signature, and the security policy of the request initiator.</p> <p>Type: string</p> <p>Example:</p> <p>In HTML: <code><input type="text" name="token" value="ak:signature:policy" /></code></p>	No
x-obs-acl	<p>When creating a bucket, you can add this header to set the permission control policy for the bucket. The predefined common policies are as follows: private, public-read, public-read-write, public-read-delivered, and public-read-write-delivered (for details about the policies, see the ACL configuration using header fields in ACLs).</p> <p>Type: string</p> <p>Examples:</p> <p>In POLICY: <code>{"acl": "public-read" }</code></p> <p>In HTML: <code><input type="text" name="acl" value="public-read" /></code></p>	No
x-obs-grant-read	<p>When creating an object, you can use this header to grant all users in an account the permissions to read the object and obtain the object metadata.</p> <p>Type: string</p> <p>Examples:</p> <p>In POLICY: <code>{'grant-read': 'id=domainId1' }</code>,</p> <p>In HTML: <code><input type="text" name="grant-read" value="id=domainId1" /></code></p>	No
x-obs-grant-read-acp	<p>When creating an object, you can use this header to grant all users in an account the permission to obtain the object ACL.</p> <p>Type: string</p> <p>Examples:</p> <p>In POLICY: <code>{"grant-read-acp": "id=domainId1" }</code>,</p> <p>In HTML: <code><input type="text" name="grant-read-acp" value="id=domainId1" /></code></p>	No

Parameter	Description	Mandatory
x-obs-grant-write-acp	<p>When creating an object, you can use this header to grant all users in an account the permission to write the object ACL.</p> <p>Type: string</p> <p>Examples:</p> <p>In POLICY: {"grant-write-acp": "id=domainId1" },</p> <p>In HTML: <input type="text" name="grant-write-acp" value="id=domainId1" /></p>	No
x-obs-grant-full-control	<p>When creating an object, you can use this header to grant all users in an account the permissions to read the object, obtain the object metadata and ACL, and write the object ACL.</p> <p>Type: string</p> <p>Examples:</p> <p>In POLICY: {"grant-full-control": "id=domainId1" },</p> <p>In HTML: <input type="text" name="grant-full-control" value="id=domainId1" /></p>	No
x-obs-storage-class	<p>When creating an object, you can use this header to specify the storage class for the object. If you do not use this header, the object storage class is the default storage class of the bucket.</p> <p>Type: string</p> <p>Storage class options: STANDARD (Standard), WARM (Infrequent Access), COLD (Archive), DEEP_ARCHIVE (Deep Archive). These values are case sensitive.</p> <p>Examples:</p> <p>In POLICY: {"storage-class": "STANDARD" },</p> <p>In HTML: <input type="text" name="x-obs-storage-class" value="STANDARD" /></p>	No

Parameter	Description	Mandatory
Cache-Control, Content-Type, Content-Disposition, Content-Encoding Expires	<p>Standard HTTP headers. OBS records those headers. If you download the object or send the HEAD Object request, those parameter values are returned.</p> <p>Type: string</p> <p>Examples:</p> <p>In POLICY: ["starts-with", "\$Content-Type", "text/"],</p> <p>In HTML: <input type="text" name="content-type" value="text/plain" /></p>	No
success_action_redirect	<p>Indicates the address (URL) to which a successfully responded request is redirected.</p> <ul style="list-style-type: none"> If the value is valid and the request is successful, OBS returns status code 303. Location contains success_action_redirect as well as the bucket name, object name, and object ETag. If this parameter value is invalid, OBS ignores this parameter. In such case, the Location header is the object address, and OBS returns the response code based on whether the operation succeeds or fails. <p>Type: string</p> <p>Examples:</p> <p>In POLICY: {"success_action_redirect": "http://123458.com"},</p> <p>In HTML: <input type="text" name="success_action_redirect" value="http://123458.com" /></p>	No
x-obs-meta-*	<p>Indicates user-defined metadata. When creating an object, you can use this header or a header starting with x-obs-meta- to define object metadata in an HTTP request. The user-defined metadata will be returned in the response when you retrieve the object or query the object metadata. For details, see User-Defined Object Metadata.</p> <p>Type: string</p> <p>Examples:</p> <p>In POLICY: {" x-obs-meta-test ": " test metadata " },</p> <p>In HTML: <input type="text" name=" x-obs-meta-test " value=" test metadata " /></p>	No

Parameter	Description	Mandatory
<p>x-obs-persistent-headers</p>	<p>When creating an object, you can add the x-obs-persistent-headers header in an HTTP request to specify one or more user-defined response headers. User-defined response headers will be returned in the response header when you retrieve the object or query the object metadata.</p> <p>Type: string</p> <p>Format: x-obs-persistent-headers: key1:base64_encode(value1),key2:base64_encode(value2)...</p> <p>Note: Items, such as key1 and key2, are user-defined headers. If they contain non-ASCII or unrecognizable characters, they can be encoded using URL or Base64. The server processes these headers as character strings, but does not decode them. Items, such as <i>value1</i> and <i>value2</i> are the values of the corresponding headers. base64_encode indicates that the value is encoded using Base64. A user-defined header and its Base64-encoded value are connected using a colon (:) to form a key-value pair. All key-value pairs are separated with a comma (,) and are placed in the x-obs-persistent-headers header. The server then decodes the uploaded value.</p> <p>Examples:</p> <p>In POLICY: {"x-obs-persistent-headers": "key1:dmFsdWUx,key2:dmFsdWUy" },</p> <p>In HTML: <input type="text" name="x-obs-persistent-headers" value="key1:dmFsdWUx,key2:dmFsdWUy" /></p> <p>The returned header for downloading the object or obtaining the object metadata is key1:value1 or key2:value2 respectively.</p> <p>Constraints:</p> <ol style="list-style-type: none"> 1. Response headers customized in this way cannot be prefixed with x-obs-. For example, you should use key1, instead of x-obs-key1. 2. Standard HTTP headers, such as host, content-md5, origin, range, and Content-Disposition, cannot be specified as custom headers. 3. The total length of this header and the custom metadata cannot exceed 8 KB. 	<p>No</p>

Parameter	Description	Mandatory
	<p>4. If the same keys are passed, values are separated with commas (,) and then returned in one key.</p> <p>5. If the decoded value contains non-US-ASCII or unrecognizable characters, the server processes the value as a string and encapsulates it using <code>?UTF-8?B?<(str)>?=</code>, but does not decode the value. For instance, value <code>key1:abbc</code> will be returned as <code>key1:=?UTF-8?B?abbc?=</code>.</code></code></p> <p>6. The values cannot contain spaces, equal signs (=), commas (,), semicolons (;), colons (:), or periods (.). If such characters are required, use URL or Base64 encoding.</p>	
<p>success_action_status</p>	<p>Indicates the status code returned after the request is successfully received. Possible values are 200, 201, and 204.</p> <ul style="list-style-type: none"> • If this parameter is set to 200 or 204, the body in the OBS response message is empty. • If this parameter is set to 201, the OBS response message contains an XML document that describes the response to the request. • If the request does not include this parameter or the parameter value is invalid, OBS returns status code 204. <p>Type: string</p> <p>Examples:</p> <p>In POLICY: ["starts-with", "\$success_action_status", ""],</p> <p>In HTML: <input type="text" name="success_action_status" value="200" /></p>	<p>No</p>
<p>x-obs-website-redirect-location</p>	<p>If a bucket is configured with the static website hosting function, it will redirect requests for this object to another object in the same bucket or to an external URL. OBS stores the value of this header in the object metadata.</p> <p>Default value: none</p> <p>Constraint: The value must be prefixed by a slash (/), http://, or https://. The length of the value cannot exceed 2 KB.</p>	<p>No</p>

Parameter	Description	Mandatory
x-obs-server-side-encryption	<p>Indicates that SSE-KMS is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption:kms</p>	<p>No. This header is required when SSE-KMS is used.</p>
x-obs-server-side-encryption-kms-key-id	<p>Indicates the master key when SSE-KMS is used. If this header is not provided, the default master key will be used. If there is no such a default master key, OBS will create one and use it by default.</p> <p>Type: string</p> <p>The following two formats are supported:</p> <ul style="list-style-type: none"> - <i>regionID.domainID:key/key_id</i> 2. <i>key_id</i> <p><i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the ID of the key created in DEW.</p> <p>Examples:</p> <ul style="list-style-type: none"> - x-obs-server-side-encryption-kms-key-id: <i>region.domainiddomainiddomainiddoma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0</i> - x-obs-server-side-encryption-kms-key-id:4f1cd4de-ab64-4807-920a-47fc42e7f0d0 	<p>No</p>
x-obs-server-side-encryption-customer-algorithm	<p>Indicates the encryption algorithm when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-algorithm:AES256</p> <p>Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used.</p>

Parameter	Description	Mandatory
<p>x-obs-server-side-encryption-customer-key</p>	<p>Indicates the key for encrypting objects when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used.</p>
<p>x-obs-server-side-encryption-customer-key-MD5</p>	<p>Indicates the MD5 value of the encryption key when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key.</p>	<p>No. This header is required when SSE-C is used.</p>
<p>x-obs-expires</p>	<p>Specifies when an object expires. It is measured in days. Once the object expires, it is automatically deleted. (The calculation starts from when the object was last modified).</p> <p>Type: integer</p> <p>Example: x-obs-expires:3</p>	<p>No</p>

Parameter	Description	Mandatory
x-obs-object-lock-mode	<p>WORM mode that will be applied to the object. Currently, only COMPLIANCE is supported. This header must be used together with x-obs-object-lock-retain-until-date.</p> <p>Type: string</p> <p>Example: x-obs-object-lock-mode:COMPLIANCE</p>	No, but required when x-obs-object-lock-retain-until-date is present.
x-obs-object-lock-retain-until-date	<p>Indicates the expiration time of the Object Lock retention. The value must be a UTC time that complies with ISO 8601, for example, 2015-07-01T04:11:15Z. This header must be used together with x-obs-object-lock-mode.</p> <p>Type: string</p> <p>Example: x-obs-object-lock-retain-until-date:2015-07-01T04:11:15Z</p>	No, but required when x-obs-object-lock-mode is present.

Response Syntax

```
HTTP/1.1 status_code
Content-Type: application/xml
Location: location
Date: date
ETag: etag
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the headers listed in [Table 5-79](#) may be used.

Table 5-79 Additional response headers

Header	Description
x-obs-version-id	Object version ID. If versioning is enabled for the bucket, the object version ID will be returned. A string null will be returned if the bucket housing the object has versioning suspended. Type: string
Access-Control-Allow-Origin	Indicates that the origin is included in the response if the origin in the request meets the CORS configuration requirements when CORS is configured for buckets. Type: string
Access-Control-Allow-Headers	Indicates that the headers are included in the response if headers in the request meet the CORS configuration requirements when CORS is configured for buckets. Type: string
Access-Control-Max-Age	Indicates MaxAgeSeconds in the CORS configuration of the server when CORS is configured for buckets. Type: integer
Access-Control-Allow-Methods	Indicates that methods in the rule are included in the response if Access-Control-Request-Method in the request meets the CORS configuration requirements when CORS is configured for buckets. Type: string Value options: GET, PUT, HEAD, POST, DELETE
Access-Control-Expose-Headers	Value of ExposeHeader in the CORS configuration of a server when CORS is configured for buckets. Type: string
x-obs-server-side-encryption	This header is included in a response if SSE-KMS is used. Type: string Example: x-obs-server-side-encryption:kms

Header	Description
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response when SSE-KMS is used. Type: string Format: <i>regionID:domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id:region:domainiddomainiddomainid-doma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0
x-obs-server-side-encryption-customer-algorithm	Indicates the encryption algorithm. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm:AES256
x-obs-server-side-encryption-customer-key-MD5	Indicates the MD5 value of the key for encrypting objects. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Uploading an Object Using POST

```
POST / HTTP/1.1
Date: WED, 01 Jul 2015 04:15:23 GMT
Host: examplebucket.obs.region.myhuaweicloud.com
Content-Type: multipart/form-data; boundary=7db143f50da2
Content-Length: 2424
Origin: www.example.com
Access-Control-Request-Headers:acc_header_1

--7db143f50da2
Content-Disposition: form-data; name="key"
```

```
object01
--7db143f50da2
Content-Disposition: form-data; name="acl"

public-read
--7db143f50da2
Content-Disposition: form-data; name="content-type"

text/plain
--7db143f50da2
Content-Disposition: form-data; name="expires"

WED, 01 Jul 2015 04:16:15 GMT
--7db143f50da2
Content-Disposition: form-data; name="AccessKeyId"

14RZT432N80TGDF2Y2G2
--7db143f50da2
Content-Disposition: form-data; name="policy"

ew0KICAiZXhaaXJhdGlvbWVl6IyMDE1LTA3LTAxVDEyOjAwOjAwLjAwMmFoiLA0KICAiY29uZGI0aW9ucyI6IFsNCiAgI
glCB7ImJ1Y2tldCI6ICJleG1hcGxlYnVja2V0IiB9LA0KICAgIHsiYWNsIjogInB1YmxpYy1yZWFKIiB9LA0KICAgIHsiRX
haaXJlcyI6IClxMDAwIiB9LA0KICAgIFsiZXEiLCAiGtleSlsiCjVYmplY3QwMSJdLA0KICAgIFsic3RhcnczLXdpdGgiLCA
AijENvbnRlbnQtVHlwZSIsICJ0ZXh0LyJdLA0KICBdDQp9DQo=
--7db143f50da2
Content-Disposition: form-data; name="signature"

Vk6rwO0Nq09BLhvNSIYwSJTRQ+k=
--7db143f50da2
Content-Disposition: form-data; name="x-obs-persistent-headers"

test:dmFsdWUx
--7db143f50da2
Content-Disposition: form-data; name="x-obs-grant-read"

id=52f24s3593as5730ea4f722483579xxx
--7db143f50da2
Content-Disposition: form-data; name="x-obs-server-side-encryption"

kms
--7db143f50da2
Content-Disposition: form-data; name="x-obs-website-redirect-location"

http://www.example.com/
--7db143f50da2
Content-Disposition: form-data; name="file"; filename="C:\Testtools\UploadFiles\object\1024Bytes.txt"
Content-Type: text/plain

01234567890
--7db143f50da2
Content-Disposition: form-data; name="submit"

Upload
--7db143f50da2--
```

Sample Response: Uploading an Object Using POST

After CORS is configured for a bucket, the response contains the **Access-Control-*** information.

```
HTTP/1.1 204 No Content
x-obs-request-id: 90E2BA00C26C00000133B442A90063FD
x-obs-id-2: OTBFMkJBMDBDMDjZDMDAwMDAxMzNCNDQyQTkwMDYzRkRBQUFBQUFBQWJiYmJiYmJi
Access-Control-Allow-Origin: www.example.com
Access-Control-Allow-Methods: POST,GET,HEAD,PUT
Access-Control-Allow-Headers: acc_header_01
Access-Control-Max-Age: 100
Access-Control-Expose-Headers: exp_header_01
Content-Type: text/xml
```



```
Location: http://examplebucket.obs.region.myhuaweicloud.com/object01
Date: WED, 01 Jul 2015 04:15:23 GMT
ETag: "ab7abb0da4bca5323ab6119bb5dcd296"
```

Sample Request: Uploading an Object (with x-obs-acl and a Storage Class Specified)

Upload an object with the x-obs-acl, storage class, and redirection header fields carried in the request message.

Before encoding, the policy content is as follows:

```
{
  "expiration":"2018-07-17T04:54:35Z",
  "conditions":[
    {
      "content-type":"text/plain"
    },
    {
      "x-obs-storage-class":"WARM"
    },
    {
      "success_action_redirect":"http://www.example.com"
    },
    {
      "x-obs-acl":"public-read"
    },
    [
      "starts-with",
      "$bucket",
      ""
    ],
    [
      "starts-with",
      "$key",
      ""
    ]
  ]
}
```

Sample request:

```
POST / HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Accept-Encoding: identity
Content-Length: 947
Content-Type: multipart/form-data; boundary=9431149156168
User-Agent: OBS/Test

--9431149156168
Content-Disposition: form-data; name="x-obs-acl"

public-read
--9431149156168
Content-Disposition: form-data; name="AccessKeyId"

H4IPJX0TQTHTHEBQQCEC
--9431149156168
Content-Disposition: form-data; name="key"

my-obs-object-key-demo
--9431149156168
Content-Disposition: form-data; name="signature"

WNwv8P1ZiWdqPQqjXeLmAfzPDAl=
--9431149156168
Content-Disposition: form-data; name="policy"
```

```
eyJleHBpcmF0aW9uIjoiMjAxOC0wNy0xN1QwODozNDoyM1oiLCAiY29uZGl0aW9ucyI6W3siY29udGVudC10eXBlIjoiaGV4dC9wbGFpbiJ9LHsieC1vYnMtYWNSIjoicHVibGljLXJlYWQifSxibnN0YXJ0cy13aXRoliwgliRidWNrZXQiLCAiIl0sWyJzdGFydHMtd2l0aCIsIklka2V5IiwgljJdXX0=  
--9431149156168  
Content-Disposition: form-data; name="content-type"  
  
text/plain  
--9431149156168  
Content-Disposition: form-data; name="file"; filename="myfile"  
Content-Type: text/plain  
  
c2c6cd0f-898e-11e8-aab6-e567c91fb541  
52b8e8a0-8481-4696-96f3-910635215a78  
  
--9431149156168--
```

Sample Response: Uploading an Object (with x-obs-acl and a Storage Class Specified)

```
HTTP/1.1 204 No Content  
Server: OBS  
Location: http://examplebucket.obs.region.myhuaweicloud.com/my-obs-object-key-demo  
ETag: "17a83fc8d431273405bd266114b7e034"  
x-obs-request-id: 5DEB00000164A728A7C7F4E032214CFA  
x-obs-id-2: 32AAAUJAIABAAAQAAEAABAAAQAAEAABCSwj2PcBE0YcoLHUDO7GSj+rVByzjflA  
Date: Tue, 17 Jul 2018 07:33:36 GMT
```

Sample Request: Using a Token for Authentication

```
POST / HTTP/1.1  
Content-Type: multipart/form-data; boundary=9431149156168  
Content-Length: 634  
Host: examplebucket.obs.region.myhuaweicloud.com  
  
--9431149156168  
Content-Disposition: form-data; name="key"  
obj01  
  
--9431149156168  
Content-Disposition: form-data; name="token"  
UDSIAMSTUBTEST002538:XsVcTzR2/  
A284oE4VH9qPndGcuE=:eyJjb25kaXRpb25zljogW3siYnVja2V0IjogInRlc3QzMdAzMDU4NzE2NjI2ODkzNjcuMTIiIiwiaGV4dC9wbGFpbiJ9LHsieC1vYnMtYWNSIjoicHVibGljLXJlYWQifSxibnN0YXJ0cy13aXRoliwgliRidWNrZXQiLCAiIl0sWyJzdGFydHMtd2l0aCIsIklka2V5IiwgljJdXX0=  
XhwaXJhdGlvbil6IChyMDlyLTA5LTA5VDEyOjA5OjI3Wij9  
  
--9431149156168  
Content-Disposition: form-data; name="file"; filename="myfile"  
Content-Type: text/plain  
01234567890  
  
--9431149156168--  
Content-Disposition: form-data; name="submit"  
Upload to OBS
```

Sample Response: Using a Token for Authentication

```
HTTP/1.1 204 No Content  
Server: OBS  
Location: http://examplebucket.obs.region.myhuaweicloud.com/my-obs-object-key-demo  
ETag: "7eda50a430fed940023acb9c4c6a2fff"  
x-obs-request-id: 000001832010443D80F30B649B969C47  
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCTj0yO9KJd5In+i9pzTgCDVG9vMnk7O/  
Date: Fri,09Sep 2022 02: 24:40 GMT
```

Sample Request: Specifying an Object Expiration Time

```
POST / HTTP/1.1  
Date: WED, 01 Jul 2015 04:15:23 GMT
```

```
Host: examplebucket.obs.cn-north-4..com
Content-Type: multipart/form-data; boundary=148828969260233905620870
Content-Length: 1639
Origin: www.example.com
Access-Control-Request-Headers:acc_header_1

--148828969260233905620870
Content-Disposition: form-data; name="key"

object01
--148828969260233905620870
Content-Disposition: form-data; name="ObsAccessKeyId"

55445349414d53545542544553543030303033
--148828969260233905620870
Content-Disposition: form-data; name="signature"

396246666f6f42793872792f7a3958524f6c44334e4e69763950553d--7db143f50da2
--148828969260233905620870
Content-Disposition: form-data; name="policy"

65794a6c65484270636d463061573975496a6f694d6a41794d7930774e6930784e565178...
--148828969260233905620870
Content-Disposition: form-data; name="x-obs-expires"

4
--148828969260233905620870
Content-Disposition: form-data; name="file"; filename="test.txt"
Content-Type: text/plain

01234567890
--148828969260233905620870
Content-Disposition: form-data; name="submit"

Upload
--148828969260233905620870--
```

Sample Response: Specifying an Object Expiration Time

```
HTTP/1.1 204 No Content
Server: OBS
Date: Thu, 15 Jun 2023 12:39:03 GMT
Connection: keep-alive
Location: http://examplebucket.obs.cn-north-4..com/my-obs-object-key-demo
x-obs-expiration: expiry-date="Tue, 20 Jun 2023 00:00:00 GMT"
ETag: "d41d8cd98f00b204e9800998ecf8427e"
x-obs-request-id: 00000188BF11049553064911000FC30D
x-obs-id-2: 32AAAUJAIABAAAQAAEAABAAAQAAEAABCswj2PcBE0YcoLHUOD7GSj+rVByzjflA
x-forward-status: 0x40020000000001
x-dae-api-type: REST.POST.OBJECT
```

Sample Request: Specifying a Status Code

Set the status code of a successful action to 200.

```
POST /srcbucket HTTP/1.1
User-Agent: PostmanRuntime/7.26.8
Accept: */*
Postman-Token: 667dcc44-1c48-41ba-9e41-9f87d8975089
Host: obs.cn-north-4..com
Accept-Encoding: gzip, deflate, br
Connection: keep-alive
Content-Type: multipart/form-data; boundary=-----285613759795901770404350
Content-Length: 1134

-----285613759795901770404350
Content-Disposition: form-data; name="key"
```

```
obj
-----285613759795901770404350
Content-Disposition: form-data; name="ObsAccessKeyId"

XXXXXXXXXXXXXXXXX000003
-----285613759795901770404350
Content-Disposition: form-data; name="signature"

9rc4bVhDPQ7eHtw17hWtYxLnBWU=
-----285613759795901770404350
Content-Disposition: form-data; name="policy"

eyJleHBpcmF0aW9uIjoiaWMyOwNiOxNVQxNDoxMTZlLCAiY29uZGl0aW9ucyI6W3siYnVja2V0Ijoic3JjYnV
ja2V0MiJ9LHsic3VjY2Vzc19hY3Rpb25fc3RhdHVzIjoiaWJwLn0seyJjb250ZW50LXR5cGUoIj0ZXh0L3BsYWluIn0s
eyJrZXkiOiIzMifSxdfQ==
-----285613759795901770404350
Content-Disposition: form-data; name="success_action_status"

200
-----285613759795901770404350
Content-Disposition: form-data; name="file"; filename="test.txt"
Content-Type: text/plain

-----285613759795901770404350
Content-Disposition: form-data; name="submit"

Upload to OBS
-----285613759795901770404350--
```

Sample Response: Specifying a Status Code

Response to the configuration of success status code 200

```
HTTP/1.1 200 OK
Server: OBS
Date: Thu, 15 Jun 2023 13:12:51 GMT
Content-Length: 0
Connection: keep-alive
Location: http://obs.cn-north-4..com/srcbucket/obj
ETag: "d41d8cd98f00b204e9800998ecf8427e"
x-obs-request-id: 00000188BF2FF55F5306426E000FE366
x-obs-id-2: 32AAAUJAIAABAAQAEEAABAAQAEEAABCScDjcXgZ7oMYSVnZnk4+HrClVwLVPTi
x-forward-status: 0x40020000000001
x-dae-api-type: REST.POST.OBJECT
```

Sample Request: Uploading an Object (with a WORM Retention Policy Configured)

```
POST /srcbucket HTTP/1.1
User-Agent: PostmanRuntime/7.26.8
Accept: /*/*
Postman-Token: 4c2f4c7e-2e0b-46c0-b1a7-4a5da560b6a1
Host: obs.cn-north-4..com
Accept-Encoding: gzip, deflate, br
Connection: keep-alive
Content-Type: multipart/form-data; boundary=-----940435396775653808840608
Content-Length: 1409

-----940435396775653808840608
Content-Disposition: form-data; name="key"

obj
-----940435396775653808840608
Content-Disposition: form-data; name="ObsAccessKeyId"

XXXXXXXXXXXXXXXXX000003
```

```
-----940435396775653808840608
Content-Disposition: form-data; name="signature"

X/7QiyMYUvxUWk0R5fToeTcgMMU=
-----940435396775653808840608
Content-Disposition: form-data; name="policy"

eyJleHBpcmF0aW9uIjoiMjAyMy0wNi0xNVQxNDoyMj01MVoiLCAiY29uZGl0aW9ucyI6W3sieC1vYnMtb2JqZW
N0LWxvY2stcmV0YWwulXVudGlsLWRhdGUiOiJ1aHUsIDlwIEp1biAyMDIzIEdEzOjEY2tdCI6InNyY2J1Y2tdDIiIj01MnVbnRlbnQt
dHlwZSI6InRleHQvcGxhaW4ifSx7ImtleSI6IjMzMyJ9LF19
-----940435396775653808840608
Content-Disposition: form-data; name="x-obs-object-lock-mode"

COMPLIANCE
-----940435396775653808840608
Content-Disposition: form-data; name="x-obs-object-lock-retain-until-date"

Thu, 20 Jun 2023 13:12:51 GMT
-----940435396775653808840608
Content-Disposition: form-data; name="file"; filename="test.txt"
Content-Type: text/plain

-----940435396775653808840608
Content-Disposition: form-data; name="submit"

Upload to OBS
-----940435396775653808840608--
```

Sample Response: Uploading an Object (with a WORM Retention Policy Configured)

```
HTTP/1.1 204 No Content
Server: OBS
Date: Thu, 15 Jun 2023 13:24:03 GMT
Connection: keep-alive
Location: http://obs.cn-north-4..com/srcbucket/obj
ETag: "d41d8cd98f00b204e9800998ecf8427e"
x-obs-request-id: 00000188BF3A36EE5306427D000FEE0A
x-obs-id-2: 32AAAUJAIABAAQAEEAABAAAQAEEAABCS/5pj0p0hAQcDVI3B6E5y167zy4eAQv
x-forward-status: 0x40020000000001
x-dae-api-type: REST.POST.OBJECT
```

5.4.3 Copying an Object

Functions

You can perform this operation to create a copy of an existing object in OBS.

Users can determine whether to copy the metadata of the source object to the target object (by default) or replace the metadata of the target object with the metadata contained in the request. The ACL of the source object is not copied to the target object. By default, the ACL of the target object is private. You can set an ACL for the target object by sending an API request.

The request for copying an object needs to carry the information about the bucket and object to be copied in the header field. The message body cannot be carried.

This operation supports server-side encryption.

An object copy can be up to 5 GB in size. If the source object size exceeds 5 GB, you can only [copy part of the object](#).

 NOTE

You cannot determine whether a request is executed successfully only using **status_code** in the header returned by HTTP. If 200 in **status_code** is returned, the server has received the request and starts to process the request. The body in the response shows whether the copy succeeds. If the body contains ETag, the copy succeeds. Otherwise, the copy failed.

Versioning

By default, **x-obs-copy-source** specifies the latest version of the source object. If the latest version of the source object is a delete marker, the object is considered deleted. You can add **versionId** to request header **x-obs-copy-source** to copy an object with the specified version ID.

If a bucket has versioning enabled, the system automatically generates a unique version ID for the requested object in this bucket and returns the version ID in response header **x-obs-version-id**. If versioning is suspended for the bucket, the object version ID is **null**.

NOTICE

When the bucket versioning status is disabled, if you make a copy of object_A and save it as object_B, and an object named as object_B already exists, the new object_B will overwrite the existing one. After the copying is executed successfully, only new object_B can be downloaded because old object_B has been deleted. Therefore, before copying an object, ensure that there is no object with the same name as the object copy to prevent data from being deleted mistakenly. During the copying, object_A has no changes.

WORM

If a bucket has WORM enabled, you can configure retention policies for objects in the bucket. You can specify the **x-obs-object-lock-mode** and **x-obs-object-lock-retain-until-date** headers to configure a retention policy when you copy an object. If you do not specify these two headers but have configured a default bucket-level WORM policy, this default policy automatically applies to the object newly copied. You can also configure or update a WORM retention policy after an object is copied to the bucket.

 NOTE

In a copy operation, the object protection status is not copied, so the protection status of an object copy is independent of that of the source object. After the copy is complete, WORM retention changes made on the source object does not affect the object copy.

Archive or Deep Archive Objects

If source objects are in the Archive or Deep Archive storage class, ensure that these objects have been restored before you copy them. If a source object is not restored or is being restored, its copy will fail and error **403 Forbidden** will be returned. The fault is described as follows:

ErrorCode: InvalidObjectState

ErrorMessage: Operation is not valid for the source object's storage class

Request Syntax

```
PUT /destinationObjectName HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
x-obs-copy-source: /sourceBucket/sourceObject
x-obs-metadata-directive: metadata_directive
x-obs-copy-source-if-match: etag
x-obs-copy-source-if-none-match: etag
x-obs-copy-source-if-unmodified-since: time_stamp
x-obs-copy-source-if-modified-since: time_stamp
Authorization: signature
Date: date
```

Request Parameters

This request contains no parameters.

Request Headers

You can add optional headers to specify the object to be copied. [Table 3-3](#) describes the optional headers.

Table 5-80 Request headers

Header	Description	Mandatory
x-obs-acl	When copying an object, you can add this header to configure the object ACL using the predefined common policies, including private , public-read , and public-read-write . For details about each policy, see "Configuring an ACL Using Header Fields" in ACLs . Type: string Example: x-obs-acl: acl	No
x-obs-grant-read	When creating an object, you can use this header to grant all users in an account the permissions to read the object and obtain the object metadata. Type: string	No
x-obs-grant-read-acp	When creating an object, you can use this header to grant all users in an account the permission to obtain the object ACL. Type: string	No
x-obs-grant-write-acp	When creating an object, you can use this header to grant all users in an account the permission to write the object ACL. Type: string	No

Header	Description	Mandatory
x-obs-grant-full-control	<p>When creating an object, you can use this header to grant all users in an account the permissions to read the object, obtain the object metadata and ACL, and write the object ACL.</p> <p>Type: string</p>	No
x-obs-copy-source	<p>Indicates names of the source bucket and the source object. If the source object has multiple versions, the versionId parameter can be used to specify the desired version.</p> <p>Type: string</p> <p>Constraint: URL encoding is required for handling full-width characters and %.</p> <p>Example: x-obs-copy-source: /source_bucket/sourceObject</p>	Yes
x-obs-metadata-directive	<p>Indicates whether the metadata of the target object is copied from the source object or replaced with the metadata contained in the request.</p> <p>Type: string</p> <p>Valid values: COPY and REPLACE</p> <p>Default value: COPY</p> <p>Example: x-obs-metadata-directive: metadata_directive</p> <p>Constraints: Values other than COPY or REPLACE result in an immediate 400-based error response. If you need to modify the metadata (the same for both the source and target objects), this parameter must be set to REPLACE, otherwise, the request is invalid and the server returns a 400 HTTP status code error. This parameter cannot change an encrypted object to a non-encrypted one (for both the source and target objects). If you use this parameter to change the encryption of an object, OBS returns a 400 error.</p>	No
x-obs-copy-source-if-match	<p>Indicates that the source object is copied only if its ETag matches the one specified in this header. Otherwise, a 412 status code (failed precondition) is returned.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-if-match: etag</p> <p>Constraint: This header can be used with x-obs-copy-source-if-unmodified-since but not other conditional copy headers.</p>	No

Header	Description	Mandatory
<p>x-obs-copy-source-if-none-match</p>	<p>Indicates that the source object is copied only if its ETag does not match the one specified in this header. Otherwise, a 412 status code (failed precondition) is returned.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-if-none-match: etag</p> <p>Constraint: This parameter can be used with x-obs-copy-source-if-modified-since but not other conditional copy parameters.</p>	<p>No</p>
<p>x-obs-copy-source-if-unmodified-since</p>	<p>Indicates that the source object is copied only if it has not been modified since the time specified by this header. Otherwise, error code 412 (failed precondition) is returned. This header can be used with x-obs-copy-source-if-match, but cannot be used with other conditional copy headers.</p> <p>Type: string</p> <p>Format: HTTP time string complying with the format specified at http://www.ietf.org/rfc/rfc2616.txt, which can be any of the following:</p> <ol style="list-style-type: none"> 1. EEE, dd MMM yyyy HH:mm:ss z 2. EEEE, dd-MMM-yy HH:mm:ss z 3. EEE MMM dd HH:mm:ss yyyy <p>Examples:</p> <ol style="list-style-type: none"> 1. x-obs-copy-source-if-unmodified-since: Sun, 06 Nov 1994 08:49:37 GMT 2. x-obs-copy-source-if-unmodified-since: Sunday, 06-Nov-94 08:49:37 GMT 3. x-obs-copy-source-if-unmodified-since: Sun Nov 6 08:49:37 1994 <p>Constraint: The time specified by this header cannot be later than the current server time (GMT time), or this header does not take effect.</p>	<p>No</p>

Header	Description	Mandatory
<p>x-obs-copy-source-if-modified-since</p>	<p>Indicates that the source object is copied only if it has been modified since the time specified by this header. Otherwise, error code 412 (failed precondition) is returned. This header can be used with x-obs-copy-source-if-none-match, but cannot be used with other conditional copy headers.</p> <p>Type: string</p> <p>Format: HTTP time string complying with the format specified at http://www.ietf.org/rfc/rfc2616.txt, which can be any of the following:</p> <ol style="list-style-type: none"> 1. EEE, dd MMM yyyy HH:mm:ss z 2. EEEE, dd-MMM-yy HH:mm:ss z 3. EEE MMM dd HH:mm:ss yyyy <p>Examples:</p> <ol style="list-style-type: none"> 1. x-obs-copy-source-if-unmodified-since: Sun, 06 Nov 1994 08:49:37 GMT 2. x-obs-copy-source-if-unmodified-since: Sunday, 06-Nov-94 08:49:37 GMT 3. x-obs-copy-source-if-unmodified-since: Sun Nov 6 08:49:37 1994 <p>Constraint: The time specified by this header cannot be later than the current server time (GMT time), or this header does not take effect.</p>	<p>No</p>
<p>x-obs-storage-class</p>	<p>When copying an object, you can use this header to specify the storage class for the object. If you do not use this header, the object storage class is the default storage class of the destination bucket where the object is copied to.</p> <p>Type: string</p> <p>Storage class options: STANDARD (Standard), WARM (Infrequent Access), COLD (Archive), DEEP_ARCHIVE (Deep Archive). These values are case sensitive.</p> <p>Example: x-obs-storage-class: STANDARD</p>	<p>No</p>

Header	Description	Mandatory
x-obs-persistent-headers	<p>When copying an object, you can add the x-obs-persistent-headers header in an HTTP request to specify one or more user-defined response headers. User-defined response headers will be returned in the response header when you retrieve the destination object or query the metadata of the destination object.</p> <p>Type: string</p> <p>Format: x-obs-persistent-headers: key1:base64_encode(<i>value1</i>),key2:base64_encode(<i>value2</i>)...</p> <p>Note: Items, such as key1 and key2, are user-defined headers. If they contain non-ASCII or unrecognizable characters, they can be encoded using URL or Base64. The server processes these headers as character strings, but does not decode them. Items, such as <i>value1</i> and <i>value2</i> are the values of the corresponding headers. base64_encode indicates that the value is encoded using Base64. A user-defined header and its Base64-encoded value are connected using a colon (:) to form a key-value pair. All key-value pairs are separated with a comma (,) and are placed in the x-obs-persistent-headers header. The server then decodes the uploaded value.</p> <p>Example: x-obs-persistent-headers: key1:dmFsdWUx,key2:dmFsdWUy</p> <p>The returned header for downloading the destination object or obtaining the metadata of the destination object is key1:value1 or key2:value2 respectively.</p> <p>Constraints:</p> <ol style="list-style-type: none"> 1. Response headers customized in this way cannot be prefixed with x-obs-. For example, you should use key1, instead of x-obs-key1. 2. Standard HTTP headers, such as host, content-md5, origin, range, and Content-Disposition, cannot be specified as custom headers. 3. The total length of this header and the custom metadata cannot exceed 8 KB. 4. If the same keys are passed, values are separated with commas (,) and then returned in one key. 	No

Header	Description	Mandatory
	<p>5. If the source object already has a user-defined response header, the response header will not be copied to the destination object.</p> <p>6. If the decoded value contains non-US-ASCII or unrecognizable characters, the server processes the value as a string and encapsulates it using <code>?UTF-8?B?<(str)>?=</code>, but does not decode the value. For instance, value <code>key1:abbc</code> will be returned as <code>key1:=?UTF-8?B?abbc?=</code>.</code></code></p> <p>7. The values cannot contain spaces, equal signs (=), commas (,), semicolons (;), colons (:), or periods (.). If such characters are required, use URL or Base64 encoding.</p>	
<p>x-obs-website-redirect-location</p>	<p>If a bucket is configured with the static website hosting function, it will redirect requests for this object to another object in the same bucket or to an external URL. OBS stores the value of this header in the object metadata.</p> <p>Type: string</p> <p>Default value: none</p> <p>Constraint: The value must be prefixed by a slash (/), <code>http://</code>, or <code>https://</code>. The length of the value cannot exceed 2 KB.</p>	<p>No</p>
<p>x-obs-server-side-encryption</p>	<p>Indicates that SSE-KMS is used. Objects are encrypted using SSE-KMS.</p> <p>Type: string</p> <p>Example: <code>x-obs-server-side-encryption: kms</code></p>	<p>No. This header is required when SSE-KMS is used.</p>

Header	Description	Mandatory
<p>x-obs-server-side-encryption-kms-key-id</p>	<p>Indicates the master key for encrypting the object copy when SSE-KMS is used. If this header is not provided, the default master key will be used. If there is no such a default master key, OBS will create one and use it by default.</p> <p>Type: string</p> <p>The following two formats are supported:</p> <ul style="list-style-type: none"> - <i>regionID.domainID:key/key_id</i> 2. <i>key_id</i> <p><i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the ID of the key created in DEW.</p> <p>Example:</p> <ul style="list-style-type: none"> - x-obs-server-side-encryption-kms-key-id: region:domainiddomainiddomainiddo-ma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0 - x-obs-server-side-encryption-kms-key-id: 4f1cd4de-ab64-4807-920a-47fc42e7f0d0 	<p>No</p>
<p>x-obs-server-side-encryption-customer-algorithm</p>	<p>Indicates the encryption algorithm for the object copy when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-algorithm: AES256</p> <p>Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used.</p>
<p>x-obs-server-side-encryption-customer-key</p>	<p>Indicates the key for encrypting the object copy when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used.</p>

Header	Description	Mandatory
<p>x-obs-server-side-encryption-customer-key-MD5</p>	<p>Indicates the MD5 value of the key for encrypting the object copy when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key.</p>	<p>No. This header is required when SSE-C is used.</p>
<p>x-obs-copy-source-server-side-encryption-customer-algorithm</p>	<p>Indicates the algorithm for decrypting the source object when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-server-side-encryption-customer-algorithm: AES256</p> <p>Constraint: This header must be used together with x-obs-copy-source-server-side-encryption-customer-key and x-obs-copy-source-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used to copy a source object.</p>
<p>x-obs-copy-source-server-side-encryption-customer-key</p>	<p>Indicates the key for decrypting the source object when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-server-side-encryption-customer-key: K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-copy-source-server-side-encryption-customer-algorithm and x-obs-copy-source-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used to copy a source object.</p>

Header	Description	Mandatory
<p>x-obs-copy-source-server-side-encryption-customer-key-MD5</p>	<p>Indicates the MD5 value of the key for decrypting the source object when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-copy-source-server-side-encryption-customer-algorithm and x-obs-copy-source-server-side-encryption-customer-key.</p>	<p>No. This header is required when SSE-C is used to copy a source object.</p>
<p>success_action_redirect</p>	<p>Indicates the address (URL) to which a successfully responded request is redirected.</p> <ul style="list-style-type: none"> If the value is valid and the request is successful, OBS returns status code 303. Location contains success_action_redirect as well as the bucket name, object name, and object ETag. If this parameter value is invalid, OBS ignores this parameter. In such case, the Location header is the object address, and OBS returns the response code based on whether the operation succeeds or fails. <p>Type: string</p>	<p>No</p>
<p>x-obs-object-lock-mode</p>	<p>WORM mode that will be applied to the object. Currently, only COMPLIANCE is supported. This header must be used together with x-obs-object-lock-retain-until-date.</p> <p>Type: string</p> <p>Example: x-obs-object-lock-mode:COMPLIANCE</p>	<p>No, but required when x-obs-object-lock-retain-until-date is present.</p>
<p>x-obs-object-lock-retain-until-date</p>	<p>Indicates the expiration time of the Object Lock retention. The value must be a UTC time that complies with ISO 8601, for example, 2015-07-01T04:11:15Z. This header must be used together with x-obs-object-lock-mode.</p> <p>Type: string</p> <p>Example: x-obs-object-lock-retain-until-date:2015-07-01T04:11:15Z</p>	<p>No, but required when x-obs-object-lock-mode is present.</p>

For details about other headers, see [Table 3-3](#).

Request Elements

This request contains no elements.

Response Syntax

```
HTTP/1.1 status_code
Content-Type: application/xml
Date: date
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<CopyObjectResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <LastModified>modifiedDate</LastModified>
  <ETag>etagValue</ETag>
</CopyObjectResult>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the headers listed in [Table 5-81](#) may be used.

Table 5-81 Additional response headers

Header	Description
x-obs-copy-source-version-id	Version ID of the source object Type: string
x-obs-version-id	Version ID of the target object Type: string
x-obs-server-side-encryption	This header is included in a response if SSE-KMS is used. Type: string Example: x-obs-server-side-encryption: kms

Header	Description
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response when SSE-KMS is used. Type: string Format: <i>regionID:domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id: <i>region:domainiddomainiddomainiddoma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0</i>
x-obs-server-side-encryption-customer-algorithm	Indicates the encryption algorithm. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm: AES256
x-obs-server-side-encryption-customer-key-MD5	Indicates the MD5 value of the key for encrypting objects. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==
x-obs-storage-class	This header is returned when the storage class of an object is not Standard. The value can be WARM or COLD or DEEP_ARCHIVE . Type: string

Response Elements

This response contains elements of a copy result. [Table 5-82](#) describes the elements.

Table 5-82 Response elements

Element	Description
CopyObjectResult	Container for the copy result Type: XML

Element	Description
LastModified	Latest time when the object was modified Type: string
ETag	128-bit MD5 digest of the Base64 code of a new object. ETag is the unique identifier of the object content. It can be used to determine whether the object content is changed. For example, if the ETag value is A when an object is uploaded, but this value has changed to B when the object is downloaded, it indicates that the object content has been changed. Type: string

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Copying an Object

Copy the object **srcobject** in bucket **bucket** to the **destobject** object in bucket **examplebucket**.

```
PUT /destobject HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:19:21 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:2rZR+iaH8xUewwUKuicLhLHpNoU=
x-obs-copy-source: /bucket/srcobject
```

Sample Response: Copying an Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 001B21A61C6C00000134031BE8005293
x-obs-id-2: MDAXQjlxQTYxQzZDMDAwMDAXMzQwMzFCRTgwMDUyOTNBQUFBQUFBQWJiYmJiYmJi
Date: WED, 01 Jul 2015 04:19:21 GMT
Content-Length: 249

<?xml version="1.0" encoding="utf-8"?>
<CopyObjectResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <LastModified>2015-07-01T00:48:07.706Z</LastModified>
  <ETag>"507e3fff69b69bf57d303e807448560b"</ETag>
</CopyObjectResult>
```

Sample Request: Copying an Object Version

Copy a multi-version object and copy the object **srcobject** whose version number is **AAABQ4uBLdLc0vycq3gAAAAEVURTRkha** in bucket **bucket** to the **destobject** object in bucket **examplebucket**.

```
PUT /destobject HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
```

```
Accept: */*
Date: WED, 01 Jul 2015 04:20:29 GMT
Authorization: OBS H4lPJX0TQTHTEBQQCEC:4BLYv+1UxfRSHBMvvrhVLDszxvcY=
x-obs-copy-source: /bucket/srcobject?versionId=AAABQ4uBLdLc0vycq3gAAAAEVURTRkha
```

Sample Response: Copying an Object Version

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: DCD2FC9CAB7800001438B8A9C898B79
x-obs-id-2: DB/qBZmbN6AloX9mrrSNYdLxwvbO0tLR/l6/XKTT4NmZspzharwp5Z74ybAYVOgr
Content-Type: application/xml
x-obs-version-id: AAABQ4uKnOrc0vycq3gAAAAFVURTRkha
x-obs-copy-source-version-id: AAABQ4uBLdLc0vycq3gAAAAEVURTRkha
Date: WED, 01 Jul 2015 04:20:29 GMT
Transfer-Encoding: chunked

<?xml version="1.0" encoding="utf-8"?>
<CopyObjectResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <LastModified>2015-07-01T01:48:07.706Z</LastModified>
  <ETag>"507e3fff69b69bf57d303e807448560b"</ETag>
</CopyObjectResult>
```

5.4.4 Downloading an Object

Functions

This operation downloads an object from OBS. Before using this GET operation, check that you have the read permission for the target object. If the object owner has granted anonymous users the read permission for the object, anonymous users can access this object without using the authentication header field.

Server-Side Encryption

If the object uploaded to the server is encrypted on the server using the encryption key provided by the client, downloading the object requires including the encryption key in the message.

Versioning

By default, the GET operation returns the current version of an object. If the current version of the object is a delete marker, OBS returns a code meaning that the object does not exist. To obtain an object of a specified version, the **versionId** parameter can be used to specify the desired version.

Archive or Deep Archive Objects

If the object you want to download is in the Archive or Deep Archive storage class, ensure that this object has been restored before you download it. The response varies depending on the object's restore state. If an object has been restored, the **x-obs-restore** header (indicating the expiry date of the object) is returned when the object is successfully downloaded. If you send a request to download Archive or Deep Archive objects that have not been restored or are being restored, a **403 Forbidden** error will be returned.

Request Syntax

```
GET /ObjectName HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```

Date: *date*
 Authorization: *authorization*
 Range:bytes=*byte_range*
 <Optional Additional Header>

 **NOTE**

The field is optional. If it does not exist, you can obtain the whole content.

Request Parameters

In a **GET** request, you can override values for a set of message headers using the request parameters. Message headers that you can override are **Content-Type**, **Content-Language**, **Expires**, **Cache-Control**, **Content-Disposition**, and **Content-Encoding**. If the target object has multiple versions, use the **versionId** parameter to specify the version to be downloaded. For details, see [Table 5-83](#).

 **NOTE**

OBS does not process Accept-Encoding carried in a request or compress or decompress the uploaded data. The client determines whether to compress or decompress the data. Some HTTP clients may decompress data based on the Content-Encoding returned by the server. The client program needs to determine whether to decompress and how to decompress the data. To decompress the data, it can modify Content-Encoding (the object metadata stored in OBS) or rewrite Content-Encoding the object is downloaded. If an object download request specifies the rewrite header, the standard HTTP message header returned by OBS is subject to the rewrite content specified in the request.

Table 5-83 Request parameters

Parameter	Description	Mandatory
response-content-type	Rewrites the Content-Type header in the response. Type: string	No
response-content-language	Rewrites the Content-Language header in the response. Type: string	No
response-expires	Rewrites the Expires header in the response. Type: string	No
response-cache-control	Rewrites the Cache-Control header in the response. Type: string	No

Parameter	Description	Mandatory
response-content-disposition	Rewrites the Content-Disposition header in the response. Type: string Example: response-content-disposition=attachment; filename*=utf-8"name1 In this example, the downloaded object is renamed name1 . If the new name contains full-width characters, it must be URL-encoded.	No
response-content-encoding	Rewrites the Content-Encoding header in the response. Type: string	No
versionId	Indicates the version ID of the object whose content is obtained. Type: string	No
x-image-process	Image processing service. An example is provided as follows: Command: x-image-process= image/commands Style: x-image-process= style/stylename For details, see the Image Processing Feature Guide .	No
attname	Rewrites the Content-Disposition header in the response. Type: string Example: attname=name1 Rename the downloaded object as name1 .	No

Request Headers

This request uses common headers. In addition, you can add additional headers to this request. [Table 5-84](#) describes the additional headers.

Table 5-84 Request headers

Header	Description	Mandatory
Range	<p>Obtains the object content within the scope defined by Range. If the parameter value is invalid, the entire object is obtained.</p> <p>Range value starts from 0, and the maximum value equals the object length minus 1. The start value of Range is mandatory. If only the start value is specified, the system obtains the object content from the start value to default maximum value.</p> <p>After the Range header field is carried, the value of ETag in the response message is the ETag of the object instead of the ETag of the object in the Range field.</p> <p>Type: string bytes=byte_range</p> <p>Example 1: bytes=0-4</p> <p>Example 2: bytes=1024</p> <p>Example 3: bytes=10-20, 30-40 (multiple ranges)</p>	No
If-Modified-Since	<p>Returns the object only if it has been modified since the time specified by this header. Otherwise, 304 Not Modified is returned.</p> <p>Type: HTTP time character string complying with the format specified at http://www.ietf.org/rfc/rfc2616.txt</p>	No
If-Unmodified-Since	<p>Returns the object only if it has not been modified since the time specified by this header. Otherwise, 412 Precondition Failed is returned.</p> <p>Type: HTTP time character string complying with the format specified at http://www.ietf.org/rfc/rfc2616.txt</p>	No
If-Match	<p>Returns the object only if its ETag is the same as the one specified by this header. Otherwise, 412 Precondition Failed is returned.</p> <p>Type: string</p> <p>ETag example: 0f64741bf7cb1089e988e4585d0d3434</p>	No

Header	Description	Mandatory
If-None-Match	<p>Returns the object only if its ETag is different from the one specified by this header. Otherwise, 304 Not Modified is returned.</p> <p>Type: string</p> <p>ETag example: 0f64741bf7cb1089e988e4585d0d3434</p>	No
x-obs-server-side-encryption-customer-algorithm	<p>Indicates the encryption algorithm when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-algorithm:AES256</p> <p>Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5.</p>	No. This header is required when SSE-C is used.
x-obs-server-side-encryption-customer-key	<p>Indicates the key for decrypting objects when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5.</p>	No. This header is required when SSE-C is used.

Header	Description	Mandatory
x-obs-server-side-encryption-customer-key-MD5	<p>Indicates the MD5 value of the encryption key when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key.</p>	No. This header is required when SSE-C is used.

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Content-Type: type
Date: date
Content-Length: length
Etag: etag
Last-Modified: time
<Object Content>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the headers listed in [Table 5-85](#) may be used.

Table 5-85 Additional response headers

Header	Description
x-obs-expiration	<p>When an object has its lifecycle rule, the object expiration time is subject to its lifecycle rule. This header field is use expiry-date to describe the object expiration date. If the lifecycle rule is configured only for the entire bucket not individual objects, the object expiration time is subject to the bucket lifecycle rule. This header field uses the expiry-date and rule-id to describe the detailed expiration information of objects. If no lifecycle rule is configured, this header field is not contained in the response.</p> <p>Type: string</p>
x-obs-website-redirect-location	<p>Indicates the redirected-to location. If the bucket is configured with website information, this parameter can be set for the object metadata so that the website endpoint will evaluate the request for the object as a 301 redirect to another object in the same bucket or an external URL.</p> <p>Type: string</p>
x-obs-delete-marker	<p>Indicates whether an object is a delete marker. If the object is not marked as deleted, the response does not contain this header.</p> <p>Type: boolean</p> <p>Value options: true, false</p> <p>The default value is false.</p>
x-obs-version-id	<p>Object version ID. If the object has no version number specified, the response does not contain this header.</p> <p>Valid value: string</p> <p>Default value: none</p>
x-obs-server-side-encryption	<p>This header is included in a response if SSE-KMS is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption:kms</p>

Header	Description
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response when SSE-KMS is used. Type: string Format: <i>regionID:domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id:region:domainiddomainiddomainid-doma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0
x-obs-server-side-encryption-customer-algorithm	Indicates a decryption algorithm. This header is included in a response if SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm:AES256
x-obs-server-side-encryption-customer-key-MD5	Indicates the MD5 value of a key used to decrypt objects. This header is included in a response if SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==
x-obs-object-type	If the object is not a normal one, this header field is returned. The value can be Appendable . Type: string
x-obs-next-append-position	This header field is returned when the object is an appendable object. Type: integer

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Downloading an Object

```
GET /object01 HTTP/1.1
User-Agent: curl/7.29.0
```

```
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:24:33 GMT
Authorization: OBS H4lPjX0TQTHtHEBQQCEC:NxtSMS0jaVxlLnxlO9awaMTn47s=
```

Sample Response: Downloading an Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D3F2A89604C49ABEE55E
Accept-Ranges: bytes
ETag: "3b46eaf02d3b6b1206078bb86a7b7013"
Last-Modified: WED, 01 Jul 2015 01:20:29 GMT
Content-Type: binary/octet-stream
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSQwxJ2l1VvxD/Xgwuw2G2RQax30gdXU
Date: WED, 01 Jul 2015 04:24:33 GMT
Content-Length: 4572

[4572 Bytes object content]
```

Sample Request: Downloading a Specified Range of an Object

Download the specified range of an object (download a range of an object).

```
GET /object01 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Mon, 14 Sep 2020 09:59:04 GMT
Range:bytes=20-30
Authorization: OBS H4lPjX0TQTHtHEBQQCEC:mNPLWQMDWg30PTkAWiqlL3ALg=
```

Download the specified range of an object (download multiple ranges of an object).

```
GET /object01 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Mon, 14 Sep 2020 10:02:43 GMT
Range:bytes=20-30,40-50
Authorization: OBS H4lPjX0TQTHtHEBQQCEC:ZwM7Vvk2d7sD9o8zRsRkKehgKQDkk=
```

Sample Response: Downloading a Specified Range of an Object

Download the specified range of an object (download a range of an object).

```
HTTP/1.1 206 Partial Content
Server: OBS
x-obs-request-id: 000001748C0DBC35802E360C9E869F31
Accept-Ranges: bytes
ETag: "2200446c2082f27ed2a569601ca4e360"
Last-Modified: Mon, 14 Sep 2020 01:16:20 GMT
Content-Range: bytes 20-30/4583
Content-Type: binary/octet-stream
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSn2JHu4okx9NBRNZAvBGawa3lt3g31g
Date: Mon, 14 Sep 2020 09:59:04 GMT
Content-Length: 11

[ 11 Bytes object content]
```

Download the specified range of an object (download multiple ranges of an object).

```
HTTP/1.1 206 Partial Content
Server: OBS
```

```
x-obs-request-id: 8DF400000163D3F2A89604C49ABEE55E
Accept-Ranges: bytes
ETag: "2200446c2082f27ed2a569601ca4e360"
Last-Modified: Mon, 14 Sep 2020 01:16:20 GMT
Content-Type: multipart/byteranges;boundary=35bcf444-e65f-4c76-9430-7e4a68dd3d26
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSIBWFOVW8eeWujkqSnoiANC2mNR1cdf
Date: Mon, 14 Sep 2020 10:02:43 GMT
Content-Length: 288

--35bcf444-e65f-4c76-9430-7e4a68dd3d26
Content-type: binary/octet-stream
Content-range: bytes 20-30/4583
[ 11 Bytes object content]
--35bcf444-e65f-4c76-9430-7e4a68dd3d26
Content-type: binary/octet-stream
Content-range: bytes 40-50/4583
[ 11 Bytes object content]
--35bcf444-e65f-4c76-9430-7e4a68dd3d26
```

Sample Request: Downloading a Resized Image

```
GET /example.jpg?x-image-process=image/resize,w_100 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:20:51 GMT
Authorization: OBS H4IPJX0TQTHHEBQQCEC:9Nsx45WjaVxlLnXlO9awasXn83N=
```

Sample Response: Downloading a Resized Image

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D3F2A89604C49ABEE55E
x-image-process:image/resize,w_100
Accept-Ranges: bytes
ETag: "3b46eaf02d3b6b1206078bb86a7b7013"
Last-Modified: WED, 01 Jul 2015 01:20:29 GMT
Content-Type: image/jpeg
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSQwxJ2I1VvxD/Xgwuw2G2RQax30gdXU
Date: WED, 01 Jul 2015 04:20:51 GMT
Content-Length: 49

[ 49 Bytes object content]
```

Sample Request: Checking the ETag Value of an Object

Download an object if its ETag value is matched.

```
GET /object01 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:24:33 GMT
If-Match: 682e760adb130c60c120da3e333a8b09
Authorization: OBS H4IPJX0TQTHHEBQQCEC:NxtSMS0jaVxlLnXlO9awaMTn47s=
```

Sample Response: Checking the ETag Value of an Object (ETag Mismatch)

If the object's ETag value is not **682e760adb130c60c120da3e333a8b09**, the system displays a download failure message.

```
HTTP/1.1 412 Precondition Failed
Server: OBS
x-obs-request-id: 8DF400000163D3F2A89604C49ABEE55E
Content-Type: application/xml
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSQwxJ2I1VvxD/Xgwuw2G2RQax30gdXU
```

```
Date: WED, 01 Jul 2015 04:20:51 GMT
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Error>
  <Code>PreconditionFailed</Code>
  <Message>At least one of the pre-conditions you specified did not hold</Message>
  <RequestId>8DF400000163D3F2A89604C49ABEE55E</RequestId>
  <HostId>ha0ZGaSKVm+uLORCXXtx4Qn1aLzvoeblctVXRAqA7pty10mzUUW/yOzFue04lBqu</HostId>
  <Condition>If-Match</Condition>
</Error>
```

Sample Response: Checking the ETag Value of an Object (ETag Matched)

If the object's ETag value is **682e760adb130c60c120da3e333a8b09**, the download is successful.

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 5DEB00000164A21E1FC826C58F6BA001
Accept-Ranges: bytes
ETag: "682e760adb130c60c120da3e333a8b09"
Last-Modified: Mon, 16 Jul 2015 08:03:34 GMT
Content-Type: application/octet-stream
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSbkdm1sLSvKnoHaRcOwRI+6+ustDwk
Date: Mon, 16 Jul 2015 08:04:00 GMT
Content-Length: 8

[ 8 Bytes object content]
```

Sample Request: Downloading an Object Using a Signed URL

```
GET /object02?
AccessKeyId=H4lPJX0TQHTHEBQQCEC&Expires=1532688887&Signature=EQmDuOhaLUrurzRNZxwS72CXeX
M%3D HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Fri, 27 Jul 2018 10:52:31 GMT
```

Sample Response: Downloading an Object Using a Signed URL

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 804F00000164DB5E5B7FB908D3BA8E00
ETag: "682e760adb130c60c120da3e333a8b09"
Last-Modified: Mon, 16 Jul 2015 08:03:34 GMT
Content-Type: application/octet-stream
x-obs-id-2: 32AAAUJAIABAAAQAAEAABAAAQAAEAABCTlpxlLjhVK/heKOWIP8Wn2IWmQoerfw
Date: Fri, 27 Jul 2018 10:52:31 GMT
Content-Length: 8

[ 8 Bytes object content]
```

Sample Request: Downloading an Object and Renaming It (with response-content-disposition Used)

Use the response-content-disposition parameter to download and rename an object.

```
GET /object01?response-content-disposition=attachment; filename*=utf-8'name1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:24:33 GMT
Authorization: OBS H4lPJX0TQHTHEBQQCEC:NxtSMS0jaVxlLnxlO9awaMTn47s=
```

Sample Response: Downloading an Object and Renaming It (with response-content-disposition Used)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 804F00000164DB5E5B7FB908D3BA8E00
ETag: "682e760adb130c60c120da3e333a8b09"
Last-Modified: Mon, 16 Jul 2015 08:03:34 GMT
Content-Type: application/octet-stream
x-obs-id-2: 32AAAUAIAABAAAQAAEAABAAQAAEAABCTlpxlLjhVK/heKOWIP8Wn2IWmQoerfw
Date: Fri, 27 Jul 2018 10:52:31 GMT
Content-Length: 8
Content-Disposition: attachment; filename*=utf-8"name1

[ 8 Bytes object content]
```

Sample Request: Downloading an Object and Renaming It (with attname Used)

Use the attname parameter to download and rename an object.

```
GET /object01?attname=name1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:24:33 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:NxtSMS0jaVxlLnXlO9awaMTn47s=
```

Sample Response: Downloading an Object and Renaming It (with attname Used)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 804F00000164DB5E5B7FB908D3BA8E00
ETag: "682e760adb130c60c120da3e333a8b09"
Last-Modified: Mon, 16 Jul 2015 08:03:34 GMT
Content-Type: application/octet-stream
x-obs-id-2: 32AAAUAIAABAAAQAAEAABAAQAAEAABCTlpxlLjhVK/heKOWIP8Wn2IWmQoerfw
Date: Fri, 27 Jul 2018 10:52:31 GMT
Content-Length: 8
Content-Disposition: attachment; filename*=utf-8"name1

[ 8 Bytes object content]
```

Sample Request: Sending a Request That Includes Custom Response Headers

```
GET /obj001?response-expires=Thu%2C%2001%20Feb%202015%2017%3A00%3A00%20GMT HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:37:22 GMT
Authorization: OBS UDSIAMSTUBTEST000003:2tod8LyZOGA0+46HMjmp176XRal=
```

Sample Response: Sending a Request That Includes Custom Response Headers

```
Server: OBS
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSmpL2dv6zZLM2HmUrXKTAi258MPqmrp
x-obs-request-id: 0000018A2A73AF59D3085C8F8ABF0C65
Accept-Ranges: bytes
ETag: "21e7e5efb6b73de19e691d6c4e32a9cf"
Content-Disposition: attachment
Date: WED, 01 Jul 2015 02:37:22 GMT
Expires: Thu, 01 Feb 2015 17:00:00 GMT
```

```
Content-Type: binary/octet-stream
Content-Length: 392

[392 Bytes object content]
```

Sample Request: Specifying a Version ID to Download a Specific Object Version

```
GET /obj001?versionId=G001118A6803675AFFFFD3043F7F91D0 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:37:22 GMT
Authorization: OBS UDSIAMSTUBTEST000003:2tod8LyZOGA0+46HMjmp176XRal=
```

Sample Response: Specifying a Version ID to Download a Specific Object Version

```
Server: OBS
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSmpL2dv6zZLM2HmUrXKTAi258MPqmrp
x-obs-request-id: 0000018A2A73AF59D3085C8F8ABF0C65
Accept-Ranges: bytes
x-obs-version-id: G001118A6803675AFFFFD3043F7F91D0
ETag: "21e7e5efb6b73de19e691d6c4e32a9cf"
Content-Disposition: attachment
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: binary/octet-stream
Content-Length: 392

[392 Bytes object content]
```

Sample Request: Downloading an Object Stored Using Server-Side Encryption

```
GET /obj001 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 02:37:22 GMT
Authorization: OBS UDSIAMSTUBTEST000003:2tod8LyZOGA0+46HMjmp176XRal=
x-obs-server-side-encryption-customer-key:d09s2lKS9cmQO9135fQXMCV8fsOP02aDWd441g
x-obs-server-side-encryption-customer-key-MD5:ZjQpad35Fiw1322Fwa
x-obs-server-side-encryption-customer-algorithm:AES256
```

Sample Response: Downloading an Object Stored Using Server-Side Encryption

```
Server: OBS
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSmpL2dv6zZLM2HmUrXKTAi258MPqmrp
x-obs-request-id: 0000018A2A73AF59D3085C8F8ABF0C65
Accept-Ranges: bytes
ETag: "21e7e5efb6b73de19e691d6c4e32a9cf"
Content-Disposition: attachment
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: binary/octet-stream
Content-Length: 392
x-obs-server-side-encryption-customer-key-MD5:ZjQpad35Fiw1322Fwa
x-obs-server-side-encryption-customer-algorithm:AES256

[392 Bytes object content]
```

5.4.5 Querying Object Metadata

Functions

Users with the read permission on objects can perform the HeadObject operation to obtain metadata of objects. The object metadata is included in the response.

This operation supports server-side encryption.

Versioning

By default, this operation returns the latest metadata of an object. If the object has a delete marker, status code 404 is returned. To obtain the object metadata of a specified version, the **versionId** parameter can be used to specify the desired version.

Request Syntax

```
HEAD /ObjectName HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

[Table 5-86](#) describes the request parameters.

Table 5-86 Request parameters

Parameter	Description	Mandatory
versionId	Object version ID Type: string	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

In addition, the request can use additional headers, as shown in [Table 5-87](#).

Table 5-87 Request headers

Header	Description	Mandatory
Origin	Origin of the cross-domain request specified by the pre-request. Generally, it is a domain name. Type: string	No

Header	Description	Mandatory
Access-Control-Request-Headers	Indicates the HTTP headers of a request. The request can use multiple HTTP headers. Type: string	No
x-obs-server-side-encryption-customer-algorithm	Indicates the decryption algorithm when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm:AES256 Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5 .	No. This header is required when SSE-C is used.
x-obs-server-side-encryption-customer-key	Indicates the decryption key when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw= Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5 .	No. This header is required when SSE-C is used.
x-obs-server-side-encryption-customer-key-MD5	Indicates the MD5 value of the decryption key when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key. Type: string Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ== Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key .	No. This header is required when SSE-C is used.

Request Elements

This request involves no elements.

Response Syntax

HTTP/1.1 *status_code*
Content-Type: *type*

Date: *date*
Content-Length: *length*
Etag: *etag*
Last-Modified: *time*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the headers listed in [Table 5-88](#) may be used.

Table 5-88 Additional response headers

Header	Description
x-obs-expiration	When an object has its lifecycle rule, the object expiration time is subject to its lifecycle rule. This header field is use expiry-date to describe the object expiration date. If the lifecycle rule is configured only for the entire bucket not individual objects, the object expiration time is subject to the bucket lifecycle rule. This header field uses the expiry-date and rule-id to describe the detailed expiration information of objects. If no lifecycle rule is configured, this header field is not contained in the response. Type: string
x-obs-website-redirect-location	Indicates the redirected-to location. If the bucket is configured with website information, this parameter can be set for the object metadata so that the website endpoint will evaluate the request for the object as a 301 redirect to another object in the same bucket or an external URL. Type: string
x-obs-version-id	Object version ID. If the object has no version number specified, the response does not contain this header. Type: string Default value: none
Access-Control-Allow-Origin	Indicates that the origin is included in the response if the origin in the request meets the CORS configuration requirements when CORS is configured for buckets. Type: string

Header	Description
Access-Control-Allow-Headers	Indicates that the headers are included in the response if headers in the request meet the CORS configuration requirements when CORS is configured for buckets. Type: string
Access-Control-Max-Age	Value of MaxAgeSeconds in the CORS configuration of the server when CORS is configured for buckets. Type: integer
Access-Control-Allow-Methods	Indicates that methods in the rule are included in the response if Access-Control-Request-Method in the request meets the CORS configuration requirements when CORS is configured for buckets. Type: string Value options: GET, PUT, HEAD, POST, DELETE
Access-Control-Expose-Headers	Value of ExposeHeader in the CORS configuration of a server when CORS is configured for buckets. Type: string
x-obs-server-side-encryption	This header is included in a response if SSE-KMS is used. Type: string Example: x-obs-server-side-encryption:kms
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response when SSE-KMS is used. Type: string Format: <i>regionID.domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id:region.domainiddomainiddomainid-doma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0
x-obs-server-side-encryption-customer-algorithm	Indicates a decryption algorithm. This header is included in a response if SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm:AES256

Header	Description
x-obs-server-side-encryption-customer-key-MD5	<p>Indicates the MD5 value of a key used to decrypt objects. This header is included in a response if SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p>
x-obs-storage-class	<p>This header is returned when the storage class of an object is not Standard. The value can be WARM or COLD or DEEP_ARCHIVE.</p> <p>Type: string</p>
x-obs-restore	<p>This header is returned when an Archive or a Deep Archive object is being restored or has been restored. It represents the object's restore status, which can be ongoing-request="true" (the object is being restored) or ongoing-request="false", expiry-date="Wed, 7 Nov 2012 00:00:00 GMT" (the object has been restored). In these statuses, expiry-date indicates when the restored object will expire.</p> <p>Type: string</p>
x-obs-object-type	<p>If the object is not a normal one, this header field is returned. The value can be Appendable.</p> <p>Type: string</p>
x-obs-next-append-position	<p>This header field is returned when the object is an appendable object.</p> <p>Type: integer</p>
x-obs-uploadId	<p>This header is returned if the object is a combination of multiple parts. The header value indicates the ID of the corresponding multipart upload task.</p> <p>Type: string</p>

Header	Description
x-obs-object-lock-mode	<p>WORM mode that will be applied to the object. Currently, only COMPLIANCE is supported. This header is returned only when the object has any object-level retention policy configured or has the default bucket-level WORM policy applied. To configure this header, the GetObjectRetention permission is required.</p> <p>Type: string</p> <p>Example: x-obs-object-lock-mode:COMPLIANCE</p>
x-obs-object-lock-retain-until-date	<p>Indicates the expiration time of the WORM retention. The value must be a UTC time that complies with ISO 8601, for example, 2015-07-01T04:11:15Z. This header is returned only when the object has any object-level retention policy configured or has the default bucket-level WORM policy applied. To configure this header, the GetObjectRetention permission is required.</p> <p>Type: string</p> <p>Example: x-obs-object-lock-retain-until-date:2015-07-01T04:11:15Z</p>

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
HEAD /object1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:19:25 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:/cARjk81I2iExMfQqn6IT3qEZ74=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D3E4BB5905C41B6E65B6
Accept-Ranges: bytes
ETag: "3b46eaf02d3b6b1206078bb86a7b7013"
Last-Modified: WED, 01 Jul 2015 01:19:21 GMT
Content-Type: binary/octet-stream
```

```
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSD3nAiTaBoeyt9oHp9vTYtXnLDmwV6D
Date: WED, 01 Jul 2015 04:19:21 GMT
Content-Length: 4572
```

Sample Request: Obtaining Object Metadata from a Versioning-enabled Bucket

```
HEAD /object1?versionId=G001118A49821905FFFFD28739D419DA HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBI66PwXDAPxjRk6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
```

Sample Response: Obtaining Object Metadata from a Versioning-enabled Bucket

```
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCShLiL70qeT0g5qpMquCeztsnr1jImRs
Accept-Ranges: bytes
x-obs-request-id: 0000018A4986DDCDD24538ACF6B54255
Server: OBS
ETag: \
x-obs-tagging-count: 0
Last-Modified: Thu, 31 Aug 2013 02:52:57 GMT
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: text/plain
x-obs-version-id: G001118A49821905FFFFD28739D419DA
```

5.4.6 Deleting an Object

Functions

You can perform this operation to delete an object. If you try to delete an object that does not exist, OBS will return a success message.

Versioning

When versioning is enabled for a bucket, a delete request that does not specify a version ID cannot permanently delete the object. Instead, OBS creates a delete marker with a unique version ID. When versioning is suspended for a bucket, a delete request that does not specify a version ID deletes the object whose version ID is **null** and creates a delete marker with a version ID of **null**.

To delete an object of a specified version, the **versionId** parameter can be used to specify the desired version.

WORM

OBS automatically enables versioning when you enable WORM for a bucket. If you delete an object without specifying a version ID, OBS does not really delete this object thanks to versioning, but inserts a delete marker with a unique version ID, which turns into the current version. If you specify a version ID when deleting an object protected by WORM, OBS prevents you from deleting this object and returns a 403 error. Delete markers are not protected by WORM.

Request Syntax

```
DELETE /ObjectName HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```

Date: *date*
Authorization: *authorization*

Request Parameters

[Table 5-89](#) describes the request parameters.

NOTICE

For deleting an object, only parameters listed in [Table 5-89](#) are supported. If the request contains parameters that cannot be identified by OBS, the server returns the 400 error code.

Table 5-89 Request parameters

Parameter	Description	Mandatory
versionId	Object version ID Type: string	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

HTTP/1.1 *status_code*
Date: *date*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

If versioning is enabled for the bucket, the headers listed in [Table 5-90](#) may also be used.

Table 5-90 Additional response headers

Header	Description
x-obs-delete-marker	Indicates whether an object is deleted. If the object is not marked as deleted, the response does not contain this header. Type: boolean Value options: true , false The default value is false .
x-obs-version-id	Object version ID. If the object has no version number specified, the response does not contain this header. Valid value: string Default value: none

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
DELETE /object2 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:19:21 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:MfK9JcN5FHCrJmjv7iRkRrce2s=
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: 8DF400000163D3F51DEA05AC9CA066F1
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCSgkM4Dij80gAeFY8pAZIwx72QhDeBZ5
Date: WED, 01 Jul 2015 04:19:21 GMT
```

Sample Request: Specifying versionId to Delete a Specific Object Version

```
DELETE /object2?versionId=G001118A49821905FFFFD28739D419DA HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBl66PwXDApxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
```

Sample Response: Specifying versionId to Delete a Specific Object Version

```
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCS3WJqDiMsxgGHKQrlqST9veFKpDgE50
x-obs-request-id: 0000018A4997390DD306CCDA0DEC814F
```



```
Server: OBS
Date: WED, 01 Jul 2015 02:37:22 GMT
x-obs-version-id: G001118A49821905FFFFD28739D419DA
```

Sample Request: Specifying versionId to Delete a Delete Marker

```
DELETE /object2?versionId=G001118A6456208AFFFFD24829FCF614
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBI66PwXDApxjRk6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
```

Sample Response: Specifying versionId to Delete a Delete Marker

```
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCS3WJqDiMsxgGHKQrlqST9veFKpDgE50
x-obs-request-id: 0000018A4997390DD306CCDA0DEC814F
Server: OBS
Date: WED, 01 Jul 2015 02:37:22 GMT
x-obs-version-id: G001118A6456208AFFFFD24829FCF614
```

5.4.7 Deleting Objects

Functions

This operation can be used to batch delete some objects in a bucket. The deletion cannot be undone. After the operation is implemented, the returned information contains the implementation result of each object in the specified bucket. OBS deletes the objects synchronously. The deletion result of each object is returned to the request user.

Objects in batches can be deleted in **verbose** or **quiet** mode. With **verbose** mode, OBS returns results of successful and failed deletion in an XML response; with **quiet** mode, OBS only returns results of failed deletion in an XML response. OBS uses the **verbose** mode by default and you can specify the **quiet** mode in the request body.

For batch deletion, the request header must contain **Content-SHA256** and **Content-Length**, so that the message body can be identified if network transmission error is detected at the server side.

Request Syntax

```
POST /?delete HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
Content-SHA256: SHA256
Content-Length: length
```

```
<?xml version="1.0" encoding="UTF-8"?>
<Delete>
  <Quiet>true</Quiet>
  <Object>
    <Key>Key</Key>
    <VersionId>VersionId</VersionId>
  </Object>
  <Object>
    <Key>Key</Key>
  </Object>
</Delete>
```

Request Parameters

This request involves no parameters.

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request uses elements to specify the list of objects to be deleted in a batch. [Table 5-91](#) describes the elements.

Table 5-91 Request elements

Element	Description	Mandatory
Quiet	Specifies the quiet mode. With the quiet mode, OBS only returns the list of objects that failed to be deleted. This element is valid when set to true . Otherwise, OBS ignores it. Type: boolean	No
EncodingType	This parameter specifies the encoding type of the object key to be deleted and the object key in the response. If an object key contains control characters that are not supported by the XML 1.0 standard, you can set this element to specify the encoding type of the object key. Type: string Value option: url	No
Delete	List of objects to be deleted Type: XML	Yes
Object	Names of objects to be deleted Type: XML	Yes
Key	Key of the object to be deleted. If EncodingType is specified, the object key must be encoded based on the encoding type. Type: string	Yes
VersionId	Version ID of the object to be deleted Type: string	No

A maximum of 1,000 objects can be deleted at a time. If you send a request for deleting more than 1,000 objects, OBS returns an error message.

After concurrent tasks are assigned, OBS may encounter an internal error during cyclic deletion of multiple objects. In that case, the metadata still exists when the object index data is deleted, which means data inconsistency.

Response Syntax

```

HTTP/1.1 status_code
Date: date
Content-Type: application/xml
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<DeleteResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Deleted>
    <Key>Key</Key>
  </Deleted>
  <Error>
    <Key>Key</Key>
    <Code>ErrorCode</Code>
    <Message>Message</Message>
  </Error>
</DeleteResult>

```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response uses elements to return results of deleted objects in a batch. [Table 5-92](#) describes the elements.

Table 5-92 Response elements

Element	Description
DeleteResult	Root node of batch deletion responses Type: container
Deleted	Container for results of successful deletion Type: container
Error	Container for results of failed deletion Type: container
EncodingType	Encodes the Key in the response based on the specified type. If EncodingType is specified in the request, the Key in the response is encoded. Type: string
Key	Object names in a deletion result Type: string
Code	Error code of a deletion failure Type: string
Message	Error message of a deletion failure Type: string
VersionId	Version IDs of objects to be deleted Type: string

Element	Description
DeleteMarker	If this element is specified, true will be returned when you create or delete a delete marker in a bucket with versioning enabled. Type: boolean
DeleteMarkerVersionId	Indicates the version ID of the delete marker deleted or created by the request. If you create or delete a delete marker in a bucket with versioning enabled, OBS returns this element in the response. This element will be returned in either of the following cases: <ul style="list-style-type: none"> You send a request that has only the object name but not the version ID specified. In this case, OBS creates a delete marker and returns its version ID in the response. You send a request that has both the object key and version ID (that identifies a delete marker) specified. In this case, OBS deletes the delete marker and returns its version ID in the response. Type: boolean

Error Responses

1. If the resolution result of an XML request contains more than 1000 objects, OBS returns **400 Bad Request**.
2. If the object key in an XML request is invalid (for example, containing more than 1,024 bytes), OBS returns **400 Bad Request**.
3. If the request header does not contain Content-SHA256, OBS returns **400 Bad Request**.

Other errors are included in [Table 6-2](#).

Sample Request

```
POST /test333?delete HTTP/1.1
User-Agent: curl/7.29.0
Host: 127.0.0.1
Accept: */*
Date: WED, 01 Jul 2015 04:34:21 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:8sjZWJlWmYmYnK5JqXaFFQ+vHEg=
Content-SHA256: ogX9qClMrVJUBiUSIKDFM0qO41jJM015SCN55/OtMyI=
Content-Length: 188

<?xml version="1.0" encoding="utf-8"?>
<Delete>
  <Quiet>true</Quiet>
  <Object>
    <Key>obja02</Key>
  </Object>
  <Object>
    <Key>obja02</Key>
```

```
</Object>  
</Delete>
```

Sample Response

```
HTTP/1.1 200 OK  
Server: OBS  
x-obs-request-id: 8DF400000163D3FE4CE80340D30B0542  
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCRhY0FBWRm6qjOE1ACBZwS+0KYIPBq0f  
Content-Type: application/xml  
Date: WED, 01 Jul 2015 04:34:21 GMT  
Content-Length: 120  
  
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<DeleteResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
```

Sample Request: Specifying versionId to Delete Multiple Delete Markers

```
POST /?delete HTTP/1.1  
Authorization: OBS H4IPJX0TQTHHEBQQCEC:iqSPeUBl66PwXDAPxjRkK6hlcN4=  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Date: WED, 01 Jul 2015 02:37:22 GMT  
Content-Type: application/xml  
Content-MD5: Y4+cxEPU7U9sgVFpRbdtUQ==  
  
<Delete>  
  <Object>  
    <Key>object1</Key>  
    <VersionId>G001118A646F2ACEFFFD24530CFB5D8</VersionId>  
  </Object>  
  <Object>  
    <Key>object2</Key>  
    <VersionId>G001118A646F2ACEFFFD24530CFB5D9</VersionId>  
  </Object>  
</Delete>
```

Sample Response: Specifying versionId to Delete Multiple Delete Markers

```
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCS3WJqDiMxsgGHKQrlqST9veFKpDgE50  
x-obs-request-id: 0000018A4997390DD306CCDA0DEC814F  
Server: OBS  
Date: WED, 01 Jul 2015 02:37:22 GMT  
Content-Length: 545  
Content-Type: application/xml  
  
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<DeleteResult xmlns="http://obs.myhwclouds.com/doc/2015-06-30/">  
  <Deleted>  
    <Key>object1</Key>  
    <VersionId>G001118A646F2ACEFFFD24530CFB5D9</VersionId>  
    <DeleteMarker>true</DeleteMarker>  
    <DeleteMarkerVersionId>G001118A646F2ACEFFFD24530CFB5D9</DeleteMarkerVersionId>  
  </Deleted>  
  <Deleted>  
    <Key>object2</Key>  
    <VersionId>G001118A646F2ACEFFFD24530CFB5D8</VersionId>  
    <DeleteMarker>true</DeleteMarker>  
    <DeleteMarkerVersionId>G001118A646F2ACEFFFD24530CFB5D8</DeleteMarkerVersionId>  
  </Deleted>  
</DeleteResult>
```

Sample Request: Sending a Request in Wrong XML Format

```
The <Delete> end tag is missing.  
POST /?delete HTTP/1.1  
Authorization: OBS H4IPJX0TQTHHEBQQCEC:iqSPeUBl66PwXDAPxjRkK6hlcN4=
```

```
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
Content-MD5: Y4+cxEPU7U9sgVFpRbdtUQ==

<Delete>
  <Quiet>true</Quiet>
  <Object>
    <Key>object1</Key>
  </Object>
  <Object>
    <Key>object2</Key>
  </Object>
```

Sample Response: Sending a Request in Wrong XML Format

```
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCS3WJqDiMsxgGHKQrlqST9veFKpDgE50
x-obs-request-id: 0000018A4997390DD306CCDA0DEC814F
Server: OBS
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Length: 545
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Error>
  <Code>MalformedXML</Code>
  <Message>The XML you provided was not well-formed or did not validate against our published
schema</Message>
  <RequestId>0000018A647F5559D385F15A331DF49B</RequestId>
  <HostId>buloGEikvQr7lmiZEtHxD9nO2owRwBRGQfbap4E9MFTp1YJJV66rkJNLI7cs3Zlz</HostId>
</Error>
```

5.4.8 Restoring Archive or Deep Archive Objects

Functions

To obtain the content of an object in the Archive or Deep Archive storage class, you need to restore the object first and then you can download it. After an object is restored, a copy of the object is saved in the Standard storage class. By doing so, the object in the Archive or Deep Archive storage class and its copy in the Standard storage class co-exist in the bucket. The copy will be automatically deleted once its retention period ends.

Versioning

By default, this operation returns the latest version of an object. If the object has a delete marker, status code 404 is returned. To restore an object of a specified version, the **versionId** parameter can be used to specify the desired version.

Request Syntax

```
POST /ObjectName?restore&versionId=VersionID HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization string
Content-MD5: MD5

<RestoreRequest>
  <Days>NumberOfDays</Days>
  <RestoreJob>
    <Tier>RetrievalOption</Tier>
```

```
</RestoreJob>  
</RestoreRequest>
```

Request Parameters

Parameter	Description	Mandatory
versionId	Version ID of the Archive or Deep Archive object to be restored Type: string	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

Table 5-93 Request elements

Element	Description	Mandatory
RestoreRequest	Container for the restore information Type: container	Yes
Days	Indicates the storage duration of the restored object. The minimum value is 1 and the maximum value is 30. Type: integer	Yes
RestoreJob	Container for the restore options Type: container	No

Element	Description	Mandatory
Tier	<p>Restore options: Expedited Standard</p> <p>Expedited indicates that objects can be quickly restored from Archive storage within 1 to 5 minutes and from Deep Archive storage (under limited beta testing) within 3 to 5 hours.</p> <p>Standard indicates that objects can be restored from Archive storage within 3 to 5 hours and from Deep Archive storage (under limited beta testing) within 5 to 12 hours.</p> <p>NOTE</p> <p>To restore a large number of objects from the Deep Archive storage class, you are advised to use the standard restore. The restore time spent depends on the object size and data volume restored.</p> <p>The default value is Standard.</p> <p>Type: string</p>	No

Response Syntax

HTTP/1.1 *status_code*
Date: *date*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

Table 5-94 List of OBS access error codes

Error Code	Description	HTTP Status Code
RestoreAlreadyIn-Progress	The object is being restored. The request conflicts with another. ErrorMessage: Object restore is already in progress	409 Conflict
ObjectHasAlready Restored	The objects have been restored and the retention period of the objects cannot be shortened. ErrorMessage: After restoring an archived object, you cannot shorten the restoration period of the archived object	409 Conflict
MalformedXML	Invalid value for the Days field (not an integer) ErrorMessage: The XML you provided was not well-formed or did not validate against our published schema	400 Bad Request
InvalidArgument	The value of the Days field is not within the range of 1 to 30. ErrorMessage: restoration days should be at least 1 and at most 30	400 Bad Request
MalformedXML	Invalid value for the Tier field. ErrorMessage: The XML you provided was not well-formed or did not validate against our published schema	400 Bad Request
InvalidObjectState	The restored object is not in the Archive or Deep Archive storage. ErrorMessage: Restore is not allowed, as object's storage class is not COLD or DEEP_ARCHIVE	403 Forbidden

Sample Request

```
POST /object?restore HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:39:46 GMT
Authorization: OBS H4IPJX0TQHTHEBQQCEC:kaEwOixnSVuS6f3Q0Lnd6kxm5A=
Content-Length: 183

<RestoreRequest>
<Days>2</Days>
<RestoreJob>
<Tier>Expedited</Tier>
```

```
</RestoreJob>  
</RestoreRequest>
```

Sample Response

```
HTTP/1.1 202 Accepted  
Server: OBS  
x-obs-request-id: A2F500000163F374CCBB2063F834C6C4  
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCSLbWIs23RR95NVpkbWUdlm8Dq+wQBw  
Date: WED, 01 Jul 2015 04:39:46 GMT  
Content-Length: 0
```

5.4.9 Appending an Object

Functions

The `AppendObject` operation adds data to the end of an object in a specified bucket. If there is no namesake object in the bucket, a new object is created.

The object created using the **AppendObject** operation is an appendable object, and the object uploaded using the **PUT** operation is a normal object.

NOTE

Uploaded objects must be stored in buckets. Only the users who have the write permission to a bucket can upload objects to the bucket. The name of each object in the same bucket must be unique.

To ensure that data is not damaged during transmission, you can add the **Content-MD5** parameter to the request header. After receiving the data, OBS performs MD5 verification for the data. If the data is inconsistent, OBS returns an error message.

This operation allows you to specify the **x-obs-acl** parameter when creating an appendable object and set the permission control policy for the object.

This operation supports server-side encryption.

Relationship with Other Operations

1. If you perform the **PUT** operation on an existing appendable object, the appendable object is overwritten by the newly uploaded object and the object type changes to normal. If you perform the other way around, an error occurs.
2. An appendable object will be changed to a normal object after being copied. An appendable object cannot be copied and saved as an appendable object.

WORM

If a bucket has WORM enabled, an append operation on this bucket will fail, with a 403 error returned.

Constraints

1. The last modification time of the object is updated each time an appending upload is performed.

2. If the SSE-C encryption mode is used on the server side, the appending upload is the same as the initialization segment. In this case, the request headers such as **x-obs-server-side-encryption** must be carried.
3. For the server-side encryption (SSE-KMS), the request header such as **x-obs-server-side-encryption** is specified only when the file is uploaded for the first time and no object with the same name exists in the bucket.
4. The length of each appended upload cannot exceed the upper limit (5 GB) of the object length.
5. The maximum number of append-only writes for each appendable object is 10,000.
6. If the object storage class is **COLD** (Archive) or **DEEP_ARCHIVE** (Deep Archive), this API cannot be called.
7. If cross-region replication is configured for a bucket, this API operation cannot be used.
8. Object appending is not available for parallel file systems.

Request Syntax

```
POST /ObjectName?append&position=Position HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Content-Type: application/xml
Content-Length: length
Authorization: authorization
Date: date
<Optional Additional Header>
<object Content>
```

Request Parameters

The request needs to specify parameters in the message, indicating that the request is for appending upload and the upload location must be specified. For details about the parameters, see [Table 5-95](#).

Table 5-95 Request parameters

Parameter	Description	Mandatory
append	Indicates that the file is uploaded in appending mode. Type: string	Yes
position	Location for the appending upload For an object to be appended, the value of position must be set to 0 when the object is uploaded for the first time. The value of position will be carried in the x-obs-next-append-position header of the response returned by the server when the object is successfully uploaded next time. Type: integer	Yes

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

[Table 5-96](#) describes the additional message headers that a request can use when the **position=0** parameter is requested.

This request can use the server-side encryption request header. For details, see [Table 5-97](#).

Table 5-96 Request headers

Header	Description	Mandatory
x-obs-acl	For the first appending, the message header can be added to set the permission control policy of the object. The predefined common policies are used, including: private , public-read , public-read-write . For details about each policy, see the ACL configuration using header fields in ACLs . Type: string Note: This header is a predefined policy expressed in a character string.	No
x-obs-grant-read	For the first write, you can use this header to grant all users in an account the permissions to read the object and obtain the object metadata. Type: string	No
x-obs-grant-read-acp	For the first write, you can use this header to grant all users in an account the permission to obtain object ACL information. Type: string	No
x-obs-grant-write-acp	For the first write, you can use this header to grant all users in an account the permission to write the object ACL. Type: string	No
x-obs-grant-full-control	For the first write, you can use this header to grant all users in an account the permissions to read the object, obtain the object metadata, obtain the object ACL information, and write the object ACL. Type: string	No

Header	Description	Mandatory
x-obs-storage-class	<p>For the first write, you can use this header field to configure the object storage class. If you do not use this header, the object storage class is the default storage class of the bucket.</p> <p>Type: string</p> <p>Because Archive (COLD) and Deep Archive (DEEP_ARCHIVE) objects do not support append upload, the configurable values are as follows: STANDARD (Standard), WARM (Infrequent Access), which are case sensitive.</p> <p>Example: x-obs-storage-class:STANDARD</p>	No
x-obs-meta-*	<p>For the first write, you can use a header starting with x-obs-meta- to define object metadata in an HTTP request. Custom metadata will be returned in the response header when you retrieve or query the metadata of the object. The size of the HTTP request excluding the request body must be equal to or smaller than 8 KB.</p> <p>Type: string</p> <p>Example: x-obs-meta-test:test metadata</p>	No

Header	Description	Mandatory
<p>x-obs-persistent-headers</p>	<p>For the first appending, you can add the x-obs-persistent-headers header in an HTTP request to specify one or more user-defined response headers. User-defined response headers will be returned in the response header when you retrieve the object or query the object metadata.</p> <p>Type: string</p> <p>Format: x-obs-persistent-headers: key1:base64_encode(value1),key2:base64_encode(value2)...</p> <p>Note: Items, such as key1 and key2, are user-defined headers. If they contain non-ASCII or unrecognizable characters, they can be encoded using URL or Base64. The server processes these headers as character strings, but does not decode them. Items, such as <i>value1</i> and <i>value2</i> are the values of the corresponding headers. base64_encode indicates that the value is encoded using Base64. A user-defined header and its Base64-encoded value are connected using a colon (:) to form a key-value pair. All key-value pairs are separated with a comma (,) and are placed in the x-obs-persistent-headers header. The server then decodes the uploaded value.</p> <p>Example: x-obs-persistent-headers: key1:dmFsdWUx,key2:dmFsdWUy</p> <p>The returned header for downloading the object or obtaining the object metadata is key1:value1 or key2:value2 respectively.</p> <p>Constraints:</p> <ol style="list-style-type: none"> 1. Response headers customized in this way cannot be prefixed with x-obs-. For example, you should use key1, instead of x-obs-key1. 2. Standard HTTP headers, such as host, content-md5, origin, range, and Content-Disposition, cannot be specified as custom headers. 3. The total length of this header and the custom metadata cannot exceed 8 KB. 4. If the same keys are passed, values are separated with commas (,) and then returned in one key. 5. If the decoded value contains non-US-ASCII or unrecognizable characters, the server processes the value as a string and encapsulates it using ?UTF-8?B?(str)?=, but does not decode the value. For instance, value key1:abbc will be returned as key1:=?UTF-8?B?abbc?=-. 	<p>No</p>

Header	Description	Mandatory
	6. The values cannot contain spaces, equal signs (=), commas (,), semicolons (;), colons (:), or periods (.). If such characters are required, use URL or Base64 encoding.	
x-obs-website-redirect-location	If a bucket is configured with the static website hosting function, it will redirect requests for this object to another object in the same bucket or to an external URL. OBS stores the value of this header in the object metadata. Type: string Default value: none Constraint: The value must be prefixed by a slash (/), http:// , or https:// . The length of the value cannot exceed 2 KB.	No
x-obs-expires	Specifies when an object expires. It is measured in days. Once the object expires, it is automatically deleted. (The calculation starts from when the object was last modified). Type: integer Example: x-obs-expires:3	No

Table 5-97 Server encryption request headers

Header	Description	Mandatory
x-obs-server-side-encryption	Indicates that SSE-KMS is used. Type: string Example: x-obs-server-side-encryption:kms	No. This header is required when SSE-KMS is used.

Header	Description	Mandatory
<p>x-obs-server-side-encryption-kms-key-id</p>	<p>Indicates the master key when SSE-KMS is used. If this header is not provided, the default master key will be used. If there is no such a default master key, OBS will create one and use it by default.</p> <p>Type: string</p> <p>The following two formats are supported:</p> <ul style="list-style-type: none"> - <i>regionID:domainID:key/key_id</i> - <i>key_id</i> <p><i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the ID of the key created in DEW.</p> <p>Examples:</p> <ul style="list-style-type: none"> - x-obs-server-side-encryption-kms-key-id:region:domainiddomainiddomainiddoma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0 - x-obs-server-side-encryption-kms-key-id:4f1cd4de-ab64-4807-920a-47fc42e7f0d0 	<p>No</p>
<p>x-obs-server-side-encryption-customer-algorithm</p>	<p>Indicates the encryption algorithm when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-algorithm:AES256</p> <p>Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used.</p>
<p>x-obs-server-side-encryption-customer-key</p>	<p>Indicates the key for encrypting objects when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used.</p>

Header	Description	Mandatory
x-obs-server-side-encryption-customer-key-MD5	<p>Indicates the MD5 value of the encryption key when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key.</p>	No. This header is required when SSE-C is used.

Request Elements

This request involves no elements.

Response Syntax

HTTP/1.1 *status_code*
Date: *date*
ETag: *etag*
Content-Length: *length*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

NOTE

The ETag returns the hash value of the data to be uploaded, not the hash value of the entire object.

Table 5-98 Additional response headers

Header	Description
x-obs-version-id	<p>Object version ID. If versioning is enabled for the bucket, the object version ID will be returned.</p> <p>Type: string</p>
x-obs-server-side-encryption	<p>This header is included in a response if SSE-KMS is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption:kms</p>

Header	Description
x-obs-server-side-encryption-kms-key-id	<p>Indicates the master key ID. This header is included in a response when SSE-KMS is used.</p> <p>Type: string</p> <p>Format: <i>regionID.domainID:key/key_id</i></p> <p><i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption.</p> <p>Example: x-obs-server-side-encryption-kms-key-id:region:domainiddomainiddomainiddoma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0</p>
x-obs-server-side-encryption-customer-algorithm	<p>Indicates the encryption algorithm. This header is included in a response when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-algorithm:AES256</p>
x-obs-server-side-encryption-customer-key-MD5	<p>Indicates the MD5 value of the key for encrypting objects. This header is included in a response when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p>
x-obs-next-append-position	<p>Indicates the position to be provided for the next request.</p> <p>Type: integer</p>

Response Elements

This response contains no elements.

Error Responses

1. If the object length exceeds the limit due to the appending upload, OBS returns **400 Bad Request** and the error code is **AppendTooLarge**.

2. If the value of position is different from the original length of the current object, OBS returns **409 Conflict** and the error code is **PositionNotEqualToLength**.
3. If an object with the same object name exists in a bucket and the object type is not Appendable, OBS returns **409 Conflict** and the error code is **ObjectNotAppendable**.
4. If the number of write times of an object exceeds 10000, OBS returns **409 Conflict** and the error code is **ObjectNotAppendable**.
5. If the object storage class is **COLD** (Archive) or **DEEP_ARCHIVE** (Deep Archive), this API cannot be called. If you still call this API, OBS returns **409 Conflict** with the error code of **ObjectNotAppendable**.
6. If cross-region replication is configured for a bucket, this API operation cannot be used. Otherwise, OBS returns **400 Bad Request** and the error code is **OperationNotSupported**.

Other errors are included in [Table 6-2](#).

Sample Request: Append Upload

```
POST /object?append&position=0 HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Expires: Wed, 27 Jun 2015 13:45:50 GMT
Date: Wed, 08 Jul 2015 06:57:01 GMT
Content-Type: image/jpg
Content-Length: 1458
Authorization: OBS H4IPJX0TQTHHEBQQCEC:kZoYNv66bsmc10+dcGKw5x2PRrk=

[1458 bytes of object data]
```

Sample Response: Append Upload

```
HTTP/1.1 200 OK
Date: Wed, 27 Jun 2015 13:45:50 GMT
ETag: "d41d8cd98f00b204e9800998ecf8427e"
Content-Length: 0
Server: OBS
x-obs-request-id: 8DF400000163D3F0FD2A03D2D30B0542
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCTJCqTmsA1XRplrmrJdvcEWwZyjbztd
x-obs-next-append-position: 1458
```

Sample Request: Append Upload (with redirect and a User-Defined Header Used)

The bucket **examplebucket** exists but the object **obj001** does not exist. Create an object by making the API call for the append operation. Set the redirection header field as follows: "**x-obs-website-redirect-location**":"**http://www.example.com/**", and set the user-defined header field to: "**x-obs-meta-redirect**":"**redirect**". The request is as follows:

```
POST /obj001?append&position=0 HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Expires: Wed, 27 Jun 2015 13:45:50 GMT
Date: Wed, 08 Jul 2015 06:57:01 GMT
x-obs-website-redirect-location: http://www.example.com/
x-obs-meta-redirect: redirect
Content-Length: 6
Authorization: OBS H4IPJX0TQTHHEBQQCEC:kZoYNv66bsmc10+dcGKw5x2PRrk=

[6 bytes of object data]
```

Sample Response: Append Upload (with redirect and a User-Defined Header Used)

```
HTTP/1.1 200 OK
Date: Wed, 27 Jun 2015 13:45:50 GMT
ETag: "9516dfb15f51c7ee19a4d46b8c0dbe1d"
Content-Length: 0
Server: OBS
x-obs-request-id: 5DEB00000164A3150AC36F8F0C120D50
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCSrVITYwsA4p9GEW+LYqotSl5BYDxHFT
x-obs-next-append-position: 6
```

Sample Request: Appending Data to an Object in a Versioning-enabled Bucket

```
POST /object01?append&position=0 HTTP/1.1
PUT /?lifecycle HTTP/1.1
Authorization: OBS H4IPjX0TQTHHEBQQCEC:iqSPeUBl66PwXDAPxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/octet-stream

[1458 bytes of object data]
```

Sample Response: Appending Data to an Object in a Versioning-enabled Bucket

```
x-obs-id-2: 32AAQAEEAABSAAgAAEAABAAAQAAEAABCSZbDadL1f7fYU44bvRLvc0l6D10+wzG
x-obs-request-id: 0000018A2BCBB3ABD3046B99E3ED2E30
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
x-obs-next-append-position: 4
ETag: "56468d5607a5aaf1604ff5e15593b003"
x-obs-version-id: G001118A6803675AFFFFD3043F7F91D0
```

5.4.10 Configuring an Object ACL

Functions

OBS supports the control of access permission for objects. By default, only the object creator has the read and write permissions for the object. However, the creator can set a public access policy to assign the read permission to all other users. Even if the ACL is configured for an object encrypted in the SSE-KMS mode, the inter-tenant access is unavailable.

You can set an access control policy when uploading an object or make a call of an API operation to modify or obtain the object ACL. An object ACL supports a maximum of 100 grants.

This section explains how to modify an object ACL and change access permission on an object.

Versioning

By default, this operation modifies the ACL of the latest version of an object. To specify a specified version, the request can carry the **versionId** parameter.

Request Syntax

```
PUT /ObjectName?acl HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization

<AccessControlPolicy>
  <Owner>
    <ID>ID</ID>
  </Owner>
  <Delivered>true</Delivered>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>ID</ID>
      </Grantee>
      <Permission>permission</Permission>
    </Grant>
  </AccessControlList>
</AccessControlPolicy>
```

Request Parameters

[Table 5-99](#) describes the request parameters.

Table 5-99 Request parameters

Parameter	Description	Mandatory
versionId	Object version ID. Object ACL of a specified version is to be changed. Type: string	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

The request message carries the ACL information of the object by using message elements. For the meanings of the elements, see [Table 5-100](#).

Table 5-100 Request elements

Element	Description	Mandatory
Owner	Bucket owner information, including the ID Type: XML	Yes
ID	Domain ID of a user. Type: string	Yes

Element	Description	Mandatory
Grant	Container for the grantee and the granted permissions. A single object ACL can contain no more than 100 grants. Type: XML	No
Grantee	Container for the details about the grantee. Type: XML	No
Canned	Grants permissions to all users. Value range: Everyone Type: string	No
Delivered	Indicates whether an object ACL inherits the ACL of a bucket. Type: boolean Default value: true	No
Permission	Authorized permission. Value options: READ , READ_ACP , WRITE_ACP , FULL_CONTROL Type: string	No
AccessControllist	Indicates an ACL, which consists of three elements: Grant , Grantee , and Permission . Type: XML	Yes

Response Syntax

```
HTTP/1.1 status_code
Content-Length: length
Content-Type: application/xml
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the headers listed in [Table 5-101](#) may be used.

Table 5-101 Additional response headers

Header	Description
x-obs-version-id	Version number of the object whose ACL is to be modified. Type: string

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /obj2?acl HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:42:34 GMT
Authorization: OBS H4IPJX0TQTHHEBQQCEC:8xAODun1ofjkwHm8YhtN0QEcy9M=
Content-Length: 727

<AccessControlPolicy xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
  </Owner>
  <Delivered>>false</Delivered>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
      </Grantee>
      <Permission>FULL_CONTROL</Permission>
    </Grant>
    <Grant>
      <Grantee>
        <ID>783fc6652cf246c096ea836694f71855</ID>
      </Grantee>
      <Permission>READ</Permission>
    </Grant>
    <Grant>
      <Grantee>
        <Canned>Everyone</Canned>
      </Grantee>
      <Permission>READ</Permission>
    </Grant>
  </AccessControlList>
</AccessControlPolicy>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D3F0FD2A03D2D30B0542
x-obs-id-2: 32AAAUgAIAABAAAQAAEAAABAAAQAAEAAABCTjCqTmsA1XRplrmrJdvcEWvZyjbztdd
Date: WED, 01 Jul 2015 04:42:34 GMT
Content-Length: 0
```

Sample Request: Configuring the ACL for a Specific Object Version

```
PUT /object01?acl&versionId=G001118A6803675AFFFFD3043F7F91D0 HTTP/1.1
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:iqSPeUBL66PwXDAPxjRkK6hlcN4=
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml

<AccessControlPolicy xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>d029cb567d46458sp0x75800575ee4cf</ID>
  </Owner>
  <Delivered>>false</Delivered>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>f98sx63gg849422e8f330af1349c588f</ID>
      </Grantee>
      <Permission>FULL_CONTROL</Permission>
    </Grant>
    <Grant>
      <Grantee>
        <ID>fa558a82a84946sn98u30af195as3hi5</ID>
      </Grantee>
      <Permission>READ</Permission>
    </Grant>
    <Grant>
      <Grantee>
        <Canned>Everyone</Canned>
      </Grantee>
      <Permission>READ</Permission>
    </Grant>
  </AccessControlList>
</AccessControlPolicy>
```

Sample Response: Configuring the ACL for a Specific Object Version

```
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCSmpL2dv6zZLM2HmUrXKTAi258MPqmrp
x-obs-request-id: 0000018A2A73AF59D3085C8F8ABF0C65
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
x-obs-version-id: G001118A6803675AFFFFD3043F7F91D0
```

5.4.11 Obtaining Object ACL Configuration

Functions

The implementation of this operation returns the ACL configuration of an object. You can perform this operation to view the ACL of an object, as long as you have the read permission for the object ACL.

Versioning

By default, this operation obtains the ACL of the latest version of an object. If the object has a delete marker, status code 404 is returned. To obtain the ACL of a specified version, the **versionId** parameter can be used to specify the desired version.

Request Syntax

```
GET /ObjectName?acl HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```


Date: *date*
Authorization: *authorization*

Request Parameters

The request parameter specifies the object ACL to be obtained. For details about the parameters, see [Table 5-102](#).

Table 5-102 Request parameters

Parameter	Description	Mandatory
versionId	Version number of an object. Type: string	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
Content-Type: application/xml

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<AccessControlPolicy xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>id</ID>
  </Owner>
  <Delivered>true</Delivered>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>id</ID>
      </Grantee>
      <Permission>permission</Permission>
    </Grant>
  </AccessControlList>
</AccessControlPolicy>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the headers listed in [Table 5-103](#) may be used.

Table 5-103 Additional response header

Header	Description
x-obs-version-id	Version number of an object. Valid value: string Default value: none

Response Elements

The response message of the request returns the ACL information of the object. [Table 5-104](#) describes the elements.

Table 5-104 Response elements

Element	Description
ID	User account ID Type: string
AccessControllist	List of users and their permissions for the bucket. Type: XML
Grant	Identifies the grantee and the permissions of the grantee. Type: XML
Grantee	Container for the details about the grantee. Type: XML
Delivered	Indicates whether an object ACL inherits the ACL of a bucket. Type: boolean
Permission	Permissions of a specified user for the bucket. Type: string

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
GET /object011?acl HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:45:55 GMT
Authorization: OBS H4lPJX0TQTHHEBQQCEC:YcmvNQxltGjFeeC1K2HeUEp8MMM=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D3E650F3065C2295674C
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCS+wsHqRuA2Tx+mXUpNtBbWLPmle9Clx
Content-Type: application/xml
Date: WED, 01 Jul 2015 04:45:55 GMT
Content-Length: 769

<?xml version="1.0" encoding="utf-8"?>
<AccessControlPolicy xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Owner>
    <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
  </Owner>
  <Delivered>>false</Delivered>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
      </Grantee>
      <Permission>FULL_CONTROL</Permission>
    </Grant>
    <Grant>
      <Grantee>
        <ID>783fc6652cf246c096ea836694f71855</ID>
      </Grantee>
      <Permission>READ</Permission>
    </Grant>
    <Grant>
      <Grantee>
        <Canned>Everyone</Canned>
      </Grantee>
      <Permission>READ_ACP</Permission>
    </Grant>
  </AccessControlList>
</AccessControlPolicy>
```

Sample Request: Obtaining the ACL of a Specific Object Version

```
GET /object01?acl HTTP/1.1
Authorization: OBS H4IPJX0TQTHHEBQQCEC:iqSPeUBl66PwXDApxjRkK6hlcN4=
versionId: G001118A6803675AFFFFD3043F7F91D0
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:37:22 GMT
Content-Type: application/xml
```

Sample Response: Obtaining the ACL of a Specific Object Version

```
x-obs-id-2: 32AAAQAAEAABSAAGAAEAABAAAQAAEAABCSmpL2dv6zZLM2HmUrXKTAi258MPqmrp
x-obs-request-id: 0000018A2A73AF59D3085C8F8ABF0C65
Server: OBS
Content-Length: 0
Date: WED, 01 Jul 2015 02:37:22 GMT
x-obs-version-id: G001118A6803675AFFFFD3043F7F91D0

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<AccessControlPolicy xmlns="http://obs.myhwclouds.com/doc/2015-06-30/">
  <Owner>
    <ID>d6s58yhn83f3081577800575ee4cf</ID>
  </Owner>
  <Delivered>>false</Delivered>
  <AccessControlList>
    <Grant>
      <Grantee>
        <ID>f262a63g69422e8f330af1349c588f</ID>
      </Grantee>
      <Permission>READ</Permission>
    </Grant>
  </AccessControlList>
</AccessControlPolicy>
```

```

</Grant>
<Grant>
  <Grantee>
    <ID>c965gfda2a849422e8f3985562432dsaa</ID>
  </Grantee>
  <Permission>FULL_CONTROL</Permission>
</Grant>
<Grant>
  <Grantee>
    <Canned>Everyone</Canned>
  </Grantee>
  <Permission>READ</Permission>
</Grant>
</AccessControlList>
</AccessControlPolicy>

```

5.4.12 Modifying Object Metadata

Functions

This operation modifies, deletes, or adds metadata to uploaded objects in a bucket.

Request Syntax

```

PUT /ObjectName?metadata HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Content-Type: application/xml
Content-Length: length
Authorization: authorization
Date: date
<Optional Additional Header>
<object Content>

```

Request Parameters

Table 5-105 Request parameters

Parameter	Description	Mandatory
versionId	Object version ID Type: string	No

Request Headers

NOTE

OBS supports the six HTTP request headers: Cache-Control, Expires, Content-Encoding, Content-Disposition, Content-Type, and Content-Language. It saves these header values in the metadata of the object. When the object is downloaded or queried, the saved values are set for corresponding HTTP headers and returned to the client.

Table 5-106 Request headers

Header	Description	Mandatory
x-obs-metadata-directive	<p>Metadata operation indicator.</p> <p>The value can be REPLACE_NEW or REPLACE.</p> <p>REPLACE_NEW: The metadata that has an existing value is replaced. A value is assigned to the metadata that does not have a value. The metadata that is not specified remains unchanged. (Note: a header with custom metadata is replaced.)</p> <p>REPLACE: Use the header field carried in the current request to replace the original metadata. The metadata that is not specified (except x-obs-storage-class) will be deleted.</p> <p>Type: string</p>	Yes
Cache-Control	<p>Specifies the cache behavior of the web page when the object is downloaded.</p> <p>Type: string</p>	No
Content-Disposition	<p>Specifies the name of the object when it is downloaded.</p> <p>Type: string</p>	No
Content-Encoding	<p>Specifies the content encoding format when an object is being downloaded.</p> <p>Type: string</p>	No
Content-Language	<p>Specifies the content language format when an object is downloaded.</p> <p>Type: string</p>	No
Content-Type	<p>Object file type.</p> <p>Type: string</p>	No
Expires	<p>Specifies the cache expiration time of the web page when the object is downloaded.</p> <p>Type: string</p>	No

Header	Description	Mandatory
x-obs-website-redirect-location	<p>When the bucket is configured with the website redirection, the request for obtaining the object can be redirected to another object or an external URL in the bucket.</p> <p>In the following example, the request header sets the redirection to an object (anotherPage.html) in the same bucket:</p> <pre>x-obs-website-redirect-location:/anotherPage.html</pre> <p>In the following example, the request header sets the object redirection to an external URL:</p> <pre>x-obs-website-redirect-location:http://www.example.com/</pre> <p>Type: string</p> <p>Constraint: The value must be prefixed by a slash (/), http://, or https://. The length of the value cannot exceed 2 KB.</p>	No
x-obs-storage-class	<p>Specifies the storage class of an object.</p> <p>Type: string</p> <p>Storage class options: STANDARD (Standard), WARM (Infrequent Access), COLD (Archive), DEEP_ARCHIVE (Deep Archive). These values are case sensitive.</p> <p>Example: x-obs-storage-class: STANDARD</p>	No
x-obs-meta-*	<p>A message header starting with x-obs-meta- can be added to a request to add custom metadata for object management. Custom metadata will be returned in the response header when you retrieve or query the metadata of the object. For details, see User-Defined Object Metadata.</p> <p>Type: string</p> <p>Example: x-obs-meta-test: test metadata</p>	No
x-obs-expires	<p>Specifies when an object expires. It is measured in days. Once the object expires, it is automatically deleted.</p> <p>Type: integer</p> <p>Example: x-obs-expires:3</p>	No

Request Elements

This request involves no elements.

Response Syntax

HTTP/1.1 *status_code*
Date: *date*

Content-Length: *length*
Etag: *etag*
Last-Modified: *time*

Response Headers

Table 5-107 Additional response headers

Header	Description
x-obs-metadata-directive	Metadata operation indicator. The value can be REPLACE_NEW or REPLACE . Type: string
Cache-Control	Specifies the cache behavior of the web page when the object is downloaded. If a request carries this header field, the response message must contain this header field. Type: string
Content-Disposition	Specifies the name of the object when it is downloaded. If a request carries this header field, the response message must contain this header field. Type: string
Content-Encoding	Specifies the content encoding format when an object is being downloaded. If a request carries this header field, the response message must contain this header field. Type: string
Content-Language	Specifies the content language format when an object is downloaded. If a request carries this header field, the response message must contain this header field. Type: string
Expires	Specifies the cache expiration time of the web page when the object is downloaded. If a request carries this header field, the response message must contain this header field. Type: string
x-obs-website-redirect-location	When the bucket is configured with the website redirection, the request for obtaining the object can be redirected to another object or an external URL in the bucket. If a request carries this header field, the response message must contain this header field. Type: string
x-obs-storage-class	Specifies the storage class of an object. If a request carries this header field, the response message must contain this header field. Type: string

Header	Description
x-obs-meta-*	Custom metadata is used to manage objects in a customized manner. If a request carries this header field, the response message must contain this header field. Type: string
x-obs-expires	Specifies when an object expires. It is measured in days. If a request carries this header field, the response message must contain this header field. Type: integer

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request: Adding Metadata for an Object

Add the following metadata to the object: **Content-Type:application/zip** and **x-obs-meta-test:meta**.

```
PUT /object?metadata HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 14:24:33 GMT
Authorization: OBS H4IPJX0TQTHHEBQQCEC:NxtSMS0jaVxlLnXlO9awaMTn47s=
x-obs-metadata-directive:REPLACE_NEW
Content-Type:application/zip
x-obs-meta-test:meta
```

Sample Response: Adding Metadata for an Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D3E4BB5905C41B6E65B6
Accept-Ranges: bytes
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSD3nAiTaBoeyt9oHp9vTYtXnLDmwV6D
Date: WED, 01 Jul 2015 04:19:21 GMT
Content-Length: 0
x-obs-metadata-directive:REPLACE_NEW
x-obs-meta-test:meta
```

Sample Request: Editing Metadata of an Object

If metadata **x-obs-meta-test:testmeta** exists in the object and the value of **x-obs-storage-class** is **WARM**, change the metadata **x-obs-meta-test** of the object to **newmeta** and change **x-obs-storage-class** to **COLD**.

```
PUT /object?metadata HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
```



```
Accept: */*
Date: WED, 01 Jul 2015 14:24:33 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:NxtSMS0jaVxLlnxLO9awaMTn47s=
x-obs-metadata-directive:REPLACE_NEW
x-obs-meta-test:newmeta
x-obs-storage-class:COLD
```

Sample Response: Editing Metadata of an Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D3E4BB5905C41B6E65B6
Accept-Ranges: bytes
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCS3nAiTaBoeyt9oHp9vTYtXnLDmwV6D
Date: WED, 01 Jul 2015 04:19:21 GMT
Content-Length: 0
x-obs-metadata-directive:REPLACE_NEW
x-obs-meta-test:newmeta
x-obs-storage-class:COLD
```

Sample Request: Deleting Metadata of an Object

Metadata **x-obs-meta-test:newmeta** and **Content-Type:application/zip** exist in the object, and delete **x-obs-meta-test**.

```
PUT /object?metadata HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 14:24:33 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:NxtSMS0jaVxLlnxLO9awaMTn47s=
x-obs-metadata-directive:REPLACE
Content-Type:application/zip
```

Sample Response: Deleting Metadata of an Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D3E4BB5905C41B6E65B6
Accept-Ranges: bytes
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCS3nAiTaBoeyt9oHp9vTYtXnLDmwV6D
Date: WED, 01 Jul 2015 04:19:21 GMT
Content-Length: 0
x-obs-metadata-directive:REPLACE
```

5.4.13 Modifying an Object

Functions

This operation can modify an object from a specified position.

NOTE

This API is supported only by parallel file systems. For details about how to create a parallel file system, see [Sample Request: Creating a Parallel File System](#).

Request Syntax

```
PUT /ObjectName?modify&position=Position HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Content-Type: type
Content-Length: length
Authorization: authorization
```

Date: *date*
<object Content>

Request Parameters

The request needs to specify parameters in the message, indicating that the upload is for modification, and specifying the position in the object to be modified. [Table 5-108](#) describes the parameters.

Table 5-108 Request parameters

Parameter	Description	Mandatory
modify	Indicates that the file is uploaded for modification. Type: string	Yes
position	Position in the object where the modification starts Type: integer	Yes

Request headers

This request uses common request headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

HTTP/1.1 *status_code*
Date: *Date*
ETag: *etag*
Content-Length: *length*
Server: OBS
x-obs-request-id: *request-id*
x-obs-id-2: *id*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /ObjectName?modify&position=Position HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Date: Wed, 08 Jul 2015 06:57:01 GMT
Content-Type: image/jpg
Content-Length: 1458
Authorization: OBS H4IPJX0TQHTHEBQQCEC:kZoYNv66bsmc10+dcGKw5x2PRrk=
[1458 bytes of object data]
```

Sample Response

```
HTTP/1.1 200
Date: Wed, 08 Jul 2015 06:57:02 GMT
ETag: "d41d8cd98f00b204e9800998ecf8427e"
Content-Length: 0
Server: OBS
x-obs-request-id: 8DF400000163D3F0FD2A03D2D30B0542
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCTJcQTmsA1XRplrmrJdvcEWvZyjbztd
```

5.4.14 Truncating an Object

Functions

This operation can truncate an object to a specified size.

NOTE

This API is supported only by parallel file systems. For details about how to create a parallel file system, see [Sample Request: Creating a Parallel File System](#).

Request Syntax

```
PUT /ObjectName?truncate&length=Length HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: authorization
Content-Length: length
Date: date
```

Request Parameters

The request needs to specify parameters in the message, indicating that this is to truncate an object to a specified size. [Table 5-109](#) describes the parameters.

Table 5-109 Request parameters

Parameter	Description	Mandatory
truncate	Indicates that the upload is for truncation. Type: string	Yes
length	Size of the object after the truncation Type: integer	Yes

Request headers

This request uses common request headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 204 status_code  
Server: OBS  
x-obs-request-id: request-id  
x-obs-id-2: id  
Date: Date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
PUT /ObjectName?truncate&length=1000 HTTP/1.1  
Host: examplebucket.obs.region.myhuaweicloud.com  
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=  
Content-Length: 1  
Date: WED, 01 Jul 2015 04:19:20 GMT
```

Sample Response

```
HTTP/1.1 204 No Content  
Server: OBS  
x-obs-request-id: 8DF400000163D3F51DEA05AC9CA066F1  
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCSgkM4Dij80gAeFY8pAZIwx72QhDeBZ5  
Date: WED, 01 Jul 2015 04:19:21 GMT
```

5.4.15 Renaming an Object

Functions

This operation can rename an object.

NOTE

This API is supported only by parallel file systems. For details about how to create a parallel file system, see [Sample Request: Creating a Parallel File System](#). Renaming an object is a non-idempotent operation.

Request Syntax

```
POST /ObjectName?name=Name&rename HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Authorization: authorization
Date: date
```

Request Parameters

The request needs to specify parameters in the message, indicating that this is a renaming operation, specifying the new name. [Table 5-110](#) describes the parameters.

Table 5-110 Request parameters

Parameter	Description	Mandatory
name	New name for the object. Use the absolute path. Type: string	Yes
rename	Indicates that this is a renaming operation. Type: string	Yes

Request Headers

This request uses common request headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 204 status_code
Server: OBS
x-obs-request-id: request-id
x-obs-id-2: id
Date: Date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

No special error responses are returned. For details about error responses, see [Table 6-2](#).

Sample Request

```
POST /ObjectName?name=file2&rename HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Authorization: OBS H4IPJX0TQHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=
Date: WED, 01 Jul 2015 04:19:20 GMT
```

Sample Response

```
HTTP/1.1 204 No Content
Server: OBS
x-obs-request-id: 8DF400000163D3F51DEA05AC9CA066F1
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCSgkM4Dij80gAeFY8pAZIwx72QhDeBZ5
Date: WED, 01 Jul 2015 04:19:21 GMT
```

5.4.16 Configuring WORM Retention for an Object

Functions

This operation configures or updates the retention period for objects uploaded to a bucket with WORM enabled.

- When you upload an object, if you do not configure a protection period or apply the default bucket-level protection rule to the object, you can perform this operation to configure a protection period for the object.
- When you upload an object, if you configure a protection period or apply the default bucket-level protection rule to the object, you can perform this operation to prolong the protection period for the object.
- The protection period of an object can only be modified, but not deleted.

NOTE

To configure or update the protection period of an object, you must have the PutObjectRetention permission.

Versioning

OBS automatically enables versioning when you enable WORM for a bucket. In such case, the object you uploaded to the bucket will be assigned a version ID. An object-level WORM policy is applied to the current object version by default, but you can specify a version ID to make the policy applied to a specific object version. The WORM configuration does not apply to a delete marker with a unique version ID.

Multipart Upload

Before a multipart upload is complete, the default bucket-level WORM policy is not automatically applied to the object parts uploaded. Besides, you cannot configure an object-level WORM policy using a header when you upload a part or assemble the object parts, or for a part that is already uploaded to the bucket. You can call this API to configure a WORM retention policy for the new object after the object parts are assembled.

Request Syntax

```
PUT /ObjectName?retention HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
```

```
Date: date
Authorization: authorization

<Retention>
  <Mode>String</Mode>
  <RetainUntilDate>Timestamp</RetainUntilDate>
</Retention>
```

Request Parameters

[Table 5-111](#) describes the parameters.

Table 5-111 Request parameters

Parameter	Description	Mandatory
versionId	ID of the object version on which this operation will be performed. If this header is not carried, this operation applies to the current object version. Type: string	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

Element	Description	Mandatory
Retention	Container for configuring an object-level WORM retention policy. Type: container	Yes
Mode	Protection mode for the object. It can only be set to COMPLIANCE now. Type: string Example: COMPLIANCE	Yes
RetainUntilDate	NOTE The value of this field must be later than the current time and can be extended but not shortened. Example: 1435728035000	Yes

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
```

Response Headers

This response uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

[Table 5-112](#) describes possible special errors in this request.

Table 5-112

Error Code	Description	HTTP Status Code
InvalidRequest	The object lock is disabled for the bucket.	400
InvalidRequest	The retention period date must be later than the current or the configured date.	400
MalformedObjectLockError	Invalid format of the Object Lock configuration.	400

For other errors, see [Table 6-2](#).

Sample Request

```
PUT /objectname?retention HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 02:25:05 GMT
Authorization: OBS H4IPJX0TQHTHEBQQCEC:75/Y4Ng1izvzc1nTGxpMXTE6ynw=
Content-Type: application/xml
Content-Length: 157
<Retention>
  <Mode>COMPLIANCE</Mode>
  <RetainUntilDate>1435728035000</RetainUntilDate>
</Retention>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BF260000016435CE298386946AE4C482
x-obs-id-2: 32AAAQAAEAABSAAgAAEAABAAAQAAEAABCT9W2tcvLmMJ+plfdopaD62S0npbaRUz
Date: WED, 01 Jul 2015 02:25:06 GMT
Content-Length: 0
```


5.5 Operations on Multipart Upload

5.5.1 Listing Initiated Multipart Uploads in a Bucket

Functions

This operation queries all the multipart upload tasks that are initialized but have not been merged or canceled in a bucket.

Request Syntax

```
GET /?uploads&max-uploads=max HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: authorization
```

Request Parameters

This request uses parameters to specify the query range for multipart uploads. [Table 5-113](#) describes the parameters.

Table 5-113 Request parameters

Parameter	Description	Mandatory
delimiter	For a multipart upload that contains delimiters, the string between the first character and the first delimiter in the object name (excluding the prefix specified in the request, if any) are returned as CommonPrefix . Multipart uploads with objects that contain CommonPrefix are considered as a group and returned as one record. The record contains no information about the tasks, only informing the user that the group involves multipart uploads. Type: string	No
prefix	If a prefix is specified, the response only contains tasks whose names start with the prefix value. Type: string	No
max-uploads	Maximum number of multipart upload tasks returned. The value ranges from 1 to 1000. If the value has exceeded this range, 1000 tasks are returned by default. Type: integer	No

Parameter	Description	Mandatory
key-marker	Lists multipart uploads that follow the value of key-marker . Type: string	No
upload-id-marker	Lists multipart tasks that follow the value of upload-id-marker in key-marker . This parameter only functions together with key-marker . Type: string	No
encoding-type	Encodes some elements in the response based on the specified type. If Delimiter, KeyMarker, Prefix, NextKeyMarker, and Key contain control characters that are not supported by the XML 1.0 standard, you can set encoding-type to encode Delimiter, KeyMarker, Prefix (including the Prefix in CommonPrefixes), NextKeyMarker, and Key in response. Type: string Value option: url	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListMultipartUploadsResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Bucket>bucketname</Bucket>
  <KeyMarker/>
  <UploadIdMarker/>
  <NextKeyMarker>nextMarker</NextKeyMarker>
  <NextUploadIdMarker>idMarker</NextUploadIdMarker>
  <MaxUploads>maxUploads</MaxUploads>
  <IsTruncated>true</IsTruncated>
  <Upload>
    <Key>key</Key>
    <UploadId>uploadID</UploadId>
    <Initiator>
      <ID>domainID/domainID.userID/userID</ID>
    </Initiator>
    <Owner>
      <ID>ownerID</ID>
    </Owner>
  </Upload>
</ListMultipartUploadsResult>
```

```
<StorageClass>storageclass</StorageClass>
<Initiated>initiatedDate</Initiated>
</Upload>
</ListMultipartUploadsResult>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains elements of information about the multipart uploads. [Table 5-114](#) describes the elements.

Table 5-114 Response elements

Element	Description
ListMultipartUploadsResult	Container for responses of requests. Type: container Child: Bucket, KeyMarker, UploadIdMarker, NextKeyMarker, NextUploadIdMarker, MaxUploads, Delimiter, Prefix, Upload, CommonPrefixes, and IsTruncated Parent: none
Bucket	Name of the bucket to which the multipart upload was initiated Type: string Parent: ListMultipartUploadsResult
EncodingType	Encodes some elements in the response based on the specified type. If encoding-type is specified in the request, Delimiter, KeyMarker, Prefix (including the Prefix in CommonPrefixes), NextKeyMarker, and Key in the response will be encoded. Type: string Parent: ListMultipartUploadsResult
KeyMarker	Object keys at or after which the multipart upload listing begins Type: string Parent: ListMultipartUploadsResult
UploadIdMarker	Upload ID after which the multipart upload listing begins Type: string Parent: ListMultipartUploadsResult

Element	Description
NextKeyMarker	Value of KeyMarker in a subsequent request after a multipart upload list is truncated Type: string Parent: ListMultipartUploadsResult
NextUploadIdMarker	Value of UploadMarker in a subsequent request when a multipart upload list is truncated. Type: string Parent: ListMultipartUploadsResult
MaxUploads	Maximum of multipart uploads to be returned in the response Type: integer Parent: ListMultipartUploadsResult
IsTruncated	Indicates whether the returned list of multipart uploads is truncated. The value true indicates that the list was truncated and false indicates that the list was not truncated. Type: boolean Parent: ListMultipartUploadsResult
Upload	Container for elements related to a specific multipart upload Type: container Child: Key, UploadId, InitiatorOwner, StorageClass, and Initiated Parent: ListMultipartUploadsResult
Key	Indicates the name of the object for which a multipart upload is initiated. Type: string Parent: Upload
UploadId	ID of the multipart upload Type: string Parent: Upload
Initiator	Container element that identifies who initiated the multipart upload Child: ID Type: container Parent: Upload
ID	ID of the account to which the owner belongs. Type: string Parent: Initiator or Owner

Element	Description
Owner	Owner of the part. Type: container Child: ID Parent: Upload
StorageClass	Indicates the storage class that will be used for storing an object when the multipart is uploaded. Type: string Parent: Upload
Initiated	Date and time when the multipart upload was initiated Type: date Parent: Upload
ListMultipartUploadsResult.Prefix	Specified prefix in a request. Type: string Parent: ListMultipartUploadsResult
Delimiter	Delimiter in a request. Type: string Parent: ListMultipartUploadsResult
CommonPrefixes	Indicates group information. If you specify a delimiter in the request, the response contains group information in CommonPrefixes . Type: container Parent: ListMultipartUploadsResult
CommonPrefixes. Prefix	Indicates a different prefix in the group information in CommonPrefixes . Type: string Parent: CommonPrefixes

Error Responses

If the value of **maxUploads** is a non-integer or smaller than 0, OBS returns **400 Bad Request**.

Other errors are included in [Table 6-2](#).

Sample Request: Listing Initiated Multipart Uploads

```
GET /?uploads HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:51:21 GMT
Authorization: OBS UDSIAMSTUBTEST000008:XdmZgYQ+ZVy1rjxJ9/KpKq+wrU0=
```

Sample Response: Listing Initiated Multipart Uploads

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF40000163D405534D046A2295674C
x-obs-id-2: 32AAAQAAEABAAAQAAEABAAAQAAEABCSDaHP+a+Bp0RI6Mm9XvCOrf7q3qvBQW
Content-Type: application/xml
Date: WED, 01 Jul 2015 04:51:21 GMT
Content-Length: 681

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListMultipartUploadsResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Bucket>examplebucket</Bucket>
  <KeyMarker/>
  <UploadIdMarker/>
  <Delimiter/>
  <Prefix/>
  <MaxUploads>1000</MaxUploads>
  <IsTruncated>>false</IsTruncated>
  <Upload>
    <Key>obj2</Key>
    <UploadId>00000163D40171ED8DF4050919BD02B8</UploadId>
    <Initiator>
      <ID>domainID/b4bf1b36d9ca43d984fbc9491b6fce9:userID/71f390117351534r88115ea2c26d1999</ID>
    </Initiator>
    <Owner>
      <ID>b4bf1b36d9ca43d984fbc9491b6fce9</ID>
    </Owner>
    <StorageClass>STANDARD</StorageClass>
    <Initiated>2015-07-01T02:30:54.582Z</Initiated>
  </Upload>
</ListMultipartUploadsResult>
```

Sample Request: Listing Initiated Multipart Uploads (with a Prefix and Delimiter Specified)

The following example describes how to list two initiated multipart uploads (with objects **multipart-object001** and **part2-key02** in bucket **examplebucket**. In this listing operation, **prefix** is set to **multipart** and **object001** is set to **delimiter**.

```
GET /?uploads&delimiter=object001&prefix=multipart HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 04:51:21 GMT
Authorization: OBS UDSIAMSTUBTEST000008:XdmZgYQ+ZVy1rjxJ9/KpKq+wrU0=
```

Sample Response: Listing Initiated Multipart Uploads (with a Prefix and Delimiter Specified)

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 5DEB00000164A27A1610B8250790D703
x-obs-id-2: 32AAAQAAEABAAAQAAEABAAAQAAEABCs3ls2ZtLDD6pQLcJq1yGITXgspSvBR
Content-Type: application/xml
Date: WED, 01 Jul 2015 04:51:21 GMT
Content-Length: 681

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListMultipartUploadsResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Bucket>newbucket0001</Bucket>
  <KeyMarker></KeyMarker>
  <UploadIdMarker/>
  </UploadIdMarker>
  <Delimiter>object</Delimiter>
  <Prefix>multipart</Prefix>
  <MaxUploads>1000</MaxUploads>
```

```
<IsTruncated>>false</IsTruncated>  
<CommonPrefixes>  
  <Prefix>multipart-object001</Prefix>  
</CommonPrefixes>  
</ListMultipartUploadsResult>
```

5.5.2 Initiating a Multipart Upload

Functions

Before using this operation, make an API operation call to create a multipart upload task. The system will return a globally unique upload ID as the multipart upload identifier. This identifier can be used in subsequent requests including UploadPart, CompleteMultipartUpload, and ListParts. Create a multipart upload task does not affect the object that has the same name as object to be uploaded in multiple parts. You can create more than one multipart upload tasks for an object. This operation request can contain headers **x-obs-acl**, **x-obs-meta-***, **Content-Type**, and **Content-Encoding**. The headers are recorded in the multipart upload metadata.

This operation supports server-side encryption.

WORM

If a bucket has WORM enabled, you can configure object-level retention policies when initiating multipart uploads. You can specify the **x-obs-object-lock-mode** and **x-obs-object-lock-retain-until-date** headers when you initiate a multipart upload to protect the object assembled. If you do not specify these two headers but have configured a default bucket-level WORM policy, this default policy automatically applies to the object newly assembled. You can also configure or update a WORM retention policy after the object is assembled.

Different from uploads with PUT and POST, a multipart upload only requires that the date specified in the **x-obs-object-lock-retain-until-date** header be no later than the initiation time, but does not have to be later than the completion time of the multipart upload. When the default bucket-level WORM policy is applied, the protection starts when the object parts are assembled and ends once the default bucket-level protection period expires. Before assembling the object parts uploaded, the multipart upload can be canceled and will not be affected by the WORM configuration.

Request Syntax

```
POST /ObjectName?uploads HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Date: date  
Authorization: authorization
```

Request Parameters

This request uses parameters to specify a multipart upload. [Table 5-115](#) describes the parameters.

Table 5-115 Request parameters

Parameter	Description	Mandatory
uploads	Indicates a multipart upload. Type: string NOTE <ul style="list-style-type: none"> This parameter is an empty string. If this parameter is not contained in a request, the request performs a common upload using POST. 	Yes
encoding-type	Encodes the Key in the response based on the specified type. If the Key contain control characters that are not supported by the XML 1.0 standard, you can set encoding-type to encode the Key in response. Type: string Value option: url	No

Request Headers

The request can use additional headers, as shown in [Table 5-116](#).

Table 5-116 Request headers

Header	Description	Man dato ry
x-obs-acl	When initiating a multipart upload, you can add this message header to set the permission control policy for the object. The predefined common policies are as follows: private , public-read , and public-read-write . For details about each policy, see the ACL configuration using header fields in ACLs . Type: string Note: This header is a predefined policy expressed in a character string. Example: x-obs-acl: public-read-write	No
x-obs-grant-read	When initiating a multipart upload, you can use this header to grant all users in an account the permissions to read the object and obtain the object metadata. Type: string Example: x-obs-grant-read: ID=domainID . If multiple accounts are authorized, separate them with commas (,).	No

Header	Description	Mandatory
x-obs-grant-read-acp	<p>When initiating a multipart upload, you can use this header to grant all users in an account the permission to obtain the object ACL.</p> <p>Type: string</p> <p>Example: x-obs-grant-read-acp: ID=domainID. If multiple accounts are authorized, separate them with commas (,).</p>	No
x-obs-grant-write-acp	<p>When initiating a multipart upload, you can use this header to grant all users in an account the permission to write the object ACL.</p> <p>Type: string</p> <p>Example: x-obs-grant-write-acp: ID=domainID. If multiple accounts are authorized, separate them with commas (,).</p>	No
x-obs-grant-full-control	<p>When initiating a multipart upload, you can use this header to grant all users in an account the permissions to read the object, obtain the object metadata and ACL, and write the object ACL.</p> <p>Type: string</p> <p>Example: x-obs-grant-full-control: ID=domainID. If multiple accounts are authorized, separate them with commas (,).</p>	No
x-obs-storage-class	<p>When initiating a multipart upload, you can add this header to specify the storage class for the object. If you do not use this header, the object storage class is the default storage class of the bucket.</p> <p>Type: string</p> <p>Storage class options: STANDARD (Standard), WARM (Infrequent Access), COLD (Archive), DEEP_ARCHIVE (Deep Archive). These values are case sensitive.</p> <p>Example: x-obs-storage-class: STANDARD</p>	No

Header	Description	Mandatory
x-obs-persistent-headers	<p>When initiating a multipart upload, you can add the x-obs-persistent-headers header in an HTTP request to specify one or more user-defined response headers. After all parts in the multipart upload are merged, user-defined response headers will be returned in the response header when you retrieve the object or query the object metadata.</p> <p>Type: string</p> <p>Format: x-obs-persistent-headers: key1:base64_encode(value1),key2:base64_encode(value2)...</p> <p>Note: Items, such as key1 and key2, are user-defined headers. If they contain non-ASCII or unrecognizable characters, they can be encoded using URL or Base64. The server processes these headers as character strings, but does not decode them. Items, such as <i>value1</i> and <i>value2</i> are the values of the corresponding headers. base64_encode indicates that the value is encoded using Base64. A user-defined header and its Base64-encoded value are connected using a colon (:) to form a key-value pair. All key-value pairs are separated with a comma (,) and are placed in the x-obs-persistent-headers header. The server then decodes the uploaded value.</p> <p>Example: x-obs-persistent-headers: key1:dmFsdWUx,key2:dmFsdWU</p> <p>After all parts in the multipart upload are merged, headers key1:value1 and key2:value2 will be returned, respectively, when you download the object and obtain the object metadata.</p> <p>Constraints:</p> <ol style="list-style-type: none"> Response headers customized in this way cannot be prefixed with x-obs-. For example, you should use key1, instead of x-obs-key1. Standard HTTP headers, such as host, content-md5, origin, range, and Content-Disposition, cannot be specified as custom headers. The total length of this header and the custom metadata cannot exceed 8 KB. If the same keys are passed, values are separated with commas (,) and then returned in one key. If the decoded value contains non-US-ASCII or unrecognizable characters, the server processes the value as a string and encapsulates it using UTF-8?B?<(str)>?=, but does not decode the 	No

Header	Description	Mandatory
	<p>value. For instance, value key1:abbc will be returned as key1:=?UTF-8?B?abbc?=&.</p> <p>6. The values cannot contain spaces, equal signs (=), commas (,), semicolons (;), colons (:), or periods (.). If such characters are required, use URL or Base64 encoding.</p>	
x-obs-website-redirect-location	<p>If a bucket is configured with the static website hosting function, it will redirect requests for this object to another object in the same bucket or to an external URL. OBS stores the value of this header in the object metadata.</p> <p>Type: string Default value: none Constraint: The value must be prefixed by a slash (/), http://, or https://. The length of the value cannot exceed 2 KB.</p>	No
x-obs-server-side-encryption	<p>Indicates that SSE-KMS is used.</p> <p>Type: string Example: x-obs-server-side-encryption: kms</p>	No. This header is required when SSE-KMS is used.

Header	Description	Mandatory
x-obs-server-side-encryption-kms-key-id	<p>Indicates the master key when SSE-KMS is used. If this header is not provided, the default master key will be used. If there is no such a default master key, OBS will create one and use it by default.</p> <p>Type: string</p> <p>The following two formats are supported:</p> <ul style="list-style-type: none"> - <i>regionID.domainID:key/key_id</i> - <i>key_id</i> <p><i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the ID of the key created in DEW.</p> <p>Examples:</p> <ol style="list-style-type: none"> 1. x-obs-server-side-encryption-kms-key-id: <i>region:domainiddomainiddomainiddoma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0</i> or 2. x-obs-server-side-encryption-kms-key-id: <i>4f1cd4de-ab64-4807-920a-47fc42e7f0d0</i> 	No
x-obs-server-side-encryption-customer-algorithm	<p>Indicates the encryption algorithm when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-algorithm: AES256</p> <p>Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5.</p>	No. This header is required when SSE-C is used.
x-obs-server-side-encryption-customer-key	<p>Indicates the key for encrypting objects when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5.</p>	No. This header is required when SSE-C is used.

Header	Description	Mandatory
x-obs-server-side-encryption-customer-key-MD5	<p>Indicates the MD5 value of the encryption key when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key.</p>	No. This header is required when SSE-C is used.
x-obs-expires	<p>Specifies when an object expires. It is measured in days. Once the object expires, it is automatically deleted. (The calculation starts from when the object was last modified).</p> <p>Type: integer</p> <p>Example: x-obs-expires:3</p>	No
x-obs-object-lock-mode	<p>WORM mode that will be applied to the object. Currently, only COMPLIANCE is supported. This header must be used together with x-obs-object-lock-retain-until-date.</p> <p>Type: string</p> <p>Example: x-obs-object-lock-mode:COMPLIANCE</p>	No, but required when x-obs-object-lock-retain-until-date is present.

Header	Description	Mandatory
x-obs-object-lock-retain-until-date	Indicates the expiration time of the Object Lock retention. The value must be a UTC time that complies with ISO 8601, for example, 2015-07-01T04:11:15Z . This header must be used together with x-obs-object-lock-mode . Type: string Example: x-obs-object-lock-retain-until-date:2015-07-01T04:11:15Z	No, but required when x-obs-object-lock-mode is present.
x-obs-meta-*	When initiating a multipart upload, you can use a header starting with x-obs-meta- in the HTTP request to define object metadata for easy management. The user-defined metadata will be returned in the response when you retrieve the object or query the object metadata. For details, see User-Defined Object Metadata . Type: string Example: x-obs-meta-test: test metadata	No

For details about other common message headers, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
Content-Length: length
Connection: status

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<InitiateMultipartUploadResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Bucket>BucketName</Bucket>
  <Key>ObjectName</Key>
  <UploadId>uploadID</UploadId>
</InitiateMultipartUploadResult>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Table 5-117 Additional response headers

Header	Description
x-obs-server-side-encryption	This header is included in a response if SSE-KMS is used. Type: string Example: x-obs-server-side-encryption: kms
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response when SSE-KMS is used. Type: string Format: <i>regionID.domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id: region:domainiddomainiddomainid-doma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0
x-obs-server-side-encryption-customer-algorithm	Indicates the encryption algorithm. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm: AES256
x-obs-server-side-encryption-customer-key-MD5	Indicates the MD5 value of a key used to encrypt objects. This header is included in a response if SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==

Response Elements

This response contains elements to indicate the upload ID and the key (name) of the object (bucket) for which the multipart upload was initiated. The returned information is used in the subsequent operations. [Table 5-118](#) describes the elements.

Table 5-118 Response elements

Element	Description
InitiateMultipartUploadResult	Container of a multipart upload task. Type: XML
Bucket	Indicates the name of the bucket to which the multipart upload was initiated. Type: string
Key	Indicates the object key in a multipart upload. Type: string
UploadId	Indicates the ID for the initiated multipart upload. This ID is used for the subsequent operation. Type: string
EncodingType	Encoding type of the key of an object that is uploaded in the multipart mode. If encoding-type is specified in the request, the Key in the response is encoded. Type: string

Error Responses

1. If the AK or signature is invalid, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
2. If the bucket is not found, OBS returns **404 Not Found** and the error code is **NoSuchBucket**.
3. Check whether the user has the write permission for the specified bucket. If not, OBS returns **403 Forbidden** and the error code is **AccessDenied**.

Other errors are included in [Table 6-2](#).

Sample Request: Initiating a Multipart Upload

```
POST /objectkey?uploads HTTP/1.1
Host: examplebucket.obs.region.myhuaweicloud.com
Date: WED, 01 Jul 2015 05:14:52 GMT
Authorization: OBS AKIAIOSFODNN7EXAMPLE:VGhpcyBtZXNzYWdlIHNPZ25lZGgieSRLbHZpbmc=
```

Sample Response: Initiating a Multipart Upload

```
HTTP/1.1 200 OK
Server: OBS
x-obs-id-2: Weag1LuByRx9e6j5Onimru9pO4ZVKnJ2Qz7/C1NPcfTWAtrPftaOFg==
x-obs-request-id: 996c76696e6727732072657175657374
Date: WED, 01 Jul 2015 05:14:52 GMT
Content-Length: 303

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<InitiateMultipartUploadResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Bucket>bucketname</Bucket>
  <Key>objectkey</Key>
```



```
<UploadId>DCD2FC98B4F7000013DF578ACA318E7</UploadId>  
</InitiateMultipartUploadResult>
```

Sample Request: Initiating a Multipart Upload (with the ACL Configured)

```
POST /objectkey?uploads HTTP/1.1  
Host: examplebucket.obs.region.myhuaweicloud.com  
Date: WED, 01 Jul 2015 05:15:43 GMT  
x-obs-grant-write-acp:ID=52f24s3593as5730ea4f722483579ai7,ID=a93fcas852f24s3596ea8366794f7224  
Authorization: OBS AKIAIOSFODNN7EXAMPLE:VGhpcyBtZXNzYWdlIHdpZ25lZGgieSRlbHZpbmc=
```

Sample Response: Initiating a Multipart Upload (with the ACL Configured)

```
HTTP/1.1 200 OK  
Server: OBS  
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCtnv+daB51p+IVhAvWN7s5rSKhcWqDFs  
x-obs-request-id: BB78000001648457112DF37FDFADD7AD  
Date: WED, 01 Jul 2015 05:15:43 GMT  
Content-Length: 303  
  
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>  
<InitiateMultipartUploadResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">  
  <Bucket>bucketname</Bucket>  
  <Key>objectkey</Key>  
  <UploadId>000001648453845DBB78F2340DD460D8</UploadId>  
</InitiateMultipartUploadResult>
```

5.5.3 Uploading Parts

Functions

After initiating a multipart upload, you can use this operation to upload parts for the multipart upload using its task ID. When parts are uploaded in a multipart upload of an object, the upload sequence does not affect part merging, namely, multiple parts can be uploaded concurrently.

Part sizes range from 100 KB to 5 GB. However, when parts are being merged, the size of the last uploaded part ranges from 0 to 5 GB. The upload part ID ranges from 1 to 10,000.

This operation supports server-side encryption.

NOTICE

The value of **partNumber** in a multipart task is unique. If you upload a part of the same **partNumber** repeatedly, the last part uploaded will overwrite the previous one. When multiple concurrent uploading of the same **partNumber** part of the same object is performed, the Last Write Win policy is applied. The time of **Last Write** is defined as the time when the metadata of the part is created. To ensure data accuracy, the client must be locked to ensure concurrent upload of the same part of the same object. Concurrent upload of different parts of the same object does not need to be locked.

Request Syntax

```
PUT /ObjectName?partNumber=partNum&uploadId=uploadID HTTP/1.1  
Host: bucketname.obs.region.myhuaweicloud.com  
Date: date
```

```
Content-Length: length
Authorization: authorization
Content-MD5:md5
<object Content>
```

Request Parameters

This request uses parameters to specify the upload task ID and part number. [Table 5-119](#) describes the parameters.

Table 5-119 Request parameters

Parameter	Description	Mandatory
partNumber	Indicates the ID of a part to be uploaded. The value is an integer from 1 to 10000. Type: integer	Yes
uploadId	Indicates a multipart upload ID. Type: string	Yes

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Table 5-120 Server encryption request headers

Header	Description	Mandatory
x-obs-server-side-encryption-customer-algorithm	Indicates the encryption algorithm when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm: AES256 Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5 .	No. This header is required when SSE-C is used. The encryption algorithm must be the same as that used to initiate multipart upload tasks.

Header	Description	Mandatory
<p>x-obs-server-side-encryption-customer-key</p>	<p>Indicates the key for encrypting objects when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used. The key must be the same as that used to initiate multipart upload tasks.</p>
<p>x-obs-server-side-encryption-customer-key-MD5</p>	<p>Indicates the MD5 value of the encryption key when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key.</p>	<p>No. This header is required when SSE-C is used. The MD5 value must be the same as that used to initiate multipart upload tasks.</p>

Request Elements

This request involves no elements.

Response Syntax

HTTP/1.1 *status_code*
Date: *date*
ETag: *etag*
Content-Length: *length*

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Table 5-121 Additional response headers

Header	Description
x-obs-server-side-encryption	This header is included in a response if SSE-KMS is used. Type: string Example: x-obs-server-side-encryption:kms
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response when SSE-KMS is used. Type: string Format: <i>regionID.domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id:region:domainiddomainiddomainiddoma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0
x-obs-server-side-encryption-customer-algorithm	Indicates the encryption algorithm. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm:AES256

Header	Description
x-obs-server-side-encryption-customer-key-MD5	<p>Indicates the MD5 value of the key for encrypting objects. This header is included in a response when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p>

Response Elements

This response contains no elements.

Error Responses

1. If a part number is not within the range from 1 to 10000, OBS returns **400 Bad Request**.
2. If a part size has exceeded 5 GB, the error code **400 Bad Request** is returned.
3. If the AK or signature is invalid, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
4. Check whether the bucket exists. If the bucket is not found, OBS returns **404 Not Found** and the error code is **NoSuchBucket**.
5. View the bucket ACL to check whether the user has the read permission for the requested bucket. If the user does not have the read permission, OBS returns **403 AccessDenied**.
6. Check whether the multipart upload task exists. If the task does not exist, OBS returns **404 Not Found** and the error code is **NoSuchUpload**.
7. Check whether the request user is the initiator of the multipart upload task. If not, OBS returns **403 Forbidden** and the error code is **AccessDenied**.

Other errors are included in [Table 6-2](#).

Sample Request

```
PUT /object02?partNumber=1&uploadId=00000163D40171ED8DF4050919BD02B8 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 05:15:55 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:ZB0hFwaHubi1aKHv7dSZjts40g=
Content-Length: 102015348

[102015348 Byte part content]
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D40956A703289CA066F1
ETag: "b026324c6904b2a9cb4b88d6d61c81d1"
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCUQu/EOEVSMa04GXVvy0z9WI+BsDKvfh
```

```
Date: WED, 01 Jul 2015 05:15:55 GMT  
Content-Length: 0
```

Sample Request: Uploading a Part, with Server-Side Encryption Headers Included

```
PUT /object02?partNumber=1&uploadId=00000163D40171ED8DF4050919BD02B8 HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: */*  
Date: WED, 01 Jul 2015 05:15:55 GMT  
Authorization: OBS H4IPJX0TQTHTEBQQCEC:ZB0hFwaHubi1aKHv7dSZjts40g=  
Content-Length: 102015348  
x-obs-server-side-encryption-customer-key: g0lCfA3Dv40jZz5SQ1ZukLRFqtd093ksp192  
x-obs-server-side-encryption-customer-key-MD5: Eo93ne1X/iTcs0132  
x-obs-server-side-encryption-customer-algorithm: AES256  
  
[102015348 Byte part content]
```

Sample Response: Uploading a Part, with Server-Side Encryption Headers Included

```
HTTP/1.1 200 OK  
Server: OBS  
x-obs-request-id: 8DF400000163D40956A703289CA066F1  
ETag: "b026324c6904b2a9cb4b88d6d61c81d1"  
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCUQu/EOEVSMa04GXVwy0z9WI+BsDKvfh  
Date: WED, 01 Jul 2015 05:15:55 GMT  
Content-Length: 0  
x-obs-server-side-encryption-customer-algorithm: AES256  
x-obs-server-side-encryption-customer-key-MD5: Eo93ne1X/iTcs0132
```

5.5.4 Copying Parts

Functions

After creating a multipart upload job, you can specify its upload ID and upload a part to the job in OBS. Alternatively, you can make an API call to add a part (part of an object or the whole object).

This operation supports server-side encryption.

NOTICE

You cannot determine whether a request is successful only based on the **status_code** in the returned HTTP header. If **200** is returned for **status_code**, the server has received the request and started to process the request. The copy is successful only when the body in the response contains ETag.

Copy the source object and save it as **part1**. If a **part1** already exists before the copying, the original **part1** will be overwritten by the newly copied **part1**. After the copy is successful, only the latest **part1** is displayed. The old **part1** data will be deleted. Therefore, ensure that the target part does not exist or has no value when using the part copy operation. Otherwise, data may be deleted by mistake. The source object in the copy process does not change.

Archive Objects

If source objects are in the Archive storage class, ensure that these objects have been restored before you copy them. If the source object is not restored or is being restored, the copy fails and error **403 Forbidden** is returned. The fault is described as follows:

ErrorCode: InvalidObjectState

ErrorMessage: Operation is not valid for the source object's storage class

Request Syntax

```
PUT /ObjectName?partNumber=partNum&uploadId=UploadID HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
x-obs-copy-source: sourceobject
x-obs-copy-source-range:bytes=start-end
Authorization: authorization
Content-Length: length
```

Request Parameters

To copy a part, you need to specify the part number of the target part and the multipart upload task number. [Table 5-122](#) describes the parameters.

Table 5-122 Request parameters

Parameter	Description	Mandatory
partNumber	Indicates the ID of a part to be uploaded. Type: integer	Yes
uploadId	Indicates a multipart upload ID. Type: string	Yes

Request Headers

In addition the common message headers, the request uses two extended headers. [Table 3-3](#) describes the common message header.

Table 5-123 Request headers

Header	Description	Mandatory
x-obs-copy-source	Indicates the source object to be copied. Type: string	Yes

Header	Description	Mandatory
x-obs-copy-source-range	<p>Indicates the range of bytes (start - end) to be copied from the source object. start indicates the start byte of the part to be copied and end indicates the end byte.</p> <p>Type: integer</p>	No
x-obs-server-side-encryption-customer-algorithm	<p>Indicates the encryption algorithm for the part copy when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-algorithm: AES256</p> <p>Constraint: This header must be used together with x-obs-server-side-encryption-customer-key and x-obs-server-side-encryption-customer-key-MD5.</p>	No. This header is required when SSE-C is used. The encryption algorithm must be the same as that used to initiate multipart upload tasks.
x-obs-server-side-encryption-customer-key	<p>Indicates the key for encrypting the part copy when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key: K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key-MD5.</p>	No. This header is required when SSE-C is used. The key must be the same as that used to initiate multipart upload tasks.

Header	Description	Mandatory
<p>x-obs-server-side-encryption-customer-key-MD5</p>	<p>Indicates the MD5 value of the key for encrypting the part copy when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-server-side-encryption-customer-algorithm and x-obs-server-side-encryption-customer-key.</p>	<p>No. This header is required when SSE-C is used. The MD5 value must be the same as that used to initiate multipart upload tasks.</p>
<p>x-obs-copy-source-server-side-encryption-customer-algorithm</p>	<p>Indicates the algorithm for the source object when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-server-side-encryption-customer-algorithm:AES256</p> <p>Constraint: This header must be used together with x-obs-copy-source-server-side-encryption-customer-key and x-obs-copy-source-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used to copy a source object.</p>

Header	Description	Mandatory
<p>x-obs-copy-source-server-side-encryption-customer-key</p>	<p>Indicates the key for decrypting the source object when SSE-C is used.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=</p> <p>Constraint: This header is a Base64-encoded 256-bit key and must be used together with x-obs-copy-source-server-side-encryption-customer-algorithm and x-obs-copy-source-server-side-encryption-customer-key-MD5.</p>	<p>No. This header is required when SSE-C is used to copy a source object.</p>
<p>x-obs-copy-source-server-side-encryption-customer-key-MD5</p>	<p>Indicates the MD5 value of the key for the source object when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==</p> <p>Constraint: This header is a Base64-encoded 128-bit MD5 value and must be used together with x-obs-copy-source-server-side-encryption-customer-algorithm and x-obs-copy-source-server-side-encryption-customer-key.</p>	<p>No. This header is required when SSE-C is used to copy a source object.</p>

Header	Description	Mandatory
<p>x-obs-copy-source-if-match</p>	<p>Indicates that the source object is copied only if its ETag matches the one specified in this header. Otherwise, a 412 status code (failed precondition) is returned.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-if-match: etag</p> <p>Constraint: This header can be used with x-obs-copy-source-if-unmodified-since but not other conditional copy headers.</p>	<p>No</p>
<p>x-obs-copy-source-if-none-match</p>	<p>Indicates that the source object is copied only if its ETag does not match the one specified in this header. Otherwise, a 412 status code (failed precondition) is returned.</p> <p>Type: string</p> <p>Example: x-obs-copy-source-if-none-match: etag</p> <p>Constraint: This header can be used with x-obs-copy-source-if-modified-since but not other conditional copy headers.</p>	<p>No</p>

Header	Description	Mandatory
<p>x-obs-copy-source-if-unmodified-since</p>	<p>Indicates that the source object is copied only if it has not been modified since the time specified by this header. Otherwise, a 412 status code (failed precondition) is returned. This header can be used with x-obs-copy-source-if-match but not other conditional copy headers.</p> <p>Type: string</p> <p>Format: HTTP time string complying with the format specified at http://www.ietf.org/rfc/rfc2616.txt, which can be any of the following:</p> <ol style="list-style-type: none"> 1. EEE, dd MMM yyyy HH:mm:ss z 2. EEEE, dd-MMM-yy HH:mm:ss z 3. EEE MMM dd HH:mm:ss yyyy <p>Examples:</p> <ol style="list-style-type: none"> 1. x-obs-copy-source-if-unmodified-since: Sun, 06 Nov 1994 08:49:37 GMT 2. x-obs-copy-source-if-unmodified-since: Sunday, 06-Nov-94 08:49:37 GMT 3. x-obs-copy-source-if-unmodified-since: Sun Nov 6 08:49:37 1994 <p>Constraint: The time specified by this header cannot be later than the current server time (GMT time), or this header does not take effect.</p>	<p>No</p>

Header	Description	Mandatory
<p>x-obs-copy-source-if-modified-since</p>	<p>Indicates that the source object is copied only if it has been modified since the time specified by this header. Otherwise, a 412 status code (failed precondition) is returned. This header can be used with x-obs-copy-source-if-none-match but not other conditional copy headers.</p> <p>Type: string</p> <p>Format: HTTP time string complying with the format specified at http://www.ietf.org/rfc/rfc2616.txt, which can be any of the following:</p> <ol style="list-style-type: none"> EEE, dd MMM yyyy HH:mm:ss z EEEE, dd-MMM-yy HH:mm:ss z EEE MMM dd HH:mm:ss yyyy <p>Examples:</p> <ol style="list-style-type: none"> x-obs-copy-source-if-unmodified-since: Sun, 06 Nov 1994 08:49:37 GMT x-obs-copy-source-if-unmodified-since: Sunday, 06-Nov-94 08:49:37 GMT x-obs-copy-source-if-unmodified-since: Sun Nov 6 08:49:37 1994 <p>Constraint: The time specified by this header cannot be later than the current server time (GMT time), or this header does not take effect.</p>	<p>No</p>

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<CopyPartResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
>
  <LastModified>modifiedDate</LastModified>
  <ETag>etag</ETag>
</CopyPartResult>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Table 5-124 Additional response headers

Header	Description
x-obs-server-side-encryption	This header is included in a response if SSE-KMS is used. Type: string Example: x-obs-server-side-encryption:kms
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response when SSE-KMS is used. Type: string Format: <i>regionID.domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id:region.domainiddomainiddomainiddoma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0
x-obs-server-side-encryption-customer-algorithm	Indicates the encryption algorithm. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm:AES256

Header	Description
x-obs-server-side-encryption-customer-key-MD5	Indicates the MD5 value of the key for encrypting objects. This header is included in a response when SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==

Response Elements

This response contains elements of a part copy result. [Table 5-125](#) describes the elements.

Table 5-125 Response elements

Element	Description
LastModified	Indicates the latest time an object was modified. Type: string
ETag	ETag value of the target part. It is the unique identifier of the part content and is used to verify data consistency when merging parts. Type: string

Error Responses

1. If the AK or signature is invalid, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
2. Check whether the source bucket or destination bucket exists. If the source bucket or destination bucket does not exist, OBS returns **404 Not Found** and the error code is **NoSuchBucket**.
3. If the source object does not exist, OBS returns **404 Not Found** and the error code is **NoSuchKey**.
4. If the user does not have the read permission for the specified object, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
5. If the user does not have the write permission for the destination bucket, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
6. If the specified task does not exist, OBS returns **404 Not Found** and the error code is **NoSuchUpload**.
7. If the user is not the initiator of the multipart upload task, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
8. When the size of a copied part has exceeded 5 GB, OBS returns **400 Bad Request**.

9. If a part number is not within the range from 1 to 10000, OBS returns error code **400 Bad Request**.

Other errors are included in [Table 6-2](#).

Sample Request

```
PUT /tobject02?partNumber=2&uploadId=00000163D40171ED8DF4050919BD02B8 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 05:16:32 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:dSnpnNpawDSsLg/xXxaqFzrAmMw=
x-obs-copy-source: /destbucket/object01
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D40ABBD20405D30B0542
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCTIjP2efLy5o8sTTComwBb2He0j11Ne
Content-Type: application/xml
Date: WED, 01 Jul 2015 05:16:32 GMT
Transfer-Encoding: chunked

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<CopyPartResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <LastModified>2015-07-01T05:16:32.344Z</LastModified>
  <ETag>"3b46eaf02d3b6b1206078bb86a7b7013"</ETag>
</CopyPartResult>
```

Sample Request: Specifying versionId to Copy a Part

```
PUT /tobject02?partNumber=2&uploadId=00000163D40171ED8DF4050919BD02B8 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 05:16:32 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:dSnpnNpawDSsLg/xXxaqFzrAmMw=
x-obs-copy-source: /examplebucket/object01?versionId=G001118A6456208AFFFFD24829FCF614
```

Sample Response: Specifying versionId to Copy a Part

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D40ABBD20405D30B0542
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCTIjP2efLy5o8sTTComwBb2He0j11NeContent-
Type: application/xml
Date: WED, 01 Jul 2015 05:16:32 GMT
Transfer-Encoding: chunked

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<CopyPartResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <LastModified>2015-07-01T05:16:32.344Z</LastModified>
  <ETag>"3b46eaf02d3b6b1206078bb86a7b7013"</ETag>
</CopyPartResult>
```

5.5.5 Listing Uploaded Parts

Functions

You can perform this operation to query all parts associated to a multipart upload. The size of each part listed by this API is the same as the size of the part uploaded.

Request Syntax

```
GET /ObjectName?uploadId=uploadid&max-parts=max&part-number-marker=marker HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: auth
```

Request Parameters

This request uses parameters to specify which parts in a multipart upload will be listed. [Table 5-126](#) describes the parameters.

Table 5-126 Request parameters

Parameter	Description	Mandatory
uploadId	ID of the multipart upload Type: string Default value: none	Yes
max-parts	Maximum number of parts that can be listed Type: integer Default value: 1,000	No
part-number -marker	Part after which the part listing begins. OBS lists only parts with greater numbers than that specified by this parameter. Type: integer Default value: none	No
encoding-type	Encoding type for the Key in the response. If the Key contain control characters that are not supported by the XML 1.0 standard, you can set encoding-type to encode the Key in response. Type: string Default value: none Value option: url	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code
Date: date
```

```
Content-Length: length

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListPartsResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Bucket>BucketName</Bucket>
  <Key>object</Key>
  <UploadId>uploadid</UploadId>
  <Initiator>
    <ID>id</ID>
  </Initiator>
  <Owner>
    <ID>ownerid</ID>
  </Owner>
  <StorageClass>storageclass</StorageClass>
  <PartNumberMarker>partNmebermarker</PartNumberMarker>
  <NextPartNumberMarker>nextPartnumberMarker</NextPartNumberMarker>
  <MaxParts>maxParts</MaxParts>
  <IsTruncated>true</IsTruncated>
  <Part>
    <PartNumber>partNumber</PartNumber>
    <LastModified>modifiedDate</LastModified>
    <ETag>etag</ETag>
    <Size>size</Size>
  </Part>
</ListPartsResult>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response uses elements to return information about uploaded parts. [Table 5-127](#) describes the elements.

Table 5-127 Response elements

Element	Description
ListPartsResult	Container for responses to part listing requests Type: container Child: Bucket, Key, UploadId, PartNumberMarker, NextPartNumberMarker, MaxParts, IsTruncated, and Part Parent: none
Bucket	Name of the bucket Type: string Parent: ListPartsResult
EncodingType	Encoding type of an object key. If encoding-type is specified in the request, the Key in the response is encoded. Type: string Parent: ListPartsResult

Element	Description
Key	Object name Type: string Parent: ListPartsResult
UploadId	ID of the multipart upload Type: string Parent: ListPartsResult
Initiator	Initiator of the multipart upload Type: container Child: ID Parent: ListPartsResult
Owner	The value of this parameter is the same as that of Initiator . Type: container Child: ID Parent: ListPartsResult
ID	ID of the domain where the owner belongs Type: string Parent: Initiator or Owner
StorageClass	Storage class Type: string Value options: STANDARD, WARM, COLD Parent: ListPartsResult
PartNumberMarker	Part number after which listing parts begins Type: integer Parent: ListPartsResult
NextPartNumberMarker	Value of PartNumberMarker in the next request when the returned result is incomplete Type: integer Parent: ListPartsResult
MaxParts	Maximum number of parts returned in a response Type: integer Parent: ListPartsResult
IsTruncated	Whether the returned part list is truncated. The value true indicates that the list was truncated and false indicates that the list was not truncated. Type: boolean Parent: ListPartsResult

Element	Description
Part	Container for elements related to a particular part. Type: string Child: PartNumber, LastModified, ETag, and Size Parent: ListPartsResult PartNumber identifies a part.
PartNumber	Number of an uploaded part Type: integer Parent: ListPartsResult.Part
LastModified	When a part was uploaded Type: date Parent: ListPartsResult.Part
ETag	ETag value of the uploaded parts. It is the unique identifier of the part content and is used to verify data consistency during the combination of parts. Type: string Parent: ListPartsResult.Part
Size	Size of an uploaded part Type: integer Parent: ListPartsResult.Part

Error Responses

1. If the AK or signature is invalid, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
2. If the requested bucket is not found, OBS returns **404 Not Found** and the error code is **NoSuchBucket**.
3. If the requested multipart upload task does not exist, OBS returns **404 Not Found** and the error code is **NoSuchUpload**.
4. OBS determines whether the user's domain ID has the read permission for the specified bucket. If the user does not have the permission, OBS returns **403 Forbidden** and the error code is **AccessDenied**.

Other errors are included in [Table 6-2](#).

Sample Request

```
GET /object02?uploadId=00000163D40171ED8DF4050919BD02B8 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 05:20:35 GMT
Authorization: OBS H4lPJX0TQTHHEBQQCEC:xkAbdSrBPrz5yqzuZdJnK5oL/yU=
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D40C099A04EF4DD1BDD9
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSK71fr+hDnzB0JBvQC1B9+S12AWxC41
Content-Type: application/xml
Date: WED, 01 Jul 2015 05:20:35 GMT
Content-Length: 888

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<ListPartsResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Bucket>test333</Bucket>
  <Key>obj2</Key>
  <UploadId>00000163D40171ED8DF4050919BD02B8</UploadId>
  <Initiator>
    <ID>domainID/domainiddomainiddomainiddo000008:userID/useriduseriduseridusidusid000008</ID>
  </Initiator>
  <Owner>
    <ID>domainiddomainiddomainiddo000008</ID>
  </Owner>
  <StorageClass>STANDARD</StorageClass>
  <PartNumberMarker>0</PartNumberMarker>
  <NextPartNumberMarker>2</NextPartNumberMarker>
  <MaxParts>1000</MaxParts>
  <IsTruncated>>false</IsTruncated>
  <Part>
    <PartNumber>1</PartNumber>
    <LastModified>2018-06-06T07:39:32.522Z</LastModified>
    <ETag>"b026324c6904b2a9cb4b88d6d61c81d1"</ETag>
    <Size>2058462721</Size>
  </Part>
  <Part>
    <PartNumber>2</PartNumber>
    <LastModified>2018-06-06T07:41:03.344Z</LastModified>
    <ETag>"3b46eaf02d3b6b1206078bb86a7b7013"</ETag>
    <Size>4572</Size>
  </Part>
</ListPartsResult>
```

5.5.6 Completing a Multipart Upload

Functions

After uploading all parts for a multipart upload, you can use this operation to complete the multipart upload. Before performing this operation, you cannot download the uploaded data. When merging parts, you need to copy the additional message header information recorded during the initialization of the multipart upload task to the object metadata. The processing process is the same as that of the common upload object with these message headers. In the case of merging parts concurrently, the Last Write Win policy must be followed but the time for initiating Last Write is specified as the time when a part multipart upload is initiated.

If a multipart upload has not been aborted, the uploaded parts occupy your storage quota. After all parts in the multipart upload are merged to an object, only the object occupies your storage quota. If a part uploaded in a multipart upload is not used in any merging parts multipart uploads, the part will be deleted to release storage quota.

You can send a request for downloading all or some data of the generated multipart by specifying a range.

You can send a request for deleting all parts uploaded in a multipart upload. Deleted data cannot be restored.

The merged parts do not use the MD5 value of entire object as the ETag. Their ETag is calculated as follows: $MD5(M_1M_2...M_N)-N$, where M_n is the MD5 value of part n (N is the total number of parts). As described in the [Sample Request](#), there are three parts and each part has an MD5 value. The MD5 values of the three parts are recalculated to obtain a new MD5 value. Then $-N$ is added to the right of the MD5 value to get the ETag of the combined parts. In this example, $-N$ is -3 .

If the response to an object merge request times out and error 500 or 503 is returned, you can first obtain the object metadata of the multipart upload task. Then, check whether the value of header **x-obs-uploadid** in the response is the same as the ID of this multipart upload task. If they are the same, object parts have been successfully merged on the server and you do not need to try again. For details, see [Consistency of Concurrent Operations](#).

WORM

If a bucket has WORM enabled, the WORM protection will be automatically applied to the object generated after a multipart upload is complete. If you specify WORM headers and a retention expiration date when you initiate a multipart upload, the protection for the assembled object ends on the specified date. If you do not specify WORM headers during the initiation, but have configured the default bucket-level retention policy, this default policy is automatically applied and the protection starts when the multipart upload is complete. After a multipart upload is complete, you can still configure object-level WORM retention policies for the assembled object.

Versioning

If a bucket has versioning enabled, a unique version ID is generated for an object created from a multipart upload in this bucket and the version ID is returned in response header **x-obs-version-id**. If versioning is suspended for a bucket, the object version obtained after the merge is **null**. For details about the versioning statuses of a bucket, see [Configuring Versioning for a Bucket](#).

NOTICE

If 10 parts are uploaded but only nine parts are selected for merge, the parts that are not merged will be automatically deleted by the system. The parts that are not merged cannot be restored after being deleted. Before combining the parts, adopt the interface used to list the parts that have been uploaded to check all parts to ensure that no part is missed.

Request Syntax

```
POST /ObjectName?uploadId=uploadID HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Content-Length: length
Authorization: authorization
<CompleteMultipartUpload>
<Part>
```

```
<PartNumber>partNum</PartNumber>
<ETag>etag</ETag>
</Part>
<Part>
  <PartNumber>partNum</PartNumber>
  <ETag>etag</ETag>
</Part>
<Part>
  <PartNumber>partNum</PartNumber>
  <ETag>etag</ETag>
</Part>
</CompleteMultipartUpload>
```

Request Parameters

This request uses parameters to specify the ID of a multipart upload whose parts will be merged. [Table 5-128](#) describes the parameters.

Table 5-128 Request parameters

Parameter	Description	Mandatory
uploadId	Indicates a multipart upload. Type: string	Yes
encoding-type	Encodes the Key in the response based on the specified type. If the Key contain control characters that are not supported by the XML 1.0 standard, you can set encoding-type to encode the Key in response. Type: string Value option: url	No

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request uses elements to specify the list of parts to be merged. [Table 5-129](#) describes the elements.

Table 5-129 Request Elements

Element	Description	Mandatory
CompleteMultipartUpload	List of parts to be combined Type: XML	Yes

Element	Description	Mandatory
PartNumber	Part number Type: integer	Yes
ETag	ETag value returned upon successful upload of a part. It is the unique identifier of the part content. This parameter is used to verify data consistency when parts are merged. Type: string	Yes

Response Syntax

```
HTTP/1.1 status_code
Date: date
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<CompleteMultipartUploadResult xmlns="http://obs.region.myhuaweicloud.com/doc/2015-06-30/">
  <Location>http://example-Bucket.obs.region.myhuaweicloud.com/example-Object</Location>
  <Bucket>bucketname</Bucket>
  <Key>ObjectName</Key>
  <ETag>ETag</ETag>
</CompleteMultipartUploadResult>
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

In addition to the common response headers, the message headers listed in [Table 5-130](#) may be used.

Table 5-130 Additional response headers

Header	Description
x-obs-version-id	Version of the object after parts being merged. Type: string
x-obs-server-side-encryption	This header is included in a response if SSE-KMS is used. Type: string Example: x-obs-server-side-encryption:kms

Header	Description
x-obs-server-side-encryption-kms-key-id	Indicates the master key ID. This header is included in a response if SSE-KMS is used. Type: string Format: <i>regionID:domainID:key/key_id</i> <i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the key ID used in this encryption. Example: x-obs-server-side-encryption-kms-key-id:region:domainiddomainiddomainid-doma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0
x-obs-server-side-encryption-customer-algorithm	Indicates an encryption algorithm. This header is included in a response if SSE-C is used. Type: string Example: x-obs-server-side-encryption-customer-algorithm:AES256

Response Elements

This response uses elements to return the result of merging parts. [Table 5-131](#) describes the elements.

Table 5-131 Response elements

Element	Description
Location	Path of the object after parts have been merged. Type: string
Bucket	Bucket in which parts are merged. Type: string
EncodingType	Encoding type of an object key. If the Key contain control characters that are not supported by the XML 1.0 standard, you can set encoding-type to encode the Key in response. Type: string Value option: url
Key	Indicates the key of the generated object. Type: string

Element	Description
ETag	The result calculated based on the ETag of each part is the unique identifier of the object content. Type: string

Error Responses

1. If no message body exists, OBS returns **400 Bad Request**.
2. If the message body format is incorrect, OBS returns **400 Bad Request**.
3. If the part information in the message body is not sorted by part sequence number, OBS returns **400 Bad Request** and the error code is **InvalidPartOrder**.
4. If the AK or signature is invalid, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
5. If the requested bucket is not found, OBS returns **404 Not Found** and the error code is **NoSuchBucket**.
6. If the requested multipart upload does not exist, OBS returns **404 Not Found** and error code **NoSuchUpload**.
7. If the user is not the initiator of the task, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
8. If the request part list contains a part that does not exist, OBS returns **400 Bad Request** and the error code is **InvalidPart**.
9. If the part's ETag contained in the request list is incorrect, OBS returns **400 Bad Request** with an error code of **InvalidPart**.
10. If the size of a part other than the last part is smaller than 100 KB, OBS returns **400 Bad Request**.
11. If the size of the object is greater than 48.8 TB after parts being merged, OBS returns status code **400 Bad Request**.

Other errors are included in [Table 6-2](#).

Sample Request

```
POST /object02?uploadId=00000163D46218698DF407362295674C HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: WED, 01 Jul 2015 05:23:46 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:dOfK9iLcKxo58tRp3fWeDoYzKA=
Content-Length: 422
```

```
<?xml version="1.0" encoding="utf-8"?>
<CompleteMultipartUpload>
  <Part>
    <PartNumber>1</PartNumber>
    <ETag>a54357aff0632cce46d942af68356b38</ETag>
  </Part>
  <Part>
    <PartNumber>2</PartNumber>
    <ETag>0c78aef83f66abc1fa1e8477f296d394</ETag>
  </Part>
</Part>
```

```
<PartNumber>3</PartNumber>
<ETag>acbd18db4cc2f85cedef654fcc4a4d8</ETag>
</Part>
</CompleteMultipartUpload>
```

Sample Response

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D4625BE3075019BD02B8
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCSN8D1AfQclvyGBZ9+Ee+jU6zv1iYdO4
Content-Type: application/xml
Date: WED, 01 Jul 2015 05:23:46 GMT
Content-Length: 326

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<CompleteMultipartUploadResult xmlns="http://obs.ap-southeast-1.myhuaweicloud.com/doc/2015-06-30/">
  <Location>/examplebucket/object02</Location>
  <Bucket>examplebucket</Bucket>
  <Key>object02</Key>
  <ETag>"03f814825e5a691489b947a2e120b2d3-3"</ETag>
</CompleteMultipartUploadResult>
```

5.5.7 Canceling a Multipart Upload Task

Functions

You can perform this operation to abort a multipart upload. You cannot upload or list parts after operations to merge parts or abort a multipart upload are performed.

Request Syntax

```
DELETE /ObjectName?uploadId=uploadID HTTP/1.1
Host: bucketname.obs.region.myhuaweicloud.com
Date: date
Authorization: auth
```

Request Parameters

This request uses message parameters to specify the multipart upload task number of the segment task. [Table 5-132](#) describes the parameters.

Table 5-132 Request parameters

Parameter	Description	Mandatory
uploadId	Indicates a multipart upload. Type: string	Yes

Request Headers

This request uses common headers. For details, see [Table 3-3](#).

Request Elements

This request involves no elements.

Response Syntax

```
HTTP/1.1 status_code  
Date: date
```

Response Headers

The response to the request uses common headers. For details, see [Table 3-20](#).

Response Elements

This response contains no elements.

Error Responses

1. If the AK or signature is invalid, OBS returns **403 Forbidden** and the error code is **AccessDenied**.
2. If the requested bucket is not found, OBS returns **404 Not Found** and the error code is **NoSuchBucket**.
3. If you are neither the initiator of a multipart upload nor the bucket owner, OBS returns **403 Forbidden**.
4. If the operation is successful, OBS returns **204 No Content** to the user.

Other errors are included in [Table 6-2](#).

Sample Request

```
DELETE /object02?uploadId=00000163D46218698DF407362295674C HTTP/1.1  
User-Agent: curl/7.29.0  
Host: examplebucket.obs.region.myhuaweicloud.com  
Accept: */*  
Date: WED, 01 Jul 2015 05:28:27 GMT  
Authorization: OBS H4lPJX0TQHTHEBQQCEC:QmM2d1DBXZ/b8drqtEv1QJHPbM0=
```

Sample Response

```
HTTP/1.1 204 No Content  
Server: OBS  
x-obs-request-id: 8DF400000163D463E02A07EC2295674C  
x-obs-id-2: 32AAAQAAEAABAAAQAAEAABAAAQAAEAABCTp5YDlzn0UgqG3laRfkHLGyz7RpR9ON  
Date: WED, 01 Jul 2015 05:28:27 GMT
```

5.6 Server-Side Encryption

5.6.1 Server-Side Encryption Overview

You can configure server-side encryption for objects, so that they will be encrypted or decrypted when you upload them to or download them from a bucket.

The encryption and decryption happen on the server side.

The encryption methods provided include SSE-KMS, SSE-OBS, and SSE-C. All of them use the AES-256 algorithm.

With SSE-KMS, OBS uses the keys provided by KMS for server-side encryption. You can create custom keys on KMS to encrypt your objects.

With SSE-OBS, OBS uses the keys provided by itself for server-side encryption. Unlike SSE-KMS where KMS manages keys, in SSE-OBS, OBS manages keys.

With SSE-C, OBS uses the keys and MD5 values provided by customers for server-side encryption.

When server-side encryption is used, the returned ETag value is not the object's MD5 value. OBS will verify the object's MD5 value as long as the upload request includes the **Content-MD5** header, no matter whether server-side encryption is used or not.

5.6.2 SSE-KMS

Functions

With SSE-KMS, OBS uses the keys provided by Key Management Service (KMS) for server-side encryption. You can create custom keys on KMS to encrypt your objects. If you do not specify a key, OBS creates a default key the first time you upload an object to the bucket. Custom keys or default keys are used to encrypt and decrypt data encryption keys (DEKs).

NOTE

When a custom KMS key in a non-default IAM project is used to encrypt objects, only the key owner can upload or download the encrypted objects.

When the default KMS key in a region is used to encrypt an object, this default key belongs to the object owner. Only the key owner (also the object owner) can upload or download this object.

Newly Added Headers

Two headers are added for SSE-KMS. You can configure the headers listed in [Table 5-133](#) to enable SSE-KMS.

You can also configure the default encryption for a bucket to encrypt objects you upload to the bucket. After default encryption is enabled for a bucket, any object upload request without encryption header included will inherit the bucket's encryption settings. For details, see [Configuring Bucket Encryption](#).

Table 5-133 Header fields used in SSE-KMS mode

Element	Description
x-obs-server-side-encryption	Indicates that SSE-KMS is used for encrypting objects. Type: string Example: x-obs-server-side-encryption:kms

Element	Description
x-obs-server-side-encryption-kms-key-id	<p>Indicates the master key for encrypting the object when SSE-KMS is used. If this header is not provided, the default master key will be used. If there is no such a default master key, OBS will create one and use it by default.</p> <p>Type: string</p> <p>The following two formats are supported:</p> <ul style="list-style-type: none">- <i>regionID:domainID:key key_id</i>- <i>key_id</i> <p><i>regionID</i> indicates the ID of the region where the key belongs. <i>domainID</i> indicates the ID of the tenant where the key belongs. <i>key_id</i> indicates the ID of the key created in DEW.</p> <p>Examples:</p> <ul style="list-style-type: none">- x-obs-server-side-encryption-kms-key-id:region:domainiddomainiddomainiddoma0001:key/4f1cd4de-ab64-4807-920a-47fc42e7f0d0- x-obs-server-side-encryption-kms-key-id:4f1cd4de-ab64-4807-920a-47fc42e7f0d0

APIs Where SSE-KMS Headers Apply

You can configure headers about SSE-KMS in the APIs below:

- [Uploading Objects - PUT](#)
- [Uploading Objects - POST](#): **x-obs-server-side-encryption** and **x-obs-server-side-encryption-kms-key-id** need to be placed in the form instead of headers.
- [Copying Objects](#) (The newly added headers apply to object copies.)
- [Initiating a Multipart Upload](#)

You can configure a bucket policy to restrict the request headers for a specified bucket. For example, if you require that object upload requests do not contain header **x-obs-server-side-encryption:"kms"**, you can use the following bucket policy:

```
{
  "Statement": [
    {
      "Sid": "DenyUnEncryptedObjectUploads",
      "Effect": "Deny",
      "Principal": "*",
      "Action": "PutObject",
      "Resource": "YourBucket/*",
```

```
    "Condition": {
      "StringNotEquals": {
        "x-obs-server-side-encryption": "kms"
      }
    }
  ]
}
```

Sample Request: Using the Default Key to Encrypt an Object

```
PUT /encryp1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 06 Jun 2018 09:08:21 GMT
Authorization: OBS H4IPJX0TQTHTEBQQCEC:f3/7eS6MFbW3JO4+7I5AtyAQENU=
x-obs-server-side-encryption:kms
Content-Length: 5242
Expect: 100-continue

[5242 Byte object contents]
```

Sample Response: Using the Default Key to Encrypt an Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D45AA81D038B6AE4C482
ETag: "d8bffdfbab5345d91ac05141789d2477"
x-obs-server-side-encryption: kms
x-obs-server-side-encryption-kms-key-id: region:783fc6652cf246c096ea836694f71855:key/522d6070-5ad3-4765-9737-9312ddc72cdb
x-obs-id-2: 32AAAUJAIABAAQAEEAABAAQAEEAABCTv7cHmAnGfBAGXUHeibUsiETTNqlCqC
Date: Wed, 06 Jun 2018 09:08:21 GMT
Content-Length: 0
```

Sample Request: Using a Custom Key to Encrypt an Object

```
PUT /encryp1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 06 Jun 2018 09:08:50 GMT
Authorization: OBS H4IPJX0TQTHTEBQQCEC:f3/PWjKXYTYGs5lPOctTNEI2QENU=
x-obs-server-side-encryption:kms
x-obs-server-side-encryption-kms-key-id: 522d6070-5ad3-4765-43a7-a7d1-ab21f498482d
Content-Length: 5242
Expect: 100-continue

[5242 Byte object contents]
```

Sample Response: Using a Custom Key to Encrypt an Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D45AA81D038B6AE4C482
ETag: "d8bffdfbab5345d91ac05141789d2477"
x-obs-server-side-encryption: kms
x-obs-server-side-encryption-kms-key-id: region:783fc6652cf246c096ea836694f71855:key/522d6070-5ad3-4765-43a7-a7d1-ab21f498482d
x-obs-id-2: 32AAAUJAIABAdiAEAA09AEAAABCTv7cHmAn12BAG83ibUsiET5eqlCqg
Date: Wed, 06 Jun 2018 09:08:50 GMT
Content-Length: 0
```

Sample Request: Using a Key to Encrypt an Object Copy

```
PUT /destobject HTTP/1.1
User-Agent: curl/7.29.0
```

```
Host: examplebucket.obs.region.myhuaweicloud.com
x-obs-server-side-encryption:kms
x-obs-server-side-encryption-kms-key-id: region:783fc6652cf246c096ea836694f71855:key/522d6070-5ad3-4765-9737-9312ddc72cdb
Accept: /*/*
Date: Wed, 06 Jun 2018 09:10:29 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:SH3uTrElaGWarVI1uTq325kTVCl=
x-obs-copy-source: /bucket/srcobject1
```

Sample Response: Using a Key to Encrypt an Object Copy

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BB78000001648480AF3900CED7F15155
ETag: "d8bffdffbab5345d91ac05141789d2477"
x-obs-server-side-encryption: kms
x-obs-server-side-encryption-kms-key-id: region:783fc6652cf246c096ea836694f71855:key/522d6070-5ad3-4765-9737-9312ddc72cdb
x-obs-id-2: oRAXhgwdaLc9wKVHqTLsmQB7I35D+32AAAUJAIABAAAQAAEAABAAAQAAEAABCS
Date: Wed, 06 Jun 2018 09:10:29 GMT
Content-Length: 0
```

Sample Request: Uploading an Encrypted Object Using a Signed URL

```
PUT /destobject?AccessKeyId=UI3SN1SRUQE14OYBKTZB&Expires=1534152518&x-obs-server-side-encryption=kms&Signature=chvmG7%2FDA%2FDCQmTRJu3xngldJpg%3D HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: /*/*
Date: Wed, 06 Jun 2018 09:10:29 GMT
```

Sample Response: Uploading an Encrypted Object Using a Signed URL

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BB78000001648480AF3900CED7F15155
ETag: "d8bffdffbab5345d91ac05141789d2477"
x-obs-server-side-encryption: kms
x-obs-server-side-encryption-kms-key-id: region:783fc6652cf246c096ea836694f71855:key/522d6070-5ad3-4765-9737-9312ddc72cdb
x-obs-id-2: oRAXhgwdaLc9wKVHqTLsmQB7I35D+32AAAUJAIABAAAQAAEAABAAAQAAEAABCS
Date: Wed, 06 Jun 2018 09:10:29 GMT
Content-Length: 0
```

5.6.3 SSE-OBS

Functions

With SSE-OBS, OBS uses the keys provided by itself for server-side encryption. Unlike SSE-KMS where KMS manages keys, in SSE-OBS, OBS manages keys.

Newly Added Headers

Use the header listed in [Table 5-134](#) to implement SSE-OBS.

You can also configure the default encryption for a bucket to encrypt objects you upload to the bucket. After default encryption is enabled for a bucket, any object upload request without encryption header included will inherit the bucket's encryption settings. For details, see [Configuring Bucket Encryption](#).

Table 5-134 Header used in SSE-OBS

Header	Description
x-obs-server-side-encryption	Indicates that SSE-OBS is used for encrypting objects. Type: string Example: x-obs-server-side-encryption:AES256

APIs Where SSE-OBS Headers Apply

You can configure headers about SSE-OBS in the APIs below:

- [Uploading Objects - PUT](#)
- [Uploading Objects - POST](#) (**x-obs-server-side-encryption** should be put in the form, instead of the header.)
- [Copying Objects](#) (The newly added headers apply to object copies.)
- [Initiating a Multipart Upload](#)

You can configure a bucket policy to restrict the request headers for a specified bucket. For example, if you require that object upload requests do not contain header **x-obs-server-side-encryption:"AES256"**, you can use the following bucket policy:

```
{
  "Statement": [
    {
      "Sid": "DenyUnEncryptedObjectUploads",
      "Effect": "Deny",
      "Principal": "*",
      "Action": "PutObject",
      "Resource": "YourBucket/*",
      "Condition": {
        "StringNotEquals": {
          "x-obs-server-side-encryption": "AES256"
        }
      }
    }
  ]
}
```

Sample Request: Using the Default Key to Encrypt an Object

```
PUT /encryp1 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 06 Jun 2018 09:08:21 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:f3/7eS6MFbW3JO4+715AtyAQENU=
x-obs-server-side-encryption:AES256
Content-Length: 5242
Expect: 100-continue

[5242 Byte object contents]
```

Sample Response: Using the Default Key to Encrypt an Object

```
HTTP/1.1 200 OK
Server: OBS
```

```
x-obs-request-id: 8DF400000163D45AA81D038B6AE4C482
ETag: "d8bffdffbab5345d91ac05141789d2477"
x-obs-server-side-encryption: AES256
x-obs-id-2: 32AAAUJAIABAAAQAAEAABAAAQAAEAABCTv7cHmAnGfBAGXUHeibUsiETTnqLcQc
Date: Wed, 06 Jun 2018 09:08:21 GMT
Content-Length: 0
```

Sample Request: Copying an Object as an Encrypted Object

```
PUT /destobject HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
x-obs-server-side-encryption:AES256
Accept: */*
Date: Wed, 06 Jun 2018 09:10:29 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:SH3uTrElaGWarV11uTq325kTVCl=
x-obs-copy-source: /bucket/srcobject1
```

Sample Response: Copying an Object as an Encrypted Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BB78000001648480AF3900CED7F15155
ETag: "d8bffdffbab5345d91ac05141789d2477"
x-obs-server-side-encryption: AES256
x-obs-id-2: oRAXhgwdalC9wKVHqTlSmQB7I35D+32AAAUJAIABAAAQAAEAABAAAQAAEAABCS
Date: Wed, 06 Jun 2018 09:10:29 GMT
Content-Length: 0
```

Sample Request: Uploading an Encrypted Object Using a Signed URL

```
PUT /destobject?AccessKeyId=UI3SN1SRUQE14OYBKTZB&Expires=1534152518&x-obs-server-side-encryption=AES256&Signature=chvmG7%2FDA%2FDCQmTRJu3xngldJpg%3D HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 06 Jun 2018 09:10:29 GMT
```

Sample Response: Uploading an Encrypted Object Using a Signed URL

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BB78000001648480AF3900CED7F15155
ETag: "d8bffdffbab5345d91ac05141789d2477"
x-obs-server-side-encryption: AES256
x-obs-id-2: oRAXhgwdalC9wKVHqTlSmQB7I35D+32AAAUJAIABAAAQAAEAABAAAQAAEAABCS
Date: Wed, 06 Jun 2018 09:10:29 GMT
Content-Length: 0
```

5.6.4 SSE-C

Functions

With SSE-C used, OBS uses the keys and MD5 values provided by customers for server-side encryption.

Newly Added Headers

OBS does not store your encryption keys. If you lost them, you lost the objects. Six headers are added to support SSE-C.

The following table lists headers that are required when you use SSE-C to encrypt objects.

Table 5-135 Header fields used for encrypting objects in SSE-C mode

Element	Description
x-obs-server-side-encryption-customer-algorithm	Indicates the encryption algorithm for the object when SSE-C is used. Example: x-obs-server-side-encryption-customer-algorithm: AES256
x-obs-server-side-encryption-customer-key	Indicates the key for encrypting objects when SSE-C is used. Its value is a Base64-encoded 256-bit key. Example: x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=
x-obs-server-side-encryption-customer-key-MD5	Indicates the MD5 value of the key for encrypting objects when SSE-C is used. Its value is a Base64-encoded MD5 hash. The MD5 value is used to check whether any error occurs during the transmission of the key. Example: x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==

APIs where the newly added headers apply:

- [Uploading an Object - PUT](#)
- [Uploading an Object - POST](#)
- [Copying an Object](#): The newly added headers apply to the object copy.
- [Querying Object Metadata](#)
- [Downloading an Object](#)
- [Initiating a Multipart Upload](#)
- [Uploading Parts](#)
- [Copying Parts](#): The newly added headers apply to target parts.

The following table lists three headers that are added for CopyObject and UploadPart-Copy operations to support source objects encrypted using SSE-C.

Table 5-136 Header fields for source objects encrypted by the SSE-C

Element	Description
x-obs-copy-source-server-side-encryption-customer-algorithm	Indicates the algorithm for decrypting the source object when SSE-C is used. Example: x-obs-server-side-encryption-customer-algorithm: AES256
x-obs-copy-source-server-side-encryption-customer-key	Indicates the key for decrypting the source object when SSE-C is used. Example: x-obs-copy-source-server-side-encryption-customer-algorithm: K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=
x-obs-copy-source-server-side-encryption-customer-key-MD5	Indicates the MD5 value of the key for decrypting the source object when SSE-C is used. The MD5 value is used to check whether any error occurs during the transmission of the key. Example: x-obs-copy-source-server-side-encryption-customer-key:4XvB3tbNTN+tIEVa0/fGaQ==

Sample Request: Uploading an Object Encrypted with SSE-C

```
PUT /encryp2 HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 06 Jun 2018 09:12:00 GMT
Authorization: OBS H4lPJX0TQTHHEBQQCEC:mZSfafoM+llApk0HG0Thlqeccu0=
x-obs-server-side-encryption-customer-algorithm:AES256
x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=
x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==
Content-Length: 5242

[5242 Byte object contents]
```

Sample Response: Uploading an Object Encrypted with SSE-C

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 8DF400000163D45E0017055619BD02B8
ETag: "0f91242c7f3d86f98ae572a686d0696e"
x-obs-server-side-encryption-customer-algorithm: AES256
x-obs-server-side-encryption-customer-key-MD5: 4XvB3tbNTN+tIEVa0/fGaQ==
x-obs-id-2: 32AAAUgAIAABAAAQAAEAABAAAQAAEAABCSAJ8bTNJV0X+Ote1PtuWecqyMh6zBJ
Date: Wed, 06 Jun 2018 09:12:00 GMT
Content-Length: 0
```

Sample Request: Copying an SSE-C Encrypted Object and Saving It as a KMS Encrypted Object

```
PUT /kmsobject HTTP/1.1
User-Agent: curl/7.29.0
```

```
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
Date: Wed, 06 Jun 2018 09:20:10 GMT
Authorization: OBS H4IPJX0TQTHTHEBQQCEC:mZSfafoM+llApk0HG0Thlqeccu0=
x-obs-copy-source-server-side-encryption-customer-algorithm:AES256
x-obs-copy-source-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=
x-obs-copy-source-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==
x-obs-server-side-encryption: kms
x-obs-copy-source: /examplebucket/encryp2
Content-Length: 5242

[5242 Byte object contents]
```

Sample Response: Copying an SSE-C Encrypted Object and Saving It as a KMS Encrypted Object

```
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: BB7800000164848E0FC70528B9D92C41
ETag: "1072e1b96b47d7ec859710068aa70d57"
x-obs-server-side-encryption: kms
x-obs-server-side-encryption-kms-key-id: region:783fc6652cf246c096ea836694f71855:key/522d6070-5ad3-4765-9737-9312ddc72cdb
x-obs-id-2: 32AAAUJAIABAAAQAAEAABAAAQAAEAABCTkkRzQXs9ECzZcavVRncBqqYNkoAEsr
Date: Wed, 06 Jun 2018 09:20:10 GMT
Content-Length: 0
```

Sample Request: Uploading an SSE-C Encrypted Object Using a Signed URL

```
PUT /encrypobject?
AccessKeyId=H4IPJX0TQTHTHEBQQCEC&Expires=1532688887&Signature=EQmDuOhaLUrurzRNZxwS72CXeX
M%3D HTTP/1.1
User-Agent: curl/7.29.0
Host: examplebucket.obs.region.myhuaweicloud.com
Accept: */*
x-obs-server-side-encryption-customer-algorithm: AES256
x-obs-server-side-encryption-customer-key:K7QkYpBkM5+hca27fsNkUnNVaobncnLht/rCB2o/9Cw=
x-obs-server-side-encryption-customer-key-MD5:4XvB3tbNTN+tIEVa0/fGaQ==
Content-Length: 5242
Expect: 100-continue

[5242 Byte object contents]
```

Sample Response: Uploading an SSE-C Encrypted Object Using a Signed URL

```
HTTP/1.1 100 Continue
HTTP/1.1 200 OK
Server: OBS
x-obs-request-id: 804F00000164DB5E5B7FB908D3BA8E00
ETag: "1072e1b96b47d7ec859710068aa70d57"
x-obs-server-side-encryption-customer-algorithm: AES256
x-obs-server-side-encryption-customer-key-MD5: 4XvB3tbNTN+tIEVa0/fGaQ==
x-obs-id-2: 32AAAUJAIABAAAQAAEAABAAAQAAEAABCTlpxlLjhVK/heKOWIP8Wn2IWmQoerfw
Content-Length: 0
```

5.6.5 API Operations Related to Server-Side Encryption

This section lists the operations related to server-side encryption and describes HTTP protocols applicable to the operations.

The following table describes the requirements on the transmission protocols used by the API operation related to server-side encryption.

Table 5-137 Requirements for the transmission protocol used by the operations related to the SSE-C

Operation	Transfer Protocol
PutObject	HTTPS
PostObject	HTTPS
InitiateMultipartUpload	HTTPS
HeadObject	HTTPS
GetObject	HTTPS
UploadPart	HTTPS
CompleteMultipartUpload	HTTP or HTTPS

Table 5-138 Requirements for the transfer protocol used by the operations related to the SSE-KMS

Operation	Transfer Protocol
PutObject	HTTPS
PostObject	HTTPS
InitiateMultipartUpload	HTTPS
HeadObject	HTTP or HTTPS
GetObject	HTTPS
UploadPart	HTTPS
CompleteMultipartUpload	HTTP or HTTPS

Table 5-139 Requirements for transfer protocol used by the CopyObject operation

Source Object	Target Object	Transfer Protocol
Non-encrypted object	Object encrypted using SSE-KMS	HTTPS
Object encrypted using SSE-KMS	Object encrypted using SSE-KMS	HTTPS
Object encrypted using SSE-OBS	Object encrypted using SSE-KMS	HTTPS
Object encrypted using SSE-C	Object encrypted using SSE-KMS	HTTPS

Source Object	Target Object	Transfer Protocol
Non-encrypted object	Object encrypted using SSE-C	HTTPS
Object encrypted using SSE-KMS	Object encrypted using SSE-C	HTTPS
Object encrypted using SSE-OBS	Object encrypted using SSE-C	HTTPS
Object encrypted using SSE-C	Object encrypted using SSE-C	HTTPS
Non-encrypted object	Non-encrypted object	HTTP or HTTPS
Object encrypted using SSE-KMS	Non-encrypted object	HTTP or HTTPS
Object encrypted using SSE-OBS	Non-encrypted object	HTTP or HTTPS
Object encrypted using SSE-C	Non-encrypted object	HTTP or HTTPS
Non-encrypted object	Object encrypted using SSE-OBS	HTTPS
Object encrypted using SSE-KMS	Object encrypted using SSE-OBS	HTTPS
Object encrypted using SSE-OBS	Object encrypted using SSE-OBS	HTTPS
Object encrypted using SSE-C	Object encrypted using SSE-OBS	HTTPS

Table 5-140 Requirements for the transfer protocol used by the UploadPart-Copy operation

Source Object	Target Part	Transfer Protocol
Non-encrypted object	Part encrypted using SSE-KMS	HTTP or HTTPS
Object encrypted using SSE-KMS	Part encrypted using SSE-KMS	HTTP or HTTPS
Object encrypted using SSE-OBS	Part encrypted using SSE-KMS	HTTP or HTTPS
Object encrypted using SSE-C	Part encrypted using SSE-KMS	HTTP or HTTPS

Source Object	Target Part	Transfer Protocol
Non-encrypted object	Part encrypted using SSE-C	HTTPS
Object encrypted using SSE-KMS	Part encrypted using SSE-C	HTTPS
Object encrypted using SSE-OBS	Part encrypted using SSE-C	HTTPS
Object encrypted using SSE-C	Part encrypted using SSE-C	HTTPS
Non-encrypted object	Non-encrypted part	HTTP or HTTPS
Object encrypted using SSE-KMS	Non-encrypted part	HTTP or HTTPS
Object encrypted using SSE-OBS	Non-encrypted part	HTTP or HTTPS
Object encrypted using SSE-C	Non-encrypted part	HTTP or HTTPS
Non-encrypted object	Part encrypted using SSE-OBS	HTTP or HTTPS
Object encrypted using SSE-KMS	Part encrypted using SSE-OBS	HTTP or HTTPS
Object encrypted using SSE-OBS	Part encrypted using SSE-OBS	HTTP or HTTPS
Object encrypted using SSE-C	Part encrypted using SSE-OBS	HTTP or HTTPS

6 Error Codes

If an API call fails, no result data is returned. You can locate the cause of the error according to the error code of each API. If an API call fails, HTTP status code *3xx*, *4xx* or *5xx* is returned. The response body contains the specific error code and information. If you are unable to locate the cause of an error, contact the Huawei Cloud customer service and provide the error code to help you address the problem as soon as possible.

Error Response Syntax

When an error occurs, the response header information contains:

- Content-Type: application/xml
- HTTP error status code *3xx*, *4xx*, or *5xx*

The response body also contains information about the error. The following is an error response example that shows common elements in the Representational State Transfer (REST) error response body.

```
<?xml version="1.0" encoding="UTF-8"?>
<Error>
<Code>NoSuchKey</Code>
<Message>The resource you requested does not exist</Message>
<Resource>/example-bucket/object</Resource>
<RequestId>001B21A61C6C0000013402C4616D5285</RequestId>
<HostId>RkRCRDJENDc5MzdGQkQ4OUY3MTI4NTQ3NDk2Mjg0M0FB
QUFBQUFBYmJiYmJiYmJD</HostId>
</Error>
```

[Table 6-1](#) describes the meaning of each element.

Table 6-1 Error response elements

Element	Description
Error	Root element that describes the error in an XML response body
Code	HTTP return code that corresponds to the error in the XML response body. For details about error codes, see Table 6-2 .

Element	Description
Message	Details the error in the XML error response body. For details about error messages, see Table 6-2 .
RequestId	ID of the request whose error response is returned. The ID is used for locating the error.
HostId	ID of the server that returns an error response
Resource	Bucket or object related to an error.

 **NOTE**

Some error responses contain more detailed information. It is recommended that all error information be logged for easier rectification of errors.

Description

If OBS encounters an error when processing a request, a response containing the error code and description is returned. [Table 6-2](#) describes the error codes of OBS.

Table 6-2 Error codes

Status Code	Error Code	Error Message	Solution
301 Moved Permanently	PermanentRedirect	The requested bucket can be accessed only through the specified address. Send subsequent requests to the address.	Send the request to the returned redirection address.
301 Moved Permanently	WebsiteRedirect	The website request lacks bucketName .	Put the bucket name in the request and try again.
307 Moved Temporarily	TemporaryRedirect	Temporary redirection. If the DNS is updated, the request is redirected to the bucket.	The system automatically redirects the request or sends the request to the redirection address.
400 Bad Request	BadDigest	The specified value of Content-MD5 does not match the value received by OBS.	Check whether the MD5 value carried in the header is the same as that calculated by the message body.
400 Bad Request	BadDomainName	The domain name is invalid.	Use a valid domain name.

Status Code	Error Code	Error Message	Solution
400 Bad Request	BadRequest	Invalid request parameters.	Modify the parameters according to the error details in the message body.
400 Bad Request	CustomDomainAlreadyExist	The configured domain already exists.	It has been configured and does not need to be configured again.
400 Bad Request	CustomDomainNotExist	Delete the domain that does not exist.	It is not configured or has been deleted. You do not need to delete it.
400 Bad Request	EntityTooLarge	<ul style="list-style-type: none"> The size of the file uploaded using the PUT, POST, or Append methods of SDKs or APIs exceeds 5 GB. The part uploaded is larger than 5 GB in size. The size of the bucket configurations exceeds 20 KB. The file size exceeds the upper limit defined in the policy of the POST form. The size of the file uploaded using the multipart upload of SDKs or APIs or the resumable upload of SDKs exceeds 48.8 TB. 	Modify the conditions specified in the upload policy or reduce the object size.

Status Code	Error Code	Error Message	Solution
400 Bad Request	EntityTooSmall	<ul style="list-style-type: none"> The part uploaded, except the last one, is smaller than 100 KB. The file size is smaller than the lower limit defined in the policy of the POST form. 	Modify the conditions specified in the upload policy or increase the object size.
400 Bad Request	IllegalLocationConstraintException	A request without Location is sent for creating a bucket in a non-default region.	Send the bucket creation request to the default region, or send the request with the Location of the non-default region.
400 Bad Request	IncompleteBody	No complete request body is received due to network or other problems.	Upload the object again.
400 Bad Request	IncorrectNumberOfFilesInPostRequest	Each POST request must contain one file to be uploaded.	Carry a file to be uploaded.
400 Bad Request	InvalidArgument	Invalid parameter.	Modify the parameter according to the error details in the message body.
400 Bad Request	InvalidBucket	The bucket to be accessed does not exist.	Change the bucket name.
400 Bad Request	InvalidBucketName	The bucket name specified in the request is invalid, which may have exceeded the maximum length, or contain special characters that are not allowed.	Change the bucket name.
400 Bad Request	InvalidContentLength	Invalid Content-Length value.	Check the encapsulation header or submit a service ticket for technical support.

Status Code	Error Code	Error Message	Solution
400 Bad Request	InvalidDefaultStorageClass	The default storage class is invalid.	Check which storage classes can be used.
400 Bad Request	InvalidEncryptionAlgorithmError	Incorrect encryption algorithm. The object cannot be decrypted due to incorrect encryption header carried when downloading the SSE-C encrypted object.	Carry the correct encryption header when downloading the object.
400 Bad Request	InvalidLocationConstraint	The specified Location in the bucket creation request is invalid or does not exist.	Correct the Location in the bucket creation request.
400 Bad Request	InvalidPart	One or more specified parts are not found. The parts may not be uploaded or the specified entity tags (ETags) do not match the parts' ETags.	Merge the parts correctly according to the ETags.
400 Bad Request	InvalidPartOrder	Parts are not listed in ascending order by part number.	Sort the parts in ascending order and merge them again.
400 Bad Request	InvalidPolicyDocument	The content of the form does not meet the conditions specified in the policy document.	Modify the policy in the constructed form according to the error details in the message body and try again.
400 Bad Request	InvalidRedirectLocation	Invalid redirect location.	Specifies the correct IP address.
400 Bad Request	InvalidRequest	Invalid request.	Modify the parameter according to the error details in the message body.
400 Bad Request	InvalidRequestBody	The request body is invalid. The request requires a message body but no message body is uploaded.	Upload the message body in the correct format.

Status Code	Error Code	Error Message	Solution
400 Bad Request	InvalidTargetBucketForLogging	The delivery group has no ACL permission for the target bucket.	Configure the target bucket ACL and try again.
400 Bad Request	KeyTooLongError	The provided key is too long.	Use a shorter key.
400 Bad Request	KMS.DisabledException	The customer master key (CMK) is disabled in SSE-KMS mode.	Change a key and try again, or submit a service ticket for technical support.
400 Bad Request	KMS.NotFoundException	The customer master key (CMK) does not exist in SSE-KMS mode.	Retry with the correct CMK.
400 Bad Request	MalformedACLError	The provided XML file is in an incorrect format or does not meet format requirements.	Use the correct XML format to retry.
400 Bad Request	MalformedError	The XML format in the request is incorrect.	Use the correct XML format to retry.
400 Bad Request	MalformedLoggingStatus	The XML format of Logging is incorrect.	Use the correct XML format to retry.
400 Bad Request	MalformedPolicy	The bucket policy does not pass.	Modify the bucket policy according to the error details returned in the message body.
400 Bad Request	MalformedQuotaError	The Quota XML format is incorrect.	Use the correct XML format to retry.
400 Bad Request	MalformedXML	An XML file of a configuration item is in incorrect format.	Use the correct XML format to retry.
400 Bad Request	MaxMessageLengthExceeded	Copying an object does not require a message body in the request.	Remove the message body and retry.
400 Bad Request	MetadataTooLarge	The size of the metadata header has exceeded the upper limit.	Reduce the size of the metadata header.

Status Code	Error Code	Error Message	Solution
400 Bad Request	MissingRegion	No region contained in the request and no default region defined in the system.	Carry the region information in the request.
400 Bad Request	MissingRequestBodyError	This error code is returned after you send an empty XML file.	Provide the correct XML file.
400 Bad Request	MissingRequiredHeader	Required headers are missing in the request.	Provide required headers.
400 Bad Request	MissingSecurityHeader	A required header is not provided.	Provide required headers.
400 Bad Request	MultipleContentLengths	There are multiple Content-Length headers.	Check the encapsulation header or submit a service ticket for technical support.
400 Bad Request	TooManyBuckets	You have attempted to create more buckets than allowed.	Delete some buckets and try again.
400 Bad Request	TooManyCustomDomains	Too many user accounts are configured.	Delete some user accounts and try again.
400 Bad Request	TooManyWrongSignatures	The request is rejected due to high-frequency errors.	Replace the Access Key and try again.
400 Bad Request	UnexpectedContent	The request requires a message body which is not carried by the client, or the request does not require a message body but the client carries the message body.	Try again according to the instruction.
400 Bad Request	UserKeyMustBeSpecified	This operation is available only to specific users.	Submit a service ticket for technical support.

Status Code	Error Code	Error Message	Solution
400 Bad Request	ContentSHA256Mismatch	The object's SHA-256 value calculated by the client is different from that calculated by the server.	Check whether the SHA-256 value calculated by the client is correct.
403 Forbidden	AccessDenied	Access denied, because the request does not carry a date header or the header format is incorrect.	Provide a correct date header in the request.
403 Forbidden	AccessDenied	The object you specified is immutable and cannot be deleted.	Wait until the WORM retention expires and then modify or delete the object.
403 Forbidden	AccessForbidden	Insufficient permission. No CORS configuration exists for the bucket or the CORS rule does not match.	Modify the CORS configuration of the bucket or send the matched OPTIONS request based on the CORS configuration of the bucket.
403 Forbidden	AllAccessDisabled	You have no permission to perform the operation. The bucket name is forbidden.	Change the bucket name.
403 Forbidden	DeregisterUser	The user has been deregistered.	Top up or re-register.
403 Forbidden	InArrearOrInsufficientBalance	The subscriber owes fees or the account balance is insufficient, and the subscriber does not have the permission to perform an operation.	Top up.
403 Forbidden	InsufficientStorageSpace	Insufficient storage space.	If the quota is exceeded, increase quota or delete some objects.
403 Forbidden	InvalidAccessKeyId	The access key ID provided by the customer does not exist in the system.	Provide correct access key ID.

Status Code	Error Code	Error Message	Solution
403 Forbidden	InvalidObjectState	You need to restore Archive objects before downloading them.	Restore the object first.
403 Forbidden	NotSignedUp	Your account has not been registered with the system. Only a registered account can be used.	Register OBS.
403 Forbidden	RequestTimeTooSkewed	There was a large time offset between the OBS server time and the time when the client initiated a request. For security purposes, OBS verifies the time offset between the client and server. If the offset is longer than 15 minutes, the OBS server will reject your requests and this error message is reported.	Check whether there is a large time offset between the client time and server time. If there is, adjust the client time based on your local time (UTC) and try again.
403 Forbidden	SignatureDoesNotMatch	The provided signature does not match the signature calculated by OBS.	Check your secret access key and signature algorithm. For details, see Why Don't the Signatures Match?
403 Forbidden	VirtualHostDomainRequired	Virtual hosting access domain name is not used.	Use the virtual hosting access domain name. For details, see Constructing a Request .
403 Forbidden	Unauthorized	The user has not been authenticated in real name.	Authenticate the user's real name and try again.
404 Not Found	NoSuchBucket	The specified bucket does not exist.	Create a bucket and perform the operation again.
404 Not Found	NoSuchBucketPolicy	No bucket policy exists.	Configure a bucket policy.

Status Code	Error Code	Error Message	Solution
404 Not Found	NoSuchCORS Configuration	No CORS configuration exists.	Configure CORS first.
404 Not Found	NoSuchCustomDomain	The requested user account does not exist.	Set a user account first.
404 Not Found	NoSuchKey	The specified key does not exist.	Upload the object first.
404 Not Found	NoSuchLifecycleConfiguration	The requested lifecycle rule does not exist.	Configure a lifecycle rule first.
404 Not Found	NoSuchUpload	The specified multipart upload does not exist. The upload ID does not exist or the multipart upload has been terminated or completed.	Use the existing part or reinitialize the part.
404 Not Found	NoSuchVersion	The specified version ID does not match any existing version.	Use a correct version ID.
404 Not Found	NoSuchWebsiteConfiguration	The requested website does not exist.	Configure the website first.
405 Method Not Allowed	MethodNotAllowed	The specified method is not allowed against the requested resource. The message "Specified method is not supported." is returned.	The method is not allowed.
405 Method Not Allowed	FsNotSupport	POSIX buckets do not support this API.	The method is not allowed.
408 Request Timeout	RequestTimeout	The socket connection to the server has no read or write operations within the timeout period.	Check the network and try again, or submit a service ticket for technical support.

Status Code	Error Code	Error Message	Solution
409 Conflict	BucketAlreadyExists	The requested bucket name already exists. The bucket namespace is shared by all users of OBS. Select another name and retry.	Change the bucket name.
409 Conflict	BucketAlreadyOwnedByYou	Your previous request for creating the namesake bucket succeeded and you already own it.	No more buckets need to be created.
409 Conflict	BucketNotEmpty	The bucket that you tried to delete is not empty.	Delete the objects in the bucket and then delete the bucket.
409 Conflict	InvalidBucketState	Invalid bucket status. After cross-region replication is configured, bucket versioning cannot be disabled.	Enable bucket versioning or cancel cross-region replication.
409 Conflict	OperationAborted	A conflicting operation is being performed on this resource. Retry later.	Try again later.
409 Conflict	ServiceNotSupported	The request method is not supported by the server.	Submit a service ticket for technical support.
409 ObjectNotAppendable	ObjectNotAppendable	The object is not appendable.	Check the bucket type. Parallel file systems do not support append upload. Check the object type. Archive and Deep Archive objects are not appendable.
411 Length Required	MissingContentLength	The HTTP header Content-Length is not provided.	Provide the Content-Length header.
412 Precondition Failed	PreconditionFailed	At least one of the specified preconditions is not met.	Modify according to the condition prompt in the returned message body.

Status Code	Error Code	Error Message	Solution
414 URI Too Long	Request-URI Too Large	The URI used in the request was too long.	Shorten the URI length.
416 Client Requested Range Not Satisfiable	InvalidRange	The requested range cannot be obtained.	Retry with the correct range.
500 Internal Server Error	InternalServerError	An internal error occurs. Retry later.	Submit a service ticket for technical support.
501 Not Implemented	ServiceNotImplemented	The request method is not implemented by the server.	Submit a service ticket for technical support.
503 Service Unavailable	ServiceUnavailable	The server is overloaded or has internal errors.	Try again later or submit a service ticket for technical support.
503 Service Unavailable	SlowDown	Too frequent requests. Reduce your request frequency.	Too frequent requests. Reduce your request frequency.

Table 6-3 OEF error codes

Status Code	Error Code	Error Message	Solution
500 Internal Server Error	SYS.0001	Internal service error.	Submit a service ticket for technical support.
404 Not Found	SYS.0003	Unsupported API.	Use another API.
401 Unauthorized	SYS.0004	Unauthenticated request.	Submit a service ticket for technical support.
403 Forbidden	SYS.0005	No access permission.	Submit a service ticket for technical support.
400 Bad Request	SYS.0006	Incorrect request format.	Check the request format.
400 Bad Request	SYS.0007	Invalid request for range download.	Submit a service ticket for technical support.

Status Code	Error Code	Error Message	Solution
500 Internal Server Error	SYS.0008	Token expired.	Use a valid token.
431 Request Header Fields Too Large	SYS.0009	The number of headers in the HTTP request exceeds the upper limit.	Reduce the number of headers in the HTTP request.
400 Bad Request	SYS.0010	Invalid request parameters.	Check the request parameters.
429 Too Many Requests	SYS.0011	The number of requests has exceeded the upper limit.	Reduce the number of requests.
400 Bad Request	SYS.0012	The request body is oversized.	Reduce the request body size.
403 Forbidden	SYS.0013	Token update is required due to permission changes.	Update the token.
404 Not Found	SYS.0014	The bucket does not exist.	Try with another bucket name.
404 Not Found	SYS.0015	The object does not exist.	Try with another object name.
500 Internal Server Error	SYS.0016	OBS access error.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0018	Internal request error. Possible causes: incorrect request format or network disconnection.	Check the request format and network connectivity.
500 Internal Server Error	SYS.0019	Failed to access the bucket policy.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0020	Failed to access the background task management service.	Submit a service ticket for technical support.
403 Forbidden	SYS.0021	Restricted account.	Top up your account.
403 Forbidden	SYS.0022	The account is frozen.	Top up or register a new account.
400 Bad Request	SYS.0023	Incorrect region.	Try with another region name.

Status Code	Error Code	Error Message	Solution
500 Internal Server Error	SYS.0024	Failed to access an authorized service.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0025	Incorrect response content.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0026	Incorrect read response content.	Submit a service ticket for technical support.
400 Bad Request	SYS.0027	The agency does not have any permissions.	Submit a service ticket for technical support.
400 Bad Request	SYS.0028	The agency does not exist.	Try with another agency.
400 Bad Request	SYS.0029	Invalid OBS region domain name.	Try with another OBS region domain name.
400 Bad Request	SYS.0030	OBS region domain name is not matched.	Try with another OBS region domain name.
500 Internal Server Error	SYS.0031	Failed to authorize OBS to automatically create an agency.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0032	Failed to authorize OBS to automatically modify an agency.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0033	Failed to grant OBS to automatically create custom permissions.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0034	Failed to grant OBS to automatically query custom permissions.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0035	Failed to grant OBS to automatically update custom permissions.	Submit a service ticket for technical support.
400 Bad Request	SYS.0036	Invalid project ID.	Try with another project ID.
400 Bad Request	SYS.0037	Insufficient permissions granted to the agency.	Submit a service ticket for technical support.
400 Bad Request	SYS.0038	Multi-range download is not supported.	Submit a service ticket for technical support.

Status Code	Error Code	Error Message	Solution
500 Internal Server Error	SYS.0039	Invalid account ID.	Enter the correct tenant ID.
500 Internal Server Error	SYS.0040	An error occurred when initializing the SDK client.	Submit a service ticket for technical support.
400 Bad Request	SYS.0041	Failed to replace the magic parameter.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0042	Server processing times out.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0043	Failed to deserialize the JSON character string.	Submit a service ticket for technical support.
500 Internal Server Error	SYS.0044	An error occurred when obtaining the internal cache status.	Submit a service ticket for technical support.

7 Permissions and Supported Actions

7.1 Introduction

This section describes fine-grained permissions management for your OBS. If your Huawei Cloud account does not require individual IAM users, skip this section.

By default, new IAM users do not have any permissions assigned. You need to add a user to one or more groups, and attach permissions policies or roles to these groups. Users inherit permissions from the groups to which they are added and can perform specified operations on cloud services based on the permissions.

For details about policies and roles related to OBS in IAM, see [Permissions Management](#). For more information about the syntax structure and examples of IAM permissions, see [IAM Permissions](#).

You can grant users permissions by using [roles](#) and [policies](#). Roles are a type of coarse-grained authorization mechanism that defines permissions related to user responsibilities. Policies define API-based permissions for operations on specific resources under certain conditions, allowing for more fine-grained, secure access control of cloud resources.

NOTE

- Policy-based authorization is useful if you want to allow or deny the access to an API.
- Because of the cache, it takes about 10 to 15 minutes for the OBS role to take effect after being granted to users, enterprise projects, and user groups. After an OBS policy is granted, it takes about 5 minutes for the policy to take effect.

An account has all of the permissions required to call all APIs, but IAM users must have the required permissions specifically assigned. The required permissions are determined by the actions supported by the API. Only users with the policies allowing for those actions can call the API successfully. For example, if an IAM user needs to create buckets using an API, the user must have been granted permissions that allow the **obs:bucket:CreateBucket** action.

Supported Actions

There are two kinds of policies: system-defined policies and custom policies. If the permissions preset in the system do not meet your requirements, you can create

custom policies and apply these policies to user groups for refined access control. Operations supported by policies are specific to APIs. The following are common concepts related to policies:

- Permissions: statements in a policy that allow or deny certain operations
- APIs: REST APIs that can be called by a user who has been granted specific permissions
- Actions: specific operations that are allowed or denied in a custom policy
- IAM projects/Enterprise projects: the authorization scope of a custom policy. A custom policy can be applied to IAM projects or enterprise projects or both. Policies that contain actions for both IAM and enterprise projects can be used and applied for both IAM and Enterprise Management. Policies that contain actions only for IAM projects can be used and applied to IAM only. For differences between IAM projects and enterprise projects, see [What Are the Differences Between IAM and Enterprise Management?](#)

 NOTE

The check mark (√) indicates that an action takes effect. The cross mark (x) indicates that an action does not take effect.

OBS supports the following actions in custom policies:

- **Bucket-related actions** include actions supported by all OBS bucket-related APIs, such as the APIs for listing all buckets, creating and deleting buckets, configuring bucket policies, configuring cross-region replication, and configuring bucket logging.
- **Object-related actions** include APIs for uploading, downloading, and deleting objects.

7.2 Bucket Actions

Table 7-1 Bucket actions

Permission	API	Action	IAM Project	Enterprise Project
Listing all buckets	Listing Buckets	obs:bucket:ListAllMyBuckets	Supported	Supported
Creating a bucket	Creating a Bucket	obs:bucket:CreateBucket	Supported	Supported
Listing objects in a bucket	Listing Objects in a Bucket	obs:bucket:ListBucket	Supported	Supported
Listing object versions in a bucket	Listing Objects in a Bucket	obs:bucket:ListBucketVersions	Supported	Supported

Permission	API	Action	IAM Project	Enterprise Project
Determining whether a bucket exists and obtaining the bucket metadata	Obtaining Bucket Metadata	obs:bucket:HeadBucket	Supported	Supported
Obtaining the bucket location	Obtaining Bucket Location	obs:bucket:GetBucketLocation	Supported	Supported
Deleting a bucket	Deleting Buckets	obs:bucket:DeleteBucket	Supported	Supported
Configuring a bucket policy	Configuring a Bucket Policy	obs:bucket:PutBucketPolicy	Supported	Supported
Obtain the bucket policy configurations	Obtaining Bucket Policy Information	obs:bucket:GetBucketPolicy	Supported	Supported
Deleting a bucket policy	Deleting a Bucket Policy	obs:bucket:DeleteBucketPolicy	Supported	Supported
Configuring the bucket ACL	Configuring a Bucket ACL	obs:bucket:PutBucketAcl	Supported	Supported
Obtaining the bucket ACL information	Obtaining Bucket ACL Information	obs:bucket:GetBucketAcl	Supported	Supported
Configuring logging for a bucket	Configuring Logging for a Bucket	obs:bucket:PutBucketLogging	Supported	Supported
Obtaining the logging configurations of a bucket	Obtaining a Bucket Logging Configuration	obs:bucket:GetBucketLogging	Supported	Supported
Configuring or deleting a lifecycle rule	Configuring Bucket Lifecycle Rules Deleting Lifecycle Rules	obs:bucket:PutLifecycleConfiguration	Supported	Supported
Obtaining the lifecycle rule configurations	Obtaining Bucket Lifecycle Configuration	obs:bucket:GetLifecycleConfiguration	Supported	Supported
Configuring versioning for a bucket	Configuring Versioning for a Bucket	obs:bucket:PutBucketVersioning	Supported	Supported

Permission	API	Action	IAM Project	Enterprise Project
Obtaining the versioning configurations of a bucket	Obtaining Bucket Versioning Status	obs:bucket:GetBucketVersioning	Supported	Supported
Configuring storage class for a bucket	Configuring Storage Class for a Bucket	obs:bucket:PutBucketStoragePolicy	Supported	Supported
Obtaining the storage class of a bucket	Obtaining Bucket Storage Class Information	obs:bucket:GetBucketStoragePolicy	Supported	Supported
Configuring cross-region replication for a bucket	Configuring Cross-Region Replication for a Bucket	obs:bucket:PutReplicationConfiguration	Supported	Supported
Obtaining the cross-region replication configuration of a bucket	Obtaining the Cross-Region Replication Configuration of a Bucket	obs:bucket:GetReplicationConfiguration	Supported	Supported
Deleting the cross-region replication configuration of a bucket	Deleting the Cross-Region Replication Configuration of a Bucket	obs:bucket>DeleteReplicationConfiguration	Supported	Supported
Adding tags to a bucket	Configuring Tags for a Bucket	obs:bucket:PutBucketTagging	Supported	Supported
Obtaining bucket tags	Obtaining Bucket Tags	obs:bucket:GetBucketTagging	Supported	Supported
Deleting bucket tags	Deleting Tags	obs:bucket>DeleteBucketTagging	Supported	Supported
Limiting storage capacity for a bucket	Configuring Bucket Storage Quota	obs:bucket:PutBucketQuota	Supported	Supported
Querying the storage capacity limit of a bucket	Querying Bucket Storage Quota	obs:bucket:GetBucketQuota	Supported	Supported
Querying the used capacity of a bucket	Obtaining Storage Information of a Bucket	obs:bucket:GetBucketStorage	Supported	Supported

Permission	API	Action	IAM Project	Enterprise Project
Configuring inventories for a bucket	Configuring Bucket Inventories	obs:bucket:PutBucketInventoryConfiguration	Supported	Supported
Obtaining a specific inventory or listing all inventories of a bucket	Obtaining a Specific Inventory of a Bucket Listing All Inventories of a Bucket	obs:bucket:GetBucketInventoryConfiguration	Supported	Supported
Deleting bucket inventories	Deleting Bucket Inventories	obs:bucket:DeleteBucketInventoryConfiguration	Supported	Supported
Configuring a user-defined domain name for a bucket	Configuring a Custom Domain Name for a Bucket	obs:bucket:PutBucketCustomDomainConfiguration	Supported	Supported
Obtaining the user-defined domain name of a bucket	Obtaining the Custom Domain Name of a Bucket	obs:bucket:GetBucketCustomDomainConfiguration	Supported	Supported
Deleting the user-defined domain name of a bucket	Deleting the Custom Domain Name of a Bucket	obs:bucket:DeleteBucketCustomDomainConfiguration	Supported	Supported
Configuring or deleting encryption for a bucket	Configuring Bucket Encryption Deleting the Encryption Configuration of a Bucket	obs:bucket:PutEncryptionConfiguration	Supported	Supported
Obtaining the encryption configurations of a bucket	Obtaining Bucket Encryption Configuration	obs:bucket:GetEncryptionConfiguration	Supported	Supported
Configuring direct reading for a bucket	Setting the Direct Reading Policy for Archive Objects in a Bucket	obs:bucket:PutDirectColdAccessConfiguration	Supported	Supported

Permission	API	Action	IAM Project	Enterprise Project
Obtaining the direct reading configurations of a bucket	Obtaining the Direct Reading Policy of Archive Objects in a Bucket	obs:bucket:GetDirectColdAccessConfiguration	Supported	Supported
Deleting the direct reading configurations of a bucket	Deleting the Direct Reading Policy of Archive Objects in a Bucket	obs:bucket:DeleteDirectColdAccessConfiguration	Supported	Supported
Configuring static website hosting for a bucket	Configuring Static Website Hosting for a Bucket	obs:bucket:PutBucketWebsite	Supported	Supported
Obtaining the static website hosting configurations of a bucket	Obtaining the Static Website Hosting Configuration of a Bucket	obs:bucket:GetBucketWebsite	Supported	Supported
Deleting the static website hosting configurations of a bucket	Deleting the Static Website Hosting Configuration of a Bucket	obs:bucket:DeleteBucketWebsite	Supported	Supported
Configuring or deleting CORS rules for a bucket	Configuring Bucket CORS Deleting the CORS Configuration of a Bucket	obs:bucket:PutBucketCORS	Supported	Supported
Obtaining the CORS configurations of a bucket	Obtaining the CORS Configuration of a Bucket	obs:bucket:GetBucketCORS	Supported	Supported
Configuring a default WORM policy for a bucket	Configuring a Default WORM Policy for a Bucket	obs:bucket:PutBucketObjectLockConfiguration	Supported	Supported
Obtaining the default WORM policy of a bucket	Obtaining the Default WORM Policy of a Bucket	obs:bucket:GetBucketObjectLockConfiguration	Supported	Supported

Permission	API	Action	IAM Project	Enterprise Project
Listing initiated multipart uploads in a bucket	Listing Initiated Multipart Uploads in a Bucket	obs:bucket:ListBucketMultipartUploads	Supported	Supported

7.3 Object Actions

Table 7-2 Object actions

Permission	API	Action	IAM Project	Enterprise Project
Uploading objects with PUT or POST, copying objects, appending content to objects, initiating a multipart upload, as well as uploading, copying, and assembling parts	Uploading an Object - PUT Uploading an Object - POST Copying an Object Appending an Object Initiating a Multipart Upload Uploading Parts Completing a Multipart Upload	obs:object:PutObject	Supported	Supported
Obtaining the content and metadata of an object	Downloading an Object Querying Object Metadata	obs:object:GetObject	Supported	Supported
Obtaining the content and metadata of a specific object version	Downloading an Object Querying Object Metadata	obs:object:GetObjectVersion	Supported	Supported
Deleting a single object or a batch of objects	Deleting an Object Deleting Objects	obs:object:DeleteObject	Supported	Supported

Permission	API	Action	IAM Project	Enterprise Project
Deleting a single object version or a batch of object versions	Deleting an Object Deleting Objects	obs:object:DeleteObjectVersion	Supported	Supported
Restoring Archive objects	Restoring Archive or Deep Archive Objects	obs:object:RestoreObject	Supported	Supported
Configuring the object ACL	Configuring an Object ACL	obs:object:PutObjectAcl	Supported	Supported
Configuring the ACL for a specific object version	Configuring an Object ACL	obs:object:PutObjectVersionAcl	Supported	Supported
Obtaining the object ACL information	Obtaining Object ACL Configuration	obs:object:GetObjectAcl	Supported	Supported
Obtaining the ACL information of a specific object version	Obtaining Object ACL Configuration	obs:object:GetObjectVersionAcl	Supported	Supported
Modifying object metadata	Modifying Object Metadata	obs:object:ModifyObjectMetadata	Supported	Supported
Listing uploaded parts	Listing Uploaded Parts	obs:object:ListMultipartUploadParts	Supported	Supported
Aborting a multipart upload	Canceling a Multipart Upload Task	obs:object:AbortMultipartUpload	Supported	Supported
Configuring WORM retention for an object	Configuring WORM Retention for an Object	obs:object:PutObjectRetention	Supported	Supported
Obtaining the object-level WORM retention configuration	Querying Object Metadata	obs:object:GetObjectRetention	Supported	Supported

8 Appendixes

8.1 Status Codes

Table 8-1 lists the status codes and prompt message returned by the server to the user.

Table 8-1 Status codes

Status Code	Description
2xx	Indicates that the server has successfully returned the requested data.
4xx	Indicates that the request sent from the client is incorrect, so the server does not create or modify data.
5xx	Indicates that an error occurs on the server, and the user does not know whether the request has been successfully sent.

 **NOTE**

Send API requests using the HTTP/HTTPS format that complies with <https://www.ietf.org/rfc/rfc2616.txt>.

8.2 Obtaining Access Keys (AK/SK)

 **NOTE**

To access OBS using access keys as an IAM user, the programmatic access must be enabled. For details, see [Viewing or Modifying IAM User Information](#).

When you call APIs, you need to use the AK and SK for authentication. To obtain the AK and SK, perform the following steps:

Step 1 Log in to the console.

Step 2 Hover over the username in the upper right corner and choose **My Credentials** from the drop-down list.

Step 3 Choose **Access Keys**.

Step 4 Click **Create Access Key**.

Step 5 Enter an access key description (optional) and click **OK**.

Step 6 Enter the verification code sent to your mobile phone, virtual MFA device, or email, and click **OK**.

 **NOTE**

This step is required only when you have enabled operation protection.

Step 7 Click **Download** to obtain the access key file.

 **NOTE**

Keep AKs and SKs properly to prevent information leakage.


----End

8.3 Obtaining Account, IAM User, Project, User Group, Region, and Agency Information

Obtaining Account, IAM User, and Project Information

- **Using the console**
 - a. On the Huawei Cloud homepage, click **Console** in the upper right corner.
 - b. Hover over the username in the upper right corner and choose **My Credentials**.

Figure 8-1 Going to the **My Credentials** page

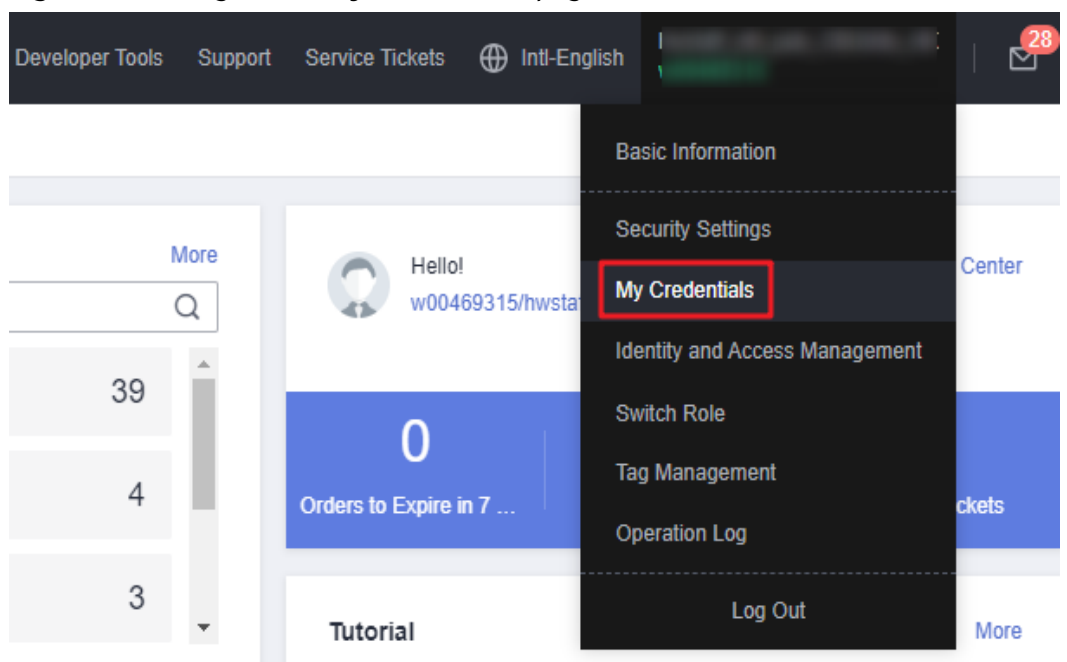

- c. On the **API Credentials** page, view the account name, account ID, IAM user name, IAM user ID, project name, and project ID.

The project ID varies depending on the region where your service is located.

Figure 8-2 Viewing the account, user, and project information



- **Calling an API**
 - To obtain a user ID, see [Listing IAM Users](#).
 - To obtain a project ID, see [Querying Project Information](#).

Obtaining User Group Information

Step 1 Log in to the Huawei Cloud console, access the IAM console, and choose **User Groups** in the navigation pane.

Step 2 Expand the details of the desired user group and view its name and ID.

----End

Obtaining Region Information

Step 1 Log in to the Huawei Cloud console, access the IAM console, and choose **Projects** in the navigation pane.

Step 2 View the content in the **Project Name** column. The content in this column indicates the ID of the region where the project belongs.

----End

Obtaining Agency Information

Step 1 Log in to the Huawei Cloud console, access the IAM console, and choose **Agencies** in the navigation pane.

Step 2 Hover over the desired agency to view its name (in the first line) and ID (in the second line) in the dark pop-up box.

----End

8.4 Consistency of Concurrent Operations

After a success message is returned in response to a client's write or deletion request, the client can obtain the latest data. If a client that initiates a write request times out in waiting for a response, or the server returns HTTP response status code **500** or **503**, the subsequent read operations may fail. If such an error


occurs, query whether the data has been successfully uploaded to the server. If not, upload the data again.

If a client simultaneously uploads, queries, or deletes the same object or bucket, these operations may reach the system at different times and have different latency periods, so different results may return. For example, if multiple clients simultaneously upload the same object, the latest upload request received by the system will replace the previous one. If you want to prevent an object from being simultaneously accessed, you must add a lock mechanism for the object in upper-layer applications.

Example of Concurrent Operations


1. When client1 is uploading an object V1, client2 is uploading an object V2 with the same name. After the successful uploads, both client1 and client2 can access the latest object data V2, as shown in [Figure 8-3](#).

Figure 8-3 Concurrent upload of the same object

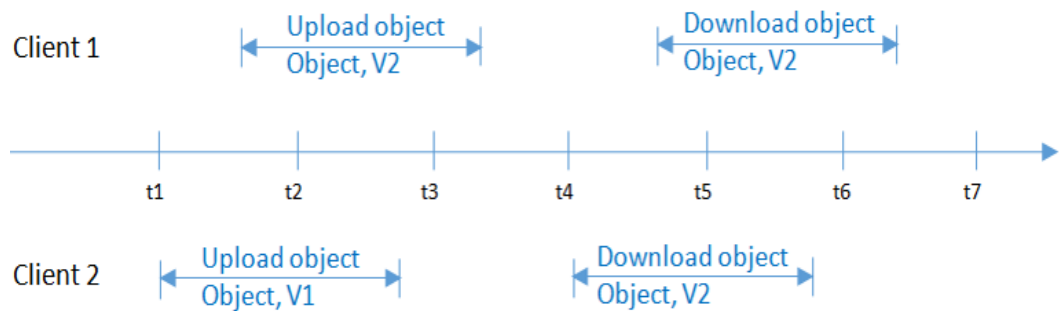


2. When client2 is uploading an object V1 and object metadata is not written yet, client1 deletes an object with the same name. In this scenario, the upload operation of client2 is still successful, and both client1 and client2 can access data object V1, as shown in [Figure 8-4](#).

Figure 8-4 Concurrent upload and deletion of the same object (1)

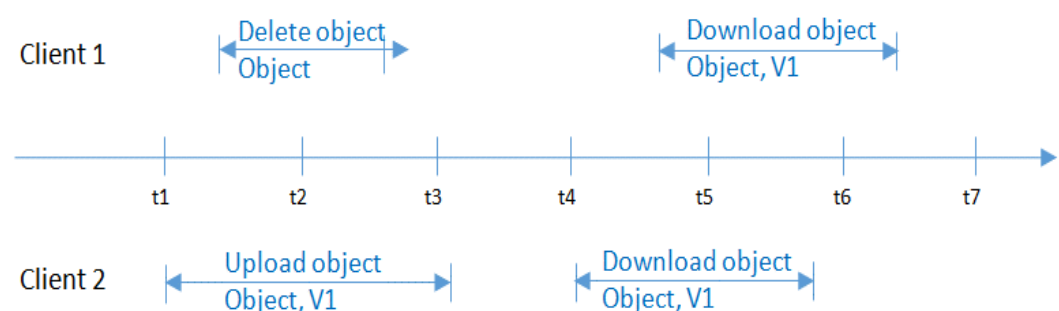


3. When client2 has successfully uploaded an object V1 and object metadata is still being written, client1 deletes an object with the same name. In this scenario, the upload operation of client2 is still successful. However, when client1 and client2 attempt to download the object, they may be able to access data object V1, or an error may be returned indicating that the object does not exist, as shown in [Figure 8-5](#).

Figure 8-5 Concurrent upload and deletion of the same object (2)

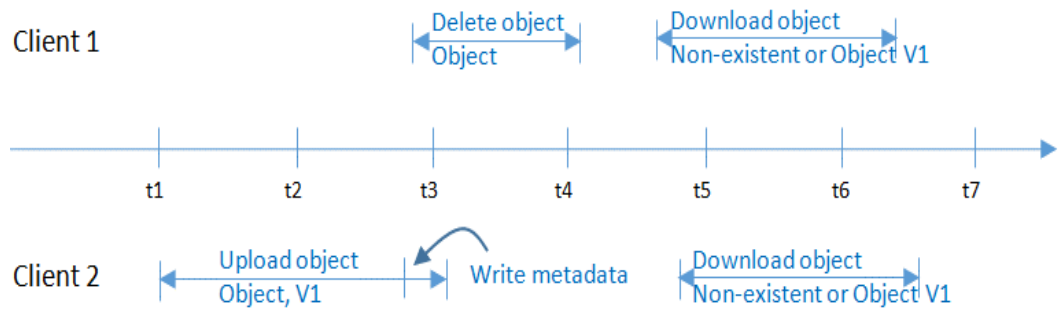


4. When client1 is downloading an object, client2 deletes an object with the same name. In this scenario, client1 may have downloaded a full copy or only part of the object data. After a deletion success message is returned to client2, an attempt to download the object will fail, and an error will be returned indicating that the object does not exist, as shown in **Figure 8-6**.

Figure 8-6 Concurrent download and deletion of the same object

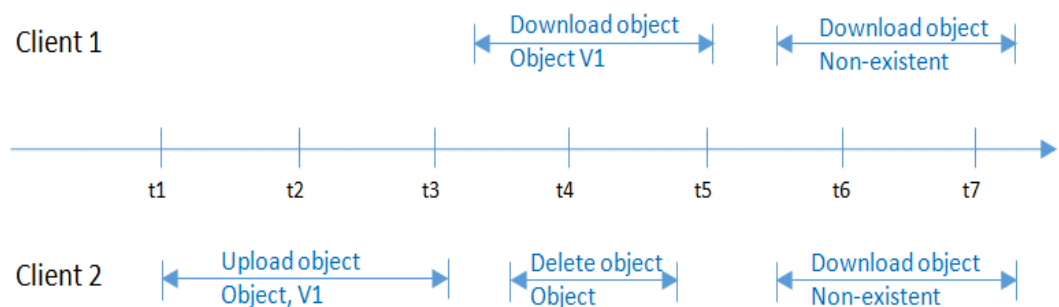


5. When client1 is downloading an object, client2 is updating an object with the same name. In this scenario, client1 may have downloaded a full copy or only part of the object data. After an update success message is returned to client 2, an attempt to download the object will succeed, and the latest data will be returned, as shown in **Figure 8-7**.

Figure 8-7 Concurrent download and update of the same object

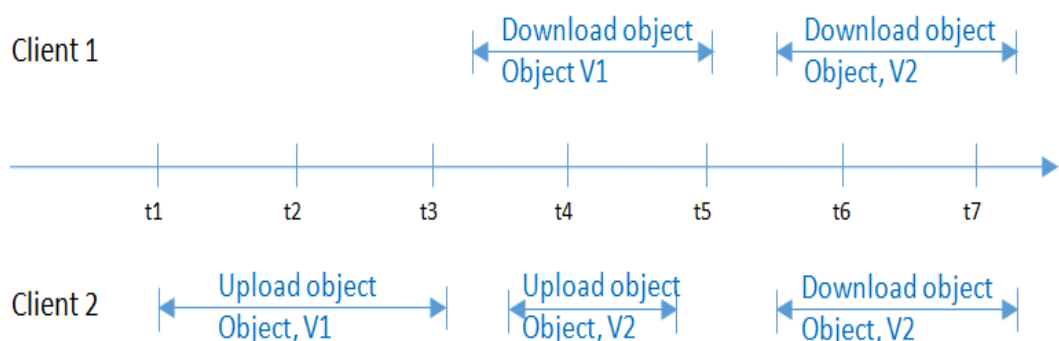

6. When client2 is uploading part V1 of an object, client1 is uploading part V2 of the same object. After part V2 is uploaded successfully, both client1 and client2 can list the information about the multipart whose entity tag (ETag) is part V2, as shown in **Figure 8-8**.

Figure 8-8 Concurrently uploading the same part of the same object

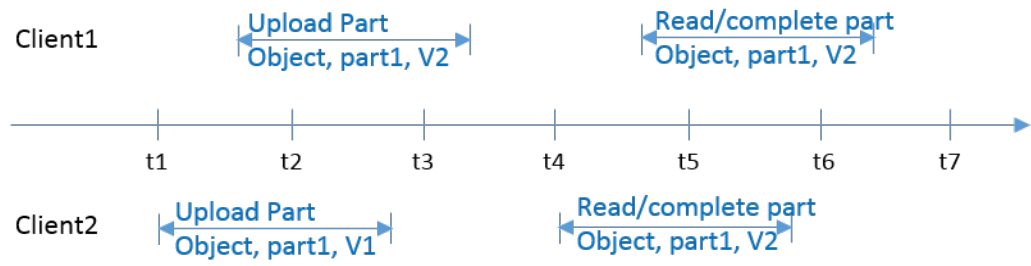

A Change History

Date	What's New
2024-04-02	This is the twentieth official release. This issue incorporates the following change: <ul style="list-style-type: none">Updated the request syntax and sample requests and responses in Configuring Bucket Encryption.
2024-03-22	This is the nineteenth official release. This issue incorporates the following change: <ul style="list-style-type: none">Supported the configuration of bucket encryption in the API for creating a bucket.
2024-02-28	This is the eighteenth official release. This issue incorporates the following change: <ul style="list-style-type: none">Added the content related to Deep Archive storage (under limited beta testing).
2024-02-19	This is the seventeenth official release. This issue incorporates the following change: <ul style="list-style-type: none">Optimized the descriptions about SSE-OBS.
2024-01-10	This is the sixteenth official release. This issue incorporates the following change: <ul style="list-style-type: none">Added descriptions about the default key in SSE-KMS.
2023-11-15	This is the fifteenth official release. This issue incorporates the following change: <ul style="list-style-type: none">Optimized parameter descriptions in Configuring Static Website Hosting for a Bucket.
2023-11-03	This is the fourteenth official release. This issue incorporates the following change: <ul style="list-style-type: none">Updated Table 7-1.

Date	What's New
2023-09-28	This is the thirteenth official release. This issue incorporates the following changes: <ul style="list-style-type: none">• Added the descriptions about SSE-OBS.• Updated Obtaining Account, IAM User, Project, User Group, Region, and Agency Information.
2023-04-23	This is the twelfth official release. This issue incorporates the following change: <ul style="list-style-type: none">• Added WORM-related APIs.
2023-01-19	This is the eleventh official release. This issue incorporates the following change: <ul style="list-style-type: none">• Removed the content related to event notifications.
2022-08-08	This is the tenth official release. This issue incorporates the following change: <ul style="list-style-type: none">• Added the API for configuring mirroring back-to-source rules.
2022-07-30	This is the ninth official release. This issue incorporates the following change: <ul style="list-style-type: none">• Added the API for configuring online decompression rules.
2021-08-11	This is the eighth official release. This issue incorporates the following change: <ul style="list-style-type: none">• Added response header BucketType to the API for obtaining a bucket list.
2020-01-20	This is the seventh official release. This issue incorporates the following change: <ul style="list-style-type: none">• Updated descriptions in section "Policies and Supported Actions".
2019-11-22	This is the sixth official release. This issue incorporates the following changes: <ul style="list-style-type: none">• Added API operations related to the parallel file system, including: modifying an object, truncating an object, and renaming an object.• Added header fields about parallel file system to the request header for creating a bucket.• Added header fields about parallel file system to the response header for obtaining bucket metadata.• Added the x-obs-bucket-type header field to the request for listing buckets.

Date	What's New
2019-07-18	This is the fifth official release. This issue incorporates the following change: <ul style="list-style-type: none">• Added APIs related to the function of direct reading of objects in the Archive storage class, including configuring the direct reading policy, obtaining the direct reading policy, and deleting the direct reading policy.
2019-07-16	This is the fourth official release. This issue incorporates the following change: <ul style="list-style-type: none">• Added the description about the image processing feature. For details, see Downloading an Object.• Added APIs related to the bucket inventory function, including configuring bucket inventories, obtaining bucket inventories, listing bucket inventories, and deleting bucket inventories.
2019-06-12	This is the third official release. This issue incorporates the following change: <ul style="list-style-type: none">• Added the description of accessing OBS through temporary authentication.• Optimized the document structure.
2019-02-03	This is the second official release. This issue incorporates the following changes: <ul style="list-style-type: none">• Resolved some ease-of-use issues.
2018-12-14	This is the first official release.