

CDN

# Getting Started

**Issue** 20  
**Date** 2025-01-09



**Copyright © Huawei Cloud Computing Technologies Co., Ltd. 2025. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Cloud Computing Technologies Co., Ltd.

## **Trademarks and Permissions**



HUAWEI and other Huawei trademarks are the property of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

## **Notice**

The purchased products, services and features are stipulated by the contract made between Huawei Cloud and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

---

# Contents

---

<b>1 Domain Name Requirements.....</b>	<b>1</b>
<b>2 Overview.....</b>	<b>3</b>
2.1 Before You Access CDN.....	3
2.2 Access Process.....	6
<b>3 Enabling CDN.....</b>	<b>9</b>
<b>4 Enabling WSA.....</b>	<b>11</b>
<b>5 Adding a Domain Name.....</b>	<b>12</b>
<b>6 Verifying the Domain Name Ownership.....</b>	<b>21</b>
<b>7 (Optional) Testing a Domain Name.....</b>	<b>24</b>
<b>8 (Optional) Recommended Configurations.....</b>	<b>26</b>
<b>9 Configuring a CNAME Record.....</b>	<b>29</b>
9.1 Overview.....	29
9.2 Adding a CNAME Record on Huawei Cloud DNS.....	31
<b>10 Checking Whether the CNAME Record Has Taken Effect.....</b>	<b>34</b>
<b>11 FAQ.....</b>	<b>35</b>

# 1 Domain Name Requirements

**Table 1-1** lists requirements for domain names that require Content Delivery Network (CDN) acceleration.

**Table 1-1** Domain name requirements

Service Area	Requirement
Chinese mainland	<ul style="list-style-type: none"><li>• Your HUAWEI ID has completed real-name authentication.</li><li>• The domain name has been licensed by the Ministry of Industry and Information Technology (MIIT) and the Internet Content Provider (ICP) license is still valid.</li><li>• The domain name has passed content moderation.</li></ul>
Outside Chinese mainland	The domain name has passed content moderation.
Global	<ul style="list-style-type: none"><li>• Your HUAWEI ID has completed real-name authentication.</li><li>• The domain name has been licensed by the MIIT and the ICP license is still valid.</li><li>• The domain name has passed content moderation.</li></ul>

 **NOTE**

**Outside Chinese mainland** indicates countries and regions other than the Chinese mainland. Hong Kong (China), Macao (China), and Taiwan (China) are included.

CDN does not support the access of websites that violate related laws and regulations, including but not limited to:

- Websites that contain pornographic content or content related to gambling, illegal drugs, frauds, or infringement
- Gaming websites that run on illegal private servers

- Websites that provide pirated games/software/videos
- P2P lending websites
- Unofficial lottery websites
- Unlicensed hospital and pharmaceutical websites
- Inaccessible websites or websites that do not contain any substantial information

 **NOTE**

- If your domain name content violates related laws and regulations, you shall bear the related risks.
- If any pornographic content or content related to gambling, illegal drugs, or frauds is found on your domain name, the domain name and other domain names that use the same origin server will be deleted from CDN and can no longer access CDN. Acceleration domain name quota of the account will be reduced to 0.
- Whether a domain name needs to be licensed does not depend on the region of the domain name provider or the area where the website server is. All that matters is the service area of your domain name. If your service area is **Chinese mainland** or **Global**, your domain name must be licensed by the MIIT before being added as an acceleration domain name.
- There is no limit on the domain name server (DNS) provider.
- Root domain name and common domain names need to be added to the CDN console separately for acceleration.

# 2 Overview

## 2.1 Before You Access CDN

Before using CDN acceleration, learn about concepts of acceleration domain names and origin servers, billing, security, and how to verify the acceleration effect. This helps you quickly enable and use CDN.

### Domain Name and Origin Server

Prepare a domain name for acceleration and an origin server (service server) based on the domain name admission conditions, content moderation requirements, and domain name description in the [Restrictions](#).

### Billing Options

Understanding CDN billing details helps you select a proper billing option when enabling CDN and reduce costs. Huawei Cloud CDN charges you for basic and value-added services.

- The basic service fee is charged based on traffic or bandwidth generated when users access CDN points of presence (PoPs).
- The value-added service fee is charged based on the number of whole site acceleration requests.

Table 2-1 Billing options

Billing Item	Billed By	Description
Basic service fee	<a href="#">Traffic</a>	<ul style="list-style-type: none"><li>• Suits you if your domain name traffic curve fluctuates greatly, bandwidth usage is always less than 30%, and the bandwidth has a peak.</li><li>• You can buy traffic packages of appropriate specifications to save money. For details, see <a href="#">Prepaid Traffic Packages</a>.</li></ul>

Billing Item	Billed By	Description
	<b>Peak bandwidth</b>	<ul style="list-style-type: none"> <li>Suits you if your domain name's daily bandwidth usage is always greater than 30% and the traffic curve is stable.</li> <li>Requires account top-ups. The monthly usage fee will be deducted from your account balance.</li> <li>Submit a service ticket to request this billing option.</li> </ul>
	<b>95th percentile bandwidth</b>	Suits you if your service traffic is heavy and your monthly expenditure will be greater than \$15,000 USD. Contact your account manager and request these billing options.
	<b>Average daily peak bandwidth</b>	
Value-added service fee	<b>Whole site acceleration requests</b>	If you use whole site acceleration, you will be charged by the number of requests.

## Resource Type and Service Type

CDN caches content to speed up content delivery. It caches static resources on CDN PoPs so that users can get the resources from the nearest PoP. Whole site acceleration speeds up the transmission of dynamic and pseudo-static resources through network routing.

**Table 2-2** Resource types

Resource Type	Description
Static	The same file is obtained for each request. Examples: images, videos, files (HTML, CSS, and JS) on websites, software installation packages, APK files, and compressed packages
Dynamic	Different files are obtained for each request. Examples: files (ASP, JSP, PHP, PERL, and CGI) on websites, APIs, and database interaction requests
Pseudo-static	Pseudo-static resources, such as HTML files, appear to be static on websites, but are actually processed using dynamic scripts such as ASP. Pseudo-static resources are essentially dynamic and are processed as dynamic content.

CDN provides four service types. Select a service type based on the resource characteristics of your website to achieve better acceleration.

**Table 2-3** Service types

Service Type	Scenario
Website	Web portals, e-commerce platforms, news apps, and user generated content (UGC)-focused apps
File download	Download clients, game clients, app stores, and websites that provide download services based on HTTP or HTTPS
On-demand services	On-demand video/audio services, such as online education websites, video sharing websites, TV VOD platforms, and music and video apps
Whole site	Websites that consist of both dynamic and static content and for sites with abundant ASP, JSP, or PHP requests

## Service Area

CDN provides three service areas. Select one based on the distribution of your end users to improve user experience.

Service Area	Acceleration Effect	Scenario
Chinese mainland	All user requests are scheduled to PoPs in the Chinese mainland.	Users are centrally distributed in the Chinese mainland.
Outside Chinese mainland	All user requests are scheduled to PoPs outside the Chinese mainland.	Users are centrally distributed outside the Chinese mainland.
Global	User requests are scheduled to the optimal CDN PoP nearby.	Users are distributed around the world.

### NOTE

- **Outside Chinese mainland** indicates countries and regions other than the Chinese mainland. Hong Kong (China), Macao (China), and Taiwan (China) are included.
- The service area of a domain name has nothing to do with the origin location. You can choose the service area that suits your services best.

## (Optional) Security

If your website has high security requirements, configure security settings to prevent malicious traffic or attacks.



Function	Description
<b>HTTPS certificate</b>	Enable HTTPS acceleration to encrypt requests between clients and CDN PoPs, securing data transmission.
<b>Access control</b>	Identity and filter visitors using referer validation, IP address access control lists (ACLs), token authentication, and User-Agent ACLs, restrict access sources, and prevent malicious traffic and attacks.
<b>Interconnect with WAF</b>	Associate Huawei Cloud CDN with Web Application Firewall (WAF) to accelerate delivery of website resources and defend against web attacks.

## Acceleration Effect Evaluation

You can use a third-party dialing test tool to test the response speed of websites. The test method is as follows:

1. Test the response speed of accessing a resource after CDN acceleration is used.
2. Test the response speed of accessing the same resource directly from the origin server.
3. Compare the preceding two data.

### Important notes:

1. If you test the access to an uncached resource, CDN needs to pull it from the origin server. Accessing it through CDN will be more time-consuming. Use a cached resource for test.
2. This solution is used for qualitative analysis on the acceleration effect. If you require professional evaluation, contact professional analysis platforms (such as Tingyun and Bonree).

### NOTE

- This solution is for reference only. The final interpretation and copyright belong to third-party websites used for testing. The websites do not belong to Huawei Cloud. Please be careful when visiting them.


## 2.2 Access Process

### Access Process

This section describes how to use CDN and how to select CDN billing options. If you are using Huawei Cloud CDN for the first time, you can quickly enable CDN by following the procedure described in this section to accelerate your content delivery.

**Figure 2-1** describes the process of using CDN.

**Figure 2-1** Process

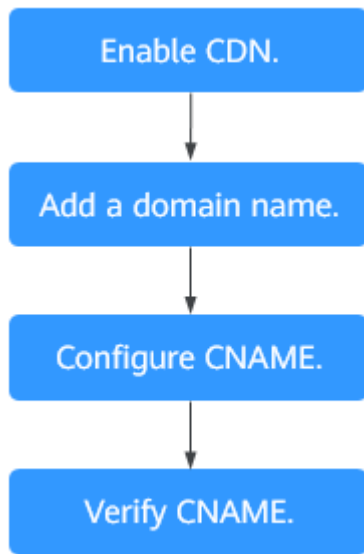

For details about each step, see [Table 2-4](#).

**Table 2-4** Access procedure

No.	Step	Description
1	<b>Enabling CDN</b>	Enable CDN.
2	<b>Adding a Domain Name</b>	If you want to use CDN to accelerate delivery of resources on your site, add the domain name of the site and configure origin details. CDN caches origin content on points of presence (PoPs) so that your content loads faster.
3	<b>(Optional) Testing a Domain Name</b>	Test your domain name before adding a CNAME record to the domain's DNS records to ensure that your domain configurations are correct.
4	Configuring a CNAME Record <ul style="list-style-type: none"> <li><b>Adding a CNAME Record on Huawei Cloud DNS</b></li> </ul>	If you have added a domain name, the system automatically assigns a CNAME to it. The CNAME cannot be accessed directly. Add this CNAME to your domain's DNS records and point the domain name to it. Then requests for your domain name will be redirected to CDN PoPs for acceleration. The CNAME configuration method varies depending on the DNS provider.
5	<b>Checking Whether the CNAME Record Has Taken Effect</b>	The length of time before the CNAME record takes effect depends on the DNS provider. You can check whether the CNAME record has taken effect by yourself.

## Billing Options

When enabling CDN, you can choose to be billed by traffic or peak bandwidth. For details about the billing options and examples, see [Billing](#).

### By traffic

If you choose traffic-based billing:

- You are billed by the traffic used per hour.
- You can buy a CDN traffic package to get more savings. For details about traffic packages, see [Prepaid Traffic Packages](#).

### By peak bandwidth

You are billed by the daily peak bandwidth.

# 3 Enabling CDN

---

Enable CDN before you use it. This section describes how to enable CDN.

## Prerequisites

- You have registered a HUAWEI ID and have specified a payment method.

### NOTE

You need to complete real-name authentication when you:

- Purchase and use cloud services on Huawei Cloud PoPs in the Chinese mainland. Real-name authentication is required by the laws and regulations in the Chinese mainland.
- Purchase a cloud service whose region includes Chinese mainland.

## Precautions

- You can enable and use CDN in traffic-based billing. To do so, buy a CDN traffic package, refresh the page of enabling CDN, and enable CDN.

## Procedure


1. Log in to [Huawei Cloud console](#). Choose **Service List > Content Delivery & Edge Computing > Content Delivery Network**.
2. Click **Enable Now**.
3. On the displayed page, click **Enable Now**.

### Figure 3-1 Enabling CDN

#### Content Delivery Network (CDN)

Content Delivery Network (CDN) accelerates content delivery to edge nodes so that your websites load faster. [Learn more](#)

Global




Billed by traffic

Select this option if your site's traffic flow cannot be predicted.

- Pay only for what you use.
- Use traffic packages to cut costs.
- Tiered pricing. Buy more, save more.



Note: • If your expenditure on CDN is or will be greater than \$15,000 USD per month, contact your account manager and apply for billing by 95th percentile bandwidth, or average daily peak bandwidth. For details about CDN billing, see [CDN Pricing Details](#) 

• CDN does not support bill generation by domain name, enterprise project, or tag. You can use [cost splitting](#) to view the amortized costs.

**Enable Now**

# 4 Enabling WSA

---

Enable Whole Site Acceleration (WSA) before you use it. This section describes how to enable WSA.

## Prerequisites

You have enabled CDN.

## Precautions

- You can enable traffic-based billing for WSA. To enable peak bandwidth-based billing, submit a service ticket.
- If you have a whole site acceleration domain name or have added such domain names in the past year, enabling WSA is optional. You can still add whole site acceleration domain names. Fees of these domain names are charged by CDN. To enable WSA, submit a service ticket.

## Procedure

1. Log in to [Huawei Cloud console](#). Choose **Service List > Content Delivery & Edge Computing > Content Delivery Network**.  
The CDN console is displayed.
2. In the navigation pane, choose **Domains**.
3. On the **Domains** page, click **Add Domain Names**.
4. Select **Whole site** for **Service Type**. If you have not enabled WSA, you will be prompted to enable it.
5. Click **Enable Now** in the prompt.
6. Select a billing option, read and agree to the service statement, and click **Enable Now** to enable WSA.

# 5 Adding a Domain Name

---

If you want to use CDN to accelerate access to your site, add the domain name of your site to CDN. CDN caches origin content on PoPs so that your content loads faster.

## Preparations

- Enable CDN for your account by referring to [Enabling CDN](#).
- Prepare a domain name for acceleration and an origin server (service server) based on the domain name admission conditions, content moderation requirements, and domain name description in the [Restrictions](#).

## Procedure

1. Log in to [Huawei Cloud console](#). Choose **Service List > Content Delivery & Edge Computing > Content Delivery Network**.  
The CDN console is displayed.
2. In the navigation pane, choose **Domains**.
3. On the **Domains** page, click **Add Domain Names** and specify domain parameters.

Figure 5-1 Adding a domain name

**Domain Information**

Service Area  
**Chinese mainland** Outside Chinese mainland Global Intranet

The price varies depending on the service area. [View Prices](#)

**!** If the service area includes Chinese mainland, your domain names must be licensed by the Ministry of Industry and Information Technology (MIIT). However, the Internet Content Provider (ICP) filing system of the MIIT has a data delay. Configure CDN acceleration for your domain names 0 hours later after completing ICP filing.

Domain Names  
www.example.com

Domain names accessed by users. CDN speeds up the access to resources on origin servers of these domain names. [Learn more](#)

**+** Add Domain Names Available for addition: 19

Service Type

- Website**  
For websites with many images and small files, such as portals and e-commerce websites
- File download**  
For large files, such as apps in app stores and game clients
- On-demand services**  
For video on demand (VOD) websites and online education websites
- Whole site**  
For websites with both dynamic and static content, such as online exam platforms, forums, and blogs

**Origin Server Settings**

Origin Protocol  
**HTTP** HTTPS Same as user

If your origin servers support HTTPS access, select HTTPS to reduce the risk of data theft or tampering during origin pull.

Origin Servers

Type	Address	Priority	HTTP Port	HTTPS Port	Host Header	Operation
No data available.						

**+** Add Origin Server Available for addition: 50

OK Cancel



**Table 5-1** Parameter description

Parameter	Item	Description
Domain Names	-	<ul style="list-style-type: none"> <li>• A domain name can contain up to 200 characters, including letters, digits, hyphens (-), periods (.), and asterisks (*). Start with a letter, digit, or asterisk.</li> <li>• Each label of a domain name (for example, *** in ***.***.com) can contain up to 63 characters.</li> <li>• You can add up to 100 domain names under each account.</li> <li>• CDN does not allow access from websites containing illicit content. For details, see "Content moderation" in <a href="#">Restrictions</a>. The existing domain names connected to CDN are reviewed regularly. If a domain name involves any violations, the CDN acceleration service will be suspended for the domain name and other domain names in your account.</li> <li>• If a domain name has been in the <b>Disabled</b> or <b>Rejected</b> state for more than 120 days, CDN starts the domain name deletion process and deletes the domain name records after confirmation. If CDN acceleration is required for the domain name, add the domain name again.</li> <li>• If a domain name has not been accessed for more than 180 days, CDN starts the domain name suspension process and disables CDN acceleration for the domain name after confirmation.</li> <li>• An acceleration domain name must be unique.</li> <li>• You can add a domain name including a wildcard (*). For example, if you add *.test.com to CDN as an acceleration domain name and have it resolved to the CNAME provided by CDN, all of the level-2 domain names under *.test.com, such as a.test.com, will enjoy CDN acceleration by default. However, level-3 domain names (such as b.a.test.com) would not.             <ol style="list-style-type: none"> <li>1. If you add a wildcard domain name to a particular account, you cannot add any of the level-2 domain names under that domain name to other accounts.</li> <li>2. You will be billed for the acceleration service provided to all of the level-2 domain names under a wildcard domain name. If there are multiple level-2 domain names, billing will be based on the traffic generated by the wildcard domain name, not on each of the level-2 domain names.</li> </ol> </li> </ul>
Enterprise Project	-	<p>This parameter is only available if Huawei Cloud Enterprise Project Management Service is enabled. For details, see <a href="#">Enterprise Management User Guide</a>.</p>

Parameter	Item	Description
Service Area	Global	CDN schedules access requests from users around the world to the optimal PoP nearby. The domain name must be licensed by the MIIT. For details, see <a href="#">ICP License Service</a> .
	Chinese mainland	CDN schedules access requests from users around the world to PoPs in the Chinese mainland. The domain name must be licensed by the MIIT. For details, see <a href="#">ICP License Service</a> .
	Outside Chinese mainland	CDN schedules access requests from users around the world to PoPs outside the Chinese mainland. The domain name does not need to be licensed by the MIIT.
Service Type	Website	CDN is perfect for web portals, e-commerce platforms, news apps, and user generated content (UGC)-focused apps. The cache format includes but is not limited to .zip, .exe, .wmv, .gif, .png, .bmp, .wma, .rar, .jpeg, and .jpg.
	File download	CDN is useful for download clients, game clients, app stores, and websites that provide download services based on HTTP or HTTPS.
	On-demand services	CDN accelerates delivery of on-demand services, such as online education, video sharing, music or video on demand, and other audiovisual content.
	Whole site	CDN is a good option for websites that consist of both dynamic and static content and for sites that involve a large number of ASP, JSP, or PHP requests. <b>NOTE</b> WSA is an independent cloud service and is billed separately. It shares the same console with CDN. You need to enable WSA before adding <b>Whole site</b> domain names. For details about how to enable WSA, see <a href="#">Enabling WSA</a> .
Origin Protocol	-	Protocol used by CDN PoPs to pull content from the origin server. <ul style="list-style-type: none"> <li>• <b>HTTP</b></li> <li>• <b>HTTPS</b> (Ensure that the origin server supports HTTPS access.)</li> <li>• <b>Same as user:</b> The origin protocol is the same as the client access protocol. For example, if a client accesses CDN using HTTP, CDN also uses HTTP for origin pull.</li> </ul>

4. In the **Origin Server Settings** area, click **Add Origin Server** to add an origin server for the domain names.

**Figure 5-2** Adding an origin server  
**Add Origin Server**

**i** Ensure that you configure the origin server correctly. Otherwise, retrieval failures will occur. ✕

Type

IP address     Domain name     OBS bucket

Address

Enter up to 50 IP addresses separated by commas (,).

Priority

Primary origin server     Standby origin server

The primary origin has a higher priority than the standby origin. If the primary origin is faulty, CDN pulls content from the standby origin.

Origin Ports

HTTP Port     HTTPS Port

Host Header

Domain name of the site accessed by CDN nodes when retrieving content. [Learn more](#)

By default, the host is your acceleration domain name. Change it to the actual site for origin pull. For example, if your origin server is the domain name of an object storage bucket, set the host header to the bucket domain name.

**Table 5-2** Parameters


Parameter	Description
Type	<p><b>IP address</b></p> <ul style="list-style-type: none"> <li>• CDN PoPs access the IP address directly to pull origin content.</li> <li>• IPv4 is supported, but IPv6 is not supported.</li> <li>• If multiple IP addresses are configured, CDN uses the <b>load balancing mechanism</b> to pull content from the origin server.</li> </ul> <p><b>Domain name</b></p> <ul style="list-style-type: none"> <li>• Start with a letter or digit. Enter up to 255 characters, including letters, digits, hyphens (-), and periods (.).</li> <li>• An origin domain cannot be the same as an acceleration domain name.</li> <li>• You can also enter the domain name of an object storage bucket in this field.</li> </ul> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>• You cannot use <b>private object storage buckets</b> as origin servers when you set <b>Type</b> to <b>Domain name</b>.</li> <li>• If you use an object storage bucket as your origin server, the object storage service will charge the CDN origin pull traffic based on its billing standards.</li> </ul>

Parameter	Description
	<p><b>OBS bucket</b></p> <p>Select an OBS bucket domain name under your account or customize one. OBS charges the CDN origin pull traffic based on the billing standard for outgoing Internet traffic. If you set a bucket of OBS 3.0 or a later version as the origin server, you can purchase OBS pull traffic packages to deduct origin pull traffic. For details, see <a href="#">OBS Billing for CDN Acceleration</a>.</p> <p><b>Notes:</b></p> <ol style="list-style-type: none"> <li>1. If your OBS private bucket is unsuitable as an origin for your domain name, do not set the private bucket as the origin server.</li> <li>2. If you enter a custom OBS bucket domain name, the origin domain name must end with <code>.myhuaweicloud.com</code> or <code>.myhuaweicloud.cn</code>.</li> <li>3. If an OBS private bucket is configured as an origin server, enable <a href="#">OBS authorization</a> and select the <b>Private bucket</b> option. Otherwise, origin pull will fail.</li> <li>4. To use a <b>custom OBS private bucket</b> as the origin server, configure a policy for the private bucket. For details, see <a href="#">Configuring a Policy for a Custom OBS Private Bucket</a>.</li> <li>5. If you have enabled <a href="#">static website hosting</a> for your OBS bucket, select the <b>Static website hosting</b> checkbox when adding a domain name. In this way, the list of all files in the bucket will not be displayed when users access the bucket.</li> <li>6. When back-to-source by mirroring is configured on OBS and range requests are enabled on CDN, if the mirror origin server does not comply with the RFC Range Requests standard, the response to range requests is not 206 and CDN fails to pull content. In this case, submit a service ticket.</li> </ol> <p><b>NOTE</b></p> <p>If you use an OBS bucket created after January 1, 2022 as the origin server and want to enable online preview, log in to the CDN console, choose <b>Domains</b> in the navigation pane, click the target domain name, click the <b>Advanced Settings</b> tab, click <b>Edit</b> next to <b>HTTP Headers</b>, and set <b>Content-Disposition</b> to <b>inline</b>. For details, see <a href="#">How Do I Preview OBS Objects in My Web Browser?</a></p>
Address	Address accessed by CDN PoPs during origin pull.
Bucket	<p>This parameter is mandatory when <b>Type</b> is set to <b>OBS bucket</b>.</p> <ul style="list-style-type: none"> <li>• <b>Public bucket:</b> public read. All users can read objects in the bucket.</li> <li>• <b>Private bucket:</b> Only users granted permissions by the ACL can access the bucket.</li> </ul>

Parameter	Description
Priority	<p>The origin server can be primary or standby. The priority of the primary origin server is higher than that of the standby origin server. CDN PoPs preferentially pull content from the primary origin server. If the primary origin server is faulty, CDN PoPs pull content from the standby origin server.</p> <ul style="list-style-type: none"> <li>Configure at least one primary origin server.</li> </ul>
Origin Ports	<p>Port numbers for CDN PoPs to pull content. By default, the HTTP port is 80 and the HTTPS port is 443.</p> <ul style="list-style-type: none"> <li>If <b>Type</b> is set to <b>OBS bucket</b>, the port numbers cannot be changed.</li> </ul>
Host Header	<p>A host is specified in the HTTP request header. It is the domain name of the site accessed by CDN PoPs when CDN pulls content from the origin server. CDN obtains resources from the corresponding site based on the host details during origin pull.</p> <p>After a domain name is added, the default host will be the domain name. Change the host in a timely fashion if either of the following conditions is met:</p> <ul style="list-style-type: none"> <li>If you set <b>Type</b> to <b>Domain name</b> and enter the domain name of an object storage bucket, set the host to the domain name of the object storage bucket.</li> <li>If you want CDN to pull content from a custom domain name, specify the host. For example, suppose an origin server is bound to two sites, <b>www.origin01.com</b> and <b>www.origin02.com</b>, and the domain name connected to CDN is <b>www.example01.com</b>. If you need CDN to pull content from <b>www.origin02.com</b>, you would need to set the host to <b>www.origin02.com</b>.</li> </ul>

- Click **OK**. To add multiple origin servers, repeat **4**. You can add up to 50 origin servers.
- After adding origin servers, click **OK** in the lower left corner of the page.

 **NOTE**

- The configuration takes 5 to 10 minutes to take effect. When **Status** of the domain name becomes **Enabled**, the domain name has been added.
- If the CNAME status of a domain name is , no CNAME has been configured for this domain name.

## Recommended Configuration

You can also follow the instructions of [\(Optional\) Recommended Configurations](#) to configure cache rules, usage caps, and HTTPS certificates for domain names, to improve access performance, cache hit ratio, and access security and reduce high bill risks.

## Configuring CNAME Resolution

After a domain name is added, the system automatically assigns a CNAME to this domain name. The CNAME cannot be accessed directly. You must **add the CNAME** to your domain's DNS records. Then requests for your domain name will be redirected to CDN PoPs for acceleration.

# 6 Verifying the Domain Name Ownership

---

## Scenario

When connecting a domain name to CDN for the first time, verify the ownership of the domain name through file upload or DNS record verification, to prevent the domain name from being maliciously added.

## Precautions

- After you verify the ownership of a domain name, ownership verification is not required for its subdomains or this domain name if you add it to CDN again.
  - Example: If you have verified the domain name ownership of domain name **b.a.com**, you do not need to verify the ownership of subdomains of **a.com**, such as **\*\*a.com** and **\*\*\*a.com**, when you add them to CDN as acceleration domain names.
- If you have verified the ownership of a domain name using account A, you must verify the ownership of this domain name again when adding it to CDN using account B.
- This topic is also applicable to the ownership verification of subdomains.

## File Upload


Domain name test.example.com is used as an example.

1. When adding a domain name to CDN, verify the ownership of the domain name in scenarios similar to the following.



**Figure 6-1** Verifying the domain name ownership

Domain Names

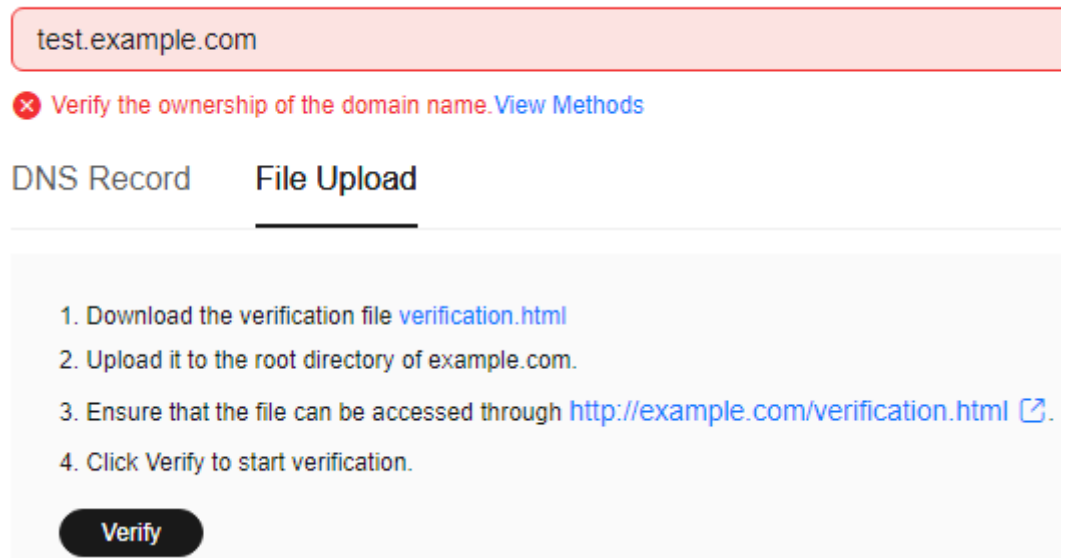

2. Click **View Methods** and click the **File Upload** tab. Do not close the verification page before the verification is complete.
3. Click **verification.html** to download the file.
4. Upload the file to the root directory of your domain server.
5. Click **Verify** to verify the ownership of the domain name.

**NOTE**


Huawei Cloud CDN will access <http://example.com/verification.html> to obtain the verification file. If the system verifies that the obtained file is correct, the verification is successful. Ensure that the verification file is accessible.

## DNS Record

Domain name test.example.com provided by Huawei Cloud DNS is used as an example.

1. When adding a domain name to CDN, verify the ownership of the domain name in scenarios similar to that displayed in the following figure.
2. Click **View Methods** and click the **DNS Record** tab. Do not close the verification page before the verification is complete.

**Figure 6-2** Verifying the domain name ownership

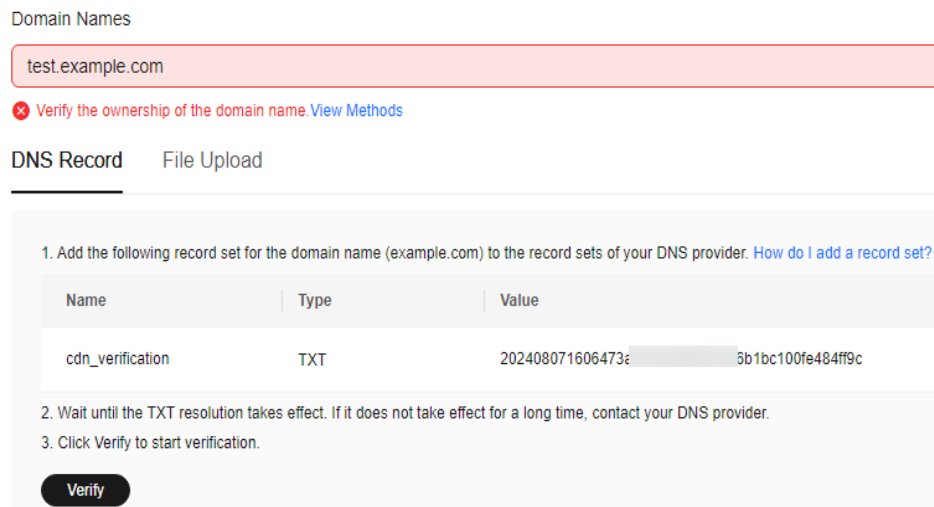

3. Add a TXT record to the record sets of your DNS provider.
  - a. In the service list, choose **Networking > Domain Name Service**.
  - b. In the navigation pane, choose **Public Zones**.
  - c. Click **example.com**. In the upper right corner of the domain name details page, click **Add Record Set**.
    - **Name:** cdn\_verification
    - **Type:** TXT – Specify text records
    - **Value:** Enter the record value under the **DNS Record** tab on the CDN console (see [Figure 6-2](#)). The value contains 32 characters and consists of a date and a random UUID.
  - a. Click **OK**.
4. After the TXT resolution takes effect, return to the **Add Domain Names** page of the CDN console and click **Verify**.

**NOTE**

- A new TXT resolution takes effect immediately. If it is modified, the modification takes effect 5 minutes later. The effective time depends on the DNS resolution time to live (TTL). The default TTL is 5 minutes.
- The configuration of other service providers, such as www.net.cn, DNSPod, Xinnet, or GoDaddy, is similar. You can verify the ownership of your domain name by referring to the preceding procedure.

# 7 (Optional) Testing a Domain Name

Test your domain name before adding a CNAME record to the domain's DNS records to ensure that your domain configurations are correct.

1. Ping the CNAME for the domain name you added to obtain the IP address.

For this example, we assume that the added domain name is `www.example.com`, the generated CNAME is `www.example.com.cdnhwc1.com`, and the IP address obtained by pinging `www.example.com.cdnhwc1.com` is `10.0.0.0`.

2. Edit the **hosts** file on the local PC.

If you use a Windows system, map the domain name `www.example.com` to the IP address `10.0.0.0` in the **hosts** file in the `C:\Windows\System32\drivers\etc\` directory.

**Figure 7-1** Testing the domain name

```
# Copyright (c) 1993-2009 Microsoft Corp.
#
# This is a sample HOSTS file used by Microsoft TCP/IP for Windows.
#
# This file contains the mappings of IP addresses to host names. Each
# entry should be kept on an individual line. The IP address should
# be placed in the first column followed by the corresponding host name.
# The IP address and the host name should be separated by at least one
# space.
#
# Additionally, comments (such as these) may be inserted on individual
# lines or following the machine name denoted by a '#' symbol.
#
# For example:
#
#       192.168.1.1       rhino.acme.com          # source server
#       192.168.1.0     x.acme.com             # x client host
#
# localhost name resolution is handled within DNS itself.
#
#       127.0.0.1       localhost
#       ::1             localhost
#
#       10.0.0.0       www.example.com
```

3. Access your domain name to test services. If the test results meet your expectation, the configurations are correct.

4. Add a CNAME record to your domain's DNS records. For details, see [Configuring a CNAME Record](#).

# 8 (Optional) Recommended Configurations

After adding an acceleration domain name, configure cache rules, smart compression, and secure acceleration to improve the cache hit ratio, optimize the acceleration effect, and enhance security.

## Improving Cache Hit Ratio and Optimizing the Acceleration Effect

Scenario	Configuration Item	Description
The cache hit ratio is low and the acceleration effect is not obvious.	<a href="#">Cache Rules</a>	<p>Set a proper cache TTL and priority for different resources to improve the cache hit ratio, reduce the origin pull ratio, and relieve the pressure on the origin server.</p> <p><b>Notes:</b></p> <ol style="list-style-type: none"> <li>1. The cache rule priority is an integer ranging from 1 to 100. A greater number indicates a higher priority.</li> <li>2. If you modify or add a cache rule, purge the cache of the corresponding resource.</li> <li>3. Set the cache TTL of dynamic resources to <b>0</b>, so dynamic resources are not cached. Otherwise, access exceptions may occur.</li> <li>4. Check the cache settings on the origin server. If <b>no-cache</b>, <b>private</b>, or <b>no-store</b> is configured for a resource on the origin server and <b>Origin Cache Control</b> is enabled on the CDN console, CDN cannot cache the resource. CDN needs to pull the resource from the origin server each time it is requested. This does not achieve acceleration.</li> </ol>

Scenario	Configuration Item	Description
	<b>Smart Compression</b>	<p>Compress static content on your websites to reduce the file size, speed up file transfer, and save bandwidth.</p> <ul style="list-style-type: none"> <li>Smart compression includes gzip compression and Brotli compression. The performance of Brotli compression is 15% to 25% higher than that of gzip compression.</li> <li>With smart compression, CDN automatically compresses .js, .html, .css, .xml, .json, .shtml and .htm files.</li> </ul>
	<b>URL Parameters</b>	<p>Ignore URL parameters to improve the cache hit ratio and speed up content distribution.</p> <ul style="list-style-type: none"> <li>If resources do not change with URL parameters, ignore the URL parameters.</li> <li>If resources change with URL parameters, retain the URL parameters.</li> </ul>

## Improving Access Performance

Scenario	Configuration Item	Description
Improving origin pull efficiency and reducing pull consumption	<b>Range Requests</b>	<p>Configure range requests to accelerate distribution of large files during origin pull and reduce bandwidth consumption.</p> <ul style="list-style-type: none"> <li>Range requests are enabled by default for download acceleration.</li> <li>The origin server must support the <b>Range</b> header.</li> </ul>
Redirection enabled for origin server resources	<b>Redirect from Origin</b>	<p>If 301 or 302 redirection is configured for the origin server address, the origin server returns status code 301 or 302 to CDN for a pull request. If this function is enabled on CDN, CDN PoPs will redirect to the address specified in the 301 or 302 response to obtain the resource, cache the resource, and return the resource to the user.</p>

## Improving Website Security

Scenario	Configuration Item	Description
Improving security performance	<b>HTTPS</b>	Configure a Secure Sockets Layer (SSL) certificate to improve the domain name security.
	<b>Access Control</b>	Identify and filter visitors to restrict their access and improve CDN resource security.
	<b>Accelerating Delivery of Resources Protected by WAF</b>	Huawei Cloud CDN works with WAF to defend against web attacks during content delivery acceleration, providing a more secure acceleration experience.

## Reducing the Risk of High Bills

Scenario	Configuration Item	Description
If your domain name is attacked or has malicious traffic coming, there may be sudden traffic spikes that result in a bill higher than your normal expenditures. CDN can help you reduce the risk of high bills.	<b>Usage Cap</b>	Set a usage cap so CDN will disable your domain name when the access bandwidth reaches the threshold you specify to avoid excessive fee.

# 9 Configuring a CNAME Record

---

## 9.1 Overview

### Background

If you have added a domain name, the system automatically assigns a CNAME to it. The CNAME cannot be accessed directly. You must add the CNAME to your domain's DNS records. Then requests for your domain name will be redirected to CDN PoPs for acceleration.

### What Is DNS Resolution?

When you use DNS for the first time, you may have some questions, such as "What is DNS resolution?", "Why is DNS resolution required?", "How is DNS resolution done?", and "What is an A record?". If you have similar questions, visit [Domain Name Service Help Center](#) to find the answers.

### How Do I Add a CNAME Record?

If your DNS provider is Huawei Cloud, see [Adding a CNAME Record on Huawei Cloud DNS](#).

### DNS Conflicts

When you add a CNAME record, you may be informed of a DNS conflict, for example, an existing A record may conflict with the CNAME record, or an existing MX record may conflict with the CNAME record. For details, see [Why Is a Message Indicating Conflict with an Existing Record Set Displayed When I Add a Record Set?](#)



**Table 9-1** Restrictions between record types

-	NS	CNAME	A	AAAA	MX	TXT	PTR	SRV	CAA
NS	No limit <sup>a</sup>	Conflict	No limit	No limit	No limit	No limit	No limit	No limit	No limit
CNAME	Conflict <sup>b</sup>	No limit	Conflict	Conflict	Conflict	Conflict	Conflict	Conflict	Conflict
A	No limit	Conflict	No limit	No limit	No limit	No limit	No limit	No limit	No limit
AAAA	No limit	Conflict	No limit	No limit	No limit	No limit	No limit	No limit	No limit
MX	No limit	Conflict	No limit	No limit	No limit	No limit	No limit	No limit	No limit
TXT	No limit	Conflict	No limit	No limit	No limit	No limit	No limit	No limit	No limit
PTR	No limit	Conflict	No limit	No limit	No limit	No limit	No limit	No limit	No limit
SRV	No limit	Conflict	No limit	No limit	No limit	No limit	No limit	No limit	No limit
CAA	No limit	Conflict	No limit	No limit	No limit	No limit	No limit	No limit	No limit
<p>a: NS record sets can be added for primary domains (for example, example.com). There are no restrictions on subdomains (for example, www.example.com).</p> <p>b: For primary domains (for example, example.com), you can add CNAME record sets and NS record sets at the same time. However, CNAME record sets conflict with NS record sets for subdomains (for example, www.example.com), and therefore they cannot be added at the same time.</p> <ul style="list-style-type: none"> <li>• <b>Conflict:</b> The two types of record sets cannot coexist in the same resolution line.</li> <li>• <b>No limit:</b> The two types of record sets can coexist without restrictions.</li> </ul>									

Two common record set conflicts are:

1. A CNAME record conflicts with an A record.
  - How do I resolve this problem?  
Delete the A record and then configure the CNAME record.
  - Do I need to keep the A record for my website so that it remains accessible?  
As long as the CNAME record is configured, all client requests will be sent to CDN. In this case, you do not need to configure an A record.

For details about how the CNAME record works, see [How CDN Works](#).

2. A CNAME record conflicts with an MX record.

For details, see [Why Is a Message Indicating Conflict with an Existing Record Set Displayed When I Add a Record Set?](#)


## 9.2 Adding a CNAME Record on Huawei Cloud DNS

If your domain name is resolved using the DNS service Huawei Cloud provides, then follow the steps in this section to add a CNAME record. **download.game-apk1.com** is used as an example.

### Procedure

- **Obtain the CNAME of the domain name.**
  1. Log in to [Huawei Cloud console](#). Choose **Service List > Content Delivery & Edge Computing > Content Delivery Network**.  
The CDN console is displayed.
  2. In the navigation pane, choose **Domains**.  
On the **Domains** page, copy the CNAME **download.game-apk1.com.\*\*\*.c.cdnhwc2.com**.

**Figure 9-1** Obtaining the CNAME

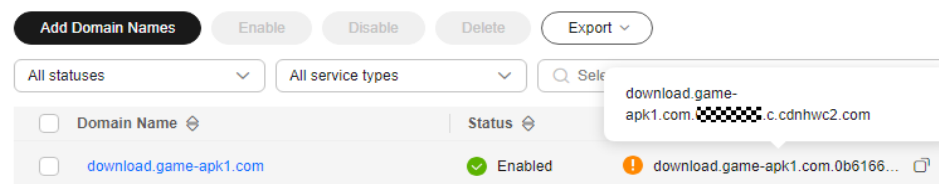

- **Add a CNAME record.**
  1. Log in to the [management console](#) and choose **Service List > Networking > Domain Name Service**.  
The DNS console is displayed.
  2. In the navigation pane, choose **Public Zones**.  
The public zone list is displayed.
  3. Click the domain name you want to add a record set to. In this example, the domain name is **game-apk1.com**.
  4. Click **Add Record Set** in the upper right corner.

**Figure 9-2** Adding a record set

**Add Record Set**

Name  .game-apk1.com

Enter the domain name prefix. If the domain name is example.com, traffic will be routed depending on the prefix:  
 Blank prefix: Traffic will be routed to example.com.  
 Prefix "www": Traffic will be routed to www.example.com.  
 Prefix "cdn": Traffic will be routed to cdn.example.com.  
 Prefix "mail": Traffic will be routed to mail.example.com.  
 Prefix "": Traffic will be routed to any subdomain of example.com.

\* Type

\* Alias  Yes  No

Whether you want this record set to be used as an alias for a HUAWEI CLOUD service resource. An alias supports second-level domain names.

\* Line

Default: returns the default resolution result if the system cannot match any line.  
 ISP: routes end users to the optimum endpoint based on their carrier network.  
 Region: routes end users to the optimum endpoint based on their geographic location.

\* TTL (s)

The length of time (in seconds) for which a local DNS server caches a record set. If your service addresses change frequently, set TTL to a small value.

\* Value

Enter the domain name you want to resolve when the value in the Name field is queried.  
 Example:  
 www.example.com

Weight

The proportion of DNS queries that will be routed to the record set. If a resolution line is a zone

5. Configure the parameters as instructed. [Table 9-2](#) describes the parameters.



**Table 9-2** Parameter description

Parameter	Parameter description	Example Value
Name	Domain name prefix	<ul style="list-style-type: none"> <li>• <b>Name</b> for www.huaweicloud.com is <b>www</b>.</li> <li>• <b>Name</b> for testcdn.huaweicloud.com is <b>testcdn</b>.</li> </ul>

Parameter	Parameter description	Example Value
Type	Type of the record set <b>NOTE</b> A CNAME record cannot coexist with an A record. Otherwise, DNS resolution will fail.	CNAME – Map one domain to another
Line	Used when the DNS server is resolving a domain name. It returns the IP address of the server according to the visitor source. For details, see <a href="#">Resolution Line</a> .	Default
TTL (s)	Cache duration of the record set on a local DNS server. If your service address changes frequently, set <b>TTL</b> to a smaller value.	Retain the default value.
Value	Domain name to be pointed to, that is, the CNAME allocated by CDN	download.game-apk1.com.***c.cdnhwc2.com
Weight	If a resolution line in a zone contains multiple record sets of the same type, you can set different weights to each record set. For details, see <a href="#">Configuring Weighted Resolution</a> .	-

6. Click **OK**.

 **NOTE**

- After the CNAME resolution takes effect, the status changes to . However, CNAME resolution may fail the verification and the status changes to , indicating that no CNAME record is configured for the domain name. If you have correctly configured the CNAME record, ignore the error message.
- A CNAME record takes effect immediately after being added. If you modify the CNAME record, then the change takes effect within 72 hours.
- If you encounter a resolution conflict, see [DNS Conflicts](#).

# 10 Checking Whether the CNAME Record Has Taken Effect


---

The length of time before the CNAME record takes effect depends on the DNS provider. To check whether a CNAME record has taken effect:

Open the command line interface that comes with Windows and run the following command:

```
nslookup -qt=cname Acceleration domain name
```

If the CNAME is displayed, the CNAME record has taken effect.

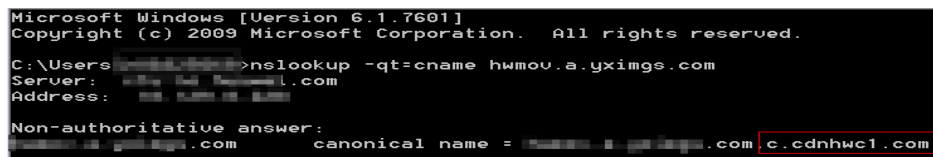

```
Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Users\>nslookup -qt=cname hwmou.a.yximgs.com
Server:
Address:

Non-authoritative answer:
.com canonical name = .com c.cdnhwcl.com
```

Now CDN acceleration has been enabled. For details about more settings, see [Domain Name Settings](#).

# 11 FAQ

---

## How Do I Do If the ICP License of an Acceleration Domain Name Expires?

You must apply for a new license from the MIIT.

- If a new license is obtained before the original one expires, your CDN service is not affected.
- If a license has expired and no new license has been obtained yet, CDN bans the domain name and changes its status to **Rejected**. After the new license is obtained, you can apply to unban the domain name on the CDN console. For details, see [Reviewing a Domain Name](#).

## Can a Level-2 Domain Be Connected to CDN If Only Its Level-1 Domain Name Is Licensed by the MIIT, but Its Level-2 Domain Name Is Resolved Outside the Chinese Mainland?

Yes. If the level-1 domain name has been licensed by the MIIT, the level-2 domain name does not need to be licensed. In addition, a domain name that requires acceleration services only outside the Chinese mainland does not need to be licensed by the MIIT.

## Can I Use CDN If My Domain Name Is Not Licensed?

If the service area of your domain name includes **Chinese mainland**, obtain an ICP license from the MIIT before using CDN. If the service area of your domain name is **Outside Chinese mainland**, the ICP license is not required before using CDN.

## Why Do I Get Request Timed Out When Trying to Ping an Acceleration Domain Name?

For security purposes, ping operations are not allowed. You can run the **nslookup** command to check whether CDN has taken effect. For details, see [Checking Whether the CNAME Record Has Taken Effect](#).

## How Do I Deploy CDN and WAF Together?

Resolve your acceleration domain name to CDN, and then change the origin address of your acceleration domain name to WAF's CNAME value. CDN forwards

the traffic to WAF. Then WAF filters out the illegitimate traffic and routes only the legitimate traffic back to your origin server. In this way, WAF protects CDN accelerated traffic.

To prevent other users from adding your domain name to WAF in advance (this will cause interference on your domain protection), you are advised to add a subdomain name and TXT record of WAF at your DNS provider.



For details, see [Domain Setup with Both CDN and WAF Deployed](#).

## What Are the Differences Between an Acceleration Domain Name and an Origin Domain?

- Acceleration domain names are provided by you for CDN acceleration. A domain name is an identification string that defines a realm of administrative autonomy, authority, or control within the Internet, such as a website, an email address, or an FTP server.
- An origin domain is the domain name of your origin server.

## Can Multiple Acceleration Domain Names Use the Same Origin Server IP Address?

Yes. Different acceleration domain names can use the same origin IP address.

## If a Domain Name Is Not Registered on the Chinese Mainland but Its CDN Service Area Is the Chinese Mainland, Is an ICP License Required for It?

Whether a domain name needs to be licensed does not depend on the region of the domain name provider or the area where the website server is. All that matters is the service area of your domain name. If the service area includes the Chinese mainland, the domain name must be licensed by the MIIT before being added as an acceleration domain name.

## Can an Origin Domain Name Be the Same as an Acceleration Domain Name?

No.

When a user requests content on an acceleration domain name, if the desired content is not cached on CDN PoPs, CDN PoPs need to pull content from the origin server. If the origin domain is the same as the acceleration domain name, the user's request will be repeatedly directed to CDN PoPs, and CDN PoPs will not be able to pull content from the origin server.

## Can Wildcards Be Used as Part of an Acceleration Domain Name?

Yes. A wildcard, \*, allows multiple level-2 domain names to be included by the same value. All these secondary domain names point to the same IP address. If

you add **\*.test.com** to CDN as an acceleration domain name and have it resolved to the CNAME provided by CDN, all of the level-2 domain names under **\*.test.com**, such as **a.test.com**, will enjoy CDN acceleration by default. However, level-3 domain names (such as **b.a.test.com**) would not.

The following are the rules for adding wildcards to domain names:

- If you add a wildcard domain name to a particular account, you cannot add any of the level-2 domain names under that domain name to other accounts.
- You will be billed for the acceleration service provided to all of the level-2 domain names under a wildcard domain name. If there are multiple level-2 domain names, billing will be based on the traffic generated by the wildcard domain name, not on each of the level-2 domain names.