

# Application Orchestration Service

## User Guide

**Issue** 01  
**Date** 2023-04-20



**Copyright © Huawei Technologies Co., Ltd. 2024. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

## **Trademarks and Permissions**



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

## **Notice**

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

## **Huawei Technologies Co., Ltd.**

Address: Huawei Industrial Base  
Bantian, Longgang  
Shenzhen 518129  
People's Republic of China

Website: <https://www.huawei.com>

Email: [support@huawei.com](mailto:support@huawei.com)

# Security Declaration

## Vulnerability

Huawei's regulations on product vulnerability management are subject to the *Vul. Response Process*. For details about this process, visit the following web page:

<https://www.huawei.com/en/psirt/vul-response-process>

For vulnerability information, enterprise customers can visit the following web page:

<https://securitybulletin.huawei.com/enterprise/en/security-advisory>

---

# Contents

---

<b>1 Resource Formation Service.....</b>	<b>1</b>
1.1 Getting Started.....	1
1.1.1 Accessing Resource Formation Service.....	1
1.1.2 Viewing the Stack Status.....	2
1.1.3 Creating a Stack.....	2
1.1.4 Querying a Stack.....	11
1.1.5 Updating a Template or Parameter.....	11
1.1.6 Creating an Execution Plan.....	13
1.1.7 Viewing Estimated Fees.....	15
1.1.8 Deleting a Stack.....	18
1.1.9 Viewing Stack Details.....	19
1.2 Visual Designer.....	21
1.2.1 Introduction.....	21
1.2.2 Visual Designer UI.....	21
1.2.3 Cloud Services or Elements.....	22
1.2.4 Shortcut Keys of Visual Designer.....	27
1.2.5 Compiling a Template to Create an EVS Disk.....	27
1.3 Managing a Stack.....	31
1.4 Stack Sets.....	32
1.4.1 Concepts.....	32
1.4.2 Using a Stack Set.....	33
1.4.3 Creating a Stack Set.....	33
1.4.4 Updating a Stack Set.....	36
1.4.5 Creating Stack Instances from a Stack Set.....	37
1.4.6 Deleting Stack Instances from a Stack Set.....	38
1.4.7 Deleting a Stack Set.....	39
1.5 Auditing.....	39
1.5.1 RFS Operations Supported by CTS.....	40
1.5.2 Viewing RFS Logs in CTS.....	41
1.6 IAM Agency.....	42
<b>2 Application Orchestration Service.....</b>	<b>46</b>
2.1 Introduction.....	46
2.2 Stack Management.....	47

---

2.3 CTS.....	50
2.3.1 AOS Operations Supported by CTS.....	50
2.3.2 Viewing Logs in CTS.....	51

# 1 Resource Formation Service

## 1.1 Getting Started

### 1.1.1 Accessing Resource Formation Service

1. Log in to the [Huawei Cloud console](#) and choose **Service List > Management & Governance > Resource Formation Service**.

The following table outlines the Huawei Cloud regions where Resource Formation Service (RFS) is available.

Site	Region Name	Region Code
Huawei Cloud International website	AP-Singapore	ap-southeast-3
	CN-Hong Kong	ap-southeast-1
	AP-Bangkok	ap-southeast-2
	TR-Istanbul	tr-west-1
	AP-Jakarta	ap-southeast-4
	ME-Riyadh	me-east-1
	CN East-Qingdao	cn-east-5
	LA-Sao Paulo1	sa-brazil-1
	LA-Santiago	la-south-2
	LA-Mexico City2	la-north-2
	AF-Johannesburg	af-south-1
	AF-Cairo	af-north-1
	LA-Mexico City1	na-mexico-1

## 1.1.2 Viewing the Stack Status

You can manage stack lifecycle (such as creation, update, deletion, and query) and the lifecycle of execution plans of a stack (such as creation, deletion, and query).

**Table 1** describes stack statuses.

**Table 2** describes execution plan statuses.

**Table 1-1** Stack statuses

Status	Description
Creation Complete	The stack has been created but not yet deployed.
Deployment In Progress	Stack deployment is in progress.
Deployment Complete	The stack has been deployed.
Deployment Failed	The stack deployment failed.
Deletion In Progress	Stack deletion is in progress.
Deletion Failed	Stack deletion failed.
Rollback In Progress	Stack rollback is in progress.
Rollback Failed	Stack rollback failed.
Rollback Complete	The stack has been rolled back.


**Table 1-2** Execution plan statuses

Status	Description
Creation In Progress	Execution plan creation is in progress.
Creation Failed	Execution plan creation failed.
Available	The execution plan is created and to be applied.
Applied	The execution plan has been applied.

## 1.1.3 Creating a Stack

On the **Stacks** page, click **Create Stack** in the upper right corner, as shown in **Figure 1-1**.

**Figure 1-1** Creating a stack

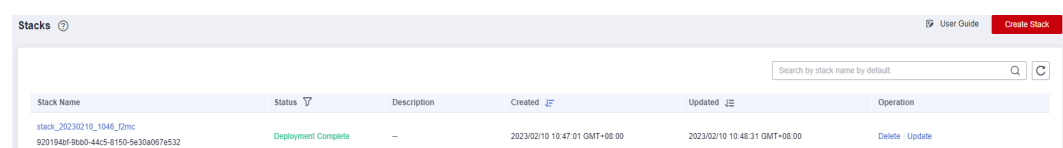


Procedure:

1. Select a template.

There are two ways to select a template, as shown in [Figure 1-2](#): (1) Enter a URL of an OBS template. (2) Upload a local template file. (3) Select a template from **My Templates**.

**Figure 1-2** Selecting a template

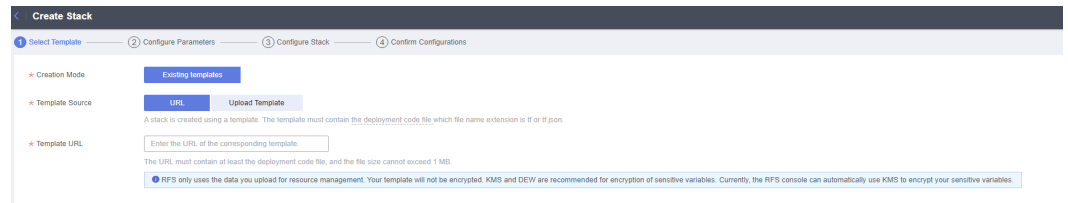

You can upload template files in either **.tf** or **.tf.json** format.

Sample of the **.tf** template for creating a VPC and an ECS:

```
terraform {
  required_providers {
    huaweicloud = {
      source = "huawei.com/provider/huaweicloud"
      version = "1.41.0"
    }
  }
}

provider "huaweicloud" {
  cloud = "myhuaweicloud.com"
  endpoints = {
    iam = "iam.cn-north-4.myhuaweicloud.com"
  }
  insecure = true
  region = "cn-north-4"
  auth_url = "https://iam.cn-north-4.myhuaweicloud.com:31943/v3"
}

variable "vpc_name" {
  type = string
  description = "vpc name"
  default = "rf_teststack_vpc"
  sensitive = true
  nullable = false
}

variable "subnet_name" {
  type = string
  description = "subnet name"
  default = "rf_teststack_subnet"
}

variable "ecs_name" {
  type = string
  description = "ecs name"
  default = "rf_teststack_ecs"
}

variable "ecs_admin_passwd" {
  type = string
  description = "ecs passwd"
}

resource "huaweicloud_vpc" "rf_doc_vpc" {
```



```
name = var.vpc_name
cidr = "192.168.0.0/16"
}

resource "huaweicloud_vpc_subnet" "rf_doc_subnet" {
  name      = var.subnet_name
  vpc_id    = huaweicloud_vpc.rf_doc_vpc.id
  cidr      = "192.168.1.0/24"
  gateway_ip = "192.168.1.1"
}

resource "huaweicloud_compute_instance" "rf_doc_ecs" {
  name          = var.ecs_name
  flavor_id     = "c7.large.2"
  admin_pass    = var.ecs_admin_passwd
  image_id      = "cecc4bcf-b055-4d35-bd5f-693d4412eaf"
  network {
    uuid = huaweicloud_vpc_subnet.rf_doc_subnet.id
  }
  system_disk_type = "SAS"
  system_disk_size = 100
  stop_before_destroy = false
  delete_disks_on_termination = true
  charging_mode      = "postPaid"
  auto_renew         = false
}

output "ecs_address" {
  value = huaweicloud_compute_instance.rf_doc_ecs.access_ip_v4
  description = "The ecs private address."
}

output "ecs_id" {
  value = huaweicloud_compute_instance.rf_doc_ecs.id
  description = "The ecs resource id."
}
```

Sample of the **.tf.json** template for creating a VPC and an ECS:

```
{
  "terraform": {
    "required_providers": {
      "huaweicloud": {
        "source": "huawei.com/provider/huaweicloud",
        "version": "1.41.0"
      }
    }
  },
  "provider": {
    "huaweicloud": {
      "cloud": "myhuaweicloud.com",
      "endpoints": {
        "iam": "iam.cn-north-4.myhuaweicloud.com"
      },
      "insecure": true,
      "region": "cn-north-4",
      "auth_url": "https://iam.cn-north-4.myhuaweicloud.com:31943/v3"
    }
  },
  "variable": {
    "vpc_name": {
      "type": "string",
      "description": "vpc name",
      "default": "rf_teststack_vpc",
      "sensitive": true,
      "nullable": false
    },
    "subnet_name": {
      "type": "string",
      "description": "subnet name",

```

```
    "default": "rf_teststack_subnet"
  },
  "ecs_name": {
    "type": "string",
    "description": "ecs name",
    "default": "rf_teststack_ecs"
  },
  "ecs_admin_passwd": {
    "type": "string",
    "description": "ecs passwd"
  }
},
"resource": {
  "huaweicloud_vpc": {
    "rf_doc_vpc": {
      "name": "${var.vpc_name}",
      "cidr": "192.168.0.0/16"
    }
  },
  "huaweicloud_vpc_subnet": {
    "rf_doc_subnet": {
      "name": "${var.subnet_name}",
      "vpc_id": "${huaweicloud_vpc.rf_doc_vpc.id}",
      "cidr": "192.168.1.0/24",
      "gateway_ip": "192.168.1.1"
    }
  },
  "huaweicloud_compute_instance": {
    "rf_doc_ecs": {
      "name": "${var.ecs_name}",
      "flavor_id": "c7.large.2",
      "admin_pass": "${var.ecs_admin_passwd}",
      "image_id": "cecc4bcf-b055-4d35-bd5f-693d4412eaef",
      "network": {
        "uuid": "${huaweicloud_vpc_subnet.rf_doc_subnet.id}"
      },
      "system_disk_type": "SAS",
      "system_disk_size": 100,
      "stop_before_destroy": false,
      "delete_disks_on_termination": true,
      "charging_mode": "postPaid",
      "auto_renew": false
    }
  },
  "output": {
    "ecs_address": {
      "value": "${huaweicloud_compute_instance.rf_doc_ecs.access_ip_v4}",
      "description": "The ecs private address."
    },
    "ecs_id": {
      "value": "${huaweicloud_compute_instance.rf_doc_ecs.id}",
      "description": "The ecs resource id."
    }
  }
}
```

---

 **CAUTION**

The sample template contains charged resources. Check whether resources need to be enabled before using the template.

This template consists of five parts:

- a. **huaweicloud\_vpc** in **resource** indicates VPC information.


- b. **huaweicloud\_vpc\_subnet** in **resource** indicates information about a subnet defined in the VPC. A subnet is a segment within the IP address range of the VPC.
  - c. **huaweicloud\_compute\_instance** in **resource** indicates information about an ECS defined in the template.
  - d. **variable** indicates variables defined by users in templates during stack creation and deployment.
  - e. **output** defines the outputs of templates. After a stack is created, its output is generated based on the definition and displayed on the **Outputs** tab page.
2. Configure parameters.
- Click **Next** to go to the **Configure Parameters** page, where you can modify the stack name and description, as shown in **Figure 1-3**.

**CAUTION**

The stack name must start with a letter and can contain a maximum of 128 characters, including letters, digits, underscores (\_), and hyphens (-). The name must be unique.

A stack description can contain a maximum of 1,024 characters.


**Figure 1-3** Configuring parameters

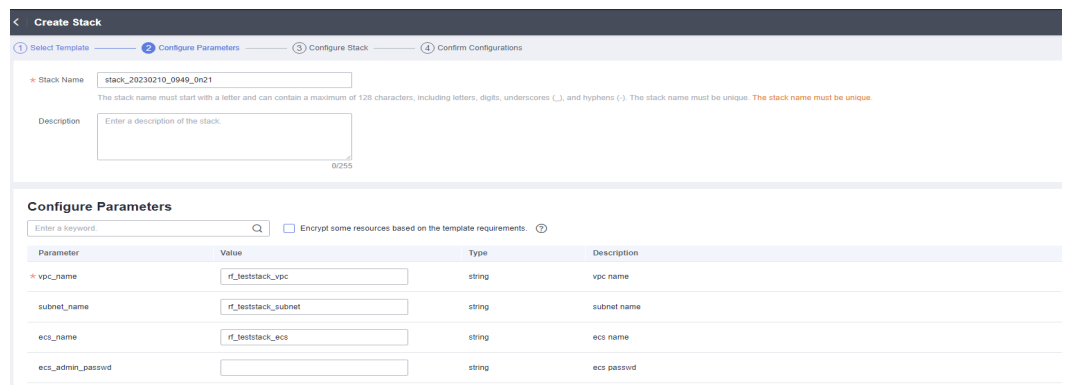

Parameters marked with a red asterisk (\*) are mandatory. Set these parameters to valid values.

If you enter an invalid value, the text box will turn red (as shown in **Figure 1-4**) and clicking **Next** will not redirect you to the next page.

**Figure 1-4** Text box with an invalid value

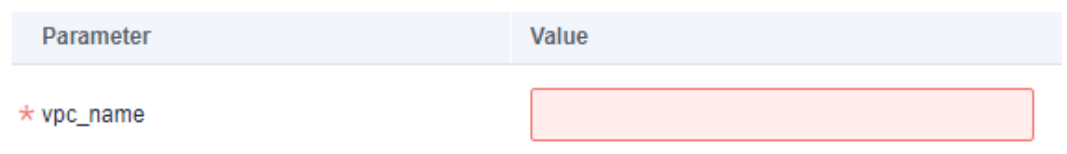

Click **Next**. The **Configure Stack** page is displayed.


 **CAUTION**

If the stack name or description is imported using a URL and contains special characters, the characters must be encoded following the HTTP encoding rules first.

Check whether the default VPC, subnet, and ECS names used on this page already exist on the corresponding consoles. If the names already exist, change them to unique ones to prevent creation failures.

3. Configure the stack.  
Click **Next** to go to the **Advanced Settings** page, as shown in [Figure 1-5](#).

**Figure 1-5** Configuring the stack

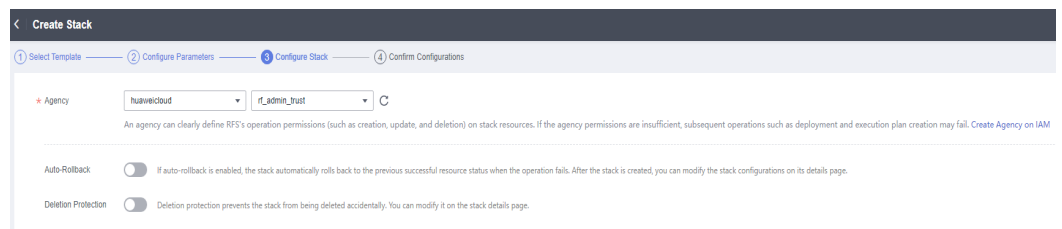

Mandatory parameter (marked with \*)

**Agency:** An agency can clearly define operation permissions of RFS (such as creation, update, and deletion) on stack resources. If the agency permissions are insufficient, subsequent operations may fail.

Optional parameters:


**Deletion Protection:** prevents the stack from being deleted accidentally. After a stack is created, you can update this configuration by clicking **Update** in the **Operation** column.

**Auto-Rollback:** Enabling auto-rollback will revert the stack to the last successful resource status in the event of a failed operation.

Click **Next** to go to the **Confirm Configurations** page.

4. Confirm the configurations.  
After you confirm the configurations, you can click either **Create Execution Plan** or **Directly Deploy Stack**.
  - a. If you click **Directly Deploy Stack**, a confirmation dialog box will be displayed.

**Figure 1-6** Directly deploy stack

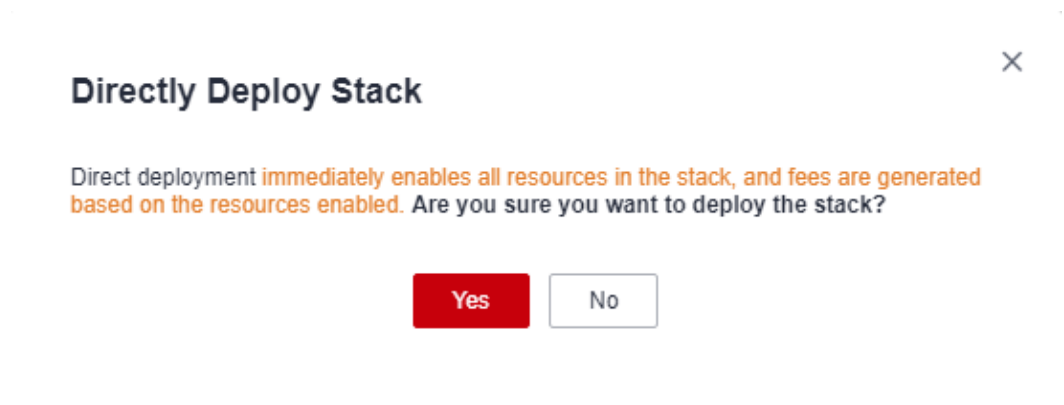

Click **Yes**. A new stack is generated and its status is **Deployment In Progress**, as shown in [Figure 1-7](#).

**Figure 1-7** Deployment in progress

Stack Name	Status	Description	Created	Updated	Operation
stack_20230210_1046_Dmrc 9201946f-9660-44c5-8150-5e30a067e532	Deployment In Progress	--	2023/02/10 10:47:01 GMT+08:00	2023/02/10 10:47:02 GMT+08:00	Delete Update


Then, the status changes to **Deployment Complete**, as shown in [Figure 1-8](#).

**Figure 1-8** Deployment complete

Stack Name	Status	Description	Created	Updated	Operation
stack_20230210_1046_Dmrc 9201946f-9660-44c5-8150-5e30a067e532	Deployment Complete	--	2023/02/10 10:47:01 GMT+08:00	2023/02/10 10:48:31 GMT+08:00	Delete Update

- b. Clicking **Create Execution Plan** will open a dialog box where you can name and describe the execution plan, as shown in [Figure 1-9](#).


Figure 1-9 Create Execution Plan dialog box

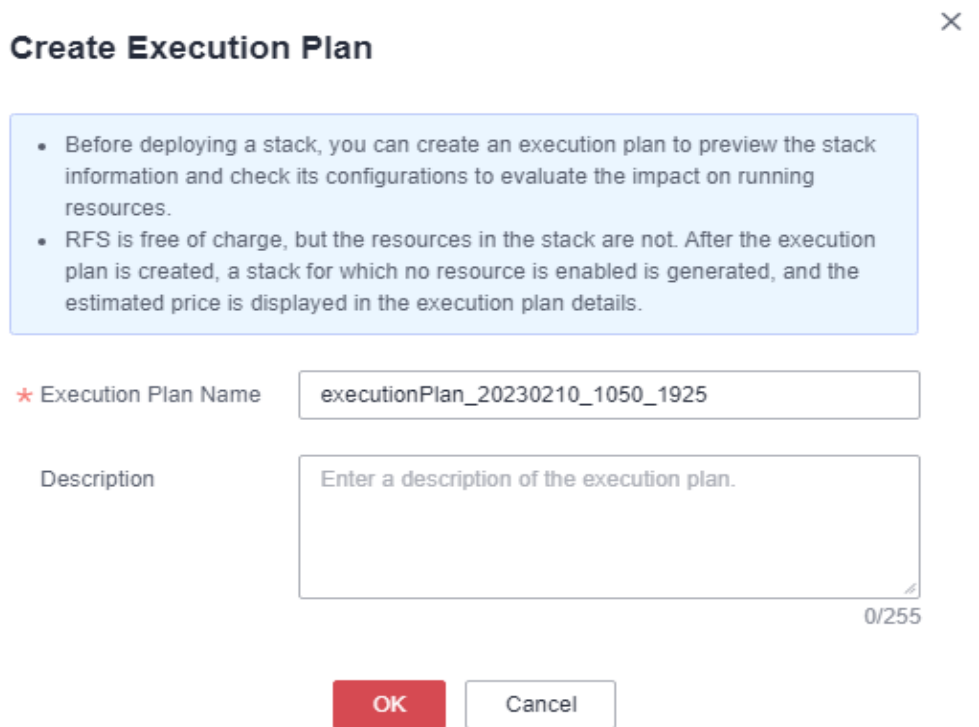

Click **OK**. The **Execution Plans** tab page is displayed.


Wait until the execution plan is created and refresh the page. The execution plan status changes to **Available**, as shown in [Figure 1-10](#).

Figure 1-10 Available

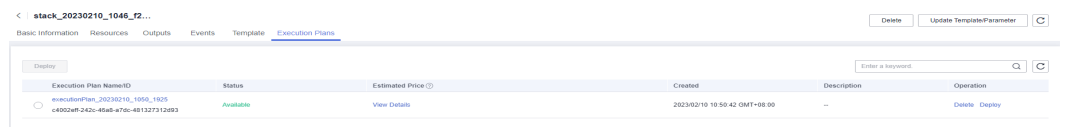

Return to the stack list page. The stack status is **Creation Complete**, as shown in [Figure 1-11](#).

Figure 1-11 Stack list




**CAUTION**

Creating an execution plan can preview the resource attribute changes of the entire stack and evaluate the impact. If the execution plan meets your expectations, you can apply the plan. Creating an execution plan does not incur fees. The system changes your stack only when you execute the plan.


Click **Deploy** in the **Operation** column of the execution plan to deploy it, as shown in [Figure 1-12](#).

**Figure 1-12** Execution plan dialog box

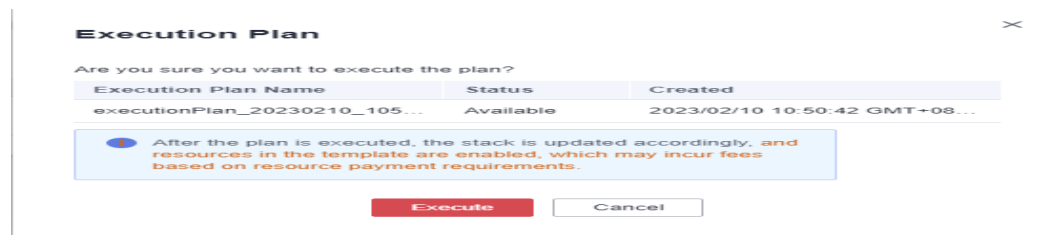

In the **Execution Plan** dialog box, click **Execute**. A message is displayed in the upper right corner, indicating that the execution plan is being deployed. Return to the stack list page. A new stack is generated and its status is **Deployment In Progress**, as shown in [Figure 1-13](#).

**Figure 1-13** Deployment in progress




Then, the stack status changes to **Deployment Complete**, as shown in [Figure 1-14](#).

**Figure 1-14** Deployment complete



On the **Execution Plans** tab page of the stack details page, the execution plan status is **Applied**, as shown in [Figure 1-15](#).

**Figure 1-15** Applied



Click the **Events** tab. The event list shows that resources of the stack are deployed, as shown in [Figure 1-16](#).

Figure 1-16 Resources deployed

Time	Type	Description	Resource Name/Type	Associated Resource ID
2023/08/15 11:34:18 GMT+08:00	Log	Apply required resource success	--	--
2023/08/15 11:34:15 GMT+08:00	--	Apply complete! Resources: 4 added, 0 changed, 0 destroyed	--	--
2023/08/15 11:34:15 GMT+08:00	Creation Complete	huaweicloud_compute_instance: Creation complete after 1m5s [d-090d085-4fe1-4ede-aa57-955e6f036ff6]	instance ECS	090d085-4fe1-4ede-aa57-955e6f036ff6
2023/08/15 11:34:10 GMT+08:00	Creation In Progress	huaweicloud_compute_instance: Still creating... [1m0s elapsed]	instance ECS	--
2023/08/15 11:34:00 GMT+08:00	Creation In Progress	huaweicloud_compute_instance: Still creating... [50s elapsed]	instance ECS	--
2023/08/15 11:33:50 GMT+08:00	Creation In Progress	huaweicloud_compute_instance: Still creating... [40s elapsed]	instance ECS	--
2023/08/15 11:33:40 GMT+08:00	Creation In Progress	huaweicloud_compute_instance: Still creating... [30s elapsed]	instance ECS	--
2023/08/15 11:33:30 GMT+08:00	Creation In Progress	huaweicloud_compute_instance: Still creating... [20s elapsed]	instance ECS	--
2023/08/15 11:33:20 GMT+08:00	Creation In Progress	huaweicloud_compute_instance: Still creating... [10s elapsed]	instance ECS	--
2023/08/15 11:33:10 GMT+08:00	Creation In Progress	huaweicloud_compute_instance: Creating...	instance ECS	--

You can view details on the console of the corresponding cloud service.

- i. In the service list, locate and click **Elastic Cloud Server**. On the displayed page, view the deployed ECS, as shown in [Figure 1-17](#).

Figure 1-17 ECS

Name/ID	Monitoring	AZ	Status	Specifications/Image	IP Address	Billing Mode	Tag	Operation
rt_teststack_ecs1 ecs0ee4bf-3f16-47a3-96f6-9d549b...		AZ3	Running	1 vCPUs   1 GB   s6... Public-CAD-HCE-B...	192.168.0.166 (Priv...	Pay-per-use	--	Remote Login More

Resources of the stack are deployed.

## 1.1.4 Querying a Stack

Log in to the RFS console and click **Stacks** in the navigation pane on the left. The stack list page is displayed.

In the search box above the stack list, enter the name of the target stack and click the search button, as shown in [Figure 1-18](#).

Figure 1-18 Querying a stack

Stack Name	Status	Description	Created	Updated	Operation
stack_20230210_1046_0mc 920118401-9600-44c5-0150-5e30a0e07e332	Deployment Complete	--	2023/02/10 10:47:01 GMT+08:00	2023/02/10 10:57:21 GMT+08:00	Delete Update

## 1.1.5 Updating a Template or Parameter




Stack change records are not available. If you want to view change details, you are recommended to create an execution plan.



You can add cloud service resources or change resource specifications in either of the following ways: Go to the stack list page, locate the target stack, and click **Update** in the **Operation** column. Alternatively, go to the stack details page and click **Update Template/Parameter** in the upper right corner to enter the page for updating the stack, as shown in [Figure 1-19](#).

**Figure 1-19** Selecting a template

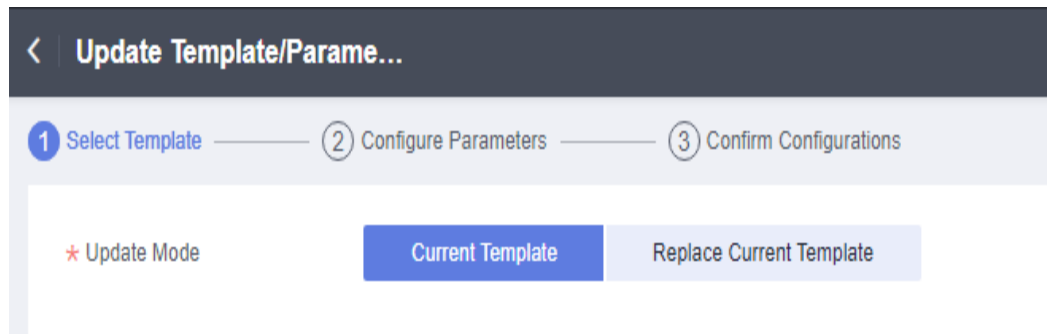


You can select **Current Template** or **Replace Current Template** (use a new template) to update the stack.

**Solution 1: Using the Current Template**


1. Click **Next** to go to the **Configure Parameters** page and modify parameters on it, as shown in [Figure 1-20](#).

**Figure 1-20** Configuring parameters

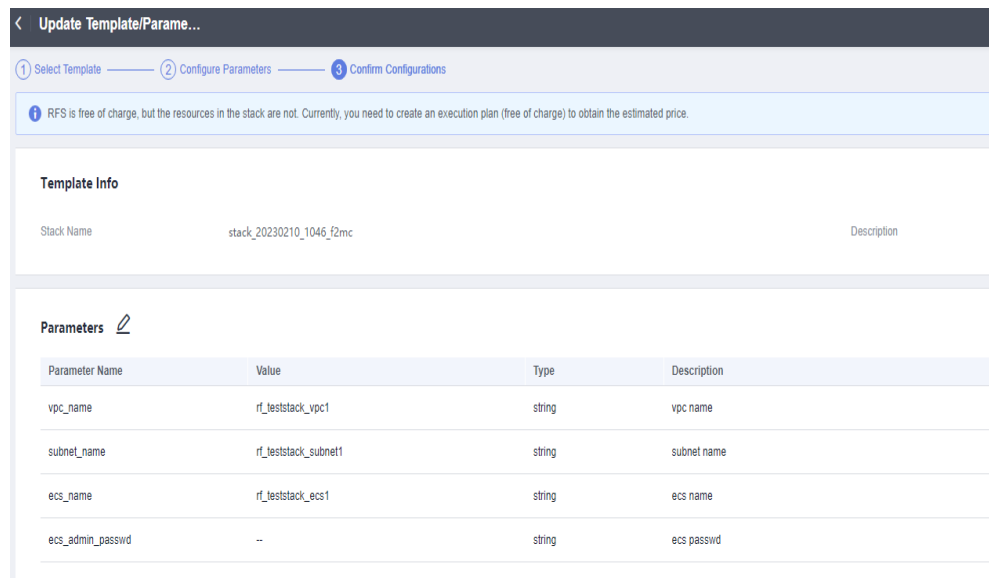


2. Click **Next** to go to the **Confirm Configurations** page, as shown in [Figure 1-21](#).

**Figure 1-21** Confirming configurations

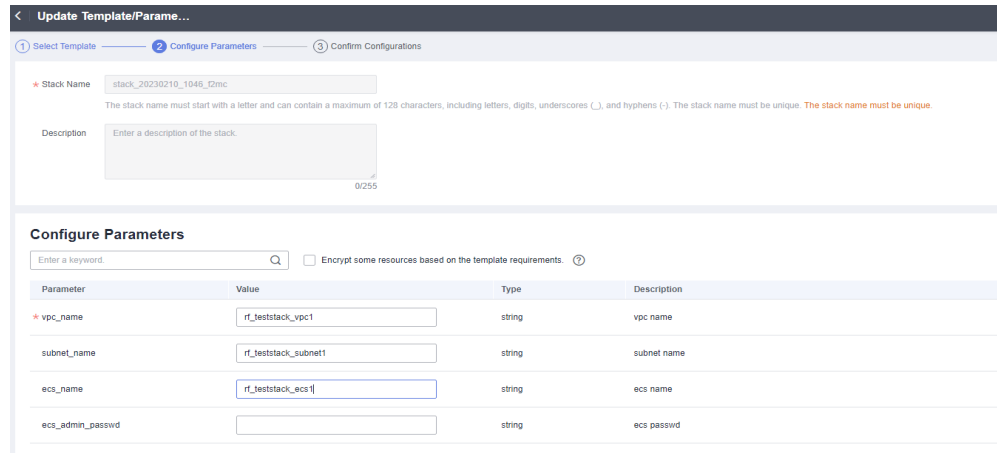

3. Click **Directly Deploy Stack**. The **Events** page is displayed. The status changes to **Update Complete**, as shown in [Figure 1-22](#).

**Figure 1-22** Update complete

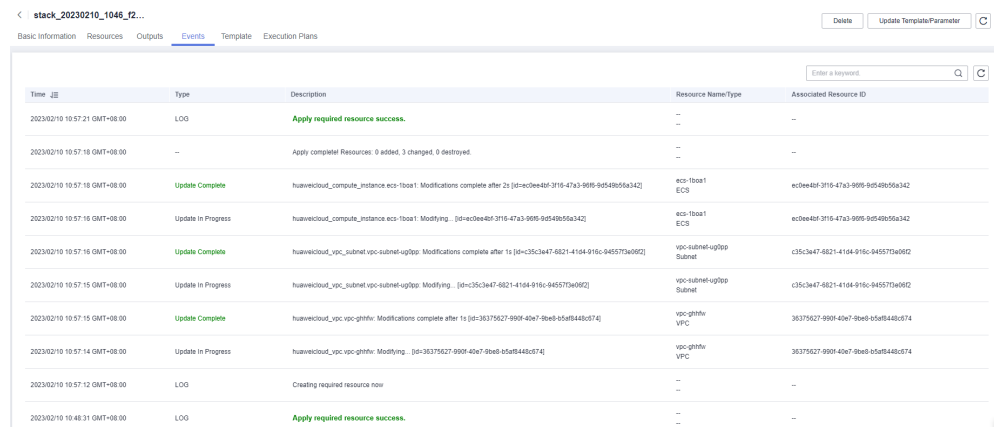


Solution 2: Replacing the Current Template (see [Creating a Stack](#))

## 1.1.6 Creating an Execution Plan

On the stack list page, click the name of the stack to go to its details page. Click **Update Template/Parameter** in the upper right corner to go to the page for creating an execution plan, as shown in [Figure 1-23](#).


**Figure 1-23** Page for creating an execution plan

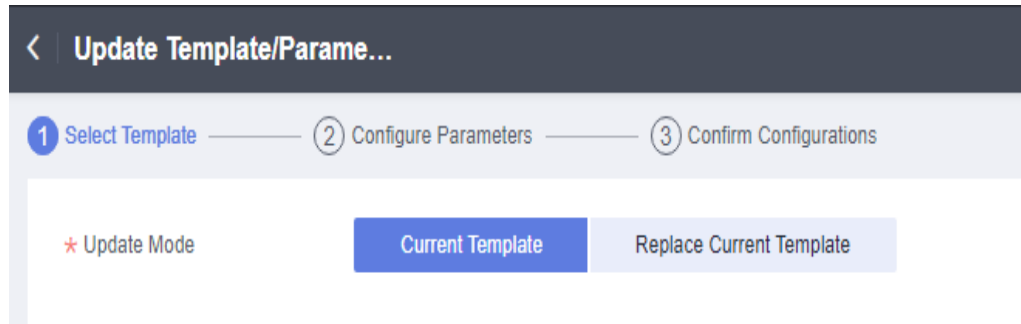

The subsequent steps are the same as those for creating a stack, except for one difference that you need to click **Create Execution Plan** instead of **Directly Deploy Stack**.

Then, an execution plan is generated, but the stack is not directly deployed. If you create multiple execution plans, they will exist in the same stack, as shown in [Figure 1-24](#).


**Figure 1-24** Execution plan list

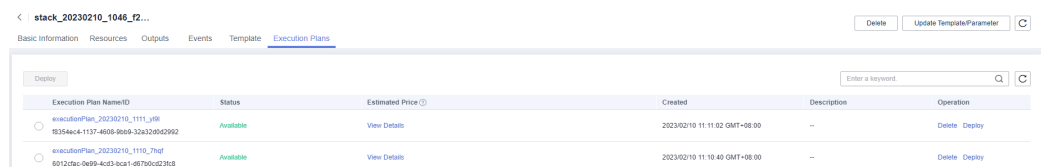

Locate the row that contains the generated execution plan and click **Deploy** in the **Operation** column if you want to apply it.

If an execution plan is no longer used, click **Delete** in the **Operation** column. In the displayed dialog box, click **OK**, as shown in [Figure 1-25](#).

**Figure 1-25** Deleting an execution plan

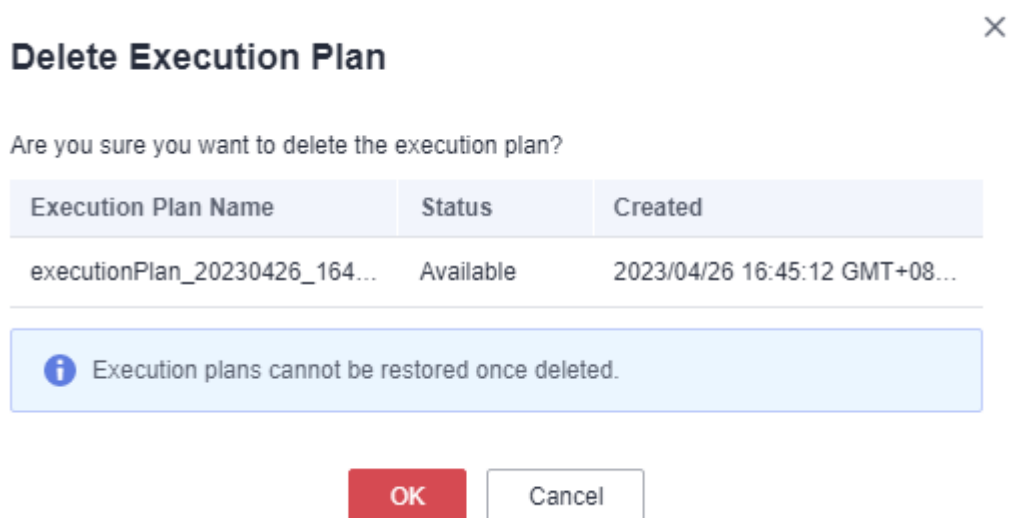

## 1.1.7 Viewing Estimated Fees

On the **Execution Plans** page, find the row where the created execution plan resides. Click **View Details** (as shown in [Figure 1-26](#)). The **Price Details** dialog box is displayed and you can see the estimated price, as shown in [Figure 1-27](#).

**Figure 1-26** Viewing price details

Execution Plan Name/ID	Status	Estimated Price	Created	Description	Operation
executionPlan_20230704_1115_... 76308236-8855-4778-8916-961b6c55e5f	Available	Yearly/Monthly: \$1.46 Pay-per-use: \$0.01/hour(s)	2023/07/04 11:15:34 GMT+08:00	-	Deploy Delete

**Figure 1-27** Price details

**Price Details**

This price is an estimate and may differ from the final price. [Pricing Details](#). Price inquiry is not supported for some resources. Go to [Price Calculator](#) to calculate the fees.

Total price Estimated yearly/monthly price: **\$1.46** Estimated pay-per-use price: **\$0.01/hour(s)**

Yearly/Monthly Pay-per-Use [Export Price List](#)

Cloud Pro...	Logical Name	Region	Duration	Q...	Original Price	Discount Details	Estimated Sale Price
Elastic Volume	myvolume3	AP-Singapore	2month(s)	1	<b>\$1.46</b>	\$0.00	<b>\$1.46</b>

Close

[Figure 1-28](#) shows the estimated price of yearly/monthly-billed resources. [Figure 1-29](#) shows the estimated price of pay-per-use resources. [Figure 1-30](#) shows the resources that do not support price inquiry.

[Table 1-3](#) lists the resources that support price inquiry.

**Figure 1-28** Yearly/Monthly

**Price Details**

This price is an estimate and may differ from the final price. [Pricing Details](#). Price inquiry is not supported for some resources. Go to [Price Calculator](#) to calculate the fees.

Total price Estimated yearly/monthly price: **\$1.46** Estimated pay-per-use price: **\$0.01/hour(s)**

Yearly/Monthly Pay-per-Use [Export Price List](#)

Cloud Pro...	Logical Name	Region	Duration	Q...	Original Price	Discount Details	Estimated Sale Price
Elastic Volume	myvolume3	AP-Singapore	2month(s)	1	<b>\$1.46</b>	\$0.00	<b>\$1.46</b>

Close

**Figure 1-29** Pay-per-use

**Price Details** ×

*This price is an estimate and may differ from the final price. [Pricing Details](#). Price inquiry is not supported for some resources. Go to [Price Calculator](#) to calculate the fees.*

Total price    Estimated yearly/monthly price: \$1.46    Estimated pay-per-use price: \$0.01/hour(s)

Yearly/Monthly    Pay-per-Use    Export Price List

Cloud Product	Logical Name <span>?</span>	Region	Qua...	Original Price	Discount Details	Estimated Sale Price
Elastic Volume Sen	myvolume2	AP-Singapore	1	\$0.01 /hour(s)	\$0.00 /hour(s)	\$0.01 /hour(s)

Close

**Figure 1-30** To be supported

**Price Details** ×

*This price is an estimate and may differ from the final price. [Pricing Details](#). Price inquiry is not supported for some resources. Go to [Price Calculator](#) to calculate the fees.*

Total price    ▲ Price inquiry is not supported for some resources. For details, see the "To Be Supported" tab page.

To Be Supported ?    Export Price List

Cloud Product	Logical Name <span>?</span>	Cause
Virtual Private Cloud	sg-rxib3	Not supported

Close

**Table 1-3** Cloud services/Resources that support price inquiry and billing modes

Cloud Service	Resource Type	Billing Mode
Elastic Cloud Server (ECS)	<a href="#">huaweicloud_compute_instance</a>	Yearly/ Monthly and pay-per-use
Elastic Volume Service (EVS)	<a href="#">huaweicloud_evs_volume</a>	Yearly/ Monthly and pay-per-use
Elastic IP (EIP)	<a href="#">huaweicloud_vpc_eip</a>	Yearly/ Monthly and pay-per-use
Bandwidth	<a href="#">huaweicloud_vpc_bandwidth</a>	Pay-per-use


Cloud Service	Resource Type	Billing Mode
Elastic Load Balance (ELB)	<a href="#">huaweicloud_elb_loadbalancer</a>	Pay-per-use
NAT Gateway	<a href="#">huaweicloud_nat_gateway</a>	Pay-per-use
Relational Database Service (RDS)	<a href="#">huaweicloud_rds_instance</a>	Yearly/ Monthly and pay-per-use
Cloud Container Engine (CCE)	<a href="#">huaweicloud_cce_cluster</a>	Yearly/ Monthly and pay-per-use
Cloud Search Service (CSS)	<a href="#">huaweicloud_css_cluster</a>	Pay-per-use
GaussDB(for Redis)	<a href="#">huaweicloud_gaussdb_redis_instance</a>	Yearly/ Monthly and pay-per-use
GaussDB(for MySQL)	<a href="#">huaweicloud_gaussdb_mysql_instance</a>	Yearly/ Monthly and pay-per-use
Scalable File Service (SFS)	<a href="#">huaweicloud_sfs_turbo</a>	Pay-per-use
Distributed Cache Service (DCS)	<a href="#">huaweicloud_dcs_instance</a>	Yearly/ Monthly and pay-per-use
Distributed Message Service (DMS) for Kafka	<a href="#">huaweicloud_dms_kafka_instance</a>	Pay-per-use

 **CAUTION**

Price estimation will fail if mandatory fields are not specified or a field is invalid in the template used for price estimation.

After the price inquiry completes, the estimated price is displayed in the basic information on the execution plan details page, as shown in [Figure 1-31](#).

Figure 1-31 Execution plan details

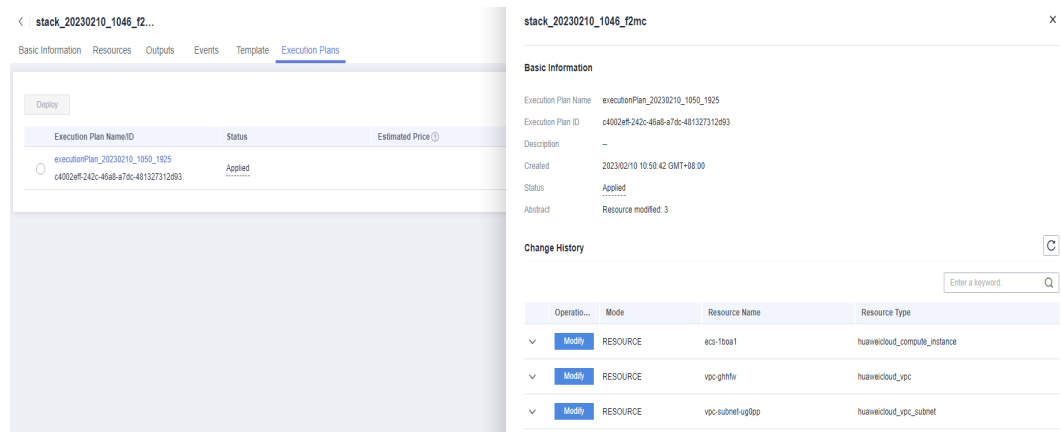


## 1.1.8 Deleting a Stack

1. When **Deletion Protection** is disabled:

On the stack list page, find the created stack and click **Delete** in the **Operation** column. In the displayed dialog box, enter **Delete** in the text box and click **OK**.

Alternatively, go to the stack details page and click **Delete** in the upper right corner, as shown in [Figure 1-32](#).


Figure 1-32 Dialog box for deleting a stack

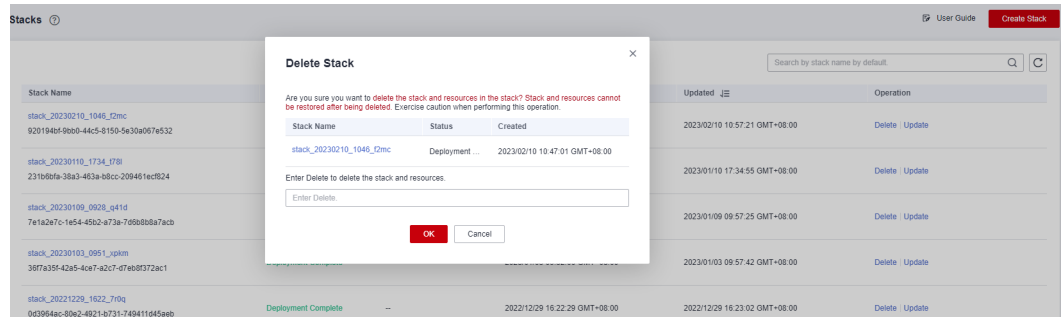

2. When **Deletion Protection** is enabled:


[Figure 1-33](#) shows that the **Enabled** status of **Deletion Protection**.

Figure 1-33 Deletion protection

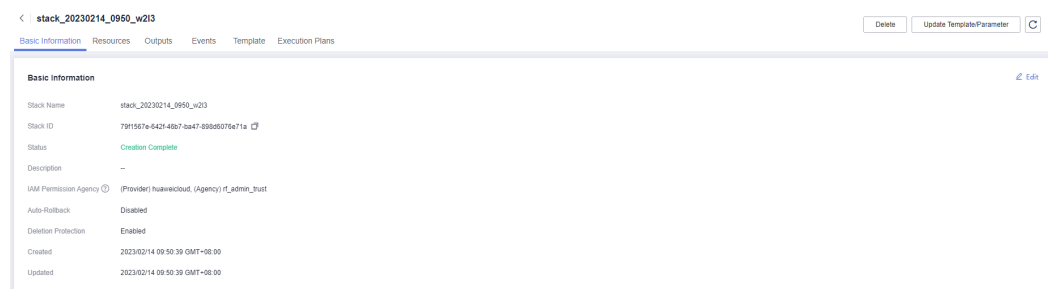

If you delete a resource stack with deletion protection enabled, an error message will be displayed, as shown in [Figure 1-34](#).

**Figure 1-34** Deletion failed

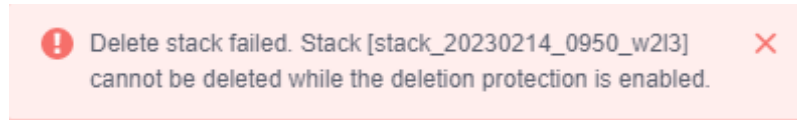


## 1.1.9 Viewing Stack Details

### 1. Viewing Stack Details

There are six function modules on the stack details page (The stack named **stack\_20221206\_0933\_uiyn** is an example here.):


- a. **Basic Information:** displays basic information about the stack, as shown in [Figure 1](#).

**Figure 1-35** Basic information

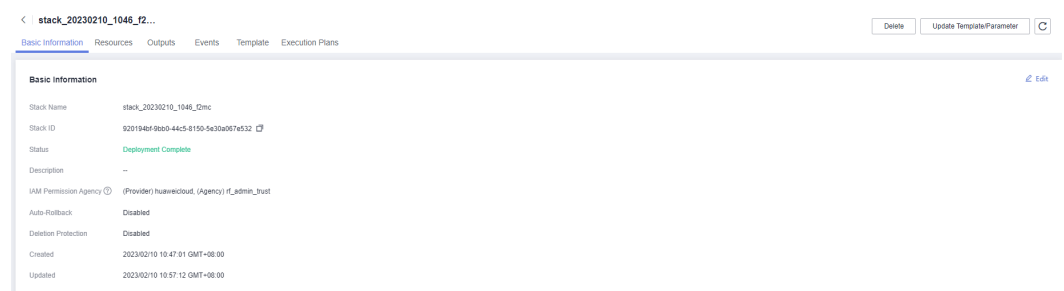

- b. **Resources:** displays information about cloud services or resources generated during plan execution and stack deployment, as shown in [Figure 1-36](#).

**Figure 1-36** Resources

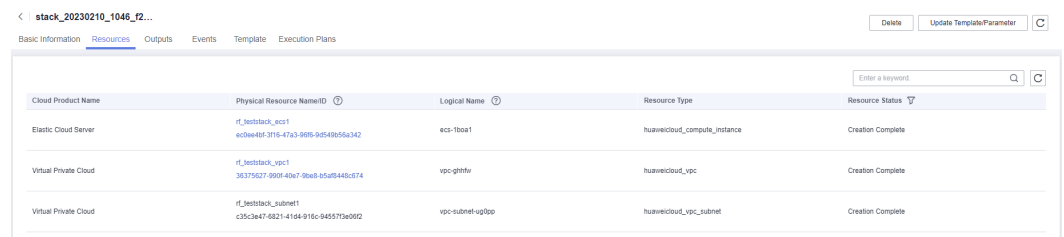

- c. **Events:** displays log information generated during plan execution and stack deployment. Events are updated in real time based on the stack status. For example, [Figure 1-37](#) shows that three resources are created.



Figure 1-37 Events

Time	Type	Description	Resource Name/Type	Associated Resource ID
2023/02/10 10:57:21 GMT+08:00	LOG	Apply required resource success.	--	--
2023/02/10 10:57:18 GMT+08:00	--	Apply complete! Resources: 0 added, 3 changed, 0 destroyed.	--	--
2023/02/10 10:57:18 GMT+08:00	Update Complete	huaweicloud_compute_instance ec2-1b0a1. Modifications complete after 2s [id=ec2e4ef-3f16-47a3-9959-9d548056a342]	ec2-1b0a1 ECS	ec2e4ef-3f16-47a3-9959-9d548056a342
2023/02/10 10:57:16 GMT+08:00	Update In Progress	huaweicloud_compute_instance ec2-1b0a1. Modifying. [id=ec2e4ef-3f16-47a3-9959-9d548056a342]	ec2-1b0a1 ECS	ec2e4ef-3f16-47a3-9959-9d548056a342
2023/02/10 10:57:16 GMT+08:00	Update Complete	huaweicloud_vpc_subnet vpc-subnet-ug0pp. Modifications complete after 1s [id=c35c3e47-6621-4104-916c-945573e0902]	vpc-subnet-ug0pp Subnet	c35c3e47-6621-4104-916c-945573e0902
2023/02/10 10:57:15 GMT+08:00	Update In Progress	huaweicloud_vpc_subnet vpc-subnet-ug0pp. Modifying. [id=c35c3e47-6621-4104-916c-945573e0902]	vpc-subnet-ug0pp Subnet	c35c3e47-6621-4104-916c-945573e0902
2023/02/10 10:57:15 GMT+08:00	Update Complete	huaweicloud_vpc_vpcgwntf. Modifications complete after 1s [id=36375627-9909-40a7-80a8-e5a8448c674]	vpc-gwntf VPC	36375627-9909-40a7-80a8-e5a8448c674
2023/02/10 10:57:14 GMT+08:00	Update In Progress	huaweicloud_vpc_vpcgwntf. Modifying. [id=36375627-9909-40a7-80a8-e5a8448c674]	vpc-gwntf VPC	36375627-9909-40a7-80a8-e5a8448c674

- d. **Outputs:** displays output parameters in the template, as shown in [Figure 1-38](#):

Figure 1-38 Outputs

Name	Type	Value
No data available.		

- e. **Template:** displays the template content used for creating a stack, as shown in [Figure 1-39](#).

Figure 1-39 Template

```

Template if json
Template if json
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000


```

- f. **Execution Plans:** displays different execution plans. After an execution plan is generated, you need to click **Deploy** to create resources in the template. After an execution plan is applied, its status changes from **Available** to **Applied** and the **Deploy** button disappears, as shown in [Execution plans](#).

Figure 1-40 Execution plans

Execution Plan Name/ID	Status	Estimated Price	Created	Description	Operation
ec2e4ef-3f16-47a3-9959-9d548056a342	Available	View Details	2023/02/10 11:10:02 GMT+08:00	--	Delete Deploy
ec2e4ef-3f16-47a3-9959-9d548056a342	Available	View Details	2023/02/10 11:10:40 GMT+08:00	--	Delete Deploy

Click the execution plan name. The execution plan details page is displayed, as shown in [Figure 1-41](#).

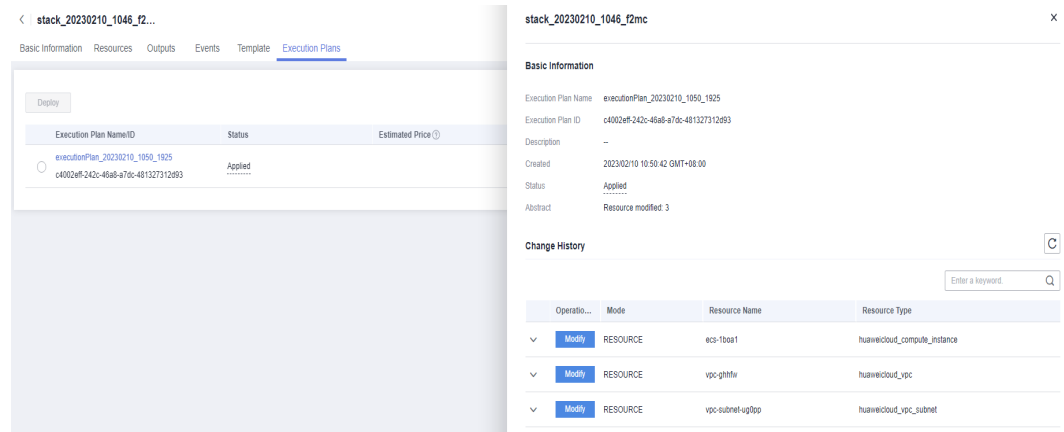**Figure 1-41** Execution plan details

## 1.2 Visual Designer

### 1.2.1 Introduction

The RFS Visual Designer is a graphic tool for creating, viewing, and modifying templates. Using the designer, you can drag elements to the canvas, directly connect them, and then edit their details in a visual form.

The designer can help you quickly understand the relationships between elements in templates and modify templates easily.

The designer has the following advantages:

- **Visualizing template resources**  
The Visual Designer visualizes template resources to offer you a better insight. The Visual Designer defines resources in the template metadata, such as resource size. When you open a template, the designer automatically adds the metadata and the layout is saved. Therefore, when you re-open the template, the last-saved template is displayed.
- **Simplifying template compiling**  
When you compile template resources in a JSON or TF file, the process is complex and error-prone. In the designer, you can add resources to the template by dragging resources to the canvas and drawing lines between resources to create a relationship.
- **Simplifying editing with the Visual Designer**  
The designer allows you to modify templates. Text designer is not required. The designer also supports autocomplete and lists all property names for a resource.

### 1.2.2 Visual Designer UI

The RFS Visual Designer UI includes six parts: control pane, resource bar, log area, design console, template pane, and attribute pane. For details about each part, see [Figure 1-42](#).

Figure 1-42 Visual Designer UI

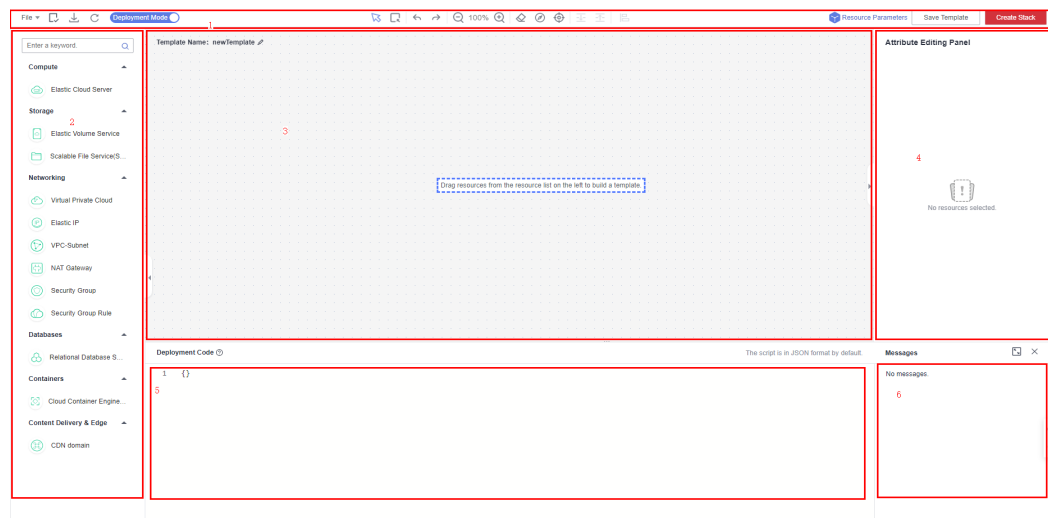


Table 1-4 Visual Designer UI description

No. (in the Above Figure)	Description
1	Control pane, which displays the control operation shortcuts of the design console.
2	Resource pane, which displays available resources for orchestration. Resources are categorized by service. You can drag resources and orchestrate them on the canvas and use lines to connect them and define their relationships.
3	Design console, which is the canvas for you to design templates and connect resources.
4	Attribute panel, which displays the attribute name and type of the selected resource.
5	Template area, which allows you to modify templates and define attributes.
6	Log area, which displays error information and messages triggered during your operation. For example, non-compliant parameters are displayed during syntax verification.

### 1.2.3 Cloud Services or Elements


A cloud service is an element and a basic unit to be orchestrated in Visual Designer. Each element contains all attributes of the resource type it belongs to.

Resources are classified on the left of the designer UI and can be dragged to the canvas on the right.

## Copying or Deleting a Cloud Service

Drag a cloud service to the canvas. Right-click the cloud service.

**Figure 1-43** Right-clicking the cloud service

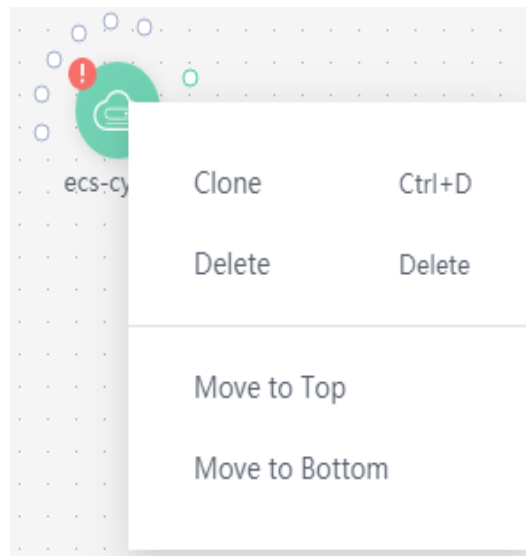


Two icons are displayed. Click **Clone** to copy the cloud service. Click **Delete** to delete the cloud service.

## Cloud Service Block Diagrams

There are two types of cloud service resource block diagrams in Visual Designer:


- Type 1: Non-scalable elements  
A non-scalable element generally represents a terminal service or an entity resource. The block diagram size is fixed.

**Figure 1-44** Non-scalable elements



- Type 2: Scalable elements  
A scalable element is a container element. The containers and elements can be put into containers. You can adjust the size of the block diagram by dragging.

**Figure 1-45** Scalable elements

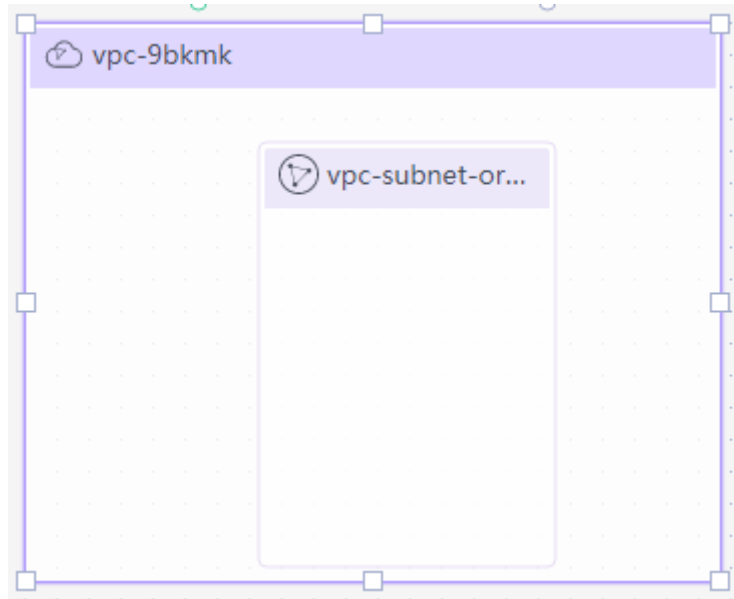

## Connecting Resources Using Hollow Points/Lines

When some elements are dragged to the canvas, a hollow point is displayed on the resource. There are **green hollow points** and **gray hollow points**.

Hollow points can be used to connect resources. The connection line between two resources represents their association or dependency. There are green lines and gray lines.

- Green hollow points

A resource displayed with a green hollow point can depend on other resources.

You can connect resources as required and the resources to be depended on are created by RFS first.


For example, when you drag an RDS resource to the canvas, a green hollow point is displayed as shown in the following figure.

**Figure 1-46** RDS green hollow point




When you move the cursor to the green hollow point of the left resource and click the green hollow point, an arrow is displayed. Drag the cursor to the resource on the right and release the cursor. The left resource depends on the right resource.

**Figure 1-47** Green hollow point: an element to be connected

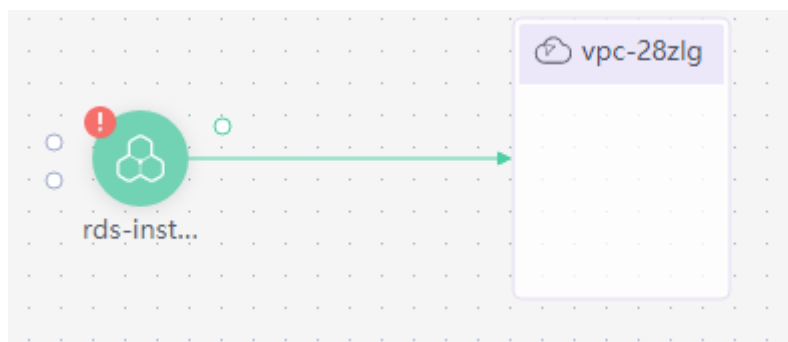


- **Gray hollow point**  
A resource with a gray hollow point can be associated with other resources. For example, when you drag a CCE resource to the canvas, a gray hollow point is displayed as shown in the following figure.

**Figure 1-48** CCE gray hollow point




When you move the cursor to the gray hollow point, you can view an attribute value as shown in the following figure, which indicates that the CCE resource can only be connected to the EIP resource.

**Figure 1-49** CCE attribute




Assume that the CCE resource needs to be connected to a VPC resource. Drag the VPC element to the canvas first.

**Figure 1-50** EIP

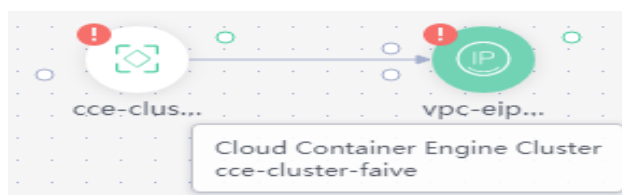


Move the cursor to the gray hollow point of the CCE resource and click the gray hollow point. An arrow is displayed. Drag the mouse to move the arrow to the EIP resource. When the hollow point of EIP resource turns green, release the mouse. The two resources are associated.

**Figure 1-51** Hollow point: an element to be connected

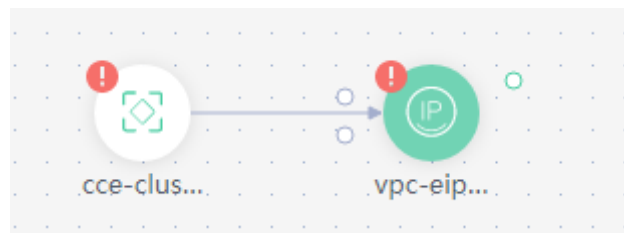

- **Green hollow points and connection lines**  
The line from a resource with a green hollow point to another resource represents the dependencies between two resources. For more information, see [•Green hollow points](#).


**Figure 1-52** Green hollow points and connection lines

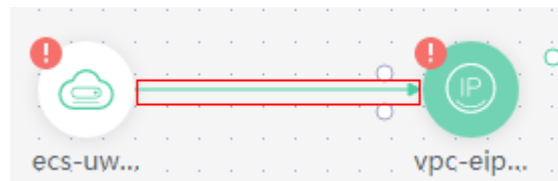

- **Gray hollow points and connection lines**  
The line from a resource with a hollow gray point to another resource indicates that the two resources are associated using an attribute value. In addition, a dependency relationship exists between the two resources. For more information, see [•Green hollow points](#).

A resource with a gray hollow point can be associated with other resources. For example, when you drag a CCE resource to the canvas, a gray hollow point is displayed as shown in the following figure. When you move the cursor to the gray hollow point, you can view an attribute value as shown in the following figure, which indicates that the CCE resource can only be connected to the EIP resource. Assume that the CCE resource needs to be connected to a EIP resource. Drag the EIP element to the canvas first. Move the cursor to the gray hollow point of the CCE resource and click the gray hollow point. An arrow is displayed. Drag the mouse to move the arrow to the EIP resource. When the hollow point of EIP resource turns green, release the mouse. The two resources are associated. Hollow point: an element to be connected

**Figure 1-53** Gray hollow points and connection lines

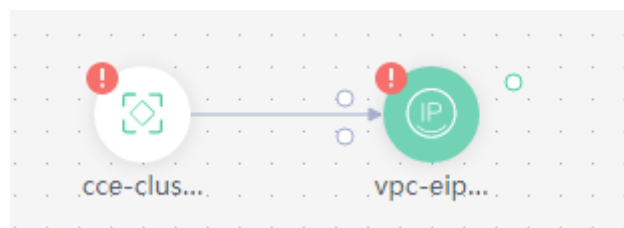


## 1.2.4 Shortcut Keys of Visual Designer

Operation	Windows OS	macOS
Copy	Ctrl-C	Command-C
Paste	Ctrl-V	Command-V
Cut	Ctrl-X	Command-X
All	Ctrl-A	Command-A
Find	Ctrl-F	Command-F
Go to the beginning of the text	Ctrl-Home	Command-Home  Command-Up
Go to the previous line	Up	Up Ctrl-P
Go to the end of the text	Ctrl-End	Command-End  Command-Down
Go to the next line	Down	Down Ctrl-N
Go to the end of the current page	PageDown	PageDown Ctrl-V
Copy the current element	Ctrl-D	Command-D
Undo	Ctrl-Z	Command-Z
Delete	Delete	Delete Ctrl-D Shift-Delete
Zoom in	Ctrl-=	Command-=
Zoom out	Ctrl--	Command--

## 1.2.5 Compiling a Template to Create an EVS Disk

This section describes how to **compile a template on the Visual Designer** to create an EVS disk. At the end of this walkthrough, you will see the newly created EVS disk on the Cloud Server Console, as shown in [Figure 1-54](#).

**Figure 1-54** Created EVS disk

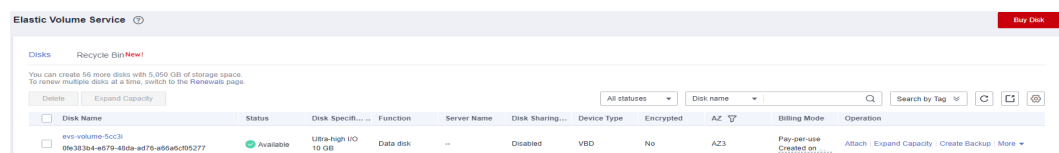

- Step 1: Use the Visual Designer to Compile a Template:** Use the Visual Designer to add elements and configure parameters for each element.
- Step 2: Create an EVS Disk:** Use the Visual Designer to create an ECS, a VPC, and a subnet.




3. **Step 3: Delete Unnecessary Resources:** Delete unnecessary stacks to avoid unwanted charges.

## Step 1: Use the Visual Designer to Compile a Template

- Step 1** Log in to the RFS console. In the navigation pane on the left, click **Visual Designer**.
- Step 2** Add and connect elements. Drag elements, such as VPC, VPC subnet, and EVS, to the canvas, and establish relationships between them, as shown in **Figure 1-55**.


Figure 1-55 Adding an element

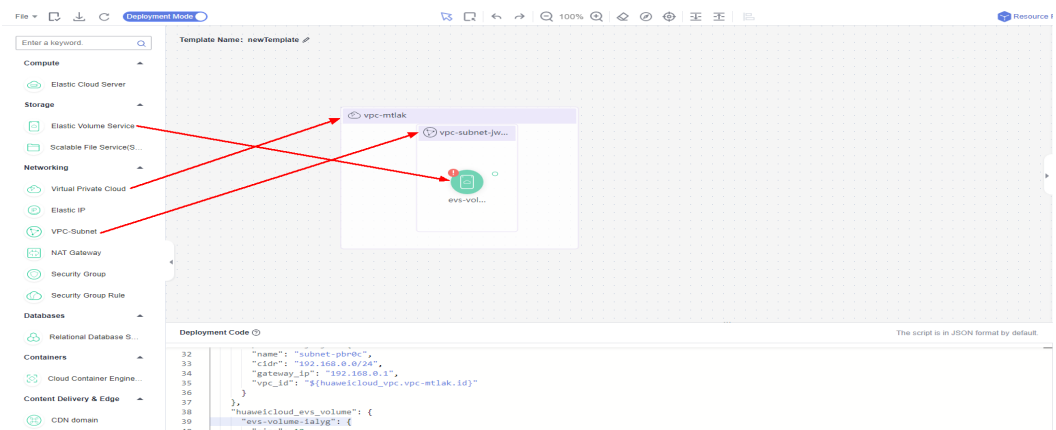

- Step 3** Configure the template parameters. Set the attributes in the **Attribute Editing Panel** panel on the right.


1. Click the **vpc** element in the canvas. The attributes of the element will be automatically displayed in the attribute pane. The CIDR can use the default value **192.168.0.0/16**.
2. Click the **subnet** element in the canvas. The attributes of the element will be automatically displayed in the attribute pane. You can set the default value for the attributes.
3. Click the **evs** element in the canvas. The attributes of the element will be automatically displayed in the attribute pane. The attributes with red text boxes are mandatory, as shown in **Figure 1-56**.

Figure 1-56 Mandatory attributes

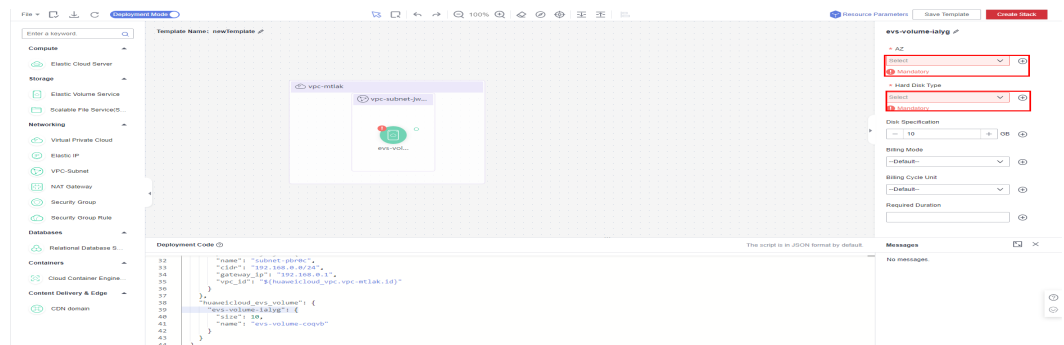


**NOTE**

To facilitate parameter setting and modification, you are advised to set parameters whose value needs to be frequently changed as input parameters. **get\_input** indicates input parameters. You can define the values behind **get\_input**.


4. Click  on the right of the attribute editing panel to generate an input parameter, as shown in [Figure 1-57](#).

**Figure 1-57** Generating an input parameter

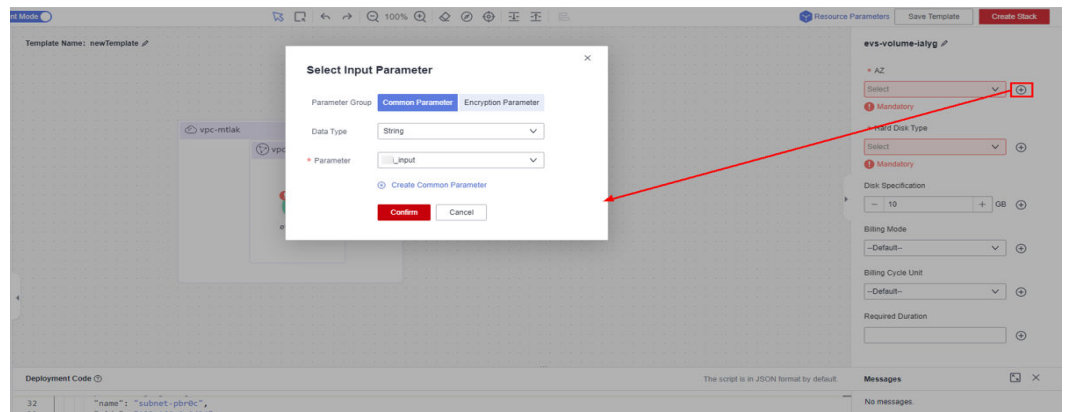

- Step 4** Click **Save Template** in the upper right corner of the Visual Designer to save the template. If the message "Template saved. You can view and manage it in My Templates." is displayed, the template is saved.

**Figure 1-58** Saving a template

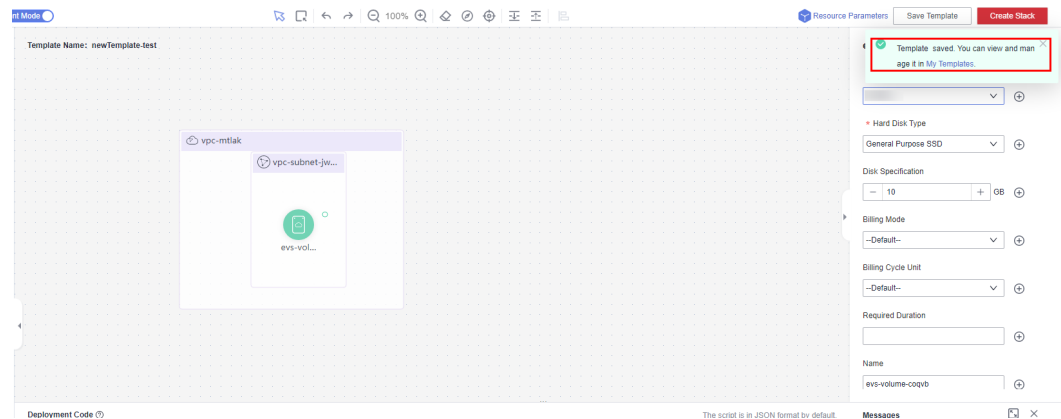

----End

## Step 2: Create an EVS Disk

- Step 1** Close the Visual Designer and go to the RFS console.
- Step 2** In the navigation pane on the left, click **Templates > My Templates**. The template is displayed in the template list.
- Step 3** Click **Create Stack** in the **Operation** column of the template.

**Step 4** Click **Next** to view the stack information. After confirming the information, click **Next**, select an agency, click **Next**, and click **Create Execution Plan**.

The **Execution Plans** tab page is displayed, click **Deploy** in the **Operation** column of the execution plan.

**Step 5** When the status of the plan is **Applied**, you can view that three cloud services exist in the **Resources** tab page. A VPC, a subnet, and an EVS disk have been created.

**Figure 1-59** Crested stack

Cloud Product Name	Physical Resource NameID	Logical Name	Resource Type	Resource Status
Elastic Cloud Server	tf_stack_ecs1 ec09440f-3f16-47a3-90b5-9d549656342	ecs-1b0a1	huaweicloud_compute_instance	Creation Complete
Virtual Private Cloud	tf_stack_vpc1 36375d27-990f-40e7-9be9-85d8448d974	vpc-gnthe	huaweicloud_vpc	Creation Complete
Virtual Private Cloud	tf_stack_subnet1 c35c3e47-6921-416a-916c-94557f3a0602	vpc-subnet-ug9op	huaweicloud_vpc_subnet	Creation Complete

**Step 6** View the created cloud services.

1. Log in to the Huawei Cloud management console.
2. Choose **Cloud Server Console > Elastic Volume Service**. You can see the newly created EVS disk.

**Figure 1-60** EVS created

Disk Name	Status	Disk Specific...	Function	Server Name	Disk Sharing...	Device Type	Encrypted	AZ	Billing Mode	Operation
evs-volume-5cc3l 09e383b4-e679-48da-a131-4c9b97b1dcb	Available	Ultra-high I/O 10 GB	Data disk	--	Disabled	VBD	No	AZ3	Pay-per-use Created on...	Attach   Expand Capacity   Create Backup   More

3. Choose **Service List > Networking > Virtual Private Cloud**. You will see the newly created VPC on the VPC list.

**Figure 1-61** Created VPC

NameID	IPv4 CIDR Block	Status	Subnets	Route Tables	Owner Project ID	Operation
vpc-ldc0l cc0440b9-6755-4f68-a131-4c9b97b1dcb	192.168.0.0/16 (Primary CIDR block)	Available	1	1	47df611e638c4a73806e2731cc79a471	Edit CIDR Block   Delete

4. Click the VPC name to show more details about the VPC. On the VPC details page, you will see that the subnet has been created in the VPC.

**Figure 1-62** Created subnet

NameID	VPC	IPv4 CIDR Block	IPv6 CIDR ...	Status	AZ	Network ACL	Route Table	Owner Project ID	Operation
subnet-6z9by 07226224-03da-41...	vpc-ldc0l	192.168.0.0/24	-- Enable IPv6	Available	--	--	rtb-vpc-ldc0l Default	47df611e638c4a73806e2731cc79a471	Change Route Table   Delete

----End

### Step 3: Delete Unnecessary Resources

You are advised to delete unnecessary stacks to avoid unwanted charges.

**Step 1** Log in to the RFS console.

**Step 2** In the navigation pane on the left, click **Stacks**.

**Step 3** Locate the created stack, click **Delete** in the **Operation** column, and delete the stack as prompted.

----End

## 1.3 Managing a Stack

Stack management consists of two aspects. One is lifecycle management of created stacks, including deleting and changing. The other is viewing stack details to obtain their running statuses.

### Modifying a Stack

After a stack is created successfully (that is, in the normal status), you can change the parameters of the stack as needed.

**Step 1** Log in to the RFS console.

**Step 2** In the navigation pane on the left, click **Stacks**.

**Step 3** In the stack list, click the stack to be changed.

**Step 4** On the stack details page, click **Update Template/Parameter**.

**Step 5** Change the template version or input parameters, and click **Next**.

**Step 6** Confirm the configurations and then click **Create Execution Plan**.

**Step 7** On the **Execution Plans** tab page of the stack details page, select the created execution plan and click **Deploy** in the **Operation** column.

On the **Events** tab page, you can view the detailed operation events related to stack changes.

----End

### Deleting a Stack

Deleted stacks cannot be restored. Exercise caution when deleting a stack.

**Step 1** Log in to the RFS console.

**Step 2** In the navigation pane on the left, click **Stacks**.

**Step 3** In the stack list, select the stack to be deleted and click **Delete** in the **Operation** column.

**Step 4** In the dialog box displayed, enter **Delete** and click **OK**.

Check the stack name carefully. The deletion cannot be revoked.

On the **Events** tab page, you can view the detailed operation events related to stack deletion.

----End

## Viewing Stack Details

After a stack is created, you can view its data and resources on the stack details page.

- Resources  
Elements of a stack, such as applications and cloud services
- Outputs  
Output parameters and their values in the stack template
- Template  
Details of the template used to create the stack
- Events  
You can view stack events to monitor the stack operation progress. For example, when you create a stack, all important steps during the stack creation are displayed on the **Events** tab page. The events are sorted in chronological order with the latest event being displayed at the top.

## 1.4 Stack Sets

### 1.4.1 Concepts

1. Administrator and target accounts  
Administrator account: A Huawei Cloud account used to create stack sets. For stack sets with service-managed permissions, use either the management account of the organization or a delegated administrator account as the administrator account. You can manage stack sets by logging in to the administrator account in which you creates them.  
Target account: An account used to create, update, or delete one or more stacks in a stack set. To use a stack set to create stacks in a target account, build a trust relationship between the administrator and target accounts first.
2. Stack set permission models  
Self-managed permissions: When using this permissions model, create IAM roles required by stack sets for deployment across accounts and Huawei Cloud regions. These roles are indispensable for establishing a trust relationship between the account used to manage stack sets and the account to which you deploy stack instances. Self-managed permissions allow stack sets to be deployed to any Huawei Cloud account in which you have permissions to create IAM roles.
3. Agency name  
Administration agency: RFS uses this agency to obtain permissions that a member account grants to a management account. This agency is created in an administrator account and must have the **iam:tokens:assume** permission to obtain the managed agency credential.

Managed agency: RFS uses this agency to obtain permissions required for deploying resources. This agency is created in a target account. The agency type is account and the delegated account is the administrator account.

## 1.4.2 Using a Stack Set

Set up required permissions to create a stack set with service-managed permissions.

To create a stack set with [self-managed permissions](#), create IAM roles in each account to establish a trust relationship between the administrator and target accounts.

1. Determine which Huawei Cloud account is the [administrator account](#). Stack sets are created in this administrator account. **A target account** is an account into which you create stacks in a stack set.

2. Determine how to configure permissions for the stack set.

The easiest (and most lenient) permissions setup is to allow all users within the administrator account to create and update the stack sets managed through that account. If you need finer-grained control, you can set up permissions to manage required resources through IAM agencies. For details, see [Creating an Agency](#).

- a. Set up permissions for users of the administrator account to perform stack set operations in all target accounts.

In the administrator account, create an agency named **Administrator\_account** (custom) that entrusts RFS. Add the **iam:tokens:assume** and **Tenant Administrator** permissions to the agency.

In the target account, create an agency named **Target\_Account** (custom) that entrusts the administrator account, and grant the **Tenant Administrator** permission.

- b. Set up advanced permissions for stack set operations.


In the administrator account, create an agency named **Administrator\_account** (custom) that entrusts RFS. Use [fine-grained authorization](#) to add **iam:tokens:assume** and required operation permissions to the agency.

In the target account, create an agency named **Target\_Account** (custom) that entrusts the administrator account, and grant the target account the permissions to perform operations on resources.

## 1.4.3 Creating a Stack Set

1. On the **Stack Set** page, click **Create Stack Set** in the upper right corner, as shown in [Figure 1-63](#).

**Figure 1-63** Creating a stack set



2. When selecting a template (as shown in [Figure 1-64](#)), specify the following information, confirm the settings, and click **Next**.


- Permission Agency
  - **Select Permission:** **SELF-MANAGED**
  - **Administration Agency Name:** RFS uses this agency to obtain permissions that a member account grants to a management account. This agency must have the **iam:tokens:assume** permission to obtain the managed agency credential. Otherwise, an error is reported when an instance is created or deployed.
  - **Managed Agency Name:** RFS uses this agency to obtain permissions required for deploying resources. The names of the agencies that different member accounts grants to the management account must be the same.
- Select Template
  - **Creation Mode:** **Existing Templates**
  - **Template Source:** Currently, you can create a template through **My Templates**, **URL**, and **Upload Template** as required.

**Figure 1-64** Selecting a template

The screenshot displays the 'Create Stack Set' wizard interface. At the top, there are four steps: 1. Select Template (active), 2. Configure Parameters, 3. Deployment Setup, and 4. Confirm Configurations. The main content is divided into two sections: 'Permission Agency' and 'Select Template'. In the 'Permission Agency' section, 'Select Permission' is set to 'SELF-MANAGED'. Below it, there is a dropdown for 'Administration Agency Name' and a text input for 'Managed Agency Name'. In the 'Select Template' section, 'Creation Mode' is set to 'Existing Templates'. Below it, there are three tabs for 'Template Source': 'My Templates' (selected), 'URL', and 'Upload Template'. At the bottom of this section, there are dropdowns for 'Template Name and Version' and 'Select a template version'. A red 'Next' button is visible in the bottom right corner.


3. Go to the parameter configuration page (as shown in [Figure 1-65](#)), customize the stack set name, configure parameters, and click **Next**.

**Figure 1-65** Configuring parameters

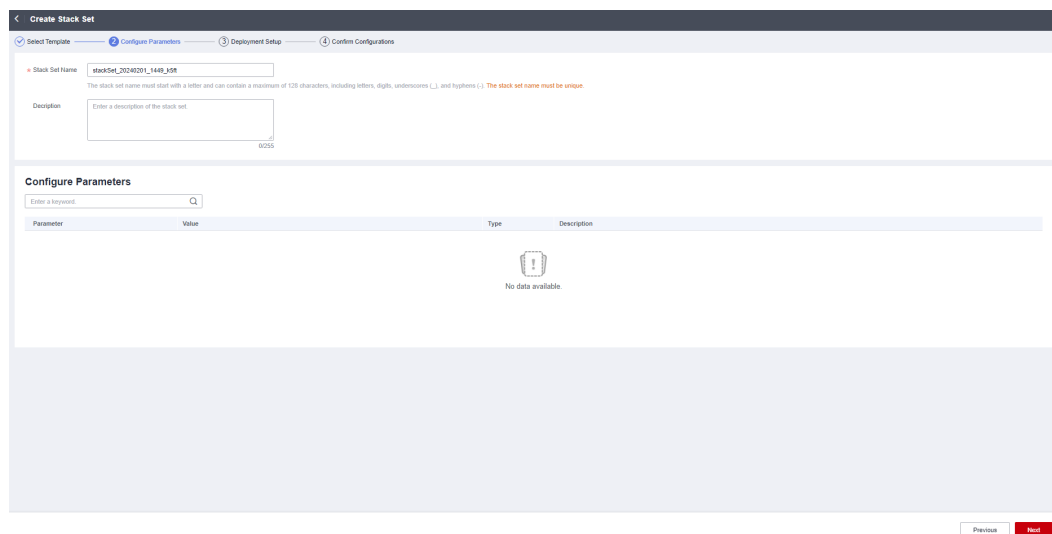

4. Go to the deployment setup page (as shown in [Figure 1-66](#)). Enter the tenant ID and select a deployment region. Confirm the information and click **Next**.

**Figure 1-66** Deployment setup

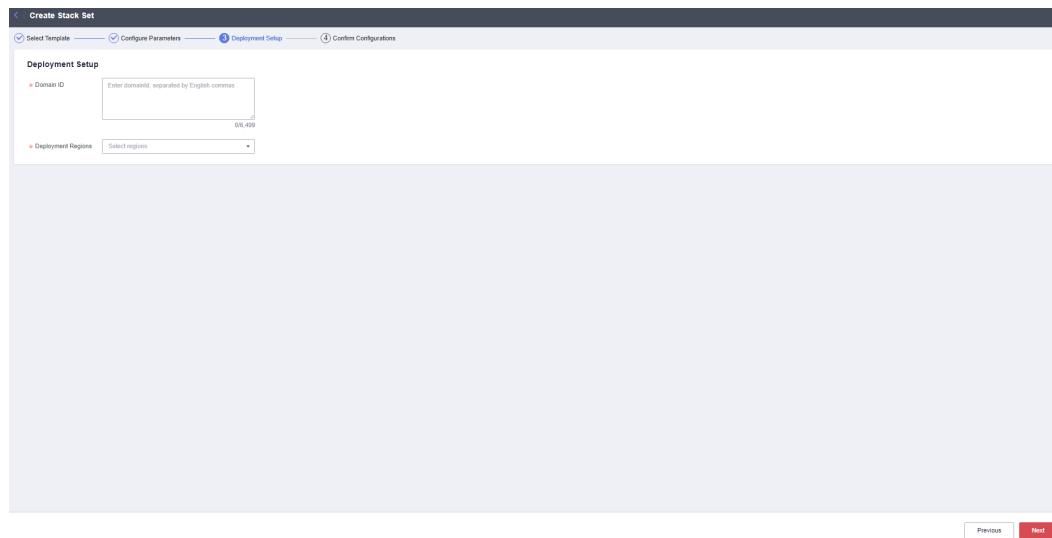

**CAUTION**

- AP-Singapore, CN-Hong Kong, and AP-Bangkok
- CN North-Beijing4, CN East-Shanghai1, and CN South-Guangzhou
- CN North-Ulanqab201
- CN South-Guizhou 202 and CN East-Suzhou201
- Saudi Arabia G42


Currently, only the above partitions can communicate with each other. Cross-partition communication is not supported.



5. Confirm the settings. Fill in correct parameters in previous steps and click **Deploy**.


6. Wait until the stack instance in **Figure 1-67** is created. The creation is successful after the operation is completed.

**Figure 1-67** Stack instances

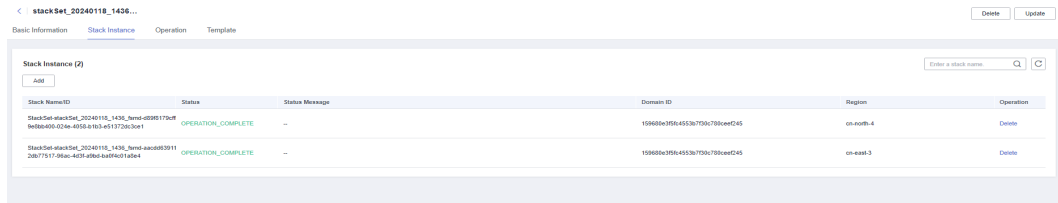


### 1.4.4 Updating a Stack Set


1. On the **Stack Set** page, click the name of the stack set in which you want to create a stack.

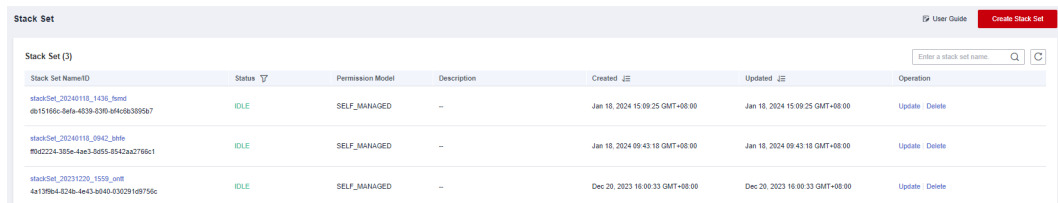

2. On the **Stack Instance** tab page, click **Update** in the upper right corner.

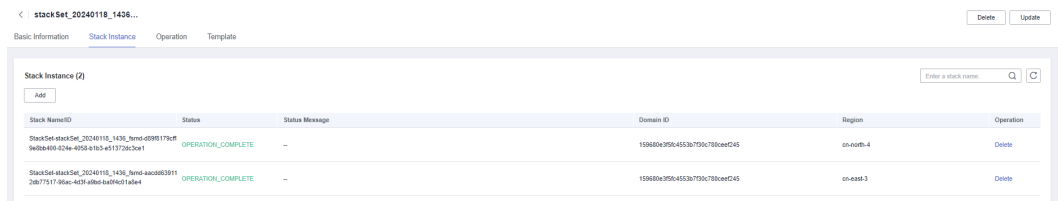

3. When selecting a template, you can select either of the creation modes as shown in the following figure.

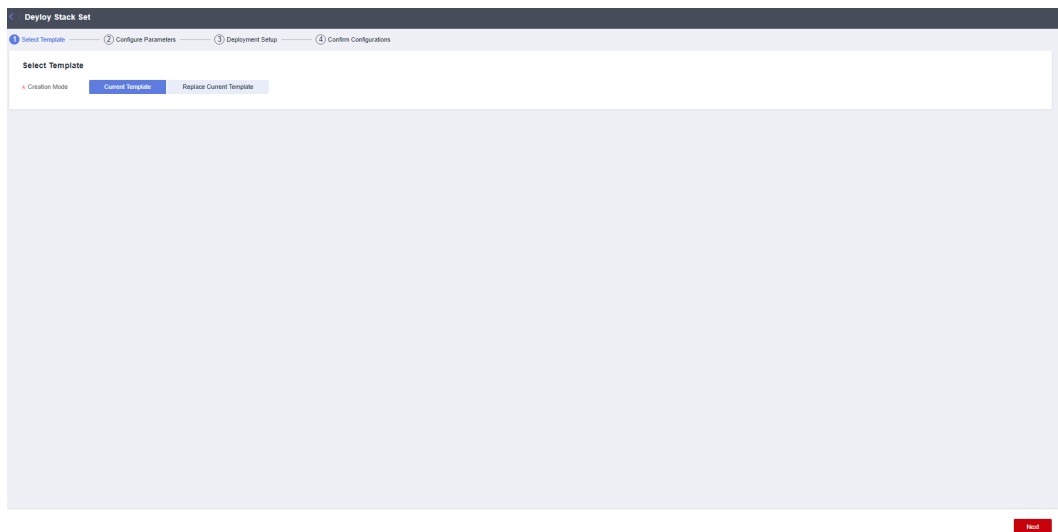

Select **Current Template** or **Replace Current Template** (use a new template) to update the stack set.

Solution 1: Using the Current Template


- Click **Next**. On the displayed parameter configuration page, modify the parameters of the current template.
- Click **Next**. On the displayed page, enter the tenant ID and select a deployment region.
- Confirm the settings. Fill in correct parameters in previous steps and click **Deploy**.

Solution 2: Replacing the Current Template

For details, see section [Creating a Stack Set](#).


## 1.4.5 Creating Stack Instances from a Stack Set

1. On the **Stack Set** page, click the name of the stack set in which you want to create a stack.

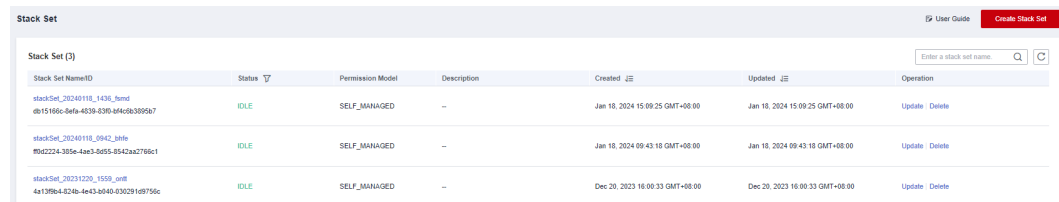

Stack Set Name/ID	Status	Permission Model	Description	Created	Updated	Operation
stackSet_20240118_1438_tmsd db15186c-8af4-4839-8380-8462b3895e7	IDLE	SELF_MANAGED	--	Jan 18, 2024 15:09:25 GMT+08:00	Jan 18, 2024 15:09:25 GMT+08:00	Update Delete
stackSet_20240118_0942_3mfe f8d2224388e-4aa3-8d55-8542a27186c1	IDLE	SELF_MANAGED	--	Jan 18, 2024 09:43:18 GMT+08:00	Jan 18, 2024 09:43:18 GMT+08:00	Update Delete
stackSet_20231220_1553_omf 4a13f9b4-424b-4e43-b040-83029168750c	IDLE	SELF_MANAGED	--	Dec 20, 2023 16:00:33 GMT+08:00	Dec 20, 2023 16:00:33 GMT+08:00	Update Delete


2. On the **Stack Instance** tab page, click **Add**.

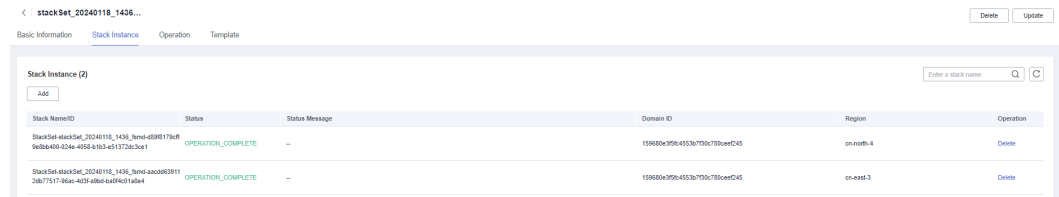

Stack Instance ID	Status	Status Message	Domain ID	Region	Operation
StackSet-stackSet_20240118_1438_tmsd-8898179c8 9e8a4a00102e-4f05a163-4511730c3e47	OPERATION_COMPLETE	--	159680e395e45538700c780ceef245	on-north-4	Delete
StackSet-stackSet_20240118_1438_tmsd-aa0683811 2ab770119aac-4d31-480e-ae049d21a8e4	OPERATION_COMPLETE	--	159680e395e45538700c780ceef245	on-east-3	Delete


3. Go to the **Deploy Stack Instance** page (as shown in [Figure 1-68](#)) and enter the tenant ID and select a deployment region. Confirm the information and click **Next**.

**Figure 1-68** Deploying a stack instance

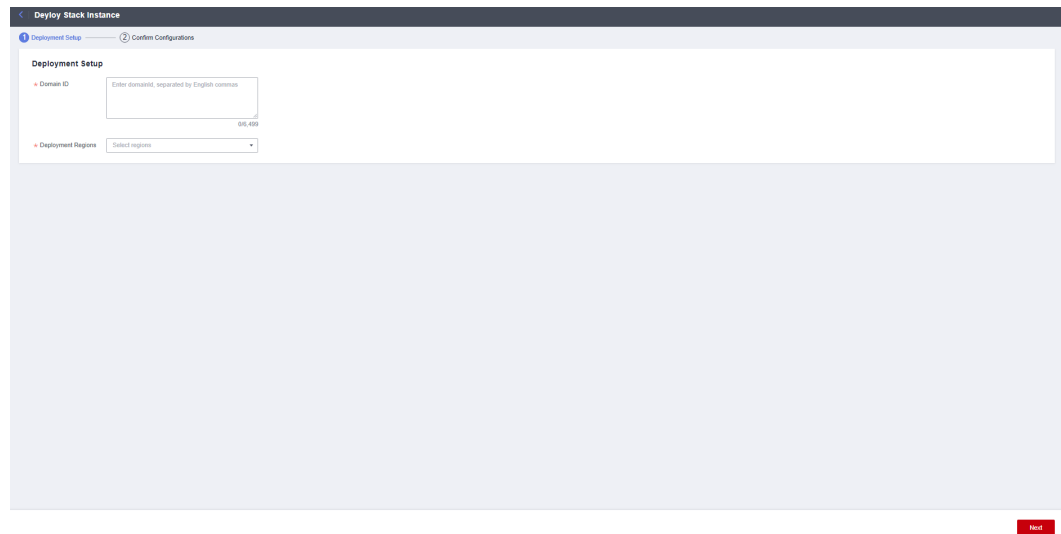


4. Confirm the parameters, and click **Deploy**.

5. Wait until the creation is successful and view the result. The creation is successful after the operation is completed.

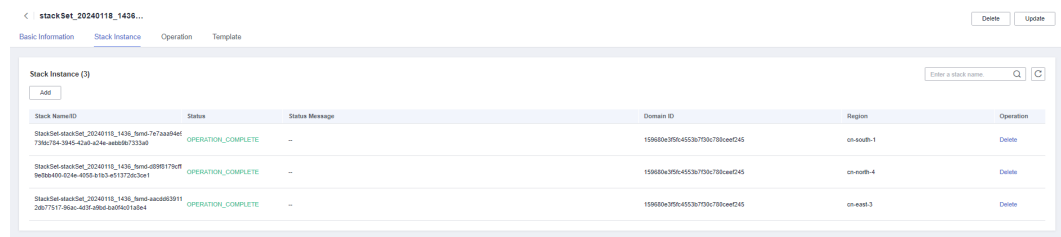


## 1.4.6 Deleting Stack Instances from a Stack Set


1. On the **Stack Set** page, click the name of the stack set in which you want to create a stack.

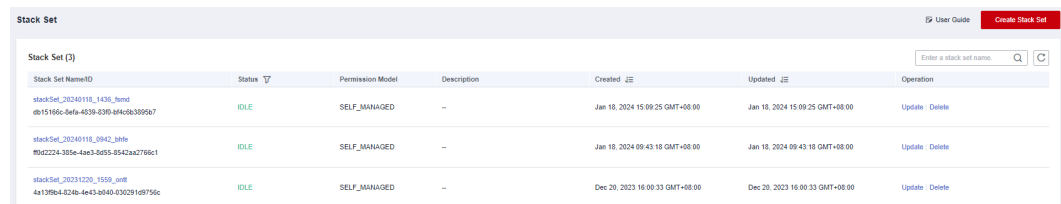

2. On the stack instance page, select the stack to be deleted and click **Delete**.

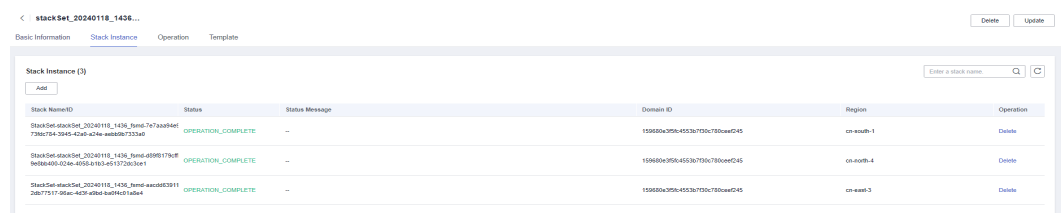


3. Click **OK** to delete the stack instance.

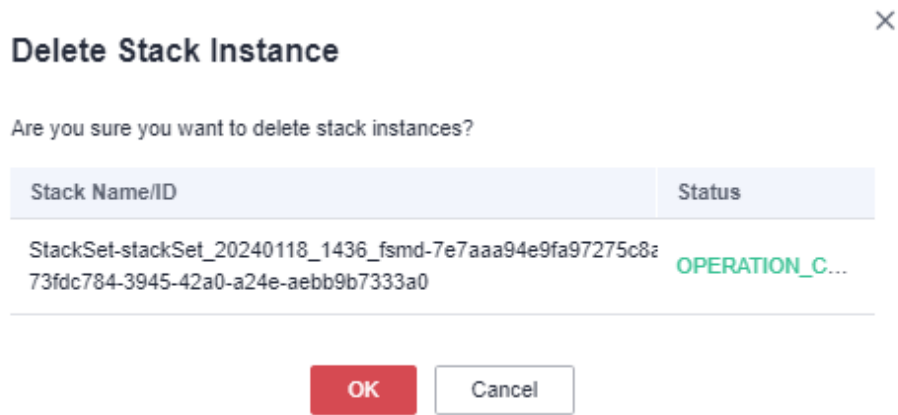


## 1.4.7 Deleting a Stack Set

1. On the **Stack Set** page, click the name of the stack set in which you want to create a stack.

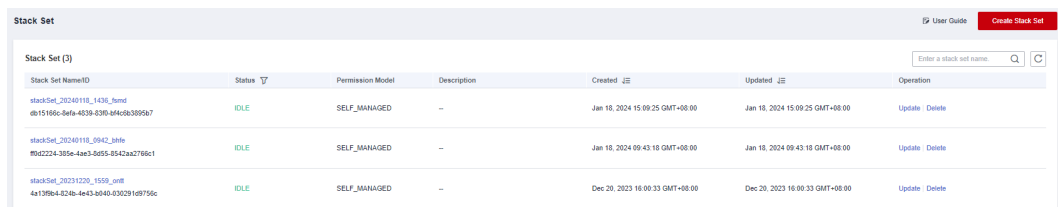


2. Go to the stack instance page and delete all stacks in the current stack set.

3. Empty stack instances in the current stack set.

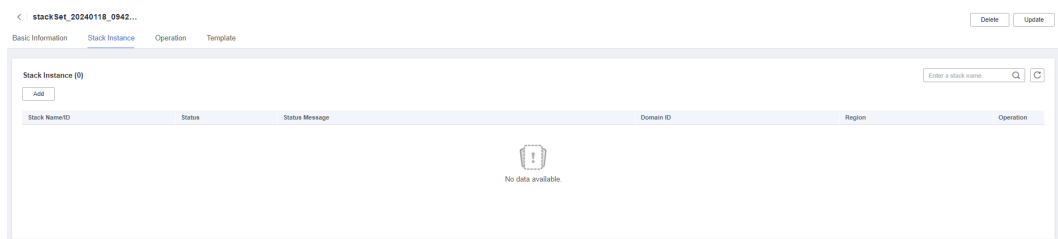

4. In the upper right corner, click **Delete** to delete the stack set. Enter **Delete** for confirmation. Wait until the stack set is deleted.

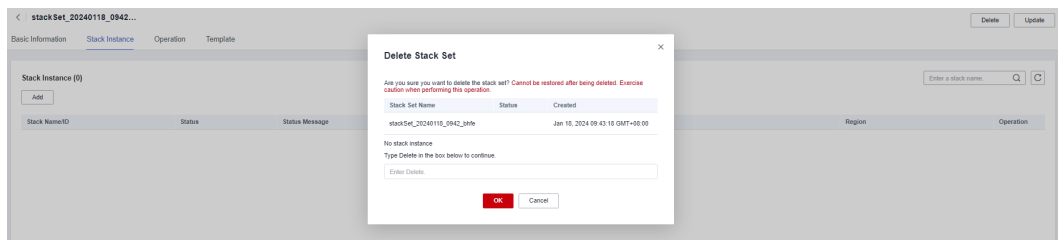

## 1.5 Auditing

## 1.5.1 RFS Operations Supported by CTS

Cloud Trace Service (CTS) records all operations performed on cloud services, providing data support for customers in fault locating, resource management, and security auditing. When you enable CTS, it begins to record operations performed on RFS resources.

**Table 1-5** RFS operations supported by CTS

Operation	Description
createStack	Creating a stack
deployStack	Deploying a stack
deleteStack	Deleting a stack
updateStack	Updating a stack
parseTemplateVariables	Parsing template variables
continueRollbackStack	Continuing to roll back a stack
continuedeployStack	Continuing to deploy a stack
createExecutionPlan	Creating an execution plan
applyExecutionPlan	Executing an execution plan
deleteExecutionPlan	Deleting an execution plan
createTemplate	Creating a template
deleteTemplate	Deleting a template
updateTemplate	Updating a template
createTemplateVersion	Creating a template version
deleteTemplateVersion	Deleting a template version
useAgency	Recording user agency
createStackSet	Creating a stack set
deleteStackSet	Deleting a stack set
deployStackSet	Deploying a stack set
updateStackSet	Updating a stack set

Operation	Description
createStackInstances	Creating stack instances
deleteStackInstances	Deleting stack instances
updateStackInstances	Updating stack instances

## 1.5.2 Viewing RFS Logs in CTS


When you enable CTS, it begins to record operations performed on RFS resources. On the CTS console, you can query operation records from the last 7 days by performing the following operations.

### Procedure

- Step 1** Log in to the CTS console.
- Step 2** In the navigation pane, click **Trace List**.
- Step 3** Filter the desired operation events.

The trace list supports four filter types:

- **Trace Source, Resource Type, and Search By**  
Select the search criteria from the drop-down lists. For example, select **RFS** from the **Trace Source** drop-down list box.  
From the **Search By** drop-down list, select a trace name. From the **Search By** drop-down list, select or enter a specific resource ID. From the **Search By** drop-down list, select or enter a specific resource name.
- **Trace Status:** Select one of **All trace statuses, Normal, Warning, and Incident**.
- **Operator:** Select a specific operator (a user other than an account).
- **Time Range:** You can query traces generated during any time range of the last seven days.

- Step 4** Click  on the left of a trace to expand its details.
- Step 5** Click **View Trace** in the **Operation** column. A dialog box is displayed to show trace structure details.

```
{
  "trace_id": "4073d5e1-6ee6-11ed-bb00-61c31199dcbc",
  "code": "200",
  "trace_name": "parseTemplateVariables",
  "resource_type": "template",
  "trace_rating": "normal",
  "source_ip": "10.172.131.218",
  "trace_type": "ApiCall",
  "service_type": "RFS",
  "event_type": "system",
  "project_id": "47cf611e636c4a73806e2731cc7fa471",
}
```

```

"response": "{ \"variables\": [{ \"default\": \"jiaoyue_test_ecs\", \"description\": \"Your ECS name\", \"name\": \"ecs_name\", \"type\": \"string\" } ], \"resource_id\": \"\", \"tracker_name\": \"system\", \"time\": \"2022/11/28 14:31:12 GMT+08:00\", \"resource_name\": \"\", \"user\": { \"domain\": { \"name\": \"iaas_aos_n30000772_01\", \"id\": \"fccca06b017704dfcb36dcf1b2a29d151\" }, \"name\": \"cto_c30031067_dev\", \"id\": \"155ad09309994f92a5147529aa0ceb2f\" }, \"record_time\": \"2022/11/28 14:31:12 GMT+08:00\" } }
    
```

----End

## 1.6 IAM Agency

By creating an agency, you can share your resources with another account, or delegate an individual or team to manage your resources. You do not need to share your security credentials (the password and access keys) with the delegated party. Instead, the delegated party can log in with its own account credentials and then switches the role to your account and manage your resources.


With RFS, you can create a stack to bind an agency with a provider and update the binding relationship by updating the stack.

RFS uses an agency only in resource operation requests, such as creating a stack (triggering deployment), creating an execution plan, deploying a stack, and deleting a stack. The agency applies only to resource operations performed by the bound provider. If the permissions provided by the agency are insufficient, resource operations may fail.

### Procedure

1. Log in to the IAM console.
2. On the IAM console, choose **Agencies** from the navigation pane on the left, and click **Create Agency** in the upper right corner.

Figure 1-69 Creating an agency

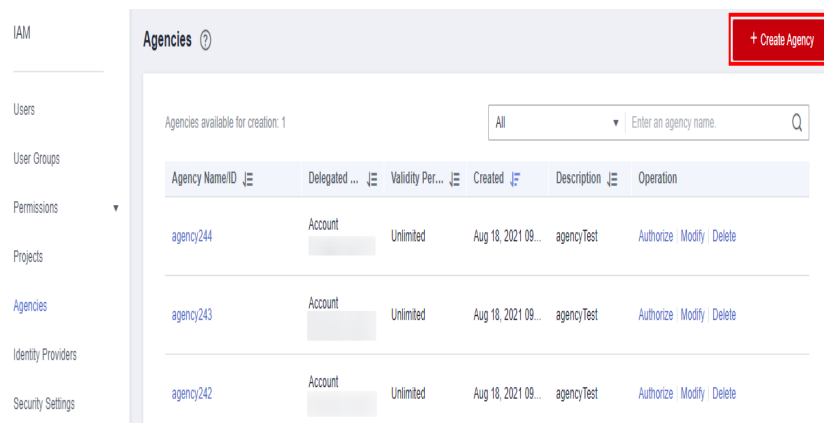

3. Enter an agency name.  
Set **Cloud Service** to **RFS**.

**Figure 1-70** Creating an agency

Agencies / Create Agency

\* Agency Name

\* Agency Type  Account  
Delegate another HUAWEI CLOUD account to perform operations on your resources.  
 Cloud service  
Delegate a cloud service to access your resources in other cloud services.

\* Cloud Service

\* Validity Period

Description   
0/255

**CAUTION**

The agency name is user-defined.

If **op\_svc\_iac** has been used for registration, you are advised to change it to **RFS**.

4. Click **Next**. The **Authorize Agency** page is displayed. You can grant permissions to the agency on this page.

**Figure 1-71** Agency authorization

Agencies / op\_svc\_iac

Basic Information **Permissions**

Authorization records (IAM projects): 1 (inheritance projects): 0


Agency name: op\_svc\_iac Search by policy rule name

PolicyRule	PolicyRule Description	Project (Region)	Principal	Principal Description	Principal Type	Operation
<input checked="" type="checkbox"/>	Grant Administrator	Tenant Administrator: 20:Include IAM	All resources (Existing and future projects)	op_svc_iac	Agency	Deny

5. Filter specific permissions and grant them to the agency.




**Figure 1-72** Selecting policies

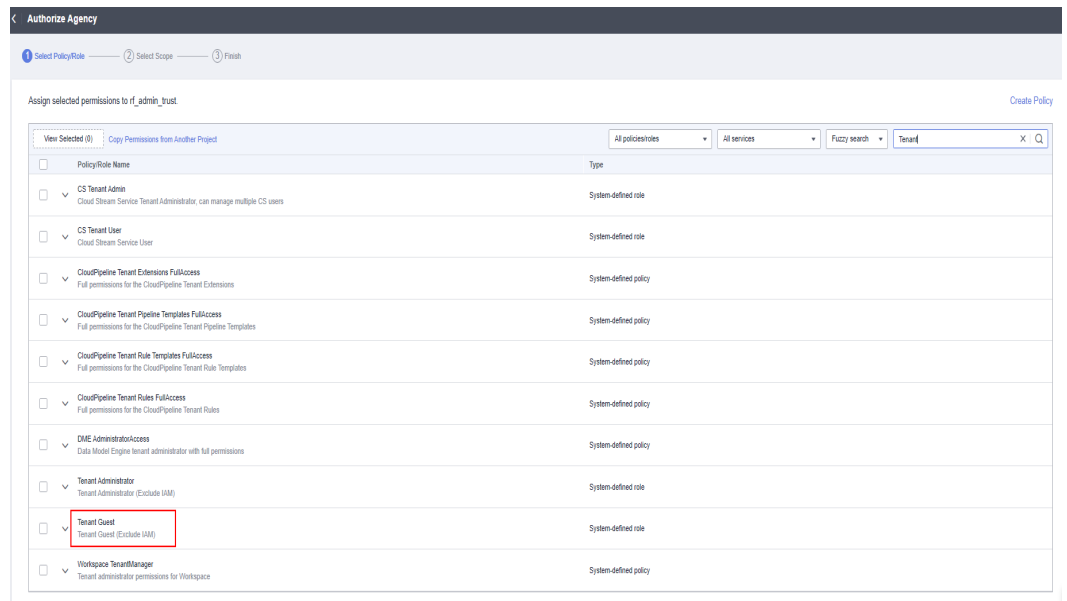

You can determine the permissions to be granted to an agency. Huawei Cloud best practices do not advise you to automatically create agencies with the Tenant Administrator permission for users. The best practice is to grant management permissions (including read and write operations) to resources that may be used in a stack.


- Set the authorization scope. You can select **All resources** or **Region-specific projects**.

**Figure 1-73** Authorization scope

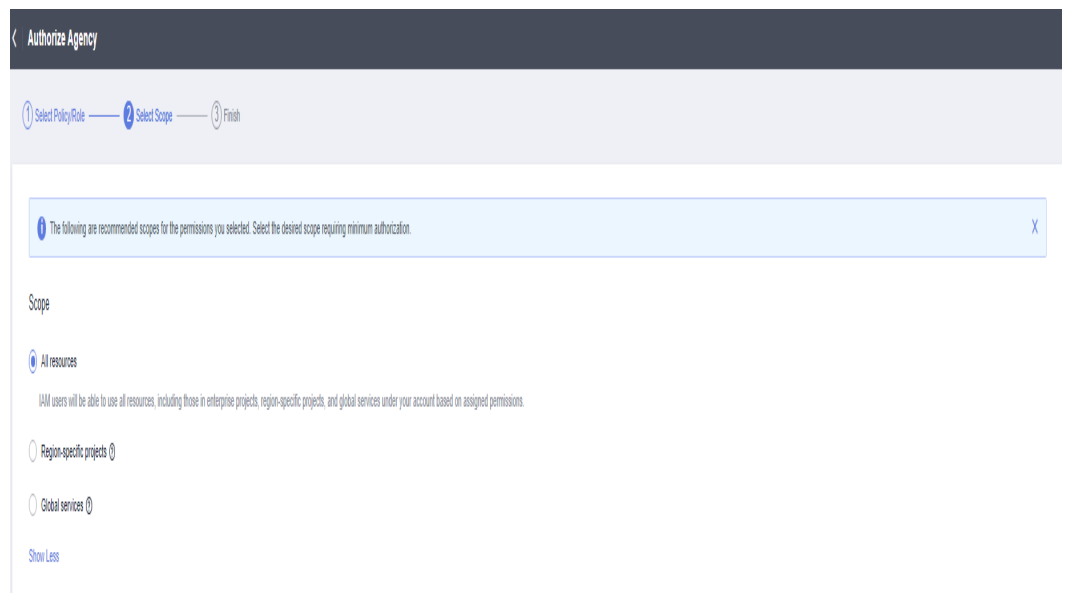

- Click **OK**. The agency is created.

Figure 1-74

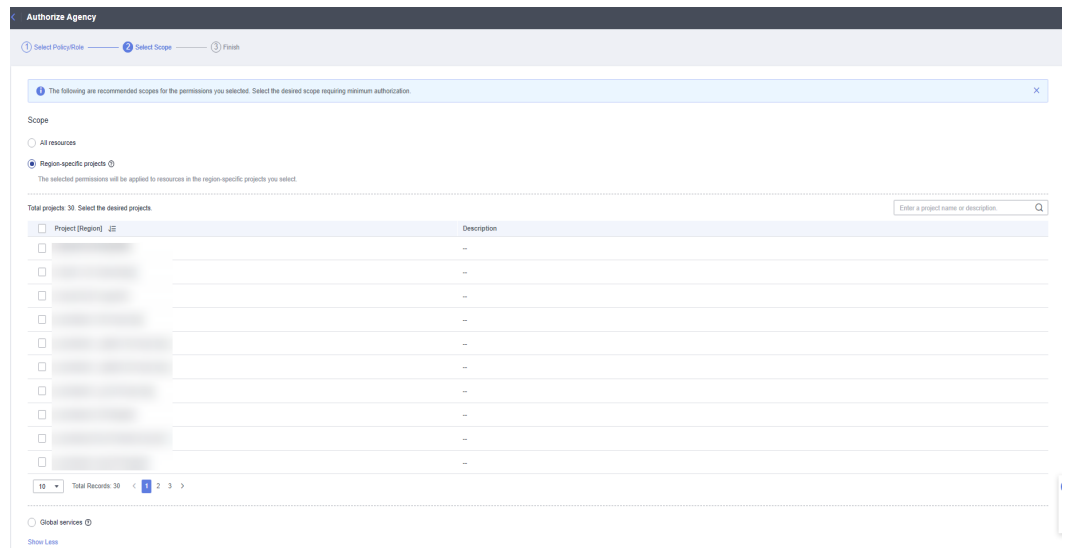


# 2 Application Orchestration Service

## 2.1 Introduction

This chapter introduces how to use Application Orchestration Service (AOS).

With AOS, you can deploy applications in the cloud by writing templates (declarations of resources that make up stacks) and creating stacks from the templates, as shown in [Figure 2-1](#). AOS also provides application lifecycle management features, such as starting, changing, and deleting.

**Figure 2-1** How AOS works

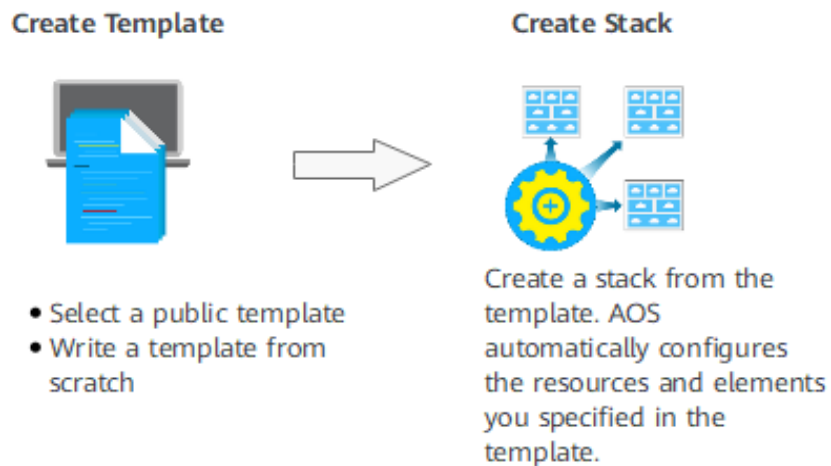

**Table 2-1** How AOS works

Step	Description
1. Create a template	<p>A template is a text file that uses AOS syntax to describe application attributes, cloud service configurations, and dependencies between applications and cloud services.</p> <p>How to obtain a template:</p> <ul style="list-style-type: none"> <li>• Select a public template: AOS provides multiple public templates from which you can quickly create stacks. For details on how to orchestrate and deploy resources using a public template, see <a href="#">Using a Public Template to Create a Stack</a>.</li> <li>• Write a template from scratch: You can write a template from scratch in JSON or YAML format. Before writing a template, gain a basic understanding of AOS templates from . In addition to writing a template on the web UI, you can also write it on a local host and then upload it to AOS. For details on how to orchestrate and deploy resources by writing a template, see <a href="#">Writing a Template to Create an ECS</a>.</li> </ul> <p><b>NOTICE</b> The YAML syntax does not support the Tab key. The hierarchical relationship must be aligned with an even number of <b>spaces</b>, such as 2, 4, 6, or 8 spaces.</p> <p>For more information about templates, see <a href="#">Templates (Cloud-Based Automation Scripts)</a>.</p>
2. Create a stack	<p>A stack is a collection of applications and cloud service resources. The applications or cloud services in a stack are treated as a unit when being created or deleted.</p> <p>You can create stacks from templates. After you select a template and specify stack parameters, AOS automatically sets up the resources and elements you specify in the template.</p> <p>For more information about stacks, see <a href="#">Stack Management</a>.</p>

## 2.2 Stack Management

Stack management consists of two aspects. One is lifecycle management of created stacks, including deleting and changing. The other is viewing stack details to obtain stack running status.

[Table 2-2](#) describes stack lifecycle status.

**Table 2-2** Status description

Status	Description
Normal	Both the stack and its instances run properly.

Status	Description
Abnormal	The stack runs abnormally. Some or all stack instances run abnormally and cannot provide functions.
Initializing	Stack instances have not been installed or have been uninstalled. The stack does not provide functions.
Processing	A stack lifecycle action is being performed. The status of stack instances is unknown.
Unknown error	An unknown stack error occurs.

After a stack is created successfully (that is, in the normal status), you can change input parameters based on your service requirements.

- Step 1** Log in to the Application Orchestration Service (AOS) console.
- Step 2** In the navigation pane, click **My Stacks**.
- Step 3** In the stack list, click the stack to be changed.
- Step 4** On the stack details page, click **Change**.
- Step 5** Change the template version or input parameters, and click **Next**.
- Step 6** Confirm the configurations and then click **Change**.

On the **Events** tab page, view the detailed operation events related to stack change.

----End

The change rules are as follows:

1. Template change rules:
  - a. During template change, only the following elements are allowed to be added or deleted.
    - AOS.Agent, AOS.AppComponent, AOS.AppComponent.Container, AOS.AppComponent.Process, AOS.AppGroup, AOS.Application.Stateful, AOS.Application.Stateless, AOS.Job, AOS.Service, AOS.StatelessApplication, and AOS.StatefulApplication
    - CCE.Addon.AutoScaler, CCE.ConfigMap, CCE.DaemonSet, CCE.Deployment, CCE.HelmRelease, CCE.Ingress, CCE.Job, CCE.NodePool, CCE.Secret, CCE.Service, CCE.StatefulSet, CCE.Storage.OBS, and CCE.Storage.SFS
    - ECS.CloudServer
    - ServiceStage.Agent, ServiceStage.AppGroup, ServiceStage.ContainerComponent, ServiceStage.Job, ServiceStage.ProcessComponent, ServiceStage.Service, ServiceStage.SoftwareComponent, ServiceStage.StatefulApplication, and ServiceStage.StatelessApplication

- nodes.Agent, nodes.AppGroup, nodes.ContainerComponent, nodes.HelmApplication, nodes.Job, nodes.ProcessComponent, nodes.Service, nodes.SoftwareComponent, nodes.StatefulApplication, and nodes.StatelessApplication
  - b. Do not modify the policies of the template.
  - c. Do not modify the association relationship between existing elements.
  - d. Do not delete the association relationship between existing elements alone. If necessary, delete both the elements and their relationship.
  - e. Do not add a relationship between a new element and an existing element.
2. Parameter change rules:
- a. Do not change the input parameters of the following elements:
    - AOS.Job and AOS.Service
    - APM.AutoScaler
    - ServiceStage.Job and ServiceStage.Service
    - nodes.Agent, nodes.AutoScaler, nodes.DynamicNodePool, nodes.DynamicVolume, nodes.FlexVolume, nodes.Job, nodes.NodePool, nodes.Service, and nodes.StatefulApplication
  - b. Do not change the input parameters of the following elements unless in cluster 1.7 or later:
    - AOS.Agent and AOS.StatefulApplication
    - ServiceStage.Agent and ServiceStage.StatefulApplication

## Deleting a Stack

Deleted stacks cannot be restored. Exercise caution when deleting a stack.

**Step 1** Log in to the AOS console.

**Step 2** In the navigation pane, click **My Stacks**.

**Step 3** In the stack list, select the stack to be deleted and click **Delete**.

**Step 4** In the dialog box that is displayed, click **OK**.

Check the stack name carefully. The deletion cannot be revoked.

On the **Events** tab page, view the detailed operation events related to stack deletion.

### NOTE

If the stack status remains **Deleting** until a timeout message is displayed and the stack status becomes **Abnormal**, try to forcibly delete the stack.

----End

## Viewing Stack Details

After a stack is created, view its data and resources on the stack details page.

- Stack elements  
The elements of a stack, such as applications and cloud services are displayed.  
Element health status:
  - Healthy: The resource is running properly.
  - Unknown: The AOS fails to obtain the resource status because an error occurs during the health check.
  - Abnormal: The AOS successfully calls the health check API of the resource, but the resource status is abnormal.
- Output parameters  
Output parameters and their values in the stack template are displayed.
- Input parameters  
Input parameters and their values in the stack template are displayed.
- Alarms  
Alarm information of the stack is displayed.
- Events  
View stack events to monitor stack operation progress. For example, when you create a stack, all important steps during the stack creation are displayed on the **Events** tab page. The events are sorted in chronological order with the latest event being displayed at the top.

## 2.3 CTS

### 2.3.1 AOS Operations Supported by CTS

Cloud Trace Service (CTS) records all operations performed on cloud services, providing data support for customers in fault locating, resource management, and security auditing. When you enable CTS, it begins to record operations performed on Application Orchestration Service (AOS) resources. CTS stores operation records from the last seven days.

**Table 2-3** AOS operations supported by CTS

Operation	Description
CreateTemplate	Creating a template
DeleteTemplate	Deleting a template
UpdateTemplate	Updating a template
PreviewStack	Previewing a stack
CreateStack	Creating a stack
DeleteStack	Deleting a stack

Operation	Description
UpdateStack	Updating a stack
ExecuteStackAction	Executing a stack lifecycle action
CleanupResources	Cleaning a resource
UpdateTenantState	Freezing or unfreezing an account

## 2.3.2 Viewing Logs in CTS

When you enable CTS, operations performed on Application Orchestration Service (AOS) resources begin to be recorded. On the CTS console, you can query operation records from the last 7 days by performing the following operations.

### Procedure

**Step 1** Log in to the CTS console.

**Step 2** In the left navigation pane, click **Trace List**.

**Step 3** Filter the desired operation events.

The trace list supports four filter types:

- **Trace Source, Resource Type, and Search By**

Select the search criteria from the drop-down lists. For example, select **AOS** from the **Trace Source** drop-down list box.

From the **Search By** drop-down list, specify a trace name. From the **Search By** drop-down list, select or enter a specific resource ID. From the **Search By** drop-down list, select or enter a specific resource name.

- **Trace Status:** Select one of **All trace statuses**, **Normal**, **Warning**, and **Incident**.
- **Operator:** Select a specific operator (at the user level rather than the account level).
- **Time range:** You can query traces generated during any time range in the last seven days.

**Step 4** On the left of the to-be-queried record, click  to view details.

**Step 5** Click **View Trace** in the **Operation** column. On the displayed **View Trace** dialog box, the trace structure details are displayed.

```
{
  "service_type": "AOS",
  "user": {
    "domain": {
      "name": "****",
      "id": "6c389820d2fd46489c8987e5eb2675cc"
    },
    "id": "19652d0b0ff1407a9432b85b9e12f9eb",
    "name": "****"
  },
  "time": "2018/04/26 16:16:53 GMT+08:00",
```



```
"code": 200,  
"resource_type": "AOS",  
"resource_name": "Stack",  
"resource_id": "19652d0b0ff1407a9432b85b9e12f9eb",  
"source_ip": "192.168.12.22",  
"trace_name": "PreviewStack",  
"trace_type": "ApiCall",  
"request": {},  
"api_version": "3.0.0",  
"message": "Preview stack successfully. Project id: 1e19d41bb1f24b5da4a98107607aac0f, stack name:  
jhgdjh, template id: cea9ee29-3b39-f7be-d093-aff126b250e8, cluster id: . ",  
"record_time": "2018/04/26 16:16:53 GMT+08:00",  
"trace_id": "2da40c60-492a-11e8-a065-286ed488cbe3",  
"trace_status": "warning"  
}
```

----End