


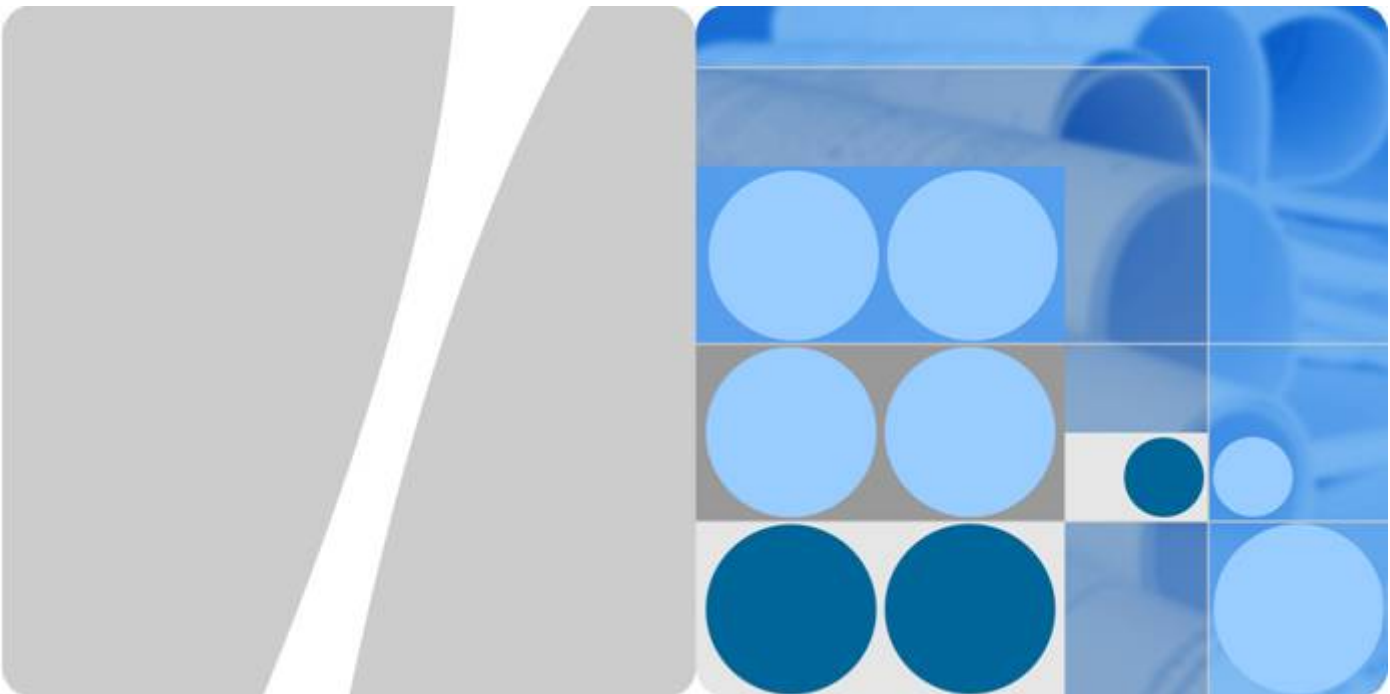

Application Operations Management

API Reference

Date **2025-08-30**

Contents

1 Before You Start..... 1

2 API Overview..... 3

3 Calling APIs..... 4

3.1 Making an API Request..... 4

3.2 Authentication..... 7

3.3 Response..... 13

4 APIs..... 15

4.1 Alarm..... 15

4.1.1 Obtaining the Alarm Sending Result..... 15

4.1.2 Deleting a Silence Rule..... 20

4.1.3 Adding a Silence Rule..... 24

4.1.4 Modifying a Silence Rule..... 29

4.1.5 Obtaining the Silence Rule List..... 34

4.1.6 Querying an Alarm Action Rule Based on Alarm Rule Name..... 39

4.1.7 Adding an Alarm Action Rule..... 45

4.1.8 Deleting an Alarm Action Rule..... 50

4.1.9 Modifying an Alarm Action Rule..... 54

4.1.10 Querying the Alarm Action Rule List..... 59

4.1.11 Querying the Event Alarm Rule List..... 64

4.1.12 Adding an Event Alarm Rule..... 70

4.1.13 Modifying an Event Alarm Rule..... 77

4.1.14 Deleting an Event Alarm Rule..... 83

4.1.15 Querying Events and Alarms..... 87

4.1.16 Counting Events and Alarms..... 98

4.1.17 Reporting Events and Alarms..... 107

4.2 Monitoring..... 112

4.2.1 Querying Time Series Objects..... 112

4.2.2 Querying Time Series Data..... 117

4.2.3 Querying Metrics..... 126

4.2.4 Querying Monitoring Data..... 132

4.2.5 Adding Monitoring Data..... 141

4.2.6 Adding or Modifying One or More Service Discovery Rules..... 145

4.2.7 Deleting a Service Discovery Rule.....	154
4.2.8 Querying Existing Service Discovery Rules.....	157
4.2.9 Adding a Threshold Rule.....	164
4.2.10 Querying the Threshold Rule List.....	170
4.2.11 Modifying a Threshold Rule.....	175
4.2.12 Deleting a Threshold Rule.....	179
4.2.13 Querying a Threshold Rule.....	181
4.2.14 Deleting Threshold Rules in Batches.....	186
4.3 Prometheus Monitoring.....	188
4.3.1 Querying Expression Calculation Results in a Specified Period Using the GET Method.....	188
4.3.2 (Recommended) Querying Expression Calculation Results in a Specified Period Using the POST Method.....	192
4.3.3 Querying the Expression Calculation Result at a Specified Time Point Using the GET Method.....	196
4.3.4 (Recommended) Querying Expression Calculation Results at a Specified Time Point Using the POST Method.....	200
4.3.5 Querying Tag Values.....	204
4.3.6 Obtaining the Tag Name List Using the GET Method.....	207
4.3.7 (Recommended) Obtaining the Tag Name List Using the POST Method.....	211
4.3.8 Querying Metadata.....	214
4.4 Log.....	218
4.4.1 Querying Logs.....	218
4.5 Prometheus Instance.....	224
4.5.1 Uninstalling a Hosted Prometheus Instance.....	224
4.5.2 Querying a Prometheus Instance.....	226
4.5.3 Adding a Prometheus Instance.....	231
4.5.4 Creating a Recording Rule for a Prometheus Instance.....	235
4.5.5 Obtaining the Credential for Calling a Prometheus Instance.....	237
4.5.6 Modifying a Prometheus Instance.....	239
4.6 Configuration Management.....	245
4.6.1 Querying the Cloud Services for Which AOM 2.0 Has Been Granted Permissions.....	245
4.6.2 Querying the ICAgent Installed on a Host.....	247
5 Examples.....	250
5.1 Querying Details About a Specified Alarm Action Rule.....	250
6 Permissions Policies and Supported Actions.....	252
6.1 Introduction.....	252
6.2 Actions Supported by Policy-based Authorization.....	253
6.2.1 Alarm APIs.....	253
6.2.2 Monitoring APIs.....	255
6.2.3 Prometheus Monitoring APIs.....	257
6.2.4 Log APIs.....	258
6.2.5 Prometheus Instance APIs.....	258
6.2.6 Configuration Management APIs.....	259

7 Appendix..... 261

7.1 Status Codes..... 261

7.2 Error Codes..... 264

7.3 Obtaining an Account ID, Project ID, and Enterprise Project ID..... 290

7.4 Common Request Headers..... 291

7.5 Common Response Headers..... 291

8 Change History..... 293

1 Before You Start

Welcome to use Application Operations Management (AOM). AOM is a one-stop, multi-dimensional O&M management platform for cloud applications. It provides one-stop observability analysis. By collecting metrics, logs, and performance data from the cloud and local devices, AOM enables you to monitor real-time running status of applications, resources, and services and detect faults in a timely manner, improving O&M automation capability and efficiency.

This document describes how to use APIs to perform operations on AOM, such as creation, deletion, and query. For details about all supported operations, see [2 API Overview](#).

If you plan to call AOM APIs, ensure that you are familiar with AOM concepts.

Endpoints

An endpoint is the **request address** for calling an API. Endpoints vary depending on services and regions. For the regions and endpoints of all services, contact the enterprise administrator.

Concepts

- IAM User

An IAM user is created using an account to use cloud services. Each IAM user has its own identity credentials (password and access keys).

An IAM user can view the account ID and user ID on the **My Credentials** page of the console. The account name, username, and password will be required for API authentication.

- Region

Regions are geographic areas isolated from each other. Resources are region-specific and cannot be used across regions through internal network connections. For low network latency and quick resource access, select the nearest region.

- Availability Zone (AZ)

AZs are physically isolated locations in a region, but are interconnected through an internal network for enhanced application availability.

API Calling

AOM supports Representational State Transfer (REST) APIs, allowing you to call APIs using HTTPS. For details about API calling, see [3 Calling APIs](#).

2 API Overview

AOM provides alarm, monitoring, Prometheus monitoring, log, Prometheus instance, and configuration management APIs, helping you quickly and cost-effectively maintain applications.

Table 2-1 API overview

Type	API
Alarm APIs	Alarm APIs, including the APIs for adding, updating, and deleting event alarm rules.
Monitoring APIs	Monitoring APIs, including the APIs for querying metrics, and querying and adding monitoring data.
Prometheus Monitoring APIs	Prometheus monitoring APIs, including the APIs for querying the expression calculation result in a specified period or at a specified time point.
Log APIs	Log APIs, including the API for querying logs.
Prometheus Instance APIs	APIs related to Prometheus instances, including adding and querying Prometheus instances, and uninstalling hosted Prometheus instances.
Configuration Management APIs	Configuration APIs, including the APIs for querying the cloud services for which AOM 2.0 has been granted permissions, and querying ICAgents installed on cluster hosts.

3 Calling APIs

3.1 Making an API Request

This section describes the structure of a REST API request, and uses the IAM API for obtaining a user token as an example to demonstrate how to call an API. The obtained token can then be used to authenticate the calling of other APIs.

Request URI


A request URI is in the following format:

{URI-scheme}://{Endpoint}/{resource-path}?{query-string}

Although a request URI is included in the request header, most programming languages or frameworks require the request URI to be transmitted separately.

- **URI-scheme:** Protocol used to transmit requests. All APIs use HTTPS.
- **Endpoint:** Domain name or IP address of the server bearing the REST service. The endpoint varies between services in different regions. It can be obtained from the enterprise administrator.
- **resource-path:** Access path of an API for performing a specified operation. Obtain the path from the URI of an API. For example, the **resource-path** of the API used to obtain a user token is **/v3/auth/tokens**.
- **query-string:** Query parameter, which is optional. Ensure that a question mark (?) is included before each query parameter that is in the format of "Parameter name=Parameter value". For example, **? limit=10** indicates that a maximum of 10 data records will be displayed.

For example, to obtain an IAM token in the *xxx* region, obtain the endpoint of IAM for this region and the **resource-path** in the URI of the API used to obtain a user token. Then, construct the URI as follows:

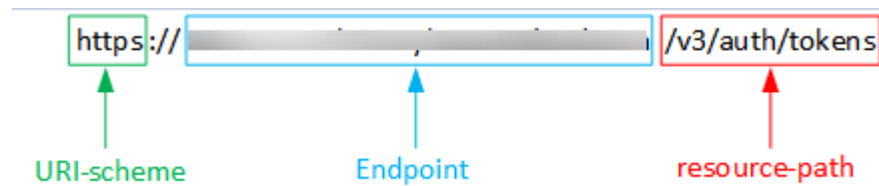Figure 3-1 Example URI**NOTE**

To simplify the URI display in this document, each API is provided only with a **resource-path** and a request method. The **URI-scheme** of all APIs is **HTTPS**, and the endpoints of all APIs in the same region are identical.

Request Methods

The HTTP protocol defines the following request methods that can be used to send a request to the server:

- **GET**: requests the server to return specified resources.
- **PUT**: requests the server to update specified resources.
- **POST**: requests the server to add resources or perform special operations.
- **DELETE**: requests the server to delete specified resources, for example, an object.
- **HEAD**: requests the server to return the response header only.
- **PATCH**: requests the server to update partial content of a specified resource. If the resource does not exist, a new resource will be created.

For example, in the URI of the API for obtaining a user token, the request method is **POST**. The request is as follows:

```
POST https://Endpoint/v3/auth/tokens
```

Request Header

You can also add additional header fields to a request, such as the fields required by a specified URI or HTTP method. For example, to request for the authentication information, add **Content-Type**, which specifies the request body type.

Common request header fields are as follows:

- **Content-Type**: specifies the request body type or format. This field is mandatory and its default value is **application/json**. Other values of this field will be provided for specific APIs if any.
- **Authorization**: signature authentication information. This field is optional. When AK/SK-based authentication is enabled, this field is automatically specified when SDK is used to sign the request. For more information, see [3.2 Authentication](#).
- **X-Sdk-Date**: the time when a request is sent. This field is optional. When AK/SK-based authentication is enabled, this field is automatically specified when SDK is used to sign the request. For more information, see [3.2 Authentication](#).

- **X-Auth-Token**: user token only for token-based API authentication. The user token is a response to the API used to obtain a user token. This API is the only one that does not require authentication.
- **X-Project-ID**: subproject ID. This field is optional and can be used in multi-project scenarios. The **X-Project-ID** field is mandatory in the request header for accessing resources in a subproject through AK/SK-based authentication.
- **X-Domain-ID**: account ID, which is optional. When you call APIs of global services using AK/SK-based authentication, **X-Domain-ID** needs to be configured in the request header.

NOTE

In addition to supporting token-based authentication, public cloud APIs also support authentication using access key ID/secret access key (AK/SK). During AK/SK-based authentication, an SDK is used to sign the request, and the **Authorization** (signature information) and **X-Sdk-Date** (time when the request is sent) header fields are automatically added to the request.

For more information, see [3.2 Authentication](#).

The API used to obtain a user token does not require authentication. Therefore, only the **Content-Type** field needs to be added to requests for calling the API. An example of such requests is as follows:

```
POST https://Endpoint/v3/auth/tokens
Content-Type: application/json
```

Request Body

The body of a request is often sent in a structured format as specified in **Content-Type**.

The request body varies between APIs. Some APIs do not require the request body, such as the APIs requested using the GET and DELETE methods.

For the API used to obtain a user token, you can check the required request parameters and their description in the API request. The following provides an example request with a body included. Replace the italic fields in bold with the actual values. **username** indicates the username, **domainname** indicates the account name, ********* indicates the login password, and **xxxxxxxxxxxxxxxxxxxxxx** indicates the project ID. For details about how to obtain the project ID, see [7.3 Obtaining an Account ID, Project ID, and Enterprise Project ID](#).

The **scope** parameter specifies where a token takes effect. You can set **scope** to an account or a project under an account. In the following example, the token takes effect only for the resources in a specified project.

```
POST https://Endpoint/v3/auth/tokens
Content-Type: application/json
{
  "auth": {
    "identity": {
      "methods": [
        "password"
      ],
      "password": {
        "user": {
          "name": "username",
          "password": "*****",
          "domain": {
            "name": "domainname"
          }
        }
      }
    }
  }
}
```

```
    }  
  }  
},  
"scope": {  
  "project": {  
    "id": "xxxxxxxxxxxxxxxxxxxxx"  
  }  
}  
}
```

If all data required for the API request is available, you can send the request to call the API through curl, Postman, or coding. In the response to the API used for obtaining a user token, **x-subject-token** is the desired user token. This token can then be used to authenticate the calling of other APIs.

3.2 Authentication

Requests for calling an API can be authenticated using either of the following methods:

- Access Key ID/Secret Access Key (AK/SK)-based authentication: Requests are encrypted using an AK/SK.
- Token-based authentication: Requests are authenticated using a token.

AK/SK-based Authentication

An AK/SK is used to verify the identity of a request sender. In AK/SK-based authentication, a signature needs to be obtained and then added to the request header.

NOTE

- AK: a unique access key ID associated with a secret access key. AK is used together with SK to obtain an encrypted signature for a request.
- SK: a secret access key used in conjunction with an AK to sign requests cryptographically. It identifies a request sender and prevents the request from being modified.


The following shows how to sign an HTTPS request and use an HTTP client to send the request.

Download the demo project at <https://github.com/api-gate-way/SdkDemo>.

If you do not need the demo project, visit the following URL to download the API Gateway signing SDK:

Obtain the API Gateway signing SDK from the enterprise administrator.

Decompress the downloaded package to obtain a JAR file. Reference the JAR file to the dependency path, as shown in the following figure.

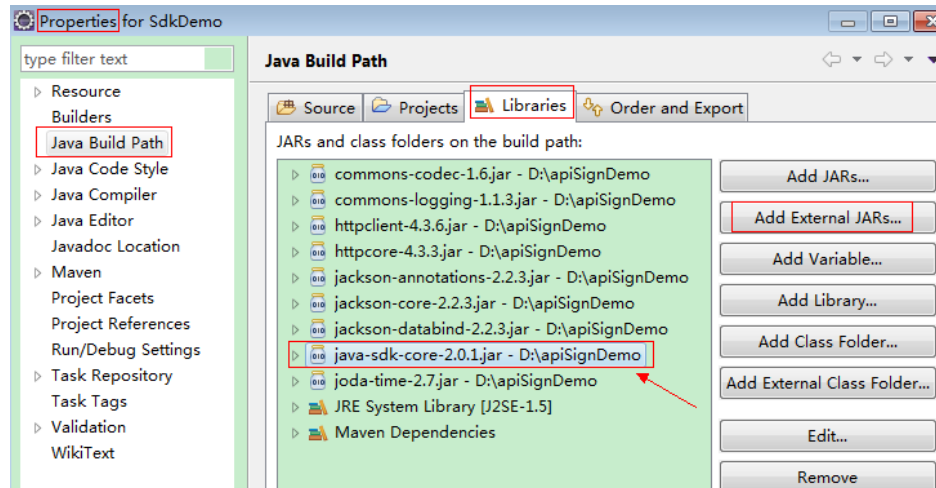

Step 1 Generate an AK/SK. (If an AK/SK file has already been obtained, skip this step and locate the downloaded AK/SK file. Generally, the file name will be **credentials.csv**.)

1. Log in to the management console.
2. Click the username and choose **My Credentials** from the drop-down list.
3. In the navigation pane, choose **Access Keys**.
4. Click **Create Access Key**.
5. On the displayed page, enter the login password.
6. Enter the verification code received by email or SMS message.

NOTE

For users created in IAM, if no email address or mobile number is specified during user creation, only the login password needs to be authenticated.

7. Click **OK** to download the access key.

NOTE

To prevent the access key from being leaked, keep it secure.

Step 2 Obtain and decompress the demo code.

Step 3 Import the sample project to Eclipse.

Figure 3-2 Selecting an existing project

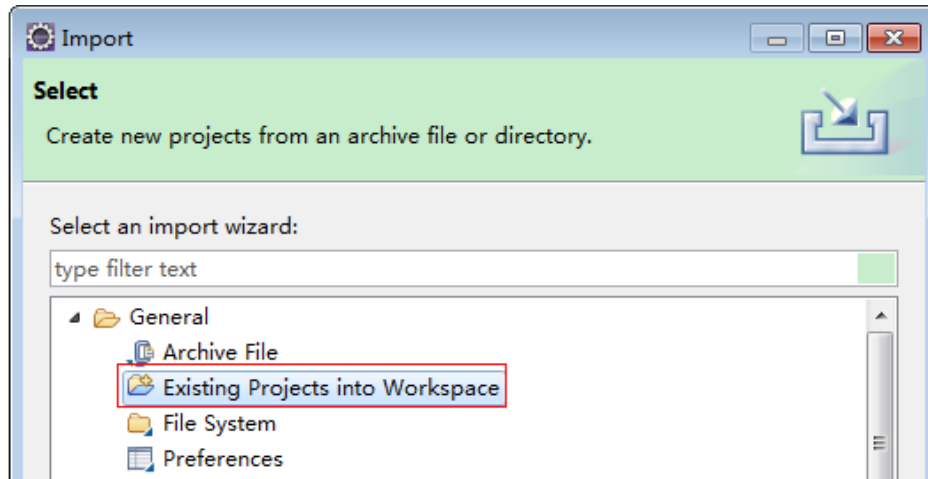


Figure 3-3 Selecting the demo project

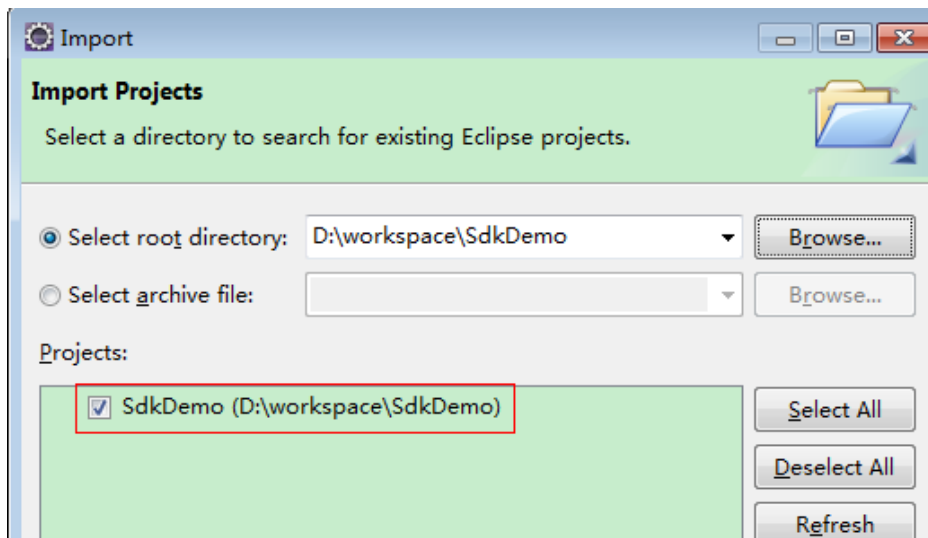
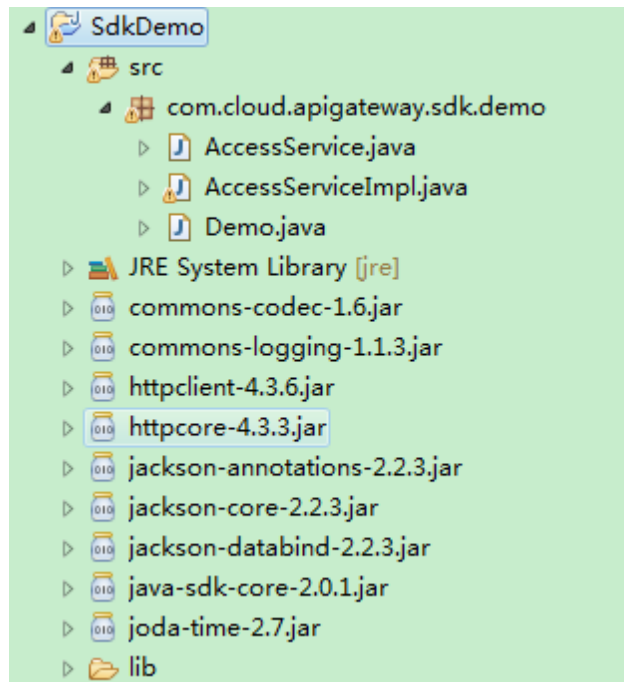


Figure 3-4 Example structure**Step 4** Sign the request.

The signature method is integrated into the JAR file imported in [step 3](#). Sign a request before sending it. The signature will be added as part of the HTTP header of the request.

The demo code is classified into three parts:

- **AccessService**: an abstract class that merges the GET, POST, PUT, and DELETE methods into the **access** method
- **Demo**: an execution entry used to simulate the sending of GET, POST, PUT, and DELETE requests
- **AccessServiceImpl**: implements the **access** method, which contains the code required for communicating with API Gateway.

1. (Optional) Add request header fields.

Locate the following rows in the **AccessServiceImpl.java** file, cancel code line shielding, and replace the subproject ID and account ID with the actual ones.

```
//TODO: Add special headers.  
//request.addHeader("X-Project-Id", "  
xxxxx");  
//request.addHeader("X-Domain-Id", "  
xxxxx");
```

2. Edit the main method in the **Demo.java** file.

Replace the bold texts with actual values. If you use other methods, such as POST, PUT, and DELETE, see the corresponding annotations.

Replace **region**, **serviceName**, **AK/SK**, and **URL**. In the demo project, the URL for obtaining the VPC is used. Replace it with the required URL. For **project_id** in the URL, obtain it from [7.3 Obtaining an Account ID, Project ID, and Enterprise Project ID](#). For the endpoint, obtain it from the enterprise administrator.

```
//TODO: Replace region with the name of the region in which the service to
//be accessed is located.
private static final String region = "";

//
TODO: Replace vpc with the name of the service you want to access. For
//example, ECS, VPC, IAM, and ELB.
private static final String serviceName = "";

public static void main(String[] args) throws UnsupportedOperationException
{
//
TODO: Replace the AK and SK with those obtained on the My Credential
//page.
String ak = "
ZIRRKMTWP*****1WKNKB";
String sk = "
Us0mdMNHk*****YrRCnW0ecfzl";

//
TODO: To specify a project ID (multi-project scenarios), add the X-Project-Id
//header.
//
TODO: To access a global service, such as IAM, DNS, CDN, and TMS, add the
//X-Domain-Id header to specify an account ID.
//
TODO: To add a header, find "Add special headers" in the
//AccessServiceImple.java file.

//
TODO: Test the API
String url = "
https://{Endpoint}/v1/{project_id}/vpcs";
get(ak, sk, url);

//
TODO: When creating a VPC, replace {project_id} in postUrl with the actual
//value.
//String postUrl = "https://serviceEndpoint/v1/{project_id}/cloudservers";
//String postbody ="{"
//vpc": {"name": "vpc", "cidr": "192.168.0.0/16"}}";
//post(ak, sk, postUrl, postbody);

//
TODO: When querying a VPC, replace {project_id} in url with the actual value.
//String url = "https://serviceEndpoint/v1/{project_id}/vpcs/{vpc_id}";
//get(ak, sk, url);

//
TODO: When updating a VPC, replace {project_id} and {vpc_id} in putUrl with
//the actual values.
//String putUrl = "https://serviceEndpoint/v1/{project_id}/vpcs/{vpc_id}";
//String putbody ="{"vpc":{"name": "vpc1", "cidr": "192.168.0.0/16"}}";
//put(ak, sk, putUrl, putbody);

//
TODO: When deleting a VPC, replace {project_id} and {vpc_id} in deleteUrl
//with the actual values.
//String deleteUrl = "https://serviceEndpoint/v1/{project_id}/vpcs/{vpc_id}";
//delete(ak, sk, deleteUrl);
}
```

3. Compile and run the code to call an API.

In the **Package Explorer** area on the left, right-click **Demo.java**, choose **Run AS > Java Application** from the shortcut menu, and click **Run**.

You can view the API calling logs on the console.

----End

Token-based Authentication

NOTE

- The validity period of a token is 24 hours. If a token is used for authentication, cache it to prevent frequent API calling.
- Ensure that the token is valid when you use it. Using a token that will soon expire may cause API calling failures.

A token specifies temporary permissions in a computer system. During API authentication using a token, the token is added to requests to get permissions for calling the API.

The token can be obtained by calling the API for obtaining a user token. Project-level tokens are required for calling APIs of this service. That is, when calling the API for obtaining a user token, specify a project under **auth.scope** in the request body.

```
{
  "auth": {
    "identity": {
      "methods": [
        "password"
      ],
      "password": {
        "user": {
          "name": "username",
          "password": "*****",
          "domain": {
            "name": "domainname"
          }
        }
      }
    },
    "scope": {
      "project": {
        "name": "xxxxxxx"
      }
    }
  }
}
```

After a token is obtained, the **X-Auth-Token** header field must be added to requests to specify the token when calling other APIs. For example, if the token is **ABCDEFGH...**, **X-Auth-Token: ABCDEFGH...** can be added to a request as follows:

```
GET https://Endpoint/v3/auth/projects
Content-Type: application/json
X-Auth-Token: ABCDEFGH...
```


3.3 Response

Status Code

After sending a request, you will receive a response, including a status code, response header, and response body.

A status code is a group of digits, ranging from 1xx to 5xx. It indicates the status of a request. For more information, see [7.1 Status Codes](#).

If status code **201** is returned for the calling of the API for obtaining a user token, the request is successful.

Response Header

Similar to a request, a response also has a header, for example, **Content-Type**.

For the API used to obtain a user token, the **x-subject-token** header field is the desired user token. This token can then be used to authenticate the calling of other APIs.

Figure 3-5 Response header

```
connection → keep-alive
content-type → application/json
date → Tue, 12 Feb 2019 06:52:13 GMT
server → Web Server
strict-transport-security → max-age=31536000; includeSubdomains;
transfer-encoding → chunked
via → proxy A
x-content-type-options → nosniff
x-download-options → noopen
x-frame-options → SAMEORIGIN
x-iam-trace-id → 218d45ab-d674-4995-af3a-2d0255ba41b5
x-subject-token → MIIVXQYJKoZIhvcNAQcCoIIYJCCEoCAQExDTALBgIghkgB8ZQMEAgEwgharBgkqhkiG9w0BBwGgghacBIIWmHsidG9rZW4iOnsiZXhwaXJlc19hdCI6IjIwMTktMDItMTNUMC
fj3KJIs6YgKnpVNRbW2eZ5eb78SZOkqjACgklqO1wi4JIGzrpd18LGXK5tdfdq4lqHCYb8P4NaY0NYejcAgz/VeFYtLWT1GSO0zxKZmlQHqJ82HBqHdglZO9fuEbL5dMhdavj+33wEI
xHRCe9I87o+k9-
j+CMZSEB7bUGd5Uj6eRASXl1jipPEGA270g1FruooL6jqglFkNPQuFSOU8+uSsttVwRtNfsC+qTp22Rkd5MCqFGQ8LcuUxC3a+9CMBnOintWW7oeRUVhVpxk8pxiX1wTEboX-
RzT6MUUpvGw-oPNFYxJECKnoH3HRozv0vN--n5d6Nbxg==
x-xss-protection → 1; mode=block;
```

Response Body

The body of a response is often returned in structured format as specified in the **Content-Type** header field. The response body transfers content except the response header.

For the API for obtaining a user token, the following message body is returned. The following describes part of the response body.

```
{
  "token": {
```

```
"expires_at": "2019-02-13T06:52:13.855000Z",  
"methods": [  
  "password"  
],  
"catalog": [  
  {  
    "endpoints": [  
      {  
        "region_id": "xx-xxxxxx-1",  
.....
```

If an error occurs during API calling, an error code and a message will be displayed. The following shows an error response body.

```
{  
  "errorCode": "SVCSTG_AMS_4000001",  
  "errorMessage": "Request param invalid"  
}
```

In the response body, **errorCode** is an error code, and **errorMessage** provides information about the error.

4 APIs

4.1 Alarm

4.1.1 Obtaining the Alarm Sending Result

Function

This API is used to obtain the alarm sending result.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v2/{project_id}/alarm-notified-histories

Table 4-1 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-2 Query Parameters

Parameter	Mandatory	Type	Description
event_sn	No	String	Alarm serial number.

Request Parameters

Table 4-3 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	No	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-4 Response body parameters

Parameter	Type	Description
notified_histories	Array of NotifiedHistoriesResult objects	Historical notification list.

Table 4-5 NotifiedHistoriesResult

Parameter	Type	Description
event_sn	String	Alarm serial number.
notifications	Array of Notifications objects	Notification result.

Table 4-6 Notifications

Parameter	Type	Description
action_rule	String	Alarm action rule name.

Parameter	Type	Description
notifier_channel	String	Notification type. SMN: Simple Message Notification. Enumeration values: • SMN
smn_channel	SmnResponse object	Notification result details.

Table 4-7 SmnResponse

Parameter	Type	Description
sent_time	Long	Sending time.
smn_notified_history	Array of SmnInfo objects	Content of a notification.
smn_request_id	String	ID for requesting SMN.
smn_response_body	String	Information returned after the SMN service is invoked.
smn_response_code	String	HTTP status code returned after the SMN service is invoked.
smn_topic	String	SMN topic.

Table 4-8 SmnInfo

Parameter	Type	Description
smn_notified_content	String	SMN message content.
smn_subscription_status	Integer	SMN subscription status.
smn_subscription_type	String	SMN subscription type.

Status code: 401**Table 4-9** Response body parameters

Parameter	Type	Description
error_code	String	Error code.

Parameter	Type	Description
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403**Table 4-10** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500**Table 4-11** Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Obtain the sending result of the alarm whose serial number is 1044686593798963201.

```
https://{Endpoint}/v2/{project_id}/alarm-notified-histories?event_sn=1044686593798963201
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "notified_histories" : [ {
    "event_sn" : "1044686593798963201",
    "notifications" : [ {
      "action_rule" : "lhy_alarm_action_test01",
```

```
"notifier_channel": "SMN",
"smn_channel": {
    "sent_time": 1669114269797,
    "smn_notified_history": [ {
        "smn_notified_content": : "<style> span {      display: inline-block;          float: left;          font-size: 14px; } b{      display: inline-block;          float: left;          color: #252B3A;          font-size: 14px }</style><table border=\\"0\\" cellpadding=\\"0\\" cellspacing=\\"0\\" style=\\"font-family:Helvetica,Arial,PingFangSC-Regular,Hiragino Sans GB;border-spacing:0px 14px;font-size:14px;padding-left: 30px;line-height:25px;\"> <thead> <tr style=\\"font-size:14px;\"> <td colspan=\\"2\\" style=\\"line-height:28px;color:#6e6e6e;font-size:14px\\"\> <b>Dear&nbsp;&nbsp;</b></td> <td colspan=\\"2\\"> <span>1 notification has been&nbsp;</span> <b>generated</b> <span>&nbsp;&in region ***</span> <b>&nbsp;&based on action rule lhy_alarm_action_test01.</b> <span></span> <span></span> <span><span><span>The alarm rule is&nbsp;&</span><b>lhy_test_001</b></span><span>. For more information, go to the AOM console.</span> <br> <p style=\\"margin-bottom:-20px;margin-top: -26px;\"> <span style=\\"color:#252B3A;line-height:24px\\"\>Here are the details.</span> </p> </td> <td><div>Account: kaifatest;<br>Notification Type: alarm;<br>CAS Application Name: app-1;<br>Notification Type: NA;<br>Severity: Critical;<br>Name: lhy_test_001;<br>Occurred: 2022-11-22 18:51:05 GMT+08:00;<br>Source: AOM;<br>Resource Type: Application;<br>Resource Identifier: <br>&nbsp;&casApplicationID: 2d216a2b-9a58-452e-9a82-fc0c7cbcd322;<br>&nbsp;&casApplicationName: app-1;<br>Possible Cause: If the specified metric value crosses the threshold and the alarm severity is \\\\"critical\\\\"", an alarm is triggered.<br>Link: https://console.xxx/aom/alarmlist;<br>Additional Info: The threshold rule lhy_test_001 status changes from \\\\"init\\" to \\\\"alarm\\". The value of \\\\"cpuCoreLimit\\" is \\\\"0.250\\" and meets the threshold criterion \\\\">=0\\\";<br>Suggestion: NA;<br></div></td> </table>",
        "smn_subscription_status": 1,
        "smn_subscription_type": "email"
    }, {
        "smn_notified_content": ": "[AOM][Critical_alarm_generated] \\nAlert Name: lhy_test_001;\\nCASS Application Name: app-1;\\nOccurrence Time: 2022-11-22 18:51:05 GMT+08:00;\\nLink: https://console.xxx/aom/alarmlist;\\nAlert Content: The threshold rule lhy_test_001 status changes from \\\"init\\\" to \\\"alarm\\\". The value of \\\"cpuCoreLimit\\\" is \\\"0.250\\\" and meets the threshold criterion \\\">=0\\\".;\\nThis message is configured in an AOM alarm rule by kaifatest. For more information, go to the AOM console.\";",
        "smn_subscription_status": 0,
        "smn_subscription_type": "sms"
    }, {
        "smn_notified_content": ": "[AOM][Critical_alarm_generated] \\nAlert Name: lhy_test_001;\\nCASS Application Name: app-1;\\nOccurrence Time: 2022-11-22 18:51:05 GMT+08:00;\\nLink: https://console.xxx/aom/alarmlist;\\nAlert Content: The threshold rule lhy_test_001 status changes from \\\"init\\\" to \\\"alarm\\\". The value of \\\"cpuCoreLimit\\\" is \\\"0.250\\\" and meets the threshold criterion \\\">=0\\\".;\\nThis message is configured in an AOM alarm rule by kaifatest. For more information, go to the AOM console.\";",
        "smn_subscription_status": 0,
        "smn_subscription_type": "sms"
    } ],
    "smn_request_id": "600bfa7447da48068312bba0fb2b3afa",
    "smn_response_body": "{ \"message_id\": \"b5db3a3419b84cc29d438a7dba336c20\", \"request_id\": \"600bfa7447da48068312bba0fb2b3afa\" }",
    "smn_response_code": "200",
    "smn_topic": "lhy_test01"
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code": "AOM.0403",
  "error_msg": "auth failed.",
  "error_type": "AUTH_FAILED",
  "trace_id": null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.2 Deleting a Silence Rule

Function

This API is used to delete a silence rule.

Calling Method

For details, see [Calling APIs](#).

URI

DELETE /v2/{project_id}/alert/mute-rules

Table 4-12 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-13 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-14 Request body parameters

Parameter	Mandatory	Type	Description
[items]	Yes	Array of DeleteMuteRuleName objects	Name of the rule to be deleted.

Table 4-15 DeleteMuteRuleName

Parameter	Mandatory	Type	Description
name	Yes	String	Name of the silence rule to be deleted.

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400

Table 4-16 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 401

Table 4-17 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403

Table 4-18 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500

Table 4-19 Response body parameters

Parameter	Type	Description
error_code	String	Response code.

Parameter	Type	Description
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Delete silent rule "1112222".

```
https://{Endpoint}/v2/{project_id}/alert/mute-rules
```

```
[ {  
  "name" : "1112222"  
}]
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{  
  "error_code" : "AOM.08015002",  
  "error_msg" : "the muteName is not exist",  
  "error_type" : "PARAM_INVALID",  
  "trace_id" : ""  
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{  
  "error_code" : "AOM.0403",  
  "error_msg" : "auth failed.",  
  "error_type" : "AUTH_FAILED",  
  "trace_id" : null  
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{  
  "error_code" : "AOM.0403",  
  "error_msg" : "auth failed.",  
  "error_type" : "AUTH_FAILED",  
  "trace_id" : null  
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{  
  "error_code" : "AOM.08001500",  
  "error_message" : "internal server error",  
}
```

```
"error_type" : "INTERNAL_SERVER_ERROR",  
"trace_id" : ""  
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.3 Adding a Silence Rule

Function

This API is used to add a silence rule.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/alert/mute-rules

Table 4-20 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-21 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-22 Request body parameters

Parameter	Mandatory	Type	Description
create_time	No	Long	Creation time.
desc	No	String	Rule description.
match	Yes	Array<Array< Match >>	Match condition of the rule. Up to 10 serial or parallel conditions can be created.
mute_config	Yes	MuteConfig object	Time when the rule takes effect.
name	Yes	String	Rule name. Enter a maximum of 100 characters and do not start or end with an underscore (_). Only letters, digits, and underscores are allowed.
timezone	No	String	Time zone.
update_time	No	Long	Modification time.
user_id	No	String	User ID.

Table 4-23 Match

Parameter	Mandatory	Type	Description
key	Yes	String	Key specified in the metadata for matching.

Parameter	Mandatory	Type	Description
operate	Yes	String	Match mode. EXIST: Exist. REGEX: Regular expression. EQUALS: Equal to. Enumeration values: • EQUALS • REGEX • EXIST
value	No	Array of strings	Value corresponding to the key. If operate is set to EXIST, this parameter is left empty.

Table 4-24 MuteConfig

Parameter	Mandatory	Type	Description
ends_at	No	Long	End time of the silence rule.
scope	No	Array of integers	When type is set to WEEKLY or MONTHLY, scope cannot be empty.
starts_at	Yes	Long	Start time of the silence rule.
type	Yes	String	Type of the time for the silence rule to take effect. FIXED: Fixed time. DAILY: Certain time every day. WEEKLY: Certain time every week. MONTHLY: Certain time every month. Enumeration values: • FIXED • DAILY • WEEKLY • MONTHLY

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400

Table 4-25 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 401

Table 4-26 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403

Table 4-27 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500

Table 4-28 Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Add a silence rule whose name is "32255" and user ID is "2xxxxxxxxxxxxxxxxxxxxxxxxcf".

```
https://{Endpoint}/v2/{project_id}/alert/mute-rules

{
  "create_time": 1668147671966,
  "desc": "",
  "match": [ [ {
    "key": "event_severity",
    "operate": "EQUALS",
    "value": [ "Info" ]
  } ] ],
  "mute_config": {
    "ends_at": 86399,
    "scope": [ ],
    "starts_at": 0,
    "type": "DAILY"
  },
  "name": "32255",
  "timezone": "xxx",
  "update_time": 1668147671966,
  "user_id": "2xxxxxxxxxxxxxxxxxxxxxxxxcf"
}
```

Example Responses

Status code: 400

Bad Request: Invalid request. The client should not repeat the request without modifications.

```
{
  "error_code": "AOM.08011001",
  "error_msg": "the muteName is exist",
  "error_type": "PARAM_INVALID",
  "trace_id": ""
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code": "AOM.0403",
  "error_msg": "auth failed.",
  "error_type": "AUTH_FAILED",
  "trace_id": null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code": "AOM.0403",
  "error_msg": "auth failed.",
  "error_type": "AUTH_FAILED",
  "trace_id": null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
400	Bad Request: Invalid request. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.4 Modifying a Silence Rule

Function

This API is used to modify a silence rule.

Calling Method

For details, see [Calling APIs](#).

URI

PUT /v2/{project_id}/alert/mute-rules

Table 4-29 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-30 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-31 Request body parameters

Parameter	Mandatory	Type	Description
create_time	No	Long	Creation time.
desc	No	String	Rule description.
match	Yes	Array<Array< Match >>	Match condition of the rule. Up to 10 serial or parallel conditions can be created.
mute_config	Yes	MuteConfig object	Time when the rule takes effect.
name	Yes	String	Rule name. Enter a maximum of 100 characters and do not start or end with an underscore (_). Only letters, digits, and underscores are allowed.
timezone	No	String	Time zone.
update_time	No	Long	Modification time.

Parameter	Mandatory	Type	Description
user_id	No	String	User ID.

Table 4-32 Match

Parameter	Mandatory	Type	Description
key	Yes	String	Key specified in the metadata for matching.
operate	Yes	String	Match mode. EXIST: Exist. REGEX: Regular expression. EQUALS: Equal to. Enumeration values: • EQUALS • REGEX • EXIST
value	No	Array of strings	Value corresponding to the key. If operate is set to EXIST, this parameter is left empty.

Table 4-33 MuteConfig

Parameter	Mandatory	Type	Description
ends_at	No	Long	End time of the silence rule.
scope	No	Array of integers	When type is set to WEEKLY or MONTHLY, scope cannot be empty.
starts_at	Yes	Long	Start time of the silence rule.
type	Yes	String	Type of the time for the silence rule to take effect. FIXED: Fixed time. DAILY: Certain time every day. WEEKLY: Certain time every week. MONTHLY: Certain time every month. Enumeration values: • FIXED • DAILY • WEEKLY • MONTHLY

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400

Table 4-34 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 401

Table 4-35 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403

Table 4-36 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500

Table 4-37 Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Modify a silence rule whose name is "32255", time zone is "xxx", and user ID is "2xxxxxxxxxxxxxxxxxxxxxxxxxxxxcf".

https://{endpoint}/v2/{project_id}/alert/mute-rules

```
{
  "create_time" : 1668147671966,
  "desc" : "",
  "match" : [ [ {
    "key" : "event_severity",
    "operate" : "EQUALS",
    "value" : [ "Info" ]
  } ] ],
  "mute_config" : {
    "ends_at" : 86399,
    "scope" : [ ],
    "starts_at" : 0,
    "type" : "DAILY"
  },
  "name" : "32255",
  "timezone" : "xxx",
  "update_time" : 1668147671966,
  "user_id" : "2xxxxxxxxxxxxxxxxxxxxxxxxxxxxcf"
}
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.08012003",
  "error_msg" : "request insertParma probably has error",
  "error_type" : "PARAM_INVALID",
  "trace_id" : ""
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.5 Obtaining the Silence Rule List

Function

This API is used to obtain the silence rule list.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v2/{project_id}/alert/mute-rules

Table 4-38 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-39 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	No	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-40 Response body parameters

Parameter	Type	Description
[items]	Array of MuteRule objects	Silence rule.

Table 4-41 MuteRule

Parameter	Type	Description
create_time	Long	Creation time.
desc	String	Rule description.

Parameter	Type	Description
match	Array<Array<Match>>	Match condition of the rule. Up to 10 serial or parallel conditions can be created.
mute_config	MuteConfig object	Time when the rule takes effect.
name	String	Rule name. Enter a maximum of 100 characters and do not start or end with an underscore (_). Only letters, digits, and underscores are allowed.
timezone	String	Time zone.
update_time	Long	Modification time.
user_id	String	User ID.

Table 4-42 Match

Parameter	Type	Description
key	String	Key specified in the metadata for matching.
operate	String	Match mode. EXIST: Exist. REGEX: Regular expression. EQUALS: Equal to. Enumeration values: • EQUALS • REGEX • EXIST
value	Array of strings	Value corresponding to the key. If operate is set to EXIST, this parameter is left empty.

Table 4-43 MuteConfig

Parameter	Type	Description
ends_at	Long	End time of the silence rule.
scope	Array of integers	When type is set to WEEKLY or MONTHLY, scope cannot be empty.
starts_at	Long	Start time of the silence rule.

Parameter	Type	Description
type	String	Type of the time for the silence rule to take effect. FIXED: Fixed time. DAILY: Certain time every day. WEEKLY: Certain time every week. MONTHLY: Certain time every month. Enumeration values: • FIXED • DAILY • WEEKLY • MONTHLY

Status code: 401**Table 4-44** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403**Table 4-45** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500

Table 4-46 Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Obtain the silence rule list.

```
https://{Endpoint}/v2/{project_id}/alert/mute-rules
```

Example Responses

Status code: 200

OK: The request is successful.

```
[ {
  "create_time" : 1668147671966,
  "desc" : "",
  "match" : [ [ {
    "key" : "event_severity",
    "operate" : "EQUALS",
    "value" : [ "Info" ]
  } ] ],
  "mute_config" : {
    "ends_at" : 86399,
    "scope" : [ ],
    "starts_at" : 0,
    "type" : "DAILY"
  },
  "name" : "32255",
  "timezone" : "xxx",
  "update_time" : 1668147671966,
  "user_id" : "2a473356cca5487f8373be891bffc1cf"
} ]
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
}
```

```
"trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.6 Querying an Alarm Action Rule Based on Alarm Rule Name

Function

This API is used to query an alarm action rule based on the alarm rule name.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v2/{project_id}/alert/action-rules/{rule_name}

Table 4-47 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .
rule_name	Yes	String	Alarm rule name.

Request Parameters

Table 4-48 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	No	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-49 Response body parameters

Parameter	Type	Description
rule_name	String	Alarm action rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, and underscores (_) are allowed.
project_id	String	Project ID.
user_name	String	Member account name.
desc	String	Rule description. Enter a maximum of 1,024 characters and do not start or end with an underscore (.). <i>Only digits, letters, underscores (), asterisk (*), and spaces are allowed.</i>

Parameter	Type	Description
type	String	Rule types. • 1: notification. • 2: user. Enumeration values: • 1 • 2
notification_template	String	Message template.
create_time	Long	Creation time.
update_time	Long	Modification time
time_zone	String	Time zone.
smn_topics	Array of SmnTopics objects	SMN topic. The total number of topics cannot exceed 5.

Table 4-50 SmnTopics

Parameter	Type	Description
display_name	String	Topic display name, which will be the name of an email sender. Max.: 192 bytes. This parameter is left blank by default.
name	String	Name of the topic. Enter 1 to 255 characters starting with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.
push_policy	Integer	SMN message push policy. Options: 0 and 1.

Parameter	Type	Description
status	Integer	Status of the topic subscriber. • 0: The topic has been deleted or the subscription list of this topic is empty. • 1: The subscription object is in the subscribed state. • 2: The subscription object is in the unsubscribed or canceled state. Enumeration values: • 0 • 1 • 2
topic_urn	String	Unique resource identifier of the topic.

Status code: 400**Table 4-51** Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Status code: 401**Table 4-52** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403

Table 4-53 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500**Table 4-54** Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Query the details of the alarm action rule named 1112222.

```
https://{Endpoint}/v2/{project_id}/alert/action-rules/1112222
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "create_time": 1665991889597,
  "notification_template": "aom.built-in.template.zh",
  "project_id": "2xxxxxxxxxxxxxxxxxxxxxf",
  "rule_name": "1112222",
  "smn_topics": [ {
    "display_name": "",
    "name": "gxxxxxt",
    "push_policy": 0,
    "status": 0,
    "topic_urn": "urn:smn:xxx:2xxxxxxxxxxxxxxxxxxxxxf:gxxxxxt"
  } ],
  "time_zone": "xxx",
  "type": "1",
  "update_time": 1665991889597,
  "user_name": "kxxxxxtt"
}
```

Status code: 400

Bad Request: Invalid request. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.08001001",
  "error_msg" : "bad request",
  "trace_id" : ""
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: Invalid request. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.7 Adding an Alarm Action Rule

Function

This API is used to add an alarm action rule.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/alert/action-rules

Table 4-55 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-56 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-57 Request body parameters

Parameter	Mandatory	Type	Description
rule_name	Yes	String	Alarm action rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, and underscores (_) are allowed.
project_id	Yes	String	Project ID.
user_name	Yes	String	Member account name.
desc	No	String	Rule description. Enter a maximum of 1,024 characters and do not start or end with an underscore (.). <i>Only digits, letters, underscores (), asterisk (*), and spaces are allowed.</i>
type	Yes	String	Rule types. • 1: notification. • 2: user. Enumeration values: • 1 • 2
notification_template	Yes	String	Message template.
create_time	No	Long	Creation time.
update_time	No	Long	Modification time
time_zone	No	String	Time zone.
smn_topics	Yes	Array of SmnTopics objects	SMN topic. The total number of topics cannot exceed 5.

Table 4-58 SmnTopics

Parameter	Mandatory	Type	Description
display_name	No	String	Topic display name, which will be the name of an email sender. Max.: 192 bytes. This parameter is left blank by default.

Parameter	Mandatory	Type	Description
name	Yes	String	Name of the topic. Enter 1 to 255 characters starting with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.
push_policy	Yes	Integer	SMN message push policy. Options: 0 and 1.
status	No	Integer	Status of the topic subscriber. • 0: The topic has been deleted or the subscription list of this topic is empty. • 1: The subscription object is in the subscribed state. • 2: The subscription object is in the unsubscribed or canceled state. Enumeration values: • 0 • 1 • 2
topic_urn	Yes	String	Unique resource identifier of the topic.

Response Parameters

Status code: 200

OK: Operation successful.

Status code: 400

Table 4-59 Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Status code: 401

Table 4-60 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403**Table 4-61** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500**Table 4-62** Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Add an alarm action rule whose name is "66666", username is "kxxxxxxxt", user ID is "21axxxxxxxxxxxxxxxxx47c", and notification template is "aom.built-in.template.en".

```
https://{Endpoint}/v2/{project_id}/alert/action-rules
```

```
{
  "desc": "1111",
  "notification_template": "aom.built-in.template.zh",
  "project_id": "21axxxxxxxxxxxxxxxxx47c",
  "rule_name": "66666",
  "smn_topics": [ {
    "display_name": "",
```

```
{
  "name" : "xiaohama",
  "push_policy" : 0,
  "status" : 0,
  "topic_urn" : "urn:smn:xxx:21axxxxxxxxxxxxxxxxx47c:xiaohama"
},
{
  "type" : "1",
  "user_name" : "kxxxxxxx",
  "time_zone" : "xxx"
}
```

Example Responses

Status code: 400

Bad Request: Invalid request. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.08018012",
  "error_msg" : "actionRule already exists",
  "trace_id" : ""
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: Operation successful.

Status Code	Description
400	Bad Request: Invalid request. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.8 Deleting an Alarm Action Rule

Function

This API is used to delete an alarm action rule.

Calling Method

For details, see [Calling APIs](#).

URI

DELETE /v2/{project_id}/alert/action-rules

Table 4-63 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-64 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-65 Request body parameters

Parameter	Mandatory	Type	Description
[items]	Yes	Array of strings	Name of the rule to be deleted.

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400**Table 4-66** Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Status code: 401**Table 4-67** Response body parameters

Parameter	Type	Description
error_code	String	Error code.

Parameter	Type	Description
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403**Table 4-68** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500**Table 4-69** Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Delete alarm action rule 1112222.

```
https://{Endpoint}/v2/{project_id}/alert/action-rules  
[ "1112222" ]
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{  
  "error_code" : "AOM.08020006",  
  "error_msg" : "The action rule does not exist",
```



```
"trace_id" : ""  
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{  
  "error_code" : "AOM.0403",  
  "error_msg" : "auth failed.",  
  "error_type" : "AUTH_FAILED",  
  "trace_id" : null  
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{  
  "error_code" : "AOM.0403",  
  "error_msg" : "auth failed.",  
  "error_type" : "AUTH_FAILED",  
  "trace_id" : null  
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{  
  "error_code" : "AOM.08020500",  
  "error_msg" : "internal server error",  
  "error_type" : "INTERNAL_SERVER_ERROR",  
  "trace_id" : ""  
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.9 Modifying an Alarm Action Rule

Function

This API is used to modify an alarm action rule.

Calling Method

For details, see [Calling APIs](#).

URI

PUT /v2/{project_id}/alert/action-rules

Table 4-70 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-71 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-72 Request body parameters

Parameter	Mandatory	Type	Description
rule_name	Yes	String	Alarm action rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, and underscores (_) are allowed.
project_id	Yes	String	Project ID.
user_name	Yes	String	Member account name.
desc	No	String	Rule description. Enter a maximum of 1,024 characters and do not start or end with an underscore (.). <i>Only digits, letters, underscores (), asterisk (*), and spaces are allowed.</i>
type	Yes	String	Rule types. • 1: notification. • 2: user. Enumeration values: • 1 • 2
notification_template	Yes	String	Message template.
create_time	No	Long	Creation time.
update_time	No	Long	Modification time
time_zone	No	String	Time zone.
smn_topics	Yes	Array of SmnTopics objects	SMN topic. The total number of topics cannot exceed 5.

Table 4-73 SmnTopics

Parameter	Mandatory	Type	Description
display_name	No	String	Topic display name, which will be the name of an email sender. Max.: 192 bytes. This parameter is left blank by default.

Parameter	Mandatory	Type	Description
name	Yes	String	Name of the topic. Enter 1 to 255 characters starting with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.
push_policy	Yes	Integer	SMN message push policy. Options: 0 and 1.
status	No	Integer	Status of the topic subscriber. • 0: The topic has been deleted or the subscription list of this topic is empty. • 1: The subscription object is in the subscribed state. • 2: The subscription object is in the unsubscribed or canceled state. Enumeration values: • 0 • 1 • 2
topic_urn	Yes	String	Unique resource identifier of the topic.

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400

Table 4-74 Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Status code: 401

Table 4-75 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403**Table 4-76** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500**Table 4-77** Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Modify the alarm action rule whose name is "lhy_test01" and user ID is "2xxxxxxxxxxxxxxxxxxcf".

`https://{endpoint}/v2/{project_id}/alert/action-rules`

```
{
  "project_id": "2xxxxxxxxxxxxxxxxxxcf",
  "rule_name": "222",
  "desc": "222",
  "type": "1",
  "smn_topics": [ {
    "display_name": "",
    "name": "lhy_test01",
    "push_policy": 0,
```

```
"topic_urn" : "urn:smn:xxx:2xxxxxxxxxxxxxxxxx:cf:lhy_test01"
  },
  "user_name" : "kxxxxxxx",
  "notification_template" : "aom.built-in.template.zh",
  "time_zone" : "xxx",
  "create_time" : 1667316727451,
  "update_time" : 1667316727451
}
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.08019006",
  "error_msg" : "The action rule does not exist",
  "trace_id" : ""
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error

The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.

Status Code	Description
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.10 Querying the Alarm Action Rule List

Function

This API is used to query the alarm action rule list.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v2/{project_id}/alert/action-rules

Table 4-78 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-79 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	No	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-80 Response body parameters

Parameter	Type	Description
action_rules	Array of ActionRule objects	Alarm action rule list.

Table 4-81 ActionRule

Parameter	Type	Description
rule_name	String	Alarm action rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, and underscores (_) are allowed.
project_id	String	Project ID.
user_name	String	Member account name.
desc	String	Rule description. Enter a maximum of 1,024 characters and do not start or end with an underscore (.). <i>Only digits, letters, underscores (), asterisk (*), and spaces are allowed.</i>

Parameter	Type	Description
type	String	Rule types. • 1: notification. • 2: user. Enumeration values: • 1 • 2
notification_template	String	Message template.
create_time	Long	Creation time.
update_time	Long	Modification time
time_zone	String	Time zone.
smn_topics	Array of SmnTopics objects	SMN topic. The total number of topics cannot exceed 5.

Table 4-82 SmnTopics

Parameter	Type	Description
display_name	String	Topic display name, which will be the name of an email sender. Max.: 192 bytes. This parameter is left blank by default.
name	String	Name of the topic. Enter 1 to 255 characters starting with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.
push_policy	Integer	SMN message push policy. Options: 0 and 1.

Parameter	Type	Description
status	Integer	Status of the topic subscriber. • 0: The topic has been deleted or the subscription list of this topic is empty. • 1: The subscription object is in the subscribed state. • 2: The subscription object is in the unsubscribed or canceled state. Enumeration values: • 0 • 1 • 2
topic_urn	String	Unique resource identifier of the topic.

Status code: 401**Table 4-83** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403**Table 4-84** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500

Table 4-85 Response body parameters

Parameter	Type	Description
error_code	String	Response code.
error_msg	String	Response message.
trace_id	String	Response ID.

Example Requests

Query all alarm action rules.

```
https://{Endpoint}/v2/{project_id}/alert/action-rules
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "action_rules": [ {
    "create_time": 1665991889597,
    "desc": "",
    "notification_template": "aom.built-in.template.zh",
    "project_id": "2xxxxxxxxxxxxxxxxxxxxf",
    "rule_name": "1112222",
    "smn_topics": [ {
      "display_name": "",
      "name": "gcmtest",
      "push_policy": 0,
      "status": 0,
      "topic_urn": "urn:smn:xxx:2xxxxxxxxxxxxxxxxxxxxf:gcmtest"
    } ],
    "time_zone": "xxx",
    "type": "1",
    "update_time": 1665991889597,
    "user_name": "kxxxxt"
  } ]
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code": "AOM.0403",
  "error_msg": "auth failed.",
  "error_type": "AUTH_FAILED",
  "trace_id": null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code": "AOM.0403",
  "error_msg": "auth failed.",
}
```

```
{
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.11 Querying the Event Alarm Rule List

Function

This API is used to query the event alarm rule list.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v2/{project_id}/event2alarm-rule

Table 4-86 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-87 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	No	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-88 Response body parameters

Parameter	Type	Description
[items]	Array of Event2alarmRuleBody objects	Event alarm entity.

Table 4-89 Event2alarmRuleBody

Parameter	Type	Description
user_id	String	Project ID.

Parameter	Type	Description
name	String	Rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, underscores (_), and hyphens (-) are allowed.
description	String	Rule description. Enter a maximum of 1024 characters and do not start or end with an underscore (_) or hyphen (-). Only letters, digits, and special characters (_-<>=,.) are allowed.
create_time	Long	Creation time.
update_time	Long	Update time.
resource_provider	String	Event source.
metadata	metadata object	Source data.
enable	Boolean	Whether to enable the rule.
trigger_policies	Array of trigger_policies objects	Trigger policy.
alarm_type	String	Alarm type. notification: direct alarm reporting. denoising: alarm noise reduction. Enumeration values: • notification • denoising
action_rule	String	Alarm action rule.
inhibit_rule	String	Alarm suppression rule.
route_group_rule	String	Alarm grouping rule.
event_names	Array of strings	Event name.
migrated	Boolean	Whether to migrate to AOM 2.0.
topics	Array of SmnTopics objects	SMN information.

Table 4-90 metadata

Parameter	Type	Description
customField	Array of strings	Custom tag.

Table 4-91 trigger_policies

Parameter	Type	Description
id	Integer	ID.
name	String	Event name.
trigger_type	String	Trigger type. accumulative: Accumulated trigger. immediately: Immediate trigger. Enumeration values: • accumulative • immediately
period	Integer	Trigger cycle.
operator	String	Comparison operator.
count	Integer	Number of trigger times.
level	String	Alarm severity.

Table 4-92 SmnTopics

Parameter	Type	Description
display_name	String	Topic display name, which will be the name of an email sender. Max.: 192 bytes. This parameter is left blank by default.
name	String	Name of the topic. Enter 1 to 255 characters starting with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.
push_policy	Integer	SMN message push policy. Options: 0 and 1.

Parameter	Type	Description
status	Integer	Status of the topic subscriber. • 0: The topic has been deleted or the subscription list of this topic is empty. • 1: The subscription object is in the subscribed state. • 2: The subscription object is in the unsubscribed or canceled state. Enumeration values: • 0 • 1 • 2
topic_urn	String	Unique resource identifier of the topic.

Status code: 401**Table 4-93** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403**Table 4-94** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500

Table 4-95 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Example Requests

Query the event alarm rule list.

```
https://{endpoint}/v2/{project_id}/event2alarm-rule
```

Example Responses

Status code: 200

OK: The request is successful.

```
[ {
  "action_rule" : "1",
  "alarm_type" : "notification",
  "create_time" : 1701442632968,
  "description" : "",
  "enable" : true,
  "event_names" : [ ],
  "inhibit_rule" : "",
  "metadata" : {
    "customField" : [ "xxx" ]
  },
  "migrated" : false,
  "name" : "1jB5h6GnbY",
  "resource_provider" : "AOM",
  "route_group_rule" : "",
  "topics" : [ ],
  "trigger_policies" : [ {
    "count" : 99,
    "id" : 0,
    "level" : "",
    "name" : "",
    "operator" : ">=",
    "period" : 300,
    "trigger_type" : "accumulative"
  } ],
  "update_time" : 0,
  "user_id" : "2a473356cca5487f8373be891bffc1cf"
} ]
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "SVCSTG.AMS.2000051",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED"
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED"
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.12 Adding an Event Alarm Rule

Function

This API is used to add an event alarm rule.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/event2alarm-rule

Table 4-96 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-97 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-98 Request body parameters

Parameter	Mandatory	Type	Description
user_id	Yes	String	Project ID.
name	Yes	String	Rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, underscores (_), and hyphens (-) are allowed.
description	No	String	Rule description. Enter a maximum of 1024 characters and do not start or end with an underscore (_) or hyphen (-). Only letters, digits, and special characters (_- <>=,.) are allowed.
create_time	Yes	Long	Creation time.
update_time	No	Long	Update time.

Parameter	Mandatory	Type	Description
resource_provider	No	String	Event source.
metadata	Yes	metadata object	Source data.
enable	Yes	Boolean	Whether to enable the rule.
trigger_policies	Yes	Array of trigger_policies objects	Trigger policy.
alarm_type	Yes	String	Alarm type. notification: direct alarm reporting. denoising: alarm noise reduction. Enumeration values: • notification • denoising
action_rule	Yes	String	Alarm action rule.
inhibit_rule	No	String	Alarm suppression rule.
route_group_rule	No	String	Alarm grouping rule.
event_names	No	Array of strings	Event name.
migrated	No	Boolean	Whether to migrate to AOM 2.0.
topics	No	Array of SmnTopics objects	SMN information.

Table 4-99 metadata

Parameter	Mandatory	Type	Description
customField	No	Array of strings	Custom tag.

Table 4-100 trigger_policies

Parameter	Mandatory	Type	Description
id	No	Integer	ID.
name	No	String	Event name.

Parameter	Mandatory	Type	Description
trigger_type	No	String	Trigger type. accumulative: Accumulated trigger. immediately: Immediate trigger. Enumeration values: • accumulative • immediately
period	No	Integer	Trigger cycle.
operator	No	String	Comparison operator.
count	No	Integer	Number of trigger times.
level	No	String	Alarm severity.

Table 4-101 SmnTopics

Parameter	Mandatory	Type	Description
display_name	No	String	Topic display name, which will be the name of an email sender. Max.: 192 bytes. This parameter is left blank by default.
name	Yes	String	Name of the topic. Enter 1 to 255 characters starting with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.
push_policy	Yes	Integer	SMN message push policy. Options: 0 and 1.
status	No	Integer	Status of the topic subscriber. • 0: The topic has been deleted or the subscription list of this topic is empty. • 1: The subscription object is in the subscribed state. • 2: The subscription object is in the unsubscribed or canceled state. Enumeration values: • 0 • 1 • 2

Parameter	Mandatory	Type	Description
topic_urn	Yes	String	Unique resource identifier of the topic.

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400

Table 4-102 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 401

Table 4-103 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403

Table 4-104 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.

Parameter	Type	Description
trace_id	String	Request ID.

Status code: 500

Table 4-105 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Example Requests

Add an event alarm rule whose user ID is "xxxx", name is "scl_test_event", and event source is "AOM".

https://{endpoint}/v2/{project_id}/event2alarm-rule

```
{
  "user_id": "xxxx",
  "name": "scl_test_event",
  "description": "",
  "create_time": 1669276173427,
  "update_time": 0,
  "resource_provider": "AOM",
  "metadata": {
    "customField": [ "xxx=xxx" ]
  },
  "enable": true,
  "trigger_policies": [ {
    "id": 0,
    "name": "",
    "trigger_type": "accumulative",
    "period": 300,
    "operator": ">=",
    "count": 99,
    "level": ""
  } ],
  "alarm_type": "notification",
  "action_rule": "111111",
  "inhibit_rule": "",
  "route_group_rule": ""
}
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.02011400",
  "error_msg" : "actionRule is invalid!",
  "error_type" : "BAD_REQUEST",
  "trace_id" : ""
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "SVCSTG.AMS.2000051",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED"
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "SVCSTG.AMS.2000051",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : "8fb508e9e31b44279016f708e1c60e4c"
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.13 Modifying an Event Alarm Rule

Function

This API is used to modify an event alarm rule.

Calling Method

For details, see [Calling APIs](#).

URI

PUT /v2/{project_id}/event2alarm-rule

Table 4-106 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-107 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	No	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-108 Request body parameters

Parameter	Mandatory	Type	Description
user_id	Yes	String	Project ID.

Parameter	Mandatory	Type	Description
name	Yes	String	Rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, underscores (_), and hyphens (-) are allowed.
description	No	String	Rule description. Enter a maximum of 1024 characters and do not start or end with an underscore (_) or hyphen (-). Only letters, digits, and special characters (_- <>=,.) are allowed.
create_time	Yes	Long	Creation time.
update_time	No	Long	Update time.
resource_provider	No	String	Event source.
metadata	Yes	metadata object	Source data.
enable	Yes	Boolean	Whether to enable the rule.
trigger_policies	Yes	Array of trigger_policies objects	Trigger policy.
alarm_type	Yes	String	Alarm type. notification: direct alarm reporting. denoising: alarm noise reduction. Enumeration values: • notification • denoising
action_rule	Yes	String	Alarm action rule.
inhibit_rule	No	String	Alarm suppression rule.
route_group_rule	No	String	Alarm grouping rule.
event_names	No	Array of strings	Event name.
migrated	No	Boolean	Whether to migrate to AOM 2.0.

Parameter	Mandatory	Type	Description
topics	No	Array of SmnTopics objects	SMN information.

Table 4-109 metadata

Parameter	Mandatory	Type	Description
customField	No	Array of strings	Custom tag.

Table 4-110 trigger_policies

Parameter	Mandatory	Type	Description
id	No	Integer	ID.
name	No	String	Event name.
trigger_type	No	String	Trigger type. accumulative: Accumulated trigger. immediately: Immediate trigger. Enumeration values: • accumulative • immediately
period	No	Integer	Trigger cycle.
operator	No	String	Comparison operator.
count	No	Integer	Number of trigger times.
level	No	String	Alarm severity.

Table 4-111 SmnTopics

Parameter	Mandatory	Type	Description
display_name	No	String	Topic display name, which will be the name of an email sender. Max.: 192 bytes. This parameter is left blank by default.

Parameter	Mandatory	Type	Description
name	Yes	String	Name of the topic. Enter 1 to 255 characters starting with a letter or digit. Only letters, digits, hyphens (-), and underscores (_) are allowed.
push_policy	Yes	Integer	SMN message push policy. Options: 0 and 1.
status	No	Integer	Status of the topic subscriber. • 0: The topic has been deleted or the subscription list of this topic is empty. • 1: The subscription object is in the subscribed state. • 2: The subscription object is in the unsubscribed or canceled state. Enumeration values: • 0 • 1 • 2
topic_urn	Yes	String	Unique resource identifier of the topic.

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400

Table 4-112 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 401

Table 4-113 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403**Table 4-114** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500**Table 4-115** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Example Requests

Update an event alarm rule whose user ID is "xxxxxxx", event source is "AOM", and name is "scl_test_event".

```
https://{endpoint}/v2/{project_id}/event2alarm-rule
```

```
{
  "user_id" : "xxxxxxx",
  "name" : "scl_test_event",
  "description" : "",
  "create_time" : 1669276304343,
  "update_time" : 1669276304343,
```

```
"resource_provider" : "AOM",
"metadata" : {
  "customField" : [ "xxx" ]
},
"enable" : true,
"trigger_policies" : [ {
  "id" : 0,
  "name" : "",
  "trigger_type" : "accumulative",
  "period" : 300,
  "operator" : ">=",
  "count" : 99,
  "level" : ""
} ],
"alarm_type" : "notification",
"action_rule" : "111111",
"inhibit_rule" : "",
"route_group_rule" : ""
}
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.02011400",
  "error_msg" : "actionRule is invalid!",
  "error_type" : "BAD_REQUEST",
  "trace_id" : ""
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "SVCSTG.AMS.2000051",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED"
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "SVCSTG.AMS.2000051",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED"
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.14 Deleting an Event Alarm Rule

Function

This API is used to delete an event alarm rule.

Calling Method

For details, see [Calling APIs](#).

URI

DELETE /v2/{project_id}/event2alarm-rule

Table 4-116 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-117 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-118 Request body parameters

Parameter	Mandatory	Type	Description
[items]	Yes	Array of strings	Name of the rule to be deleted.

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400**Table 4-119** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 401

Table 4-120 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 403

Table 4-121 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Status code: 500

Table 4-122 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Example Requests

Delete event alarm rule "aomTestLts".

```
https://{endpoint}/v2/{project_id}/event2alarm-rule  
[ "aomTestLts" ]
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.02013125",
  "error_msg" : "send kafka message failed",
  "error_type" : "INTERNAL_SERVER_ERROR",
  "trace_id" : "8fb508e9e31b44279016f708e1c60e4c"
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code" : "SVCSTG.AMS.2000051",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED"
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "SVCSTG.AMS.2000051",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED"
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.1.15 Querying Events and Alarms

Function

This API is used to query events and alarms of a user.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/events

Table 4-123 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-124 Query Parameters

Parameter	Mandatory	Type	Description
type	No	String	Type of information to be queried. - active_alert: Active alarms are to be queried. - history_alert: Historical alarms are to be queried. If this parameter is not transferred or other values are transferred, information that meets the specified search criteria will be returned. Enumeration values: - history_alert - active_alert
limit	No	Integer	Maximum number of records returned for each query. Default: 1,000.

Parameter	Mandatory	Type	Description
marker	No	String	Pagination marker. The initial value is 0 , and the subsequent value is the value of next_marker in the response body.

Request Parameters

Table 4-125 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json
Enterprise-Project-Id	No	String	Enterprise project ID. • To query instances in an enterprise project, enter the enterprise project ID. • To query instances in all enterprise projects, enter all_granted_eps.

Table 4-126 Request body parameters

Parameter	Mandatory	Type	Description
time_range	Yes	String	Time range specified to query data of the last N minutes when the client time is inconsistent with the server time. It can also be used to accurately query the data of a specified period. Example: • -1.-1.60: indicates that the data of the latest 60 minutes is queried. This query is based on the server time regardless of the current client time. • 1650852000000.1650852300000.5: indicates the five minutes from 10:00:00 to 10:05:00 on April 25, 2022 GMT+08:00. Format: startTimeInMillis.endTimeInMillis.durationInMinutes Parameter description: • startTimeInMillis: start time (UTC) of the query, in milliseconds. If this parameter is set to -1, the server calculates the start time as follows: $\text{endTimeInMillis} - \text{durationInMinutes} \times 60 \times 1000$. For example, -1.1650852300000.5 is equivalent to 1650852000000.1650852300000.5. • endTimeInMillis: end time (UTC) of the query, in milliseconds. If this parameter is set to -1, the server calculates the end time as follows: $\text{startTimeInMillis} + \text{durationInMinutes} \times 60 \times 1000$. If the calculated end time is later than the

Parameter	Mandatory	Type	Description
			current system time, the current system time is used. For example, 1650852000000.-1.5 is equivalent to 1650852000000.1650852300000.5. durationInMinutes: query time span, in minutes. The value must be greater than 0 and greater than or equal to the result of $(\text{endTimeInMillis} - \text{startTimeInMillis}) / (60 \times 1000) - 1$. If both the start time and end time are set to -1, the system sets the end time to the current UTC time (in milliseconds) and calculates the start time as follows: $\text{endTimeInMillis} - \text{durationInMinutes} \times 60 \times 1000$. For example, -1.-1.60 indicates the latest 60 minutes. Constraint: In a single request, the following condition must be met: $\text{durationInMinutes} \times 60 / \text{period} \leq 1,440$
step	No	Long	Statistical step (unit: ms). For example, if the statistical step is one minute, set this parameter to 60,000.
search	No	String	Field specified for fuzzy query, which can be left blank. If this field is not left blank, fuzzy query can be performed accordingly. In that case, the metadata field is mandatory.
sort	No	sort object	Sorting order, which can be left blank.
metadata_relation	No	Array of RelationModel objects	Combination of search criteria, which can be left blank.

Table 4-127 sort

Parameter	Mandatory	Type	Description
order_by	Yes	Array of strings	List of sorted fields. Fields in this list are sorted based on the specified order. This parameter is mandatory if sort is not empty.
order	No	String	Sorting order. asc: ascending order. desc: descending order. Enumeration values: • asc • desc

Table 4-128 RelationModel

Parameter	Mandatory	Type	Description
key	Yes	String	Key specified for query, which corresponds to the key in the metadata. This parameter is mandatory if metadata_relation is not empty.
value	No	Array of strings	Value of the specified key in the search criterion.
relation	No	String	Relationship between search criteria. • AND: All criteria must be met. • OR: One of the criteria needs to be met. • NOT: None of the criteria can be met. Enumeration values: • AND • OR • NOT

Response Parameters

Status code: 200

Table 4-129 Response body parameters

Parameter	Type	Description
events	Array of ListEventModel objects	Event or alarm details.
page_info	PageInfo object	Pagination information.

Table 4-130 ListEventModel

Parameter	Type	Description
starts_at	Long	Time when an event or alarm is generated (UTC timestamp precise down to the millisecond).
ends_at	Long	Time when an event or alarm is cleared (UTC timestamp precise down to the millisecond). 0: The event or alarm is not deleted.
timeout	Long	After how long will an alarm be automatically cleared. Unit: ms. For example, if an alarm is cleared after 1 minute, set this parameter to 60000 . The default value is 5 days (that is, 5 days × 24 hours × 60 minutes × 60,000 ms).

Parameter	Type	Description
metadata	Map<String,String>	Details of an event or alarm. The value is a key-value pair. The following fields are mandatory: • event_name: event or alarm name, which is a string. • event_severity: event severity, which is an enumerated value with string elements. Options: Critical, Major, Minor, and Info. • event_type: event type, which is an enumerated value with string elements. Options: event and alarm. • resource_provider: name of a cloud service corresponding to an event, which is a string. • resource_type: type of the resource corresponding to an event, which is a string. • resource_id: resource ID corresponding to an event, which is a string.
annotations	Map<String,Object>	Additional field for an event or alarm, which can be left blank.
attach_rule	Map<String,Object>	Reserved field for an event or alarm, which can be left blank.
id	String	Event or alarm ID, which is automatically generated by the system.
event_sn	String	Alarm serial number.
arrives_at	Long	Time when an event arrives at the system (UTC timestamp precise down to the millisecond).
enterprise_project_id	String	ID of the enterprise project to which the event or alarm belongs.
policy	Map<String,Object>	Open alarm policy.

Table 4-131 PageInfo

Parameter	Type	Description
current_count	Integer	Total number of events and alarms on the current page.
previous_marker	String	Previous marker.
next_marker	String	Next marker.

Status code: 400

Table 4-132 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Status code: 401

Table 4-133 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Status code: 403

Table 4-134 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.

Parameter	Type	Description
trace_id	String	Request ID.

Status code: 500

Table 4-135 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Status code: 503

Table 4-136 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Example Requests

Query the events and alarms of a specified user.

```
https://{endpoint}/v2/{project_id}/events
```

```
{
  "time_range": "-1.-1.30",
  "metadata_relation": [ {
    "key": "event_type",
    "relation": "AND",
    "value": [ "alarm" ]
  }, {
    "key": "event_severity",
    "relation": "AND",
    "value": [ "Critical", "Major", "Minor", "Info" ]
  } ],
  "search": "",
  "sort": {
    "order_by": [ "starts_at" ],
    "order": "desc"
  }
}
```

```
}  
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{  
  "events" : [ {  
    "annotations" : {  
      "alarm_fix_suggestion_zh_cn" : "Suggestions",  
      "alarm_probableCause_zh_cn" : "Possible Causes",  
      "message" : "Alarm Details"  
    },  
    "arrives_at" : 16377362908000,  
    "ends_at" : 0,  
    "enterprise_project_id" : "0",  
    "event_sn" : "1283514476372426755",  
    "id" : "6775161208461480000",  
    "metadata" : {  
      "event_name" : "test",  
      "event_severity" : "Major",  
      "event_type" : "alarm",  
      "resource_id" : "ecs123",  
      "resource_provider" : "ecs",  
      "resource_type" : "vm"  
    },  
    "policy" : { },  
    "starts_at" : 16377362908000,  
    "timeout" : 60000  
  } ],  
  "page_info" : {  
    "current_count" : 1,  
    "next_marker" : "",  
    "previous_marker" : "0"  
  }  
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{  
  "error_code" : "AOM.08032002",  
  "error_message" : "The request body is illegal",  
  "error_type" : "SC_BAD_REQUEST"  
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{  
  "error_code" : "AOM.0403",  
  "error_message" : "auth failed.",  
  "error_type" : "AUTH_FAILED",  
  "trace_id" : null  
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_message" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_message" : "Internal Server Error",
  "trace_id" : null
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0503",
  "error_message" : "SC_NOT_IMPLEMENTED",
  "error_type" : "SC_NOT_IMPLEMENTED"
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.1.16 Counting Events and Alarms

Function

This API is used to count events and alarms that meet specified conditions.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/events/statistic

Table 4-137 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-138 Query Parameters

Parameter	Mandatory	Type	Description
type	No	String	Type of information to be queried. - active_alert: Active alarms are to be queried. - history_alert: Historical alarms are to be queried. If this parameter is not transferred or other values are transferred, information that meets the specified search criteria will be returned. Enumeration values: - history_alert - active_alert

Request Parameters

Table 4-139 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-140 Request body parameters

Parameter	Mandatory	Type	Description
time_range	Yes	String	Time range specified to query data of the last N minutes when the client time is inconsistent with the server time. It can also be used to accurately query the data of a specified period. Example: • -1.-1.60: indicates that the data of the latest 60 minutes is queried. This query is based on the server time regardless of the current client time. • 1650852000000.1650852300000.5: indicates the five minutes from 10:00:00 to 10:05:00 on April 25, 2022 GMT+08:00. Format: startTimeInMillis.endTimeInMillis.durationInMinutes Parameter description: • startTimeInMillis: start time (UTC) of the query, in milliseconds. If this parameter is set to -1, the server calculates the start time as follows: $\text{endTimeInMillis} - \text{durationInMinutes} \times 60 \times 1000$. For example, -1.1650852300000.5 is equivalent to 1650852000000.1650852300000.5. • endTimeInMillis: end time (UTC) of the query, in milliseconds. If this parameter is set to -1, the server calculates the end time as follows: $\text{startTimeInMillis} + \text{durationInMinutes} \times 60 \times 1000$. If the calculated end time is later than the

Parameter	Mandatory	Type	Description
			current system time, the current system time is used. For example, 1650852000000.-1.5 is equivalent to 1650852000000.1650852300000.5. durationInMinutes: query time span, in minutes. The value must be greater than 0 and greater than or equal to the result of $(\text{endTimeInMillis} - \text{startTimeInMillis}) / (60 \times 1000) - 1$. If both the start time and end time are set to -1, the system sets the end time to the current UTC time (in milliseconds) and calculates the start time as follows: $\text{endTimeInMillis} - \text{durationInMinutes} \times 60 \times 1000$. For example, -1.-1.60 indicates the latest 60 minutes. Constraint: In a single request, the following condition must be met: $\text{durationInMinutes} \times 60 / \text{period} \leq 1,440$
step	No	Long	Statistical step. Unit: ms. For example, if an alarm is cleared after 1 minute, set this parameter to 60000 . Min.: 1 minute.
search	No	String	Field specified for fuzzy query, which can be left blank. If this field is not left blank, the system will return metadata's mandatory fields that are fuzzily matched.
sort	No	sort object	Sorting order, which can be left blank.
metadata_relation	No	Array of RelationModel objects	Combination of search criteria, which can be left blank.

Table 4-141 sort

Parameter	Mandatory	Type	Description
order_by	No	Array of strings	List of sorted fields. Fields in this list are sorted based on the specified order.
order	No	String	Sorting order. asc: ascending order. desc: descending order. Enumeration values: • asc • desc

Table 4-142 RelationModel

Parameter	Mandatory	Type	Description
key	Yes	String	Key specified for query, which corresponds to the key in the metadata. This parameter is mandatory if metadata_relation is not empty.
value	No	Array of strings	Value of the specified key in the search criterion.
relation	No	String	Relationship between search criteria. • AND: All criteria must be met. • OR: One of the criteria needs to be met. • NOT: None of the criteria can be met. Enumeration values: • AND • OR • NOT

Response Parameters

Status code: 200

Table 4-143 Response body parameters

Parameter	Type	Description
step	Long	Statistical step (unit: ms). For example, if the statistical step is one minute, set this parameter to 60,000.
timestamps	Array of longs	Time series object corresponding to the statistical result.
series	Array of EventSeries objects	Statistical results of a time series object's different severities of events or alarms.
summary	Map<String,Integer>	Alarm statistics summary.

Table 4-144 EventSeries

Parameter	Type	Description
event_severity	String	Enumerated values of event or alarm severities. Enumeration values: • Critical • Major • Minor • Info
values	Array of integers	Event or alarm statistical result.

Status code: 400**Table 4-145** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Status code: 401

Table 4-146 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Status code: 403

Table 4-147 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Status code: 500

Table 4-148 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Status code: 503

Table 4-149 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.

Parameter	Type	Description
trace_id	String	Request ID.

Example Requests

Query the events and alarms on the step basis in a specified time range.

```
https://{endpoint}/v2/{project_id}/events/statistic
{
  "time_range": "-1.-1.5",
  "step": 60000
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "series": [ {
    "event_severity": "Critical",
    "values": [ 2, 3, 3, 1, 0 ]
  }, {
    "event_severity": "Major",
    "values": [ 4, 3, 5, 4, 0 ]
  }, {
    "event_severity": "Minor",
    "values": [ 3, 1, 1, 1, 0 ]
  }, {
    "event_severity": "Info",
    "values": [ 0, 0, 0, 0, 0 ]
  } ],
  "step": 60000,
  "summary": {
    "critical_count": 9,
    "info_count": 0,
    "major_count": 16,
    "minor_count": 6
  },
  "timestamps": [ 1711788600000, 1711788660000, 1711788720000, 1711788780000, 1711788840000 ]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code": "AOM.08033002",
  "error_message": "The request body is illegal",
  "trace_id": ""
}
```

Status code: 401

Unauthorized: The authentication information is incorrect or invalid.

```
{
  "error_code": "AOM.0403",
  "error_message": "auth failed.",
}
```

```
{
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0403",
  "error_message" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_message" : "Internal Server Error",
  "trace_id" : ""
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.0503",
  "error_message" : "SC_NOT_IMPLEMENTED",
  "error_type" : "SC_NOT_IMPLEMENTED"
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.1.17 Reporting Events and Alarms

Function

This API is used to report events and alarms to AOM. It is also used to clear alarms.

Calling Method

For details, see [Calling APIs](#).

URI

PUT /v2/{project_id}/push/events

Table 4-150 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-151 Query Parameters

Parameter	Mandatory	Type	Description
action	No	String	Requested action. - If this parameter is not transferred or other values are transferred, an alarm or event is to be reported. By default, this parameter is left blank, indicating that an alarm or event is to be reported. - clear: An alarm is to be cleared. Enumeration values: clear

Request Parameters

Table 4-152 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json
enterprise-project-id	No	String	ID of the enterprise project to which the alarm belongs. For details, see Obtaining an Enterprise Project ID . If this parameter is not transferred, the default enterprise project will be used (ID: 0).

Table 4-153 Request body parameters

Parameter	Mandatory	Type	Description
events	Yes	Array of EventModel objects	Event or alarm details.

Table 4-154 EventModel

Parameter	Mandatory	Type	Description
starts_at	No	Long	Time when an event or alarm is generated (UTC timestamp precise down to the millisecond). Example: 2024-10-16 16:03:01 needs to be converted to UTC timestamp 1702759381000 using a tool. This parameter needs to be specified if the value of action is left blank (which indicates that an event or alarm is to be reported).
ends_at	No	Long	Time when an event or alarm is cleared (UTC timestamp precise down to the millisecond). 0 (default): The alarm is not cleared. Example: 2024-10-16 16:03:01 needs to be converted to UTC timestamp 1702759381000 using a tool. This parameter needs to be specified if the value of action is set to clear.
timeout	No	Long	After how long will an alarm be automatically cleared. Unit: ms. For example, if an alarm is cleared after 1 minute, set this parameter to 60000. By default, alarms older than five days will be cleared. The corresponding value is $7,200 \times 60,000$ (5 days $\times$ 24 hours $\times$ 60 minutes $\times$ 60,000 ms). Max.: 15 days. This parameter needs to be specified if the value of action is left blank (which indicates that an alarm is to be reported).

Parameter	Mandatory	Type	Description
metadata	Yes	Map<String,String>	Details about an event or alarm to be reported. The value is a key-value pair. Mandatory fields: • event_name: event or alarm name, which is a string. • event_severity: event or alarm severity, which is a string. Options: – Critical – Major – Minor – Info • event_type: event or alarm type, which is a string. Options: – event – alarm • resource_provider: name of a cloud service corresponding to an event, which is a string. • resource_type: type of the resource corresponding to an event, which is a string. • resource_id: resource ID corresponding to an event, which is a string. Length: 1 to 2,048 characters.
annotations	No	Map<String,Object>	Additional field for an event or alarm, which can be left blank.
attach_rule	No	Map<String,Object>	Reserved field for an event or alarm, which can be left blank.
id	No	String	Event or alarm ID, which is automatically generated when an event or alarm is generated. This parameter needs to be specified if the value of action is set to clear.

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 400

Table 4-155 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error description.
error_type	String	API call failure type.
trace_id	String	Request ID.

Example Requests

Report an alarm named "test".

```
https://{EndPoint}/v2/{project_id}/push/events
{
  "events": [ {
    "starts_at": 1605232501000,
    "timeout": 60000,
    "metadata": {
      "event_name": "test",
      "event_severity": "Major",
      "event_type": "alarm",
      "resource_provider": "ecs",
      "resource_type": "vm",
      "resource_id": "ecs123"
    },
    "annotations": {
      "alarm_probableCause_zh_cn": "Possible Causes",
      "alarm_fix_suggestion_zh_cn": "Suggestions",
      "message": "Alarm Details"
    },
    "attach_rule": { }
  } ]
}
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code": "AOM.0400",
  "error_msg": "parse eventParam failed",
  "error_type": "SC_BAD_REQUEST"
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2 Monitoring

4.2.1 Querying Time Series Objects

Function

This API is used to query the time series objects that can be monitored in the system. You can specify a namespace, name, dimension, and resource ID (format: resType_resId). You can also specify the start position and the maximum number of returned records for a pagination query.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/series

Table 4-156 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-157 Query Parameters

Parameter	Mandatory	Type	Description
limit	No	String	Maximum number of returned records. Value range: 1–1000. Default value: 1000.
offset	No	String	Start position of a pagination query. The value is a non-negative integer.

Request Parameters

Table 4-158 Request body parameters

Parameter	Mandatory	Type	Description
series	Yes	Array of QuerySeriesOptionParam objects	Array for querying time series objects.

Table 4-159 QuerySeriesOptionParam

Parameter	Mandatory	Type	Description
namespace	Yes	String	Namespace of time series objects. Options: PAAS.CONTAINER, PAAS.NODE, PAAS.SLA, PAAS.AGGR, and CUSTOMMETRICS. • PAAS.CONTAINER: namespace of application time series objects. • PAAS.NODE: namespace of node time series objects. • PAAS.SLA: namespace of SLA time series objects. • PAAS.AGGR: namespace of cluster time series objects. • CUSTOMMETRICS: namespace of custom time series objects. Custom namespaces are also supported. To query namespaces, call the API Querying Tag Values.
metric_name	No	String	Time series name. Length: 1 to 255 characters. Options: basic time series names (such as cpuUsage and cpuCoreUsed) provided by AOM, and custom time series names. To query time series names, call the API Querying Tag Values.
dimensions	No	Array of DimensionSeries objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects.

Table 4-160 DimensionSeries

Parameter	Mandatory	Type	Description
name	No	String	Dimension name.
value	No	String	Dimension value.

Response Parameters

Status code: 200

Table 4-161 Response body parameters

Parameter	Type	Description
series	Array of SeriesQueryItem-Result objects	List of time series objects.
meta_data	MetaDataSeries object	Metadata, including pagination information.

Table 4-162 SeriesQueryItemResult

Parameter	Type	Description
namespace	String	Namespace.
dimensions	Array of DimensionSeries objects	List of time series dimensions.
metric_name	String	Time series name.
unit	String	Time series unit.
dimension_value_hash	String	Time series hash value.

Table 4-163 DimensionSeries

Parameter	Type	Description
name	String	Dimension name.
value	String	Dimension value.

Table 4-164 MetaDataSeries

Parameter	Type	Description
count	Integer	Number of returned records.
offset	Integer	Start of the next page, which is used for pagination. null: No more data.
total	Integer	Total number of records.

Parameter	Type	Description
nextToken	Integer	Offset.

Status code: 400

Table 4-165 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Request ID.

Example Requests

Query time series objects by namespace and metric_name.

```
https://{Endpoint}/v2/{project_id}/series
{
  "series": [ {
    "namespace": "PAAS.CONTAINER",
    "metric_name": "aom_process_cpu_usage"
  } ]
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "meta_data": {
    "count": 1,
    "offset": null,
    "total": 1,
    "nextToken": 0
  },
  "series": [ {
    "namespace": "PAAS.CONTAINER",
    "metric_name": "cpuUsage",
    "unit": "Percent",
    "dimensions": [ {
      "name": "appName",
      "value": "appValue"
    } ],
    "dimension_value_hash": null
  } ]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.04007101",
  "error_msg" : "Invalid namespace",
  "error_type" : "BAD_REQUEST",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.2 Querying Time Series Data

Function

This API is used to query time series data within a specified period. You can specify a dimension or period to query. (This API will not evolve. You are advised to use [Querying Expression Calculation Results in a Specified Period Using the POST Method](#).)

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/samples

Table 4-166 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-167 Query Parameters

Parameter	Mandatory	Type	Description
fill_value	No	String	Value filled for breakpoints in time series data. Default value: -1. • -1: Breakpoints are filled with -1. • 0: Breakpoints are filled with 0. • null: Breakpoints are filled with null. • average: Breakpoints are filled with the average value of adjacent valid data. If there is no valid data, breakpoints are filled with null.

Request Parameters

Table 4-168 Request body parameters

Parameter	Mandatory	Type	Description
samples	Yes	Array of QuerySample objects	List of time series objects. A JSON array can contain up to 20 objects.
statistics	Yes	Array of strings	Statistic. Values: maximum, minimum, sum, average, and sampleCount.

Parameter	Mandatory	Type	Description
period	Yes	Integer	Monitoring data granularity. Options: • 60: The granularity is 1 minute. • 300: The granularity is 5 minutes. • 900: The granularity is 15 minutes. • 3600: The granularity is 1 hour.

Parameter	Mandatory	Type	Description
time_range	Yes	String	Time range specified to query data of the last N minutes when the client time is inconsistent with the server time. It can also be used to accurately query the data of a specified period. Example: -1.-1.60: indicates that the data of the latest 60 minutes is queried. This query is based on the server time regardless of the current client time. 1650852000000.1650852300000.5: indicates the five minutes from 10:00:00 to 10:05:00 on April 25, 2022 GMT+08:00. Format: startTimeInMillis.endTimeInMillis.durationInMinutes Parameter description: - startTimeInMillis: start time (UTC) of the query, in milliseconds. If this parameter is set to -1, the server calculates the start time as follows: $\text{endTimeInMillis} - \text{durationInMinutes} \times 60 \times 1000$. For example, -1.1650852300000.5 is equivalent to 1650852000000.1650852300000.5. - endTimeInMillis: end time (UTC) of the query, in milliseconds. If this parameter is set to -1, the server calculates the end time as follows: $\text{startTimeInMillis} + \text{durationInMinutes} \times 60 \times 1000$. If the calculated end time is later than the current system time, the current system time is used.

Parameter	Mandatory	Type	Description
			For example, 1650852000000.-1.5 is equivalent to 1650852000000.165085230000.5. durationInMinutes: query time span, in minutes. The value must be greater than 0 and greater than or equal to the result of $(\text{endTimeInMillis} - \text{startTimeInMillis}) / (60 \times 1000) - 1$. If both the start time and end time are set to -1, the system sets the end time to the current UTC time (in milliseconds) and calculates the start time as follows: $\text{endTimeInMillis} - \text{durationInMinutes} \times 60 \times 1000$. For example, -1.-1.60 indicates the latest 60 minutes. Constraint: In a single request, the following condition must be met: $\text{durationInMinutes} \times 60 / \text{period} \leq 1,440$

Table 4-169 QuerySample

Parameter	Mandatory	Type	Description
namespace	Yes	String	Namespace of time series objects. Options: PAAS.CONTAINER, PAAS.NODE, PAAS.SLA, PAAS.AGGR, and CUSTOMMETRICS. - PAAS.CONTAINER: namespace of application time series objects. • PAAS.NODE: namespace of node time series objects. • PAAS.SLA: namespace of SLA time series objects. • PAAS.AGGR: namespace of cluster time series objects. • CUSTOMMETRICS: namespace of custom time series objects. To query namespaces, call the API Querying Tag Values.
dimensions	Yes	Array of DimensionSeries objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects.
metric_name	Yes	String	Time series name. Length: 1 to 255 characters. Options: basic time series names (such as cpuUsage and cpuCoreUsed) provided by AOM, and custom time series names. To query time series names, call the API Querying Tag Values.

Table 4-170 DimensionSeries

Parameter	Mandatory	Type	Description
name	No	String	Dimension name.
value	No	String	Dimension value.

Response Parameters

Status code: 200

Table 4-171 Response body parameters

Parameter	Type	Description
samples	Array of SampleDataValue objects	List of time series objects.

Table 4-172 SampleDataValue

Parameter	Type	Description
sample	QuerySample object	List of time series objects.
data_points	Array of MetricDataPoints objects	Time series data.

Table 4-173 QuerySample

Parameter	Type	Description
namespace	String	Namespace of time series objects. Options: PAAS.CONTAINER, PAAS.NODE, PAAS.SLA, PAAS.AGGR, and CUSTOMMETRICS. - PAAS.CONTAINER: namespace of application time series objects. • PAAS.NODE: namespace of node time series objects. • PAAS.SLA: namespace of SLA time series objects. • PAAS.AGGR: namespace of cluster time series objects. • CUSTOMMETRICS: namespace of custom time series objects. To query namespaces, call the API Querying Tag Values .
dimensions	Array of DimensionSeries objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects .

Parameter	Type	Description
metric_name	String	Time series name. Length: 1 to 255 characters. Options: basic time series names (such as cpuUsage and cpuCoreUsed) provided by AOM, and custom time series names. To query time series names, call the API Querying Tag Values .

Table 4-174 DimensionSeries

Parameter	Type	Description
name	String	Dimension name.
value	String	Dimension value.

Table 4-175 MetricDataPoints

Parameter	Type	Description
statistics	Array of StatisticValue objects	Statistic.
timestamp	Long	Timestamp.
unit	String	Time series unit.

Table 4-176 StatisticValue

Parameter	Type	Description
statistic	String	Statistic.
value	Double	Statistical result.

Status code: 400**Table 4-177** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.

Parameter	Type	Description
error_type	String	Error type.
trace_id	String	Request ID.

Example Requests

Query time series data in the last five minutes by namespace, metric_name, and dimensions.

```
https://{Endpoint}/v2/{project_id}/samples
{
  "samples": [
    {
      "namespace": "PAAS.CONTAINER",
      "metric_name": "aom_process_cpu_usage",
      "dimensions": [
        {
          "name": "appName",
          "value": "aomApp"
        }
      ]
    }
  ],
  "period": 60,
  "time_range": "-1.-1.5", // Last 5 minutes
  "statistics": [
    "sum"
  ]
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "samples": [ {
    "sample": {
      "namespace": "PAAS.CONTAINER",
      "metric_name": "aom_process_cpu_usage",
      "dimensions": [ {
        "name": "appName",
        "value": "aomApp"
      } ]
    }
  },
  "data_points": [ {
    "timestamp": 1694673300000,
    "unit": "Percent",
    "statistics": [ {
      "statistic": "sum",
      "value": "23"
    } ]
  } ]
} ]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.04008105",
  "error_msg" : "Query metric data samples is invalid",
  "error_type" : "BAD_REQUEST",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.3 Querying Metrics

Function

This API is used to query the metrics that can be monitored in the system. You can query specific metrics by specifying a namespace, metric name, dimension, and resource ID (format: resType_resId). You can also specify the start position and the maximum number of returned records for a pagination query.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/ams/metrics

Table 4-178 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-179 Query Parameters

Parameter	Mandatory	Type	Description
type	No	String	Metric query mode.
limit	No	String	Maximum number of returned records. Value range: 1–1000. Default value: 1000.
start	No	String	Start position of a pagination query. The value is a non-negative integer.

Request Parameters

Table 4-180 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-181 Request body parameters

Parameter	Mandatory	Type	Description
inventoryId	No	String	Resource ID, which must be in the format of resType_resId. Enumerated values of resType: host, application, instance, container, process, network, storage, and volume. When type (a URI parameter) is inventory, this parameter instead of metricItems is used for associated metric queries.
metricItems	No	Array of QueryMetricItemOptionParam objects	If the value of type in the URI is not inventory, metrics are queried based on the information carried by metricItems.

Table 4-182 QueryMetricItemOptionParam

Parameter	Mandatory	Type	Description
dimensions	No	Array of Dimension objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects .
metricName	No	String	Metric name. Length: 1 to 255 characters. Options: basic metrics (such as cpuUsage and cpuCoreUsed) provided by AOM, and custom metrics. To query metric names, call the API Querying Tag Values .

Parameter	Mandatory	Type	Description
namespace	Yes	String	Metric namespace. Options: • PAAS.CONTAINER: namespace of component, instance, process, and container metrics. • PAAS.NODE: namespace of host, network, disk, and file system metrics. • PAAS.SLA: namespace of SLA metrics. • PAAS.AGGR: namespace of cluster metrics. • CUSTOMMETRICS: default namespace of custom metrics. Custom namespaces are also supported. To query namespaces, call the API Querying Tag Values. Enumeration values: • PAAS.CONTAINER • PAAS.NODE • PAAS.SLA • PAAS.AGGR • CUSTOMMETRICS

Table 4-183 Dimension

Parameter	Mandatory	Type	Description
name	Yes	String	Dimension name.
value	Yes	String	Dimension value.

Response Parameters

Status code: 200

Table 4-184 Response body parameters

Parameter	Type	Description
metaData	MetaDataSet object	Metadata, including pagination information.
metrics	Array of MetricItemResultAPI objects	Metric list.

Table 4-185 MetaDataSet

Parameter	Type	Description
count	Integer	Number of returned records.
offset	Integer	Start of the next page, which is used for pagination. null: No more data.
total	Integer	Total number of records.
nextToken	Integer	Offset.

Table 4-186 MetricItemResultAPI

Parameter	Type	Description
dimensions	Array of Dimension objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects .
dimensionvaluehash	String	Metric hash value.
metricName	String	Metric name.
namespace	String	Namespace.
unit	String	Metric unit.

Table 4-187 Dimension

Parameter	Type	Description
name	String	Dimension name.
value	String	Dimension value.

Example Requests

- Query metrics by inventory ID.

```
https://{Endpoint}/v1/{project_id}/ams/metrics
```

```
{
  "metricItems": [ {
    "namespace": "PAAS.CONTAINER",
    "dimensions": [ {
      "name": "appName",
      "value": "aomApp"
    }, {
      "name": "clusterName",
      "value": "aomCluster"
    } ]
  } ]
}
```

- Query metrics by namespace, appName, and clusterName.

```
https://{Endpoint}/v1/{project_id}/ams/metrics?type=inventory
```

```
{
  "inventoryId": "application_xxxxxxxx-xxxx-xxxx-xxxx-xxxxx3fee10"
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "errorCode": "SVCSTG_AMS_2000000",
  "errorMessage": "success",
  "metaData": {
    "count": 1,
    "offset": 1,
    "nextToken": null,
    "total": 1
  },
  "metrics": [ {
    "namespace": "PAAS.CONTAINER",
    "metricName": "aom_process_cpu_usage",
    "unit": "Percent",
    "dimensions": [ {
      "name": "appName",
      "value": "aomApp"
    } ]
  } ]
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.

Status Code	Description
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.4 Querying Monitoring Data

Function

This API is used to query monitoring data of metrics within a specified period. You can specify a dimension or period to query. (This API will not evolve. You are advised to use [Querying Expression Calculation Results in a Specified Period Using the POST Method](#).)

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/ams/metricdata

Table 4-188 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-189 Query Parameters

Parameter	Mandatory	Type	Description
fillValue	No	String	Value filled for breakpoints in monitoring data. Default value: -1. • -1: Breakpoints are filled with -1. • 0: Breakpoints are filled with 0. • null: Breakpoints are filled with null. • average: Breakpoints are filled with the average value of adjacent valid data. If there is no valid data, breakpoints are filled with null. Enumeration values: • -1 • 0 • null • average

Request Parameters

Table 4-190 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-191 Request body parameters

Parameter	Mandatory	Type	Description
metrics	Yes	Array of MetricQuery MetricParam objects	Metric list. A JSON array can contain up to 20 objects.
period	Yes	Integer	Monitoring data granularity. Options: • 60: The granularity is 1 minute. • 300: The granularity is 5 minutes. • 900: The granularity is 15 minutes. • 3600: The granularity is 1 hour.
statistics	Yes	Array of strings	Statistic. Values: maximum, minimum, sum, average, and sampleCount.

Parameter	Mandatory	Type	Description
timerange	Yes	String	Time range specified to query data of the last N minutes when the client time is inconsistent with the server time. It can also be used to accurately query the data of a specified period. Example: • -1.-1.60: indicates that the data of the latest 60 minutes is queried. This query is based on the server time regardless of the current client time. • 1650852000000.1650852300000.5: indicates the five minutes from 10:00:00 to 10:05:00 on April 25, 2022 GMT+08:00. Format: startTimeInMillis.endTimeInMi llis.durationInMinutes Parameter description: • startTimeInMillis: start time (UTC) of the query, in milliseconds. If this parameter is set to -1, the server calculates the start time as follows: endTimeInMillis – durationInMinutes × 60 × 1000. For example, -1.1650852300000.5 is equivalent to 1650852000000.1650852300000.5. • endTimeInMillis: end time (UTC) of the query, in milliseconds. If this parameter is set to -1, the server calculates the end time as follows: startTimeInMillis + durationInMinutes × 60 × 1000. If the calculated end time is later than the current system time, the current system time is used.

Parameter	Mandatory	Type	Description
			For example, 1650852000000.-1.5 is equivalent to 1650852000000.165085230000.5. • durationInMinutes: query time span, in minutes. The value must be greater than 0 and greater than or equal to the result of $(\text{endTimeInMillis} - \text{startTimeInMillis}) / (60 \times 1000) - 1$. If both the start time and end time are set to -1, the system sets the end time to the current UTC time (in milliseconds) and calculates the start time as follows: $\text{endTimeInMillis} - \text{durationInMinutes} \times 60 \times 1000$. For example, -1.-1.60 indicates the latest 60 minutes. Constraint: In a single request, the following condition must be met: $\text{durationInMinutes} \times 60 / \text{period} \leq 1,440$

Table 4-192 MetricQueryMetricParam

Parameter	Mandatory	Type	Description
dimensions	Yes	Array of Dimension objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects . Neither the array nor the name/value of any dimension in the array can be left blank.

Parameter	Mandatory	Type	Description
metricName	Yes	String	Metric name. Length: 1 to 255 characters. Options: basic metrics (such as cpuUsage and cpuCoreUsed) provided by AOM, and custom metrics. To query metrics, call the API Querying Tag Values .
namespace	Yes	String	Metric namespace. Options: • PAAS.CONTAINER: namespace of component, instance, process, and container metrics. • PAAS.NODE: namespace of host, network, disk, and file system metrics. • PAAS.SLA: namespace of SLA metrics. • PAAS.AGGR: namespace of cluster metrics. • CUSTOMMETRICS: default namespace of custom metrics. Custom namespaces are also supported. To query namespaces, call the API Querying Tag Values .

Table 4-193 Dimension

Parameter	Mandatory	Type	Description
name	Yes	String	Dimension name.
value	Yes	String	Dimension value.

Response Parameters

Status code: 200

Table 4-194 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.

Parameter	Type	Description
errorMessage	String	Response message.
metrics	Array of MetricDataValue objects	Metric list.

Table 4-195 MetricDataValue

Parameter	Type	Description
dataPoints	Array of MetricDataPoints objects	Key metric.
metric	MetricQueryMetricParam object	Query parameters.

Table 4-196 MetricDataPoints

Parameter	Type	Description
statistics	Array of StatisticValue objects	Statistic.
timestamp	Long	Timestamp.
unit	String	Time series unit.

Table 4-197 StatisticValue

Parameter	Type	Description
statistic	String	Statistic.
value	Double	Statistical result.

Table 4-198 MetricQueryMetricParam

Parameter	Type	Description
dimensions	Array of Dimension objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects . Neither the array nor the name/value of any dimension in the array can be left blank.
metricName	String	Metric name. Length: 1 to 255 characters. Options: basic metrics (such as cpuUsage and cpuCoreUsed) provided by AOM, and custom metrics. To query metrics, call the API Querying Tag Values .
namespace	String	Metric namespace. Options: • PAAS.CONTAINER: namespace of component, instance, process, and container metrics. • PAAS.NODE: namespace of host, network, disk, and file system metrics. • PAAS.SLA: namespace of SLA metrics. • PAAS.AGGR: namespace of cluster metrics. • CUSTOMMETRICS: default namespace of custom metrics. Custom namespaces are also supported. To query namespaces, call the API Querying Tag Values .

Table 4-199 Dimension

Parameter	Type	Description
name	String	Dimension name.
value	String	Dimension value.

Example Requests

Query the monitoring data of **cpuUsage** in the **PAAS.CONTAINER** namespace in the last five minutes.

```
https://{Endpoint}/v1/{project_id}/ams/metricdata
```

```
{
  "metrics" : [ {
    "dimensions" : [ {
      "name" : "appName",
      "value" : "aomApp"
    } ],
    "metricName" : "cpuUsage",
    "namespace" : "PAAS.CONTAINER"
  } ],
  "period" : 60,
  "statistics" : [ "maximum", "minimum", "sum" ],
  "timerange" : "-1.-1.5"
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "errorCode" : "SVCSTG_AMS_2000000",
  "errorMessage" : "success",
  "metrics" : [ {
    "metric" : {
      "namespace" : "PAAS.CONTAINER",
      "metricName" : "cpuUsage",
      "dimensions" : [ {
        "name" : "appName",
        "value" : "aomApp"
      } ]
    }
  } ],
  "dataPoints" : [ {
    "timestamp" : "1467892800000",
    "unit" : "Percent",
    "statistics" : [ {
      "statistic" : "maximum",
      "value" : "23"
    } ]
  } ]
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Status Code	Description
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.5 Adding Monitoring Data

Function

This API is used to add one or more monitoring data records to a server.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/ams/report/metricdata

Table 4-200 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-201 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-202 Request body parameters

Parameter	Mandatory	Type	Description
[items]	Yes	Array of MetricDataItem objects	Monitoring data items to be added.

Table 4-203 MetricDataItem

Parameter	Mandatory	Type	Description
collect_time	Yes	Long	Data collection time (Unix timestamp, in ms), which ranges from the last 24 hours to the next 30 minutes. Example: 2024-10-16 16:03:01 needs to be converted to Unix timestamp 1702759381000 using a tool. If the data reporting time is earlier than 08:00 of the current day, only the data generated after 08:00 of the current day is displayed on the metric monitoring page.
metric	Yes	MetricItemInfo object	Metric details.
values	Yes	Array of ValueData objects	Metric value.

Table 4-204 MetricItemInfo

Parameter	Mandatory	Type	Description
dimensions	Yes	Array of Dimension2 objects	List of metric dimensions. To query the metric dimension list, call the API Querying Time Series Objects . A maximum of 50 dimensions are supported. Each dimension is in JSON format.

Parameter	Mandatory	Type	Description
namespace	Yes	String	Metric namespace. To query metric namespaces, call the API Querying Tag Values. To use a custom namespace, ensure that: It cannot contain colons (:). It must be in the format of "service.item". The value must contain 3 to 32 characters starting with a letter. Only letters, digits, and underscores (_) are allowed. In addition, "service" cannot be "PAAS".

Table 4-205 Dimension2

Parameter	Mandatory	Type	Description
name	Yes	String	Name of the custom metric dimension. Length: 1 to 32 characters.
value	Yes	String	Value of the custom metric dimension. Length: 1 to 64 characters.

Table 4-206 ValueData

Parameter	Mandatory	Type	Description
metric_name	Yes	String	Metric name. Length: 1 to 255 characters.
type	No	String	Metric data type. • int: integer. • float: floating-point number. Enumeration values: • int • float
unit	No	String	Data unit. Length: up to 32 characters.
value	Yes	Double	Metric value. Value range: valid numeral type.

Response Parameters

Status code: 200

Table 4-207 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.
errorMessage	String	Response message.

Example Requests

Add a piece of monitoring data to the server. (In the following example, set "collect_time" to the latest timestamp.)

https://{Endpoint}/v1/{project_id}/ams/report/metricdata

```
[ {
  "metric" : {
    "namespace" : "NOPAAS.ESC",
    "dimensions" : [ {
      "name" : "instance_id",
      "value" : "instance-101"
    } ]
  },
  "values" : [ {
    "unit" : "percent",
    "metric_name" : "cpu_util",
    "type" : "int",
    "value" : 35
  } ],
  "collect_time" : 1467787152000
} ]
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "errorCode" : "SVCSTG_AMS_2000000",
  "errorMessage" : "success"
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.

Status Code	Description
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.6 Adding or Modifying One or More Service Discovery Rules

Function

This API is used to add or modify one or more service discovery rules. A maximum of 100 rules can be added to a project.

Calling Method

For details, see [Calling APIs](#).

URI

PUT /v1/{project_id}/inv/servicediscoveryrules

Table 4-208 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-209 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-210 Request body parameters

Parameter	Mandatory	Type	Description
appRules	No	Array of AppRules objects	Service parameters.

Table 4-211 AppRules

Parameter	Mandatory	Type	Description
createTime	No	String	Creation time. When creating a service discovery rule, leave this parameter blank. When modifying a service discovery rule, enter the returned createTime.
enable	Yes	Boolean	Whether a rule is enabled. Values: true and false.
eventName	Yes	String	aom_inventory_rules_event Rule event name. For service discovery, the fixed value is aom_inventory_rules_event.
hostid	No	Array of strings	Host ID. Currently, this parameter is not used and can be left blank.

Parameter	Mandatory	Type	Description
id	Yes	String	Rule ID. When creating a service discovery rule, leave this parameter blank. When modifying a service discovery rule, enter a rule ID.
name	Yes	String	Rule name, which contains a maximum of 64 characters. It must start with a lowercase letter but cannot end with a hyphen (-). Only digits, lowercase letters, and hyphens are allowed.
projectId	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .
spec	Yes	AppRulesSpec object	Rule details.
desc	No	String	Custom description

Table 4-212 AppRulesSpec

Parameter	Mandatory	Type	Description
appType	Yes	String	Service type, which is used only for rule classification and UI display. You can enter any field. For example, enter Java or Python by technology stack, or enter collector or database by function.
attrList	No	Array of strings	Attribute list. Currently, this parameter is not used and can be left blank. Values: cmdLine and env.
detectLog	Yes	String	Whether to enable log collection. Values: true and false.

Parameter	Mandatory	Type	Description
discoveryRule	Yes	Array of DiscoveryRule objects	Discovery rule. If the array contains multiple conditions, only the processes that meet all the conditions will be matched. If the value of checkType is cmdLine, set the value of checkMode to contain. checkContent is in the format of ["xxx"], indicating that the process must contain the xxx parameter. If the value of checkType is env, set the value of checkMode to contain. checkContent is in the format of ["k1","v1"], indicating that the process must contain the environment variable whose name is k1 and value is v1. If the value of checkType is scope, set the value of checkMode to equals. checkContent is in the format of ["hostId1","hostId2"], indicating that the rule takes effect only on specified nodes. If no nodes are specified, the rule applies to all nodes of the project.
isDefaultRule	Yes	String	Whether the rule is the default one. Values: true and false.
isDetect	Yes	String	Whether the scenario is a pre-check scenario. No rules will be saved in the pre-check scenario. This scenario is designed only to check whether a rule can detect node processes before it is delivered. Values: true and false.
logFileFix	Yes	Array of strings	Log file suffix. Values: log, trace, and out.

Parameter	Mandatory	Type	Description
logPathRule	No	Array of LogPathRule objects	Log path configuration rule. If cmdLineHash is a fixed string, logs in the specified log path or log file are collected. Otherwise, only the files whose names end with .log or .trace are collected. If the value of nameType is cmdLineHash, args is in the format of ["00001"] and value is in the format of ["/xxx/xx.log"], indicating that the log path is /xxx/xx.log when the startup command is 00001.
nameRule	Yes	NameRule object	Naming rules for discovered services and applications.
priority	Yes	Integer	Rule priority. Value range: 1 to 9999. Default value: 9999.
dataSource	No	String	Data source.
editable	No	String	Whether to support editing. Options: true and false.
aom_metric_relabel_configs	No	Object	Metric configuration.

Table 4-213 DiscoveryRule

Parameter	Mandatory	Type	Description
checkContent	Yes	Array of strings	Matched value.
checkMode	Yes	String	Match condition. Values: contain and equals.
checkType	Yes	String	Match type. Values: cmdLine, env, and scope.

Table 4-214 LogPathRule

Parameter	Mandatory	Type	Description
args	Yes	Array of strings	Command.

Parameter	Mandatory	Type	Description
nameType	Yes	String	Value type, which can be cmdLineHash.
value	Yes	Array of strings	Log path.

Table 4-215 NameRule

Parameter	Mandatory	Type	Description
appNameRule	Yes	Array of AppNameRule objects	Service name rule. If there are multiple objects in the array, the character strings extracted from these objects constitute the service name. If the value of nameType is cmdLine, args is in the format of ["start", "end"], indicating that the characters between start and end in the command are extracted. If the value of nameType is cmdLine, args is in the format of ["aa"], indicating that the environment variable named aa is extracted. If the value of nameType is str, args is in the format of ["fix"], indicating that the service name is suffixed with fix. If the value of nameType is cmdLineHash, args is in the format of ["0001"] and value is in the format of ["ser"], indicating that the service name is ser when the startup command is 0001.

Parameter	Mandatory	Type	Description
applicationNameRule	Yes	Array of ApplicationNameRule objects	Application name rule.If the value of nameType is cmdLine, args is in the format of ["start", "end"], indicating that the characters between start and end in the command are extracted.If the value of nameType is cmdLine, args is in the format of ["aa"], indicating that the environment variable named aa is extracted.If the value of nameType is str, args is in the format of ["fix"], indicating that the service name is suffixed with fix.If the value of nameType is cmdLineHash, args is in the format of ["0001"] and value is in the format of ["ser"], indicating that the application name is ser when the startup command is 0001.

Table 4-216 AppNameRule

Parameter	Mandatory	Type	Description
nameType	Yes	String	Value type. Values: cmdLineHash, cmdLine, env, and str.
args	Yes	Array of strings	Input value.
value	No	Array of strings	Service name, which is mandatory only when the value of nameType is cmdLineHash.

Table 4-217 ApplicationNameRule

Parameter	Mandatory	Type	Description
nameType	Yes	String	Value type. Values: cmdLineHash, cmdLine, env, and str.

Parameter	Mandatory	Type	Description
args	Yes	Array of strings	Input value.
value	No	Array of strings	Service name, which is mandatory only when the value of nameType is cmdLineHash.

Response Parameters

Status code: 200

Table 4-218 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.
errorMessage	String	Response message.
responseStatus	Integer	Response status code (no longer used).
id	Array of strings	Service discovery rule ID list. This parameter is used during cross-AZ configuration synchronization.
results	Array of Map<String,String> objects	Details about service discovery rules.

Example Requests

Add an application discovery rule whose name is **aom_inventory_rules_event** and project ID is **684fc87a79d7xxxx22e62a7da95b**.

`https://{endpoint}/v1/{project_id}/inv/servicediscoveryrules`

```
{
  "appRules" : [ {
    "createTime" : "1694705766730",
    "enable" : true,
    "name" : "ica**nt",
    "eventName" : "aom_inventory_rules_event",
    "hostid" : [ ],
    "id" : "b53a5152-****-****-302367e04c0b",
    "projectid" : "684fc87a79d7xxxx22e62a7da95b",
    "spec" : {
      "detectLog" : "true",
      "editable" : null,
      "logPathRule" : [ ],
      "priority" : 9999,
      "attrList" : [ "cmdLine" ],
      "nameRule" : {
```

```
"appNameRule" : [ {
  "args" : [ "/opt/***** -DNFW=ica**nt" ],
  "nameType" : "cmdLineHash",
  "value" : [ "aicagentserver" ]
}],
"applicationNameRule" : [ {
  "args" : [ "/opt/***** -DNFW=ica**nt" ],
  "nameType" : "cmdLineHash",
  "value" : [ "aica**nt" ]
}]
},
"appType" : "",
"aom_metric_relabel_configs" : null,
"logFileFix" : [ "log", "trace", "out" ],
"isDetect" : "false",
"isDefaultRule" : null,
"dataSource" : null,
"discoveryRule" : [ {
  "checkType" : "cmdLine",
  "checkContent" : [ "-DNFW=ica**nt" ],
  "checkMode" : "contain"
}]
},
"desc" : "Custom description"
}]
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "errorCode" : "SVCSTG.INV.2000000",
  "errorMessage" : null,
  "id" : [ ],
  "results" : [ {
    "name" : "aom_inventory_rules_event",
    "id" : "b53a5152-****-****-302367e04c0b"
  } ]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "errorCode" : "SVCSTG.INV.4000115",
  "errorMessage" : "apprule name has existed",
  "id" : [ ],
  "results" : [ ]
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.

Status Code	Description
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.7 Deleting a Service Discovery Rule

Function

This API is used to delete a service discovery rule.

Calling Method

For details, see [Calling APIs](#).

URI

DELETE /v1/{project_id}/inv/servicediscoveryrules

Table 4-219 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-220 Query Parameters

Parameter	Mandatory	Type	Description
appRulesIds	Yes	Array of strings	Discovery rule ID. Multiple IDs need to be separated by commas (,). The parameter cannot be empty.

Request Parameters

Table 4-221 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-222 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.
errorMessage	String	Response message.
responseStatus	Integer	Response status code (no longer used).
id	Array of strings	Service discovery rule ID list. This parameter is used during cross-AZ configuration synchronization.

Example Requests

Delete a service discovery rule with a specified ID.

```
https://{Endpoint}/v1/{project_id}/inv/servicediscoveryrules?appRulesIds=b788349e-62b2-xxxx-xxxx-02c611d59801
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "errorCode" : "SVCSTG.INV.2000000",
  "errorMessage" : null,
  "id" : [ ]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "errorCode" : "SVCSTG.INV.40000118",
  "errorMessage" : "Request param is invalid",
  "trace_id" : ""
}
```

Status code: 404

Not Found: The requested resource could not be found. The client should not repeat this request without modification.

```
{
  "errorCode" : "SVCSTG.INV.4040000",
  "errorMessage" : "Inventory does not exists",
  "id" : [ ]
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
404	Not Found: The requested resource could not be found. The client should not repeat this request without modification.

Status Code	Description
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Unauthorized: The authentication information is incorrect or invalid.

Error Codes

See [Error Codes](#).

4.2.8 Querying Existing Service Discovery Rules

Function

This API is used to query existing service discovery rules in the system.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/inv/servicediscoveryrules

Table 4-223 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-224 Query Parameters

Parameter	Mandatory	Type	Description
id	No	String	Service discovery rule ID, which corresponds to a service discovery rule. If this parameter is left blank, all service discovery rules in the project are returned.

Request Parameters

Table 4-225 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	No	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-226 Response body parameters

Parameter	Type	Description
appRules	Array of AppRules objects	Rule information.
errorCode	String	Response code. AOM_INVENTORY_2000000: Success response.
errorMessage	String	Response message.
id	Array of strings	Service discovery rule ID list. This parameter is used during cross-AZ configuration synchronization.

Table 4-227 AppRules

Parameter	Type	Description
createTime	String	Creation time. When creating a service discovery rule, leave this parameter blank. When modifying a service discovery rule, enter the returned createTime.
enable	Boolean	Whether a rule is enabled. Values: true and false.

Parameter	Type	Description
eventName	String	aom_inventory_rules_event Rule event name. For service discovery, the fixed value is aom_inventory_rules_event.
hostid	Array of strings	Host ID. Currently, this parameter is not used and can be left blank.
id	String	Rule ID. When creating a service discovery rule, leave this parameter blank. When modifying a service discovery rule, enter a rule ID.
name	String	Rule name, which contains a maximum of 64 characters. It must start with a lowercase letter but cannot end with a hyphen (-). Only digits, lowercase letters, and hyphens are allowed.
projectid	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .
spec	AppRulesSpec object	Rule details.
desc	String	Custom description

Table 4-228 AppRulesSpec

Parameter	Type	Description
appType	String	Service type, which is used only for rule classification and UI display. You can enter any field. For example, enter Java or Python by technology stack, or enter collector or database by function.
attrList	Array of strings	Attribute list. Currently, this parameter is not used and can be left blank. Values: cmdLine and env.
detectLog	String	Whether to enable log collection. Values: true and false.

Parameter	Type	Description
discoveryRule	Array of DiscoveryRule objects	Discovery rule. If the array contains multiple conditions, only the processes that meet all the conditions will be matched. If the value of checkType is cmdLine, set the value of checkMode to contain. checkContent is in the format of ["xxx"], indicating that the process must contain the xxx parameter. If the value of checkType is env, set the value of checkMode to contain. checkContent is in the format of ["k1","v1"], indicating that the process must contain the environment variable whose name is k1 and value is v1. If the value of checkType is scope, set the value of checkMode to equals. checkContent is in the format of ["hostId1","hostId2"], indicating that the rule takes effect only on specified nodes. If no nodes are specified, the rule applies to all nodes of the project.
isDefaultRule	String	Whether the rule is the default one. Values: true and false.
isDetect	String	Whether the scenario is a pre-check scenario. No rules will be saved in the pre-check scenario. This scenario is designed only to check whether a rule can detect node processes before it is delivered. Values: true and false.
logFileFix	Array of strings	Log file suffix. Values: log, trace, and out.
logPathRule	Array of LogPathRule objects	Log path configuration rule. If cmdLineHash is a fixed string, logs in the specified log path or log file are collected. Otherwise, only the files whose names end with .log or .trace are collected. If the value of nameType is cmdLineHash, args is in the format of ["00001"] and value is in the format of ["/xxx/xx.log"], indicating that the log path is /xxx/xx.log when the startup command is 00001.
nameRule	NameRule object	Naming rules for discovered services and applications.

Parameter	Type	Description
priority	Integer	Rule priority. Value range: 1 to 9999. Default value: 9999.
dataSource	String	Data source.
editable	String	Whether to support editing. Options: true and false.
aom_metric_relabel_configs	Object	Metric configuration.

Table 4-229 DiscoveryRule

Parameter	Type	Description
checkContent	Array of strings	Matched value.
checkMode	String	Match condition. Values: contain and equals.
checkType	String	Match type. Values: cmdLine, env, and scope.

Table 4-230 LogPathRule

Parameter	Type	Description
args	Array of strings	Command.
nameType	String	Value type, which can be cmdLineHash.
value	Array of strings	Log path.

Table 4-231 NameRule

Parameter	Type	Description
appNameRule	Array of AppNameRule objects	Service name rule. If there are multiple objects in the array, the character strings extracted from these objects constitute the service name. If the value of nameType is cmdLine, args is in the format of ["start", "end"], indicating that the characters between start and end in the command are extracted.If the value of nameType is cmdLine, args is in the format of ["aa"], indicating that the environment variable named aa is extracted.If the value of nameType is str, args is in the format of ["fix"], indicating that the service name is suffixed with fix.If the value of nameType is cmdLineHash, args is in the format of ["0001"] and value is in the format of ["ser"], indicating that the service name is ser when the startup command is 0001.
applicationNameRule	Array of ApplicationNameRule objects	Application name rule.If the value of nameType is cmdLine, args is in the format of ["start", "end"], indicating that the characters between start and end in the command are extracted.If the value of nameType is cmdLine, args is in the format of ["aa"], indicating that the environment variable named aa is extracted.If the value of nameType is str, args is in the format of ["fix"], indicating that the service name is suffixed with fix.If the value of nameType is cmdLineHash, args is in the format of ["0001"] and value is in the format of ["ser"], indicating that the application name is ser when the startup command is 0001.

Table 4-232 AppNameRule

Parameter	Type	Description
nameType	String	Value type. Values: cmdLineHash, cmdLine, env, and str.
args	Array of strings	Input value.

Parameter	Type	Description
value	Array of strings	Service name, which is mandatory only when the value of nameType is cmdLineHash.

Table 4-233 ApplicationNameRule

Parameter	Type	Description
nameType	String	Value type. Values: cmdLineHash, cmdLine, env, and str.
args	Array of strings	Input value.
value	Array of strings	Service name, which is mandatory only when the value of nameType is cmdLineHash.

Example Requests

Query the application discovery rule whose ID is **-6066-****-8cc7-**.

```
https://{endpoint}/v1/{project_id}/inv/servicediscoveryrules?id=*****-6066-****-8cc7-*****
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "appRules" : [ {
    "createTime" : "1694705814424",
    "enable" : true,
    "name" : "icaaant",
    "eventName" : "aom_inventory_rules_event",
    "hostid" : [ ],
    "id" : "*****-6066-****-8cc7-*****",
    "projectid" : "684fc87a79d7xxx22e62a7da95b",
    "spec" : {
      "detectLog" : "true",
      "editable" : null,
      "logPathRule" : [ ],
      "priority" : 9999,
      "attrList" : [ "cmdLine" ],
      "nameRule" : {
        "appNameRule" : [ {
          "args" : [ "/opt/***** -DNFW=ica**nt" ],
          "nameType" : "cmdLineHash",
          "value" : [ "aicagentserver" ]
        } ],
        "applicationNameRule" : [ {
          "args" : [ "/opt/***** -DNFW=ica**nt" ],
          "nameType" : "cmdLineHash",
          "value" : [ "aica**nt" ]
        } ]
      }
    }
  } ],
}
```

```
"appType" : "",
"aom_metric_relabel_configs" : null,
"logFileFix" : [ "log", "trace", "out" ],
"isDetect" : "false",
"isDefaultRule" : null,
"dataSource" : null,
"discoveryRule" : [ {
  "checkType" : "cmdLine",
  "checkContent" : [ "-DNFW=ica**nt" ],
  "checkMode" : "contain"
} ]
},
"desc" : "Custom description"
} ],
"errorMessage" : null,
"errorCode" : "SVCSTG.INV.2000000",
"id" : [ ]
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
404	Not Found: The requested resource could not be found. The client should not repeat this request without modification.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.9 Adding a Threshold Rule

Function

This API is used to add a threshold rule.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/alarm-rules

Table 4-234 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-235 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-236 Request body parameters

Parameter	Mandatory	Type	Description
action_enabled	No	Boolean	Whether to enable notification.
alarm_actions	No	Array of strings	List of alarm notifications.
alarm_advice	No	String	Alarm clearance suggestion.
alarm_description	No	String	Threshold rule description.

Parameter	Mandatory	Type	Description
alarm_level	Yes	Integer	Alarm severity. • 1: critical. • 2: major. • 3: minor. • 4: info. Enumeration values: • 1 • 2 • 3 • 4
alarm_rule_name	Yes	String	Threshold rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, underscores (_), and hyphens (-) are allowed.
comparison_operator	Yes	String	Threshold-crossing condition. • <: lower than the threshold. • NOTE : greater than the threshold. • <=: less than or equal to the threshold. • NOTE =: greater than or equal to the threshold. Enumeration values: • < • > • <= • >=
dimensions	Yes	Array of Dimension objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects .
evaluation_periods	Yes	Integer	Interval.
is_turn_on	No	Boolean	Whether to enable the threshold rule.

Parameter	Mandatory	Type	Description
insufficient_data_actions	No	Array of strings	List of insufficient data notifications.
metric_name	Yes	String	Time series name. Length: 1 to 255 characters.
namespace	Yes	String	Time series objects' namespace.
ok_actions	No	Array of strings	List of normal status notifications.
period	Yes	Integer	Statistical period. Options: • 60000: one minute. • 300000: five minutes. • 900000: 15 minutes. • 3600000: one hour. Enumeration values: • 60000 • 300000 • 900000 • 3600000
statistic	Yes	String	Statistic. Enumeration values: • maximum • minimum • average • sum • sampleCount
threshold	Yes	String	Threshold value.
unit	Yes	String	Time series unit.

Table 4-237 Dimension

Parameter	Mandatory	Type	Description
name	Yes	String	Dimension name.
value	Yes	String	Dimension value.

Response Parameters

Status code: 200

Table 4-238 Response body parameters

Parameter	Type	Description
alarm_rule_id	Long	Threshold rule ID.

Status code: 400**Table 4-239** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID, which is used to search for logs and locate faults. If 2xx is returned, trace_id is empty. If 4xx , trace_id is not empty.

Status code: 500**Table 4-240** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID, which is used to search for logs and locate faults. If 2xx is returned, trace_id is empty. If 4xx , trace_id is not empty.

Example Requests

Add a threshold rule whose name is **testaom**, alarm severity is **3**, namespace is **PAAS.CONTAINER**, and statistical mode is **average**.

```
https://{Endpoint}/v2/{project_id}/alarm-rules
```

```
{
  "is_turn_on" : true,
  "action_enabled" : false,
  "alarm_actions" : [ ],
  "alarm_advice" : ""
```

```
"alarm_description" : "",
"alarm_level" : 3,
"alarm_rule_name" : "aom_rule",
"comparison_operator" : ">=",
"dimensions" : [ {
  "name" : "appName",
  "value" : "rhm-broker"
} ],
"evaluation_periods" : 1,
"insufficient_data_actions" : [ ],
"metric_name" : "cpuCoreLimit",
"namespace" : "PAAS.CONTAINER",
"ok_actions" : [ ],
"period" : 60000,
"statistic" : "average",
"threshold" : 0,
"unit" : "Core"
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "alarm_rule_id" : 1134050083814244400
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.02001102",
  "error_msg" : "this Threshold rule name has been existed",
  "error_type" : "BAD_REQUEST",
  "trace_id" : ""
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "AOM.02001500",
  "error_msg" : "internal server error",
  "error_type" : "INTERNAL_SERVER_ERROR",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.

Status Code	Description
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.10 Querying the Threshold Rule List

Function

This API is used to query the threshold rule list. (This is an AOM 1.0 API and will be brought offline soon.)

Calling Method

For details, see [Calling APIs](#).

URI

GET /v2/{project_id}/alarm-rules

Table 4-241 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-242 Query Parameters

Parameter	Mandatory	Type	Description
offset	No	String	Pagination information.

Parameter	Mandatory	Type	Description
limit	No	Integer	Maximum number of returned records. Value range: 1–1000. Default value: 1000.

Request Parameters

Table 4-243 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	No	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-244 Response body parameters

Parameter	Type	Description
meta_data	MetaData object	Metadata, including pagination information.
thresholds	Array of QueryAlarmResult objects	Parameters specified for querying a threshold rule.

Table 4-245 MetaData

Parameter	Type	Description
count	Integer	Number of returned records.
start	String	Start of the next page, which is used for pagination. null: No more data.
total	Integer	Total number of records.

Table 4-246 QueryAlarmResult

Parameter	Type	Description
action_enabled	Boolean	Whether to enable notification.
alarm_actions	Array of strings	List of alarm notifications.
alarm_advice	String	Alarm clearance suggestion.
alarm_description	String	Threshold rule description.
alarm_level	String	Alarm severity.
alarm_rule_id	String	Threshold rule ID.
alarm_rule_name	String	Threshold rule name.
comparison_operator	String	Comparison operator.
dimensions	Array of Dimension objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects .
evaluation_periods	Integer	Interval.
id_turn_on	Boolean	Whether to enable the threshold rule.
insufficient_data_actions	Array of strings	List of insufficient data notifications.
metric_name	String	Time series name.
namespace	String	Time series objects' namespace.
ok_actions	Array of strings	List of normal status notifications.
period	Integer	Statistical period.
policy_name	String	Threshold rule name.
resources	Array of strings	Resource information (discarded).
state_reason	String	Cause description.
state_updated_timestamp	String	Time when the status was updated.
state_value	String	Service status.
statistic	String	Statistic.
threshold	String	Threshold value.
type	String	Threshold rule type.
unit	String	Threshold unit.

Table 4-247 Dimension

Parameter	Type	Description
name	String	Dimension name.
value	String	Dimension value.

Status code: 400**Table 4-248** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID, which is used to search for logs and locate faults. If 2xx is returned, trace_id is empty. If 4xx , trace_id is not empty.

Example Requests

Obtain the alarm rule list of a user whose ID is **Project_Id**.

```
https://{EndPoint_Id}/v2/{Project_Id}/alarm-rules
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "meta_data": [ {
    "count": 10,
    "total": 100
  } ],
  "thresholds": [ {
    "action_enabled": false,
    "alarm_actions": null,
    "alarm_advice": null,
    "alarm_description": null,
    "alarm_level": 3,
    "alarm_rule_id": 2137,
    "alarm_rule_name": "aom_rule",
    "comparison_operator": ">=",
    "dimensions": [ {
      "name": "appName"
    } ], {
```

```
{
  "value": "rhm-broker"
},
"evaluation_periods": 1,
"id_turn_on": true,
"insufficient_data_actions": null,
"metric_name": "cpuCoreLimit",
"namespace": "PAAS.CONTAINER",
"ok_actions": null,
"period": 60000,
"policy_name": "23,",
"resources": [ ],
"state_reason": null,
"state_updated_timestamp": null,
"state_value": "alarm",
"statistic": "average",
"threshold": 0,
"type": "single,",
"unit": "Core"
}]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code": "AOM.02003SVCSTG_AMS_4000123",
  "error_msg": "The rule does not exist",
  "error_type": "BAD_REQUEST",
  "trace_id": ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.11 Modifying a Threshold Rule

Function

This API is used to modify a threshold rule.

Calling Method

For details, see [Calling APIs](#).

URI

PUT /v2/{project_id}/alarm-rules

Table 4-249 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-250 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-251 Request body parameters

Parameter	Mandatory	Type	Description
action_enabled	No	Boolean	Whether to enable notification.
alarm_actions	No	Array of strings	List of alarm notifications.

Parameter	Mandatory	Type	Description
alarm_advice	No	String	Alarm clearance suggestion, which contains a maximum of 255 characters.
alarm_description	No	String	Threshold rule description, which contains a maximum of 1024 characters.
alarm_level	Yes	Integer	Alarm severity. Values: 1 (critical), 2 (major), 3 (minor), and 4 (warning). Enumeration values: • 1 • 2 • 3 • 4
alarm_rule_name	Yes	String	Threshold rule name. Enter a maximum of 100 characters and do not start or end with a special character. Only letters, digits, underscores (_), and hyphens (-) are allowed.
comparison_operator	Yes	String	Comparison operator. Options: <: less than the threshold; >: greater than the threshold; <=: less than or equal to the threshold; >=: greater than or equal to the threshold. Enumeration values: • < • > • <= • >=
dimensions	Yes	Array of Dimension objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects .
evaluation_periods	Yes	Integer	Interval at which data is calculated.
is_turn_on	No	Boolean	Whether to enable the threshold rule.

Parameter	Mandatory	Type	Description
insufficient_data_actions	No	Array of strings	List of insufficient data notifications.
metric_name	Yes	String	Time series name. Length: 1 to 255 characters.
namespace	Yes	String	Namespace of time series objects.
ok_actions	No	Array of strings	List of normal status notifications.
period	Yes	Integer	Statistical period. Options: 60000: one minute; 300000: five minutes; 900000: 15 minutes; 3600000: one hour. Enumeration values: • 60000 • 300000 • 900000 • 3600000
statistic	Yes	String	Statistic. Enumeration values: • maximum • minimum • average • sum • sampleCount
threshold	Yes	String	Threshold.
unit	Yes	String	Time series unit.

Table 4-252 Dimension

Parameter	Mandatory	Type	Description
name	Yes	String	Dimension name.
value	Yes	String	Dimension value.

Response Parameters

Status code: 200

Table 4-253 Response body parameters

Parameter	Type	Description
alarm_rule_id	Long	Threshold rule ID.

Status code: 400**Table 4-254** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID, which is used to search for logs and locate faults. If 2xx is returned, trace_id is empty. If 4xx , trace_id is not empty.

Example Requests

Modify a threshold rule whose name is **testaom**, alarm severity is **3**, metric name is **cpuCoreLimit**, and namespace is **PAAS.CONTAINER**.

`https://{Endpoint}/v2/{project_id}/alarm-rules`

```
{
  "action_enabled": false,
  "alarm_actions": [ ],
  "alarm_advice": "",
  "alarm_description": "",
  "alarm_level": 3,
  "alarm_rule_name": "aom_rule",
  "comparison_operator": ">=",
  "dimensions": [ {
    "name": "appName",
    "value": "rhm-broker"
  } ],
  "evaluation_periods": 1,
  "insufficient_data_actions": [ ],
  "metric_name": "cpuCoreLimit",
  "namespace": "PAAS.CONTAINER",
  "ok_actions": [ ],
  "period": 60000,
  "statistic": "average",
  "threshold": 0,
  "unit": "Core"
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{  
  "alarm_rule_id" : 91307490000416600  
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{  
  "error_code" : "AOM.02002SVCSTG_AMS_4000101",  
  "error_msg" : "Invalid alarm name",  
  "error_type" : "BAD_REQUEST",  
  "trace_id" : ""  
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.12 Deleting a Threshold Rule

Function

This API is used to delete a threshold rule.

Calling Method

For details, see [Calling APIs](#).

URI

DELETE /v2/{project_id}/alarm-rules/{alarm_rule_id}

Table 4-255 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .
alarm_rule_id	Yes	String	Threshold rule ID.

Request Parameters

Table 4-256 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

OK: The request is successful.

Status code: 400

Table 4-257 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID, which is used to search for logs and locate faults. If 2xx is returned, trace_id is empty. If 4xx , trace_id is not empty.

Example Requests

Delete a threshold rule.

```
https://{Endpoint}/v2/{project_id}/alarm-rules/{alarm_rule_id}
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.02005115",
  "error_msg" : "Invalid request parameter",
  "error_type" : "BAD_REQUEST",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.13 Querying a Threshold Rule

Function

This API is used to query a threshold rule.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v2/{project_id}/alarm-rules/{alarm_rule_id}

Table 4-258 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .
alarm_rule_id	Yes	String	Threshold rule ID.

Request Parameters

Table 4-259 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	No	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Response Parameters

Status code: 200

Table 4-260 Response body parameters

Parameter	Type	Description
meta_data	MetaData object	Metadata, including pagination information.
thresholds	Array of QueryAlarmResult objects	Threshold rule list.

Table 4-261 MetaData

Parameter	Type	Description
count	Integer	Number of returned records.
start	String	Start of the next page, which is used for pagination. null: No more data.
total	Integer	Total number of records.

Table 4-262 QueryAlarmResult

Parameter	Type	Description
action_enabled	Boolean	Whether to enable notification.
alarm_actions	Array of strings	List of alarm notifications.
alarm_advice	String	Alarm clearance suggestion.
alarm_description	String	Threshold rule description.
alarm_level	String	Alarm severity.
alarm_rule_id	String	Threshold rule ID.
alarm_rule_name	String	Threshold rule name.
comparison_operator	String	Comparison operator.
dimensions	Array of Dimension objects	List of time series dimensions. To query the time series dimension list, call the API Querying Time Series Objects .
evaluation_periods	Integer	Interval.
id_turn_on	Boolean	Whether to enable the threshold rule.
insufficient_data_actions	Array of strings	List of insufficient data notifications.
metric_name	String	Time series name.
namespace	String	Time series objects' namespace.
ok_actions	Array of strings	List of normal status notifications.
period	Integer	Statistical period.
policy_name	String	Threshold rule name.
resources	Array of strings	Resource information (discarded).
state_reason	String	Cause description.

Parameter	Type	Description
state_updated_timestamp	String	Time when the status was updated.
state_value	String	Service status.
statistic	String	Statistic.
threshold	String	Threshold value.
type	String	Threshold rule type.
unit	String	Threshold unit.

Table 4-263 Dimension

Parameter	Type	Description
name	String	Dimension name.
value	String	Dimension value.

Status code: 400**Table 4-264** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID, which is used to search for logs and locate faults. If 2xx is returned, trace_id is empty. If 4xx , trace_id is not empty.

Example Requests

Obtain the details about the alarm rule whose ID is **alarm_rule_id**.

```
https://{Endpoint}/v2/{project_id}/alarm-rules/{alarm_rule_id}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "meta_data": {
    "count": 1,
    "start": null,
    "total": 1
  },
  "thresholds": [ {
    "action_enabled": false,
    "alarm_actions": null,
    "alarm_advice": null,
    "alarm_description": null,
    "alarm_level": "3",
    "alarm_rule_id": 2137,
    "alarm_rule_name": "aom_rule",
    "comparison_operator": ">=",
    "dimensions": [ {
      "name": "appName"
    } ],
    "value": "rhbm-broker"
  } ],
  "evaluation_periods": 1,
  "id_turn_on": true,
  "insufficient_data_actions": null,
  "metric_name": "cpuCoreLimit",
  "namespace": "PAAS.CONTAINER",
  "ok_actions": null,
  "period": 60000,
  "policy_name": "23",
  "resources": [ ],
  "state_reason": null,
  "state_updated_timestamp": null,
  "statistic": "average",
  "threshold": 0,
  "type": "single",
  "unit": "Core"
} ] }
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code": "AOM.02004115",
  "error_msg": "Invalid request parameter",
  "error_type": "BAD_REQUEST",
  "trace_id": ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

Status Code	Description
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.2.14 Deleting Threshold Rules in Batches

Function

This API is used to delete threshold rules in batches.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v2/{project_id}/alarm-rules/delete

Table 4-265 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-266 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Parameter	Mandatory	Type	Description
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-267 Request body parameters

Parameter	Mandatory	Type	Description
alarm_rules	Yes	Array of strings	Name of the rule to be deleted.

Response Parameters

Status code: 200

OK: The request is successful.

Status code: 400

Table 4-268 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID, which is used to search for logs and locate faults. If 2xx is returned, trace_id is empty. If 4xx , trace_id is not empty.

Example Requests

Delete threshold rules in batches by rule name.

```
https://{Endpoint}/v2/{project_id}/alarm-rules/delete
{
  "alarm_rules": [ ]
}
```

Example Responses

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "error_code" : "AOM.02005115",
  "error_msg" : "Invalid request parameter",
  "error_type" : "BAD_REQUEST",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.3 Prometheus Monitoring

4.3.1 Querying Expression Calculation Results in a Specified Period Using the GET Method

Function

This API is used to query the calculation results of a PromQL expression in a specified period using the GET method.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/aom/api/v1/query_range

Table 4-269 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-270 Query Parameters

Parameter	Mandatory	Type	Description
query	Yes	String	PromQL expression. For details, see Prometheus official document .
start	Yes	String	Start timestamp (Unix, in seconds). Example: 2024-10-16 16:03:01 needs to be converted to Unix timestamp 1729065781 using a tool.
end	Yes	String	End timestamp (Unix, in seconds). Example: 2024-10-16 16:03:01 needs to be converted to Unix timestamp 1729065781 using a tool.
step	Yes	String	Query step, which indicates a query interval. By setting a step, the time range can be divided into multiple segments. Then calculation is performed for each segment. The step must match the data collection interval to ensure accurate and consistent data. If the step is too small, query performance may deteriorate. If the step is too large, some details may be missed.

Request Parameters

Table 4-271 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Response Parameters

Status code: 200

Table 4-272 Response body parameters

Parameter	Type	Description
status	String	Response status.
data	Object	Response data.

Status code: 403

Table 4-273 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 422

Table 4-274 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 503

Table 4-275 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Example Requests

Query the calculation result of PromQL expression "up" every 15s in a specified period.

```
https://{EndPoint}/v1/{project_id}/aom/api/v1/query_range?  
query=up&start=1630124012&end=1630127612&step=15s
```

Example Responses

Status code: 200

OK: The request is successful.

```
{  
  "status": "success",  
  "data": {  
    "resultType": "matrix",  
    "result": [ {  
      "metric": {  
        "__name__": "up",  
        "job": "prometheus",  
        "instance": "localhost:9090"  
      },  
      "values": [ [ 1.435781430781E9, "1" ], [ 1.435781445781E9, "1" ], [ 1.435781460781E9, "1" ] ]  
    }, {  
      "metric": {  
        "__name__": "up",  
        "job": "node",  
        "instance": "localhost:9091"  
      },  
      "values": [ [ 1.435781430781E9, "0" ], [ 1.435781445781E9, "0" ], [ 1.435781460781E9, "1" ] ]  
    } ]  
  }  
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
1:1: parse error: unexpected <op:*>
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{  
  "status": "error",  
  "errorType": "auth",
```

```
{
  "error": "auth project_id not pass."
}
```

Status code: 422

Unprocessable: The expression cannot be executed.

```
{
  "status": "error",
  "errorType": "excution",
  "error": "expression can't be executed."
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "status": "error",
  "errorType": "timeout",
  "error": "query timed out in query execution."
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
422	Unprocessable: The expression cannot be executed.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.3.2 (Recommended) Querying Expression Calculation Results in a Specified Period Using the POST Method

Function

This API is used to query the calculation results of a PromQL expression in a specified period using the POST method.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/aom/api/v1/query_range

Table 4-276 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-277 Query Parameters

Parameter	Mandatory	Type	Description
query	Yes	String	PromQL expression. For details, see Prometheus official document .
start	Yes	String	Start timestamp (Unix, in seconds).
end	Yes	String	End timestamp (Unix, in seconds).
step	Yes	String	Query step (in seconds). The task is executed on the step basis within the specified period.

Request Parameters

Table 4-278 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Response Parameters

Status code: 200

Table 4-279 Response body parameters

Parameter	Type	Description
status	String	Response status.
data	Object	Response data.

Status code: 403**Table 4-280** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 422**Table 4-281** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 503**Table 4-282** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Example Requests

Query the top N aom_node_status metrics on the step basis in a specified period.

```
https://{EndPoint}/v1/{project_id}/aom/api/v1/query_range?  
query=topk(2,aom_node_status)&start=1630386780&end=1630390380&step=15
```

Example Responses

Status code: 200

OK: The request is successful.

```
{  
  "status": "success",  
  "data": {  
    "resultType": "matrix",  
    "result": [ {  
      "metric": {  
        "__name__": "amm_node_status",  
        "clusterId": "000000-0000-0000-0000-00000000",  
        "hostID": "c9xxcb-2x6c-4h54-8fcd-f68xx85",  
        "nameSpace": "default",  
        "nodeIP": "1xx.1xx.0.1xx",  
        "nodeName": "sis-xxn-amm"  
      },  
      "values": [ [ 1630386780, "0" ], [ 1630388610, "0" ], [ 1630388625, "0" ] ]  
    }, {  
      "metric": {  
        "__name__": "amm_node_status",  
        "clusterId": "00000000-0000-0000-0000-00000000",  
        "hostID": "ec5xxxb-0xx8-4xxx-bxx-9ecxxf",  
        "nameSpace": "default",  
        "nodeIP": "1xx.168.0.1x",  
        "nodeName": "fdx-ibxxst"  
      },  
      "values": [ [ 1630388265, "0" ], [ 1630388280, "0" ], [ 1630388295, "0" ] ]  
    }  
  ]  
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
1:1: parse error: unexpected <op:*>
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{  
  "status": "error",  
  "errorType": "auth",  
  "error": "auth project_id not pass."  
}
```

Status code: 422

Unprocessable: The expression cannot be executed.

```
{  
  "status": "error",  
  "errorType": "excution",  
  "error": "expression can't be executed."  
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "timeout",
  "error" : "query timed out in query execution."
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
422	Unprocessable: The expression cannot be executed.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.3.3 Querying the Expression Calculation Result at a Specified Time Point Using the GET Method

Function

This API is used to query the calculation result of a PromQL expression at a specified time point using the GET method.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/aom/api/v1/query

Table 4-283 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-284 Query Parameters

Parameter	Mandatory	Type	Description
query	Yes	String	PromQL expression. For details, see Prometheus official document .
time	No	String	Timestamp specified for PromQL calculation (Unix, in seconds). Example: 2024-10-16 16:03:01 needs to be converted to Unix timestamp 1729065781 using a tool. If this parameter is not specified, the data of the current time will be queried.

Request Parameters

Table 4-285 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Response Parameters

Status code: 200

Table 4-286 Response body parameters

Parameter	Type	Description
status	String	Response status.
data	Object	Response data.

Status code: 400

Table 4-287 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 403

Table 4-288 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 422

Table 4-289 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 503

Table 4-290 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Example Requests

Query the calculation result of expression "up" at time point "1630124012".

```
https://{EndPoint}/v1/{project_id}/aom/api/v1/query?query=up&time=1630124012
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "status" : "success",
  "data" : {
    "resultType" : "vector",
    "result" : [ ]
  }
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "bad_param",
  "error" : "param is invalid."
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "auth",
  "error" : "auth project_id not pass."
}
```

Status code: 422

Unprocessable: The expression cannot be executed.

```
{
  "status" : "error",
  "errorType" : "excution",
  "error" : "expression can't be executed."
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "timeout",
  "error" : "query timed out in query execution."
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
422	Unprocessable: The expression cannot be executed.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.3.4 (Recommended) Querying Expression Calculation Results at a Specified Time Point Using the POST Method

Function

This API is used to query the calculation result of a PromQL expression at a specified time point using the POST method.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/aom/api/v1/query

Table 4-291 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-292 Query Parameters

Parameter	Mandatory	Type	Description
query	Yes	String	PromQL expression. For details, see Prometheus official document .
time	No	String	Timestamp specified for PromQL calculation (Unix, in seconds).

Request Parameters

Table 4-293 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Response Parameters

Status code: 200

Table 4-294 Response body parameters

Parameter	Type	Description
status	String	Response status.
data	Object	Response data.

Status code: 400

Table 4-295 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 403

Table 4-296 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 422**Table 4-297** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 503**Table 4-298** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Example Requests

Query the top N aom_node_status metrics at time point "1630381536".

`https://{EndPoint}/v1/{project_id}/aom/api/v1/query?query=topk(2,aom_node_status)&time=1630381536`

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "status": "success",
  "data": {
    "resultType": "vector",
    "result": [ {
      "metric": {
        "__name__": "amm_node_status",
```

```
{
  "clusterId" : "00000000-0000-0000-0000-00000000",
  "hostID" : "g947xcxh-2xcxc-xxx-xxcd-f6xxx85",
  "nameSpace" : "default",
  "nodeIP" : "1x6.1xx.0.xxx",
  "nodeName" : "sdxs-jxxxgksi-axx"
},
"value" : [ 16303810036, "0" ]
}, {
  "metric" : {
    "__name__" : "amm_node_status",
    "clusterId" : "00000000-0000-0000-0000-00000000",
    "hostID" : "dc1xxxf7e-b095-4e77-bxx-914dhlxxxbf7",
    "nameSpace" : "default",
    "nodeIP" : "1xx.1xx.0.xxx",
    "nodeName" : "sds-jjxxxi-texxt"
  },
  "value" : [ 1630381536, "0" ]
}
}]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "bad_param",
  "error" : "param is invalid."
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "auth",
  "error" : "auth project_id not pass."
}
```

Status code: 422

Unprocessable: The expression cannot be executed.

```
{
  "status" : "error",
  "errorType" : "excution",
  "error" : "expression can't be executed."
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "timeout",
  "error" : "query timed out in query execution."
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
422	Unprocessable: The expression cannot be executed.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.3.5 Querying Tag Values

Function

This API is used to query the values of a specified tag.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/aom/api/v1/label/{label_name}/values

Table 4-299 Path Parameters

Parameter	Mandatory	Type	Description
label_name	Yes	String	Tag specified for query. You can obtain tag names by calling the API Obtaining the Tag Name List Using the POST Method .
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-300 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Response Parameters

Status code: 200

Table 4-301 Response body parameters

Parameter	Type	Description
status	String	Response status.
data	Array of strings	Tag value.

Status code: 400

Table 4-302 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 403

Table 4-303 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 422

Table 4-304 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 503

Table 4-305 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Example Requests

Query all values of the "job" tag.

```
https://{EndPoint}/v1/{project_id}/aom/api/v1/label/job/values
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "status": "success",
  "data": [ "node", "prometheus" ]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "status": "error",
  "errorType": "bad_param",
  "error": "param is invalid."
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "status": "error",

```

```
{
  "errorType": "auth",
  "error": "auth project_id not pass."
}
```

Status code: 422

Unprocessable: The expression cannot be executed.

```
{
  "status": "error",
  "errorType": "excution",
  "error": "expression can't be executed."
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "status": "error",
  "errorType": "timeout",
  "error": "query timed out in query execution."
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
422	Unprocessable: The expression cannot be executed.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.3.6 Obtaining the Tag Name List Using the GET Method

Function

This API is used to obtain the tag name list using the GET method.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/aom/api/v1/labels

Table 4-306 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-307 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Response Parameters

Status code: 200

Table 4-308 Response body parameters

Parameter	Type	Description
status	String	Response status.
data	Array of strings	Tag value.

Status code: 400

Table 4-309 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 403**Table 4-310** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 422**Table 4-311** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 503**Table 4-312** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Example Requests

Return the tag name list.

```
https://{EndPoint}/v1/{project_id}/aom/api/v1/labels
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "status": "success",
  "data": [ "__name__", "call", "code", "config", "dialer_name", "endpoint", "event", "goversion", "handler",
```

```
"instance", "slice", "version" ]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "bad_param",
  "error" : "param is invalid."
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "auth",
  "error" : "auth project_id not pass."
}
```

Status code: 422

Unprocessable: The expression cannot be executed.

```
{
  "status" : "error",
  "errorType" : "excution",
  "error" : "expression can't be executed."
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "timeout",
  "error" : "query timed out in query execution."
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
422	Unprocessable: The expression cannot be executed.

Status Code	Description
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.3.7 (Recommended) Obtaining the Tag Name List Using the POST Method

Function

This API is used to obtain the tag name list using the POST method.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/aom/api/v1/labels

Table 4-313 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-314 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Response Parameters

Status code: 200

Table 4-315 Response body parameters

Parameter	Type	Description
status	String	Response status.
data	Array of strings	Tag value.

Status code: 400

Table 4-316 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 403

Table 4-317 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 422

Table 4-318 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 503

Table 4-319 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Example Requests

Return the tag name list.

```
https://{EndPoint}/v1/{project_id}/aom/api/v1/labels
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "status": "success",
  "data": [ "__name__", "alarm_level", "adfname", "alertstate", "ammApplicationID",
"ammApplicationName", "appID", "appName", "clusterId", "clusterName", "cluster_id",
"comparisonOperator", "containerID", "containerName", "nameSpace", "namespace", "netDevice",
"nodeIP", "nodeName", "node_ip", "paild", "pailName", "period_expr", "podID", "podName", "processCmd" ]
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{
  "status": "error",
  "errorType": "bad_param",
  "error": "param is invalid."
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{
  "status": "error",
  "errorType": "auth",
  "error": "auth project_id not pass."
}
```

Status code: 422

Unprocessable: The expression cannot be executed.

```
{
  "status": "error",
  "errorType": "excution",
  "error": "expression can't be executed."
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{
  "status" : "error",
  "errorType" : "timeout",
  "error" : "query timed out in query execution."
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
422	Unprocessable: The expression cannot be executed.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.3.8 Querying Metadata

Function

This API is used to query metric metadata.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/aom/api/v1/metadata

Table 4-320 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Request Parameters

Table 4-321 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .

Response Parameters

Status code: 200

Table 4-322 Response body parameters

Parameter	Type	Description
status	String	Response status.
data	Object	Metadata information.

Status code: 400

Table 4-323 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 403

Table 4-324 Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 422**Table 4-325** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Status code: 503**Table 4-326** Response body parameters

Parameter	Type	Description
status	String	Response status.
errorType	String	Error type.
error	String	Error message.

Example Requests

Obtain the metadata.

```
https://{EndPoint}/v1/{project_id}/aom/api/v1/metadata
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "status" : "success",
  "data" : {
    "aggregator_openapi_v2_regeneration_count" : [ {
      "type" : "counter",
      "help" : "[ALPHA] Counter of OpenAPI v2 spec regeneration count broken down by causing APIService name and reason.",
    }
  ]
}
```

```
    "unit" : ""  
  } ]  
}  
}
```

Status code: 400

Bad Request: The request is invalid. The client should not repeat the request without modifications.

```
{  
  "status" : "error",  
  "errorType" : "bad_param",  
  "error" : "param is invalid."  
}
```

Status code: 403

Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.

```
{  
  "status" : "error",  
  "errorType" : "auth",  
  "error" : "auth project_id not pass."  
}
```

Status code: 422

Unprocessable: The expression cannot be executed.

```
{  
  "status" : "error",  
  "errorType" : "excution",  
  "error" : "expression can't be executed."  
}
```

Status code: 503

Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

```
{  
  "status" : "error",  
  "errorType" : "timeout",  
  "error" : "query timed out in query execution."  
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
422	Unprocessable: The expression cannot be executed.

Status Code	Description
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.4 Log

4.4.1 Querying Logs

Function

This API is used to query logs by different dimensions, such as by cluster, IP address, or application. Pagination queries are supported.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/als/action

Table 4-327 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID, which can be obtained from the console or by calling an API. For details, see Obtaining a Project ID .

Table 4-328 Query Parameters

Parameter	Mandatory	Type	Description
type	Yes	String	Log API call mode. When the value is querylogs, this API is used to query logs.

Request Parameters

Table 4-329 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM. For details, see Obtaining a Token .
Content-Type	Yes	String	Message body type or format. Content type, which is application/json. Enumeration values: • application/json

Table 4-330 Request body parameters

Parameter	Mandatory	Type	Description
category	Yes	String	Log type. Options:- app_log: application log.- node_log: host log.- custom_log: log in a custom path.
endTime	Yes	Long	End time of the query (UTC, in ms).
hideSyslog	No	Integer	Whether to hide system logs during search. • 0 (default): Hide system logs. • 1: Show system logs.

Parameter	Mandatory	Type	Description
keyWord	No	String	Keyword for search. - Exact search by keyword is supported. A keyword is between two adjacent delimiters. - Fuzzy search by keyword is supported. Example: RROR, ERRO?, ROR, ERR*, or ER*OR. - Exact search by phrase is supported. Example: Start to refresh alm Statistic. - Search using AND (&&) or OR () is supported. Example: query&&logs or query logs. Note: Default delimiters: , "" ; = () [] { } @ & < > / : \ n \ t \ r
lineNum	No	String	Sequence number of the final log in the last query result. This parameter is not required for the first query, but is required for subsequent pagination queries.
pageSize/size	No	String	Number of logs queried each time. Default value: 5000. Recommended value: 100. For the first query, pageSize is used. For subsequent pagination queries, size is used.
searchKey	Yes	SearchKey object	Log filter criteria, which vary by log source.
startTime	Yes	Long	Start time of the query (UTC, in ms).
type	No	String	Pagination query. This parameter is not required for the first query, but is required for subsequent pagination queries.

Parameter	Mandatory	Type	Description
isDesc	No	Boolean	Whether to query logs based on lineNum in ascending or descending order. • true: lineNum in descending order (from the latest time to the earliest time). • false: lineNum in ascending order (from the earliest time to the latest time).

Table 4-331 SearchKey

Parameter	Mandatory	Type	Description
appName	No	String	Application name.
clusterId	Yes	String	CCE cluster ID.
hostIP	No	String	IP address of the VM where logs are located.
nameSpace	No	String	CCE cluster namespace.
pathFile	No	String	Log file name.
podName	No	String	Container instance name.

Response Parameters

Status code: 200

Table 4-332 Response body parameters

Parameter	Type	Description
errorCode	String	Response code. SVCSTG_AMS_2000000: Success response.
errorMessage	String	Response message.
result	String	Metadata, including results and the total number of returned records.

Status code: 400

Table 4-333 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.
errorMessage	String	Response message.

Status code: 401

Table 4-334 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.
errorMessage	String	Response message.

Status code: 403

Table 4-335 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.
errorMessage	String	Response message.

Status code: 500

Table 4-336 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.
errorMessage	String	Response message.

Status code: 503

Table 4-337 Response body parameters

Parameter	Type	Description
errorCode	String	Response code.
errorMessage	String	Response message.

Example Requests

- Example 1: Query application logs under a cluster.

```
POST https://{endpoint}/v1/{project_id}/als/action?type=querylogs"

{
  "category": "app_log",
  "endTime": 15389000003,
  "hideSyslog": 0,
  "keyWord": "",
  "searchKey": {
    "clusterId": "c69xxx-5xxx-1xxx-8xxx5-02xxxxx40"
  },
  "startTime": 15389000003
}
```

- Example 2: Perform pagination queries.

- a. For pagination queries, the lineNumber (sequence number of the final log in the last query result), type (value: next), and size parameters need to be added.
- b. The values of category, searchKey, keyWord, startTime, and endTime must be the same as those in the first query.
- c. To implement another pagination query, change the value of lineNumber to the sequence number of the final log in the last query result. The rest may be deduced by analogy.

```
/v1/{project_id}/als/action?type=querylogs

{
  "category": "app_log",
  "searchKey": {
    "clusterId": "874xxx9a2-xxxf-xxx-8xxe-02xxxxx3"
  },
  "keyWord": "",
  "startTime": 156946300095,
  "endTime": 15694600008895,
  "lineNum": "1569463900000047",
  "type": "next",
  "size": 100,
  "hideSyslog": 0
}
```

Notes:

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "errorCode": "SVCSTG.ALS.200.200",
  "errorMessage": "Query data success",
  "result": [ {
    "data": [ {
      "appName": "axxs0712",
      "category": "apx",
      "clusterId": "c6xxxx7c-54cd-11e8-8055-025xxx1e40",
      "collectTime": 153900000983,
      "containerName": "contssner-0",
      "hostIP": "1xx.xxx.0.1xxx",
      "hostId": "c11xxxxx11-0000b-4925-bef4-d0xxxx9b0",
      "hostName": "1x2.168.0.xxx",
      "lineNum": "1xxx23xxxxxx2VW5xxxxxx0ZWdlcg=="
    }
  ]
}
```

```
"logContent" : "warn:2018/10/09 06:57:01 helloworld.go:108: the main process is running now.",
"logContentSize" : null,
"loghash" : "4xxxx0d40a83c17f262540xxxxxxxxfeaa30eb",
"nameSpace" : "default",
"pathFile" : "/xxx/xxx/xxx/xxx/xxx/xxx.trxe",
"podName" : "axxx12-7xf884-qxxwp",
"serviceID" : ""
}],
"total" : 5000
}]
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized: The authentication information is incorrect or invalid.
403	Forbidden: The request is rejected. The server has received the request and understood it, but the server refuses to respond to it. The client should not repeat the request without modifications.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.
503	Service Unavailable: The requested service is invalid. The client should not repeat the request without modifications.

Error Codes

See [Error Codes](#).

4.5 Prometheus Instance

4.5.1 Uninstalling a Hosted Prometheus Instance

Function

This API is used to uninstall a hosted Prometheus instance.

Calling Method

For details, see [Calling APIs](#).

URI

DELETE /v1/{project_id}/aom/prometheus

Table 4-338 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID obtained from IAM. Generally, a project ID contains 32 characters.

Table 4-339 Query Parameters

Parameter	Mandatory	Type	Description
prom_id	Yes	String	Prometheus instance ID.

Request Parameters

Table 4-340 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM.
Content-Type	Yes	String	Content type, which is application/json.
Enterprise-Project-Id	Yes	String	Enterprise project ID. To delete instances in an enterprise project, enter the enterprise project ID.

Response Parameters

Status code: 200

OK: The request is successful.

Status code: 400

Table 4-341 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID.

Example Requests

Delete the Prometheus instance whose **prom_id** is **08****2a-8b-45-b1-d1*****79**.

```
https://{Endpoint}/v1/{project_id}/aom/prometheus?prom_id=08****2a-8**b-4**5-b**1-d1*****79
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "08****2a-8**b-4**5-b**1-d1*****79" : true
}
```

Status code: 400

No Prometheus instance is found.

```
{
  "error_code" : "AOM.11017014",
  "error_msg" : "prom instance not found",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	No Prometheus instance is found.

Error Codes

See [Error Codes](#).

4.5.2 Querying a Prometheus Instance

Function

This API is used to query a Prometheus instance.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/aom/prometheus

Table 4-342 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID obtained from IAM. Generally, a project ID contains 32 characters.

Table 4-343 Query Parameters

Parameter	Mandatory	Type	Description
prom_id	No	String	Prometheus instance ID. If both prom_id and prom_type exist, only prom_id takes effect.
prom_type	No	String	Prometheus instance type (VPC and KUBERNETES are not supported). Enumeration values: • default • ECS • VPC • CCE • REMOTE_WRITE • KUBERNETES • CLOUD_SERVICE • ACROSS_ACCOUNT
cce_cluster_enabled	No	String	Whether to enable a CCE cluster. Enumeration values: • true • false
prom_status	No	String	Prometheus instance status. Enumeration values: • DELETED • NORMAL • ALL

Request Parameters

Table 4-344 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM.
Content-Type	No	String	Content type, which is application/json.
Enterprise-Project-Id	Yes	String	Enterprise project ID. - To query instances in an enterprise project, enter the enterprise project ID. - To query instances in all enterprise projects, enter all_granted_eps.

Response Parameters

Status code: 200**Table 4-345** Response body parameters

Parameter	Type	Description
prometheus	Array of PromInstanceEpsModel objects	Prometheus instance list.

Table 4-346 PromInstanceEpsModel

Parameter	Type	Description
prom_name	String	Prometheus instance name. Enter 1–100 characters and do not start or end with an underscore (_) or hyphen (-). Only letters, digits, underscores, and hyphens are allowed.
prom_id	String	Prometheus instance ID.

Parameter	Type	Description
prom_type	String	Prometheus instance type (VPC and KUBERNETES are not supported). Enumeration values: • default • ECS • VPC • CCE • REMOTE_WRITE • KUBERNETES • CLOUD_SERVICE • ACROSS_ACCOUNT
prom_version	String	Prometheus instance version.
prom_create_time_stamp	Long	Timestamp when the Prometheus instance is created.
prom_update_time_stamp	Long	Timestamp when the Prometheus instance is updated.
prom_status	String	Prometheus instance status. Enumeration values: • DELETED • NORMAL • ALL
enterprise_project_id	String	Enterprise project that the Prometheus instance belongs to.
project_id	String	ID of the project that the Prometheus instance belongs to.
is_deleted_tag	Long	Whether an instance has been deleted.
deleted_time	Long	Deletion time.
prom_spec_config	PromConfigModel object	Special configuration of the Prometheus instance.
cce_spec_config	String	Special configuration of the Prometheus instance in the CCE scenario.
prom_limits	PromLimits object	Prometheus instance limitations.
limits_update_time	Long	Time when the metric storage duration was modified.

Table 4-347 PromConfigModel

Parameter	Type	Description
remote_write_url	String	Remote write address of the Prometheus instance.
remote_read_url	String	Remote read address of the Prometheus instance.
prom_http_api_endpoint	String	URL for calling the Prometheus instance.
dashboard_id	String	ID of the dashboard associated with the Prometheus instance (not used currently).
region_id	String	Region that the Prometheus instance belongs to.

Table 4-348 PromLimits

Parameter	Type	Description
compactor_blocks_retention_period	String	Metric storage duration. Only 15, 30, 60, and 90 days are supported. Enumeration values: • "360h" • "720h" • "1440h" • "2160h"

Example Requests

- Query a Prometheus instance.
`https://{Endpoint}/v1/{project_id}/aom/prometheus`
- Query the Prometheus instance whose **prom_id** is **08****2a-8b-45-b1-d1*****79**.
`https://{Endpoint}/v1/{project_id}/aom/prometheus?prom_id=08****2a-8**b-4**5-b**1-d1*****79`

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "prometheus": [ {
    "deleted_time": 0,
    "enterprise_project_id": "0",
    "project_id": "2a4***56cc***7f837***891***c1cf",
    "prom_create_timestamp": 1691718171483,
```

```
"prom_id" : "08***2a-8**b-4**5-b**1-d1*****79",
"prom_name" : "aom_prometheus",
"prom_spec_config" : {
  "prom_http_api_endpoint" : "aom-internal.cn-***-*.com:***/v1/2a4***56cc***7f837***891***c1cf/
08***2a-8**b-4**5-b**1-d1*****79",
  "region_id" : "cn-***-*",
  "remote_read_url" : "aom-internal.cn-***-*.com:***/v1/2a4***56cc***7f837***891***c1cf/
08***2a-8**b-4**5-b**1-d1*****79/api/v1/read",
  "remote_write_url" : "aom-internal.cn-***-*.com:***/v1/2a4***56cc***7f837***891***c1cf/
08***2a-8**b-4**5-b**1-d1*****79/push"
},
"prom_type" : "CCE",
"prom_update_timestamp" : 1691718171483
}]
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.

Error Codes

See [Error Codes](#).

4.5.3 Adding a Prometheus Instance

Function

This API is used to add a Prometheus instance.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/aom/prometheus

Table 4-349 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID obtained from IAM. Generally, a project ID contains 32 characters.

Request Parameters

Table 4-350 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM.
Content-Type	Yes	String	Content type, which is application/json.
region	Yes	String	Region to which the Prometheus instance belongs. Generally, it is the domain name or IP address of the server bearing the REST service endpoint. This parameter varies depending on the service and region.

Table 4-351 Request body parameters

Parameter	Mandatory	Type	Description
prom_name	Yes	String	Prometheus instance name. Enter 1–100 characters and do not start or end with an underscore (_) or hyphen (-). Only letters, digits, underscores, and hyphens are allowed.
prom_type	Yes	String	Prometheus instance type. • ECS: Prometheus for ECS • CCE: Prometheus for CCE • REMOTE_WRITE: Common Prometheus instance • CLOUD_SERVICE: Prometheus for cloud services • ACROSS_ACCOUNT: Prometheus for multi-account aggregation
prom_version	No	String	Prometheus instance version.
enterprise_project_id	No	String	Enterprise project that the Prometheus instance belongs to.

Parameter	Mandatory	Type	Description
project_id	No	String	ID of the project that the Prometheus instance belongs to.

Response Parameters

Status code: 200

Table 4-352 Response body parameters

Parameter	Type	Description
prometheus	Array of PromInstanceEpsCreateModel objects	Prometheus instance list.

Table 4-353 PromInstanceEpsCreateModel

Parameter	Type	Description
prom_name	String	Prometheus instance name. Enter 1–100 characters and do not start or end with an underscore (_) or hyphen (-). Only letters, digits, underscores, and hyphens are allowed.
prom_id	String	Prometheus instance ID.
prom_type	String	Prometheus instance type (VPC and KUBERNETES are not supported). Enumeration values: • ECS • VPC • CCE • REMOTE_WRITE • KUBERNETES • CLOUD_SERVICE • ACROSS_ACCOUNT
prom_version	String	Prometheus instance version.
prom_create_time_stamp	Long	Timestamp when the Prometheus instance was created.

Parameter	Type	Description
prom_update_timestamp	Long	Timestamp when the Prometheus instance was updated.
prom_status	String	Prometheus instance status. Enumeration values: • DELETED • NORMAL • ALL
enterprise_project_id	String	Enterprise project that the Prometheus instance belongs to.
project_id	String	ID of the project that the Prometheus instance belongs to.
deleted_time	Long	Deletion time.
prom_spec_config	PromConfigModel object	Special configuration of the Prometheus instance.
cce_spec_config	String	Special configuration of the Prometheus instance in the CCE scenario.

Table 4-354 PromConfigModel

Parameter	Type	Description
remote_write_url	String	Remote write address of the Prometheus instance.
remote_read_url	String	Remote read address of the Prometheus instance.
prom_http_api_endpoint	String	URL for calling the Prometheus instance.
dashboard_id	String	ID of the dashboard associated with the Prometheus instance (not used currently).
region_id	String	Region that the Prometheus instance belongs to.

Example Requests

Add a Prometheus instance for CCE.

```
https://{Endpoint}/v1/{project_id}/aom/prometheus
{
```

```
{
  "prom_type": "CCE",
  "prom_name": "aom_prometheus"
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "prometheus": [ {
    "deleted_time": 0,
    "enterprise_project_id": "0",
    "project_id": "2a4***56cc***7f837***891***c1cf",
    "prom_create_timestamp": 1691718171483,
    "prom_id": "08***2a-8**b-4**5-b**1-d1*****79",
    "prom_name": "aom_prometheus",
    "prom_spec_config": {
      "prom_http_api_endpoint": "aom-internal.cn-***-*.***.com:***/v1/2a4***56cc***7f837***891***c1cf/08***2a-8**b-4**5-b**1-d1*****79",
      "remote_read_url": "aom-internal.cn-***-*.***.com:***/v1/2a4***56cc***7f837***891***c1cf/08***2a-8**b-4**5-b**1-d1*****79/api/v1/read",
      "remote_write_url": "aom-internal.cn-***-*.***.com:***/v1/2a4***56cc***7f837***891***c1cf/08***2a-8**b-4**5-b**1-d1*****79/push",
      "region_id": "cn-***-*"
    },
    "prom_type": "CCE",
    "prom_update_timestamp": 1691718171483
  } ]
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.

Error Codes

See [Error Codes](#).

4.5.4 Creating a Recording Rule for a Prometheus Instance

Function

This API is used to create a recording rule for a Prometheus instance.

Calling Method

For details, see [Calling APIs](#).

URI

POST /v1/{project_id}/{prometheus_instance}/aom/api/v1/rules

Table 4-355 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID obtained from IAM. Generally, a project ID contains 32 characters.
prometheus_instance	Yes	String	Prometheus instance ID.

Request Parameters

Table 4-356 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM.
Content-Type	Yes	String	Content type, which is application/json.

Table 4-357 Request body parameters

Parameter	Mandatory	Type	Description
recording_rule	Yes	String	Recording rule.

Response Parameters

Status code: 204

No Content: The request is successful, but no content is returned.

Status code: 500

Table 4-358 Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID.

Example Requests

Create a recording rule for a Prometheus instance.

```
https://{Endpoint}/v1/{project_id}/{prometheus_instance}/aom/api/v1/rules
{
  "recording_rule": "groups:\n  - name: apiserver_request_total\n    interval: 60s\n    rules:\n      -\n        record: job_instance_mode:apiserver_request_total:avg_rate5m\n        expr: avg by (job, instance, mode)\n          (rate(apiserver_request_total[5m]))\n        labels:\n          team: operations\n        - record:\n          job:apiserver_request_total:sum_rate10m\n          expr: sum by (job)(rate(apiserver_request_total[10m]))\n        labels:\n          team: operations"
}
```

Example Responses

Status code: 500

The recording rule already exists.

```
{
  "error_code" : "AOM.5001019",
  "error_msg" : "recording rule exist for the prometheus instance"
}
```

Status Codes

Status Code	Description
204	No Content: The request is successful, but no content is returned.
500	The recording rule already exists.

Error Codes

See [Error Codes](#).

4.5.5 Obtaining the Credential for Calling a Prometheus Instance

Function

This API is used to obtain the credential for calling a Prometheus instance.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/access-code

Table 4-359 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID obtained from IAM. Generally, a project ID contains 32 characters.

Request Parameters

Table 4-360 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM.
Content-Type	No	String	Content type, which is application/json.

Response Parameters

Status code: 200

Table 4-361 Response body parameters

Parameter	Type	Description
access_codes	Array of AccessCodeModel objects	Access codes.

Table 4-362 AccessCodeModel

Parameter	Type	Description
access_code	String	Access code.
access_code_id	String	Access code ID.
create_at	Long	Creation time.
status	String	Status.

Example Requests

Obtain the credential for calling a Prometheus instance.

`https://{Endpoint}/v1/{project_id}/access-code`

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "access_codes": [ {
    "access_code": "b***OOJpV***B4ciU*****NfR2f9xZ*****tgpba*****yQS66lh****a",
    "access_code_id": "c6*04****ee6e*****092*****45*3",
    "create_at": 1700796457506243016,
    "status": "enable"
  } ]
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.

Error Codes

See [Error Codes](#).

4.5.6 Modifying a Prometheus Instance

Function

This API is used to modify a Prometheus instance.

Calling Method

For details, see [Calling APIs](#).

URI

PUT `/v1/{project_id}/aom/prometheus`

Table 4-363 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID obtained from IAM. Generally, a project ID contains 32 characters.

Request Parameters

Table 4-364 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM.
Content-Type	Yes	String	Content type, which is application/json.
Enterprise-Project-Id	Yes	String	Enterprise project ID. To modify the instances in an enterprise project, enter the enterprise project ID.

Table 4-365 Request body parameters

Parameter	Mandatory	Type	Description
prom_id	Yes	String	ID of the Prometheus instance to be modified.
prom_limits	No	PromLimits object	Metric storage duration, which can be modified only once a day.
prom_name	No	String	Name of the target Prometheus instance. Enter 1–100 characters and do not start or end with an underscore (_) or hyphen (-). Only letters, digits, underscores, and hyphens are allowed.

Table 4-366 PromLimits

Parameter	Mandatory	Type	Description
compactor_blocks_retention_period	No	String	Metric storage duration. Only 15, 30, 60, and 90 days are supported. Enumeration values: "360h" "720h" "1440h" "2160h"

Response Parameters

Status code: 200

Table 4-367 Response body parameters

Parameter	Type	Description
count	Long	Total number of Prometheus instances.
prometheus	Array of PromInstanceEpsModel objects	List of Prometheus instance names.

Table 4-368 PromInstanceEpsModel

Parameter	Type	Description
prom_name	String	Prometheus instance name. Enter 1–100 characters and do not start or end with an underscore (_) or hyphen (-). Only letters, digits, underscores, and hyphens are allowed.
prom_id	String	Prometheus instance ID.
prom_type	String	Prometheus instance type (VPC and KUBERNETES are not supported). Enumeration values: • default • ECS • VPC • CCE • REMOTE_WRITE • KUBERNETES • CLOUD_SERVICE • ACROSS_ACCOUNT
prom_version	String	Prometheus instance version.
prom_create_time stamp	Long	Timestamp when the Prometheus instance is created.
prom_update_time stamp	Long	Timestamp when the Prometheus instance is updated.

Parameter	Type	Description
prom_status	String	Prometheus instance status. Enumeration values: • DELETED • NORMAL • ALL
enterprise_project_id	String	Enterprise project that the Prometheus instance belongs to.
project_id	String	ID of the project that the Prometheus instance belongs to.
is_deleted_tag	Long	Whether an instance has been deleted.
deleted_time	Long	Deletion time.
prom_spec_config	PromConfigModel object	Special configuration of the Prometheus instance.
cce_spec_config	String	Special configuration of the Prometheus instance in the CCE scenario.
prom_limits	PromLimits object	Prometheus instance limitations.
limits_update_time	Long	Time when the metric storage duration was modified.

Table 4-369 PromConfigModel

Parameter	Type	Description
remote_write_url	String	Remote write address of the Prometheus instance.
remote_read_url	String	Remote read address of the Prometheus instance.
prom_http_api_endpoint	String	URL for calling the Prometheus instance.
dashboard_id	String	ID of the dashboard associated with the Prometheus instance (not used currently).
region_id	String	Region that the Prometheus instance belongs to.

Table 4-370 PromLimits

Parameter	Type	Description
compactor_blocks_retention_period	String	Metric storage duration. Only 15, 30, 60, and 90 days are supported. Enumeration values: • "360h" • "720h" • "1440h" • "2160h"

Status code: 400**Table 4-371** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID.

Status code: 401**Table 4-372** Response body parameters

Parameter	Type	Description
error_code	String	Error code.
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID.

Status code: 500**Table 4-373** Response body parameters

Parameter	Type	Description
error_code	String	Error code.

Parameter	Type	Description
error_msg	String	Error message.
error_type	String	Error type.
trace_id	String	Trace ID.

Example Requests

Modify the Prometheus instance name and metric storage duration.

```
https://{Endpoint}/v1/{project_id}/aom/prometheus
```

```
{
  "prom_id": "a4a3****-****-4ef6-****-****d1cc****",
  "prom_limits": {
    "compactor_blocks_retention_period": "720h"
  },
  "prom_name": "aomPrometheus"
}
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "count": 0,
  "prometheus": [ {
    "deleted_time": 0,
    "enterprise_project_id": "0",
    "limits_update_time": 0,
    "project_id": "2a4***56cc***7f837***891***c1cf",
    "prom_create_timestamp": 1691718171483,
    "prom_id": "08****2a-8**b-4**5-b**1-d1*****79",
    "prom_name": "aom_prometheus",
    "prom_spec_config": {
      "prom_http_api_endpoint": "aom-internal.cn-****-*.***.com:***/v1/2a4***56cc***7f837***891***c1cf/08****2a-8**b-4**5-b**1-d1*****79",
      "region_id": "cn-****-*",
      "remote_read_url": "aom-internal.cn-****-*.***.com:***/v1/2a4***56cc***7f837***891***c1cf/08****2a-8**b-4**5-b**1-d1*****79/api/v1/read",
      "remote_write_url": "aom-internal.cn-****-*.***.com:***/v1/2a4***56cc***7f837***891***c1cf/08****2a-8**b-4**5-b**1-d1*****79/push"
    },
    "prom_type": "CCE",
    "prom_update_timestamp": 1691718171483
  } ]
}
```

Status code: 400

Bad Request: Invalid request. The client should not repeat this request without modification.

```
{
  "error_code": "AOM.11016014",
  "error_msg": "prom instance not found",
  "trace_id": ""
}
```

Status code: 401

Unauthorized: The authorization information provided by the client is incorrect or invalid.

```
{
  "error_code" : "SVCSTG.AMS.4010000",
  "error_msg" : "auth failed.",
  "error_type" : "AUTH_FAILED",
  "trace_id" : null
}
```

Status code: 500

Internal Server Error: The server is able to receive the request but unable to understand the request.

```
{
  "error_code" : "APM.00000500",
  "error_msg" : "Internal Server Error",
  "trace_id" : ""
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.
400	Bad Request: Invalid request. The client should not repeat this request without modification.
401	Unauthorized: The authorization information provided by the client is incorrect or invalid.
500	Internal Server Error: The server is able to receive the request but unable to understand the request.

Error Codes

See [Error Codes](#).

4.6 Configuration Management

4.6.1 Querying the Cloud Services for Which AOM 2.0 Has Been Granted Permissions

Function

This API is used to query the cloud services for which AOM 2.0 has been granted permissions.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/aom/auth/grant

Table 4-374 Path Parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID obtained from IAM. Generally, a project ID contains 32 characters.

Request Parameters

Table 4-375 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM.
Content-Type	No	String	Content type, which is application/json.

Response Parameters

Status code: 200

OK: The request is successful.

None

Example Requests

Query the cloud services for which AOM 2.0 has been granted permissions.

```
https://{Endpoint}/v1/{project_id}/aom/auth/grant
```

Example Responses

Status code: 200

OK: The request is successful.

```
{
  "CES" : {
    "role_name" : [ "CES ReadOnlyAccess" ],
    "status" : true
  },
  "ECS" : {
    "role_name" : [ "ECS CommonOperations", "ECS ReadOnlyAccess" ],
    "status" : true
  },
  "CCE" : {
```

```
{
  "role_name" : [ "CCE FullAccess" ],
  "status" : true
},
"CCI" : {
  "role_name" : [ "CCI FullAccess" ],
  "status" : true
},
"RMS" : {
  "role_name" : [ "RMS ReadOnlyAccess" ],
  "status" : true
},
"LTS" : {
  "role_name" : [ "LTS FullAccess" ],
  "status" : true
},
"DMS" : {
  "role_name" : [ "DMS UserAccess" ],
  "status" : true
}
}
```

Status Codes

Status Code	Description
200	OK: The request is successful.

Error Codes

See [Error Codes](#).

4.6.2 Querying the ICAgent Installed on a Host

Function

This API is used to query the ICAgent installed on a cluster host or a custom host.

Calling Method

For details, see [Calling APIs](#).

URI

GET /v1/{project_id}/{cluster_id}/{namespace}/agents

Table 4-376 Path Parameters

Parameter	Mandatory	Type	Description
cluster_id	Yes	String	- Enter a cluster ID when a cluster host is queried. - Enter APM when a custom host is queried.

Parameter	Mandatory	Type	Description
namespace	Yes	String	- Enter a namespace when a cluster host is queried. - Enter APM when a custom host is queried.
project_id	Yes	String	Project ID obtained from IAM. Generally, a project ID contains 32 characters.

Request Parameters

Table 4-377 Request header parameters

Parameter	Mandatory	Type	Description
X-Auth-Token	Yes	String	User token obtained from IAM.
Content-Type	No	String	Content type, which is application/json.

Response Parameters

Status code: 200

OK: The request is successful.

None

Example Requests

Query the ICAgent installed on a host.

```
https://{Endpoint}/v1/{project_id}/{cluster_id}/{namespace}/agents
```

Example Responses

Status code: 200

OK: The request is successful.

```
[ {  
  "ip" : "10.**.**.13",  
  "agentId" : "7b***93-7**1-4**e-8**b-3d***35**84",  
  "devCloudId" : "",  
  "nodeName" : "aom-docker-75079-iul66",  
  "status" : "running",  
  "lastModified" : "1700577655170",  
  "updateTime" : "1701141177267",  
  "version" : "5.13.110.52",  
  "osType" : "linux",  
  "pinpointVersion" : "1.0.29",  
}
```

```
"pinpointStatus" : "",
"phpProbeVersion" : "",
"dotnetProbeVersion" : "",
"extendInfo" : null,
"customHostTag" : null,
"enterprise_project_id" : "d64fbcc8-c296-4a6f-8988-6850dfb08b47",
"reserved" : "{ \"cpu_used\" : \"1.5\", \"goroutine_used\" : 9507, \"mem_used\" : \"181556\", \"net_used\" : 0.1923828125 }"
}]
```

Status Codes

Status Code	Description
200	OK: The request is successful.

Error Codes

See [Error Codes](#).

5 Examples

5.1 Querying Details About a Specified Alarm Action Rule

Scenario

This section describes how to query an alarm action rule by name.

Obtaining Basic Information

Before querying the details about an alarm action rule, obtain its rule name first. You can call the API for obtaining the alarm action rule list or go to the AOM 2.0 console to obtain the rule name.

Querying Details About a Specified Alarm Action Rule

- URI format
URI format: GET `/v2/{project_id}/alert/action-rules/{rule_name}`
- Example request
GET `https://{Endpoint}/v2/{project_id}/alert/action-rules/{rule_name}`
You can obtain the value of `{aom_endpoint}` from the enterprise administrator.
- Example response

```
{
  "create_time": 1665991889597,
  "notification_template": "aom.built-in.template.zh",
  "project_id": "2xxxxxxxxxxxxxxxxxxxxxf",
  "rule_name": "1112222",
  "smn_topics": [{
    "display_name": "",
    "name": "gxxxxxt",
    "push_policy": 0,
    "status": 0,
    "topic_urn": "urn:smn:xxx:2xxxxxxxxxxxxxxxxxxxxxf:gxxxxxt"
  }],
  "time_zone": "xx/XXX",
  "type": "1",
  "update_time": 1665991889597,
```

```
} "user_name": "kxxxxxxxxt"
```

6 Permissions Policies and Supported Actions

6.1 Introduction

You can use Identity and Access Management (IAM) for fine-grained permissions management of your AOM. If your account does not need individual IAM users, you can skip this topic.

By default, new IAM users do not have any permissions assigned. You need to add a user to one or more groups, and assign permissions policies or roles to these groups. The user then inherits permissions from the groups it is a member of. This process is called authorization. After authorization, the user can perform specified operations on AOM.

You can grant users permissions by using roles and policies. Roles are provided by IAM to define service-based permissions that match users' job responsibilities. Policies define API-based permissions for operations on specific resources under certain conditions, allowing for more fine-grained, secure access control of cloud resources.

NOTE

If you want to allow or deny the access to an API, use policy-based authorization.

Your account has all the permissions required to call all APIs, but IAM users under your account must be assigned the required permissions. The required permissions are determined by the actions supported by the API. Only users with the policies allowing for those actions can call the API successfully. For example, if an IAM user wants to query metrics using an API, the user must have been granted permissions that allow the **aom:metric:get** action.

Supported Actions

AOM provides system-defined policies that can be directly used in IAM. You can also create custom policies to supplement system-defined policies for more refined access control. Operations supported by policies are specific to APIs. The following are common concepts related to policies:

- **Permissions:** statements in a policy that allow or deny certain operations
- **APIs:** REST APIs that can be called by a user who has been granted specific permissions.
- **Actions:** specific operations that are allowed or denied in a custom policy.
- **Dependencies:** actions which a specific action depends on. When allowing an action for a user, you also need to allow any existing action dependencies for that user.
- **IAM projects/Enterprise projects:** the authorization scope of a custom policy. A custom policy can be applied to IAM projects or enterprise projects or both. Policies that contain actions for both IAM and enterprise projects can be used and applied for both IAM and Enterprise Management. Policies that contain actions only for IAM projects can be used and applied to IAM only. Administrators can check whether an action supports IAM projects or enterprise projects in the action list.

AOM supports the following actions that can be defined in custom policies:

- **Alarm APIs:** actions supported by alarm APIs, such as the API for querying alarms.
- **Monitoring APIs:** actions supported by monitoring APIs, such as the API for querying metrics.
- **Prometheus monitoring APIs:** actions supported by Prometheus monitoring APIs, such as the API for querying the expression calculation result in a specified period.
- **Log APIs:** actions supported by log APIs, such as the API for querying logs.
- **Prometheus instance APIs:** actions supported by Prometheus instance APIs, such as the API for uninstalling a hosted Prometheus instance.

6.2 Actions Supported by Policy-based Authorization

6.2.1 Alarm APIs

NOTE

√: supported; x: not supported

Table 6-1 Alarm APIs

Permissi on	API	Action	IAM Project	Enterprise Project
Adding an event alarm rule	POST /v2/{project_id}/event2alarm-rule	aom:event2AlarmRule:create	√	×
Querying the event alarm rule list	GET /v2/{project_id}/event2alarm-rule	aom:event2AlarmRule:list	√	×

Permissi on	API	Action	IAM Project	Enterprise Project
Modifying an event alarm rule	PUT /v2/{project_id}/event2alarm-rule	aom:event2AlarmRule:set	√	×
Deleting an event alarm rule	DELETE /v2/{project_id}/event2alarm-rule	aom:event2AlarmRule:delete	√	×
Obtaining the sent alarm content	GET /v2/{project_id}/alarm-notified-histories	aom:alarm:list	√	×
Deleting a silence rule	DELETE /v2/{project_id}/alert/mute-rules	aom:muteRule:delete	√	√
Adding a silence rule	POST /v2/{project_id}/alert/mute-rules	aom:muteRule:create	√	√
Modifying a silence rule	PUT /v2/{project_id}/alert/mute-rules	aom:muteRule:update	√	√
Querying the silence rule list	GET /v2/{project_id}/alert/mute-rules	aom:muteRule:list	√	√
Querying an alarm action rule by name	GET /v2/{project_id}/alert/action-rules/{rule_name}	aom:actionRule:get	√	√
Adding an alarm action rule	POST /v2/{project_id}/alert/action-rules	aom:actionRule:create	√	√
Deleting an alarm action rule	DELETE /v2/{project_id}/alert/action-rules	aom:actionRule:delete	√	√

Permissi on	API	Action	IAM Project	Enterprise Project
Modifying an alarm action rule	PUT /v2/{project_id}/alert/action-rules	aom:action Rule:update	√	√
Querying the alarm rule list	GET /v2/{project_id}/alert/action-rules	aom:action Rule:list	√	√
Querying events and alarms	POST /v2/{project_id}/events	aom:alarm:l ist	√	×
Counting events and alarms	POST /v2/{project_id}/events/statistic	aom:alarm:l ist	√	×
Reporting events or alarms	PUT /v2/{project_id}/push/events	aom:alarm: put	√	×

6.2.2 Monitoring APIs

NOTE

√: supported; x: not supported

Table 6-2 Monitoring APIs

Permissi on	API	Action	IAM Project	Enterprise Project
Querying time series objects	POST /v2/{project_id}/series	aom:metric: list	√	×
Querying time series data	POST /v2/{project_id}/samples	aom:metric: list	√	×
Querying metrics	POST /v1/{project_id}/ams/metrics	aom:metric: get	√	×

Permissi on	API	Action	IAM Project	Enterprise Project
Querying monitorin g data	POST /v1/{project_id}/ams/ metricdata	aom:metric: get	√	×
Adding monitorin g data	POST /v1/{project_id}/ams/ report/metricdata	aom:metric: put	√	×
Adding or modifyin g a service discovery rule	PUT /v1/{project_id}/inv/ servicediscoveryrules	aom:discov eryRule:set	√	×
Deleting a service discovery rule	DELETE /v1/ {project_id}/inv/ servicediscoveryrules	aom:discov eryRule:del ete	√	×
Querying existing service discovery rules	GET /v1/{project_id}/inv/ servicediscoveryrules	aom:discov eryRule:list	√	×
Adding a threshold rule	POST /v2/{project_id}/ alarm-rules	aom:alarm Rule:create	√	×
Querying the threshold rule list	GET /v2/{project_id}/alarm- rules	aom:alarm Rule:get	√	×
Modifyin g a threshold rule	PUT /v2/{project_id}/alarm- rules	aom:alarm Rule:set	√	×
Deleting a threshold rule	DELETE /v2/{project_id}/ alarm-rules/{alarm_rule_id}	aom:alarm Rule:delete	√	×
Querying a threshold rule	GET /v2/{project_id}/alarm- rules/{alarm_rule_id}	aom:alarm Rule:get	√	×

Permissi on	API	Action	IAM Project	Enterprise Project
Deleting threshold rules in batches	POST /v2/{project_id}/alarm-rules/delete	aom:alarm Rule:delete	√	×

6.2.3 Prometheus Monitoring APIs

NOTE

√: supported; x: not supported

Table 6-3 Prometheus monitoring APIs

Permissi on	API	Action	IAM Project	Enterprise Project
Querying the expression calculation result in a specified period	GET /v1/{project_id}/aom/api/v1/query_range	aom:metric: list	√	√
Querying the expression calculation result in a specified period	POST /v1/{project_id}/aom/api/v1/query_range	aom:metric: list	√	√
Querying the expression calculation result at a specified time point	GET /v1/{project_id}/aom/api/v1/query	aom:metric: list	√	√

Permissi on	API	Action	IAM Project	Enterprise Project
Querying the expression calculation result at a specified time point	POST /v1/{project_id}/aom/api/v1/query	aom:metric: list	√	√
Querying tag values	GET /v1/{project_id}/aom/api/v1/label/{label_name}/values	aom:metric: list	√	√
Obtainin g the tag name list	GET /v1/{project_id}/aom/api/v1/labels	aom:metric: list	√	√
Obtainin g the tag name list	POST /v1/{project_id}/aom/api/v1/labels	aom:metric: list	√	√
Querying metadata	GET /v1/{project_id}/aom/api/v1/metadata	aom:metric: list	√	√

6.2.4 Log APIs

NOTE

√: supported; x: not supported

Table 6-4 Log APIs

Perm ission	API	Action	IAM Project	Enterprise Project
Quer ying logs	POST /v1/{project_id}/als/ action	aom:log:l ist	√	×

6.2.5 Prometheus Instance APIs

NOTE

√: supported; x: not supported

Table 6-5 Prometheus instance APIs

Permissi on	API	Action	IAM Project	Enterprise Project
Uninstalli ng a hosted Promethe us instance	DELETE /v1/{project_id}/aom/ prometheus	aom:metric: delete	√	√
Querying a Promethe us instance	GET /v1/{project_id}/aom/ prometheus	aom:metric: list	√	√
Adding a Promethe us instance	POST /v1/{project_id}/aom/ prometheus	aom:metric: put	√	√
Creating a recording rule for a Promethe us instance	POST /v1/{project_id}/ {prometheus_instance}/aom /api/v1/rules	aom:metric: put	√	√
Obtainin g the credential for calling a Promethe us instance	GET /v1/{project_id}/access- code	aom:icmgr: get	√	√
Modifyin g a Promethe us instance	PUT /v1/{project_id}/aom/ prometheus	aom:metric: set	√	√

6.2.6 Configuration Management APIs

NOTE

√: supported; x: not supported

Table 6-6 Configuration management APIs

Perm ission	API	Action	IAM Project	Enterprise Project
Quer ying the cloud servic es for which AOM 2.0 has been grant ed permi ssions	GET /v1/{project_id}/aom/ auth/grant	aom:age ncy:get	√	×
Quer ying the ICAge nt instal led on a host	GET /v1/{project_id}/ {cluster_id}/{namespace}/ agents	aom:icm gr:list	√	×

7 Appendix

7.1 Status Codes

Table 7-1 describes status codes.

Table 7-1 Status codes

Status Code	Message	Description
100	Continue	The client should continue with its request. This interim response is used to inform the client that the initial part of the requests has been received and not rejected by the server.
101	Switching Protocols	The protocol should be switched. The protocol can only be switched to a more advanced protocol. For example, a new HTTP protocol.
200	OK	The request has succeeded.
201	Created	The request has been fulfilled, resulting in the creation of a new resource.
202	Accepted	The request has been accepted, but the processing has not been completed.
203	Non-Authoritative Information	The server successfully processed the request, but is returning information that may be from another source.
204	No Content	The server has successfully processed the request, but does not return any content. The status code is returned in response to an HTTP OPTIONS request.

Status Code	Message	Description
205	Reset Content	The server has fulfilled the request, but the requester is required to reset the content.
206	Partial Content	The server has successfully processed a part of the GET request.
300	Multiple Choices	There are multiple options for the location of the requested resource. The response contains a list of resource characteristics and addresses from which a user terminal (such as a browser) can choose the most appropriate one.
301	Moved Permanently	The requested resource has been assigned with a new permanent URI. This new URI is contained in the response.
302	Found	The requested resource resides temporarily under a different URI.
303	See Other	The response to the request can be found under a different URI. It should be retrieved using a GET or POST method.
304	Not Modified	The requested resource has not been modified. When the server returns this status code, it does not return any resources.
305	Use Proxy	The requested resource must be accessed through a proxy.
306	Unused	This HTTP status code is no longer used.
400	Bad Request	The request is invalid. The client should not repeat the request without modifications.
401	Unauthorized	The authorization information provided by the client is incorrect or invalid.
402	Payment Required	This status code is reserved for future use.
403	Forbidden	The request is rejected. The server has received the request and understood it, but the server is refusing to respond to it. The client should not repeat the request without modifications.
404	Not Found	The requested resource cannot be found. The client should not repeat the request without modifications.

Status Code	Message	Description
405	Method Not Allowed	The method specified in the request is not supported by the requested resource. The client should not repeat the request without modifications.
406	Not Acceptable	The server cannot fulfill the request based on the content characteristics of the request.
407	Proxy Authentication Required	This status code is similar to 401, but indicates that the client must authenticate itself with the proxy first.
408	Request Timeout	The client does not produce a request within the time that the server was prepared to wait. The client may repeat the request without modifications later.
409	Conflict	The request cannot be processed due to a conflict. The resource that the client attempts to create already exists, or the request fails to be processed because of the update of the conflict request.
410	Gone	The requested resource cannot be found. The requested resource has been deleted permanently.
411	Length Required	The server refuses to process the request without a defined Content-Length.
412	Precondition Failed	The server does not meet one of the preconditions that the requester puts on the request.
413	Request Entity Too Large	The server refuses to process a request because the request entity is too large. The server may disable the connection to prevent the client from sending requests consecutively. If the server cannot process the request temporarily, the response will contain a Retry-After field.
414	Request-URI Too Long	The request URI is too long for the server to process.
415	Unsupported Media Type	The server cannot process the media format in the request.
416	Requested Range Not Satisfiable	The requested range is invalid.
417	Expectation Failed	The server fails to meet the requirements of the Expect request-header field.

Status Code	Message	Description
422	Unprocessable Entity	The request is well-formed but is unable to be processed due to semantic errors.
429	Too Many Requests	The client sends excessive requests to the server within a given time (exceeding the limit on the access frequency of the client), or the server receives excessive requests within a given time (beyond its processing capability). In this case, the client should repeat requests after the time specified in the Retry-After header of the response expires.
500	Internal Server Error	The server is able to receive the request but unable to understand the request.
501	Not Implemented	The server does not support the function required to fulfill the request.
502	Bad Gateway	The server acting as a gateway or proxy receives an invalid response from a remote server.
503	Service Unavailable	The requested service is invalid. The client should not repeat the request without modifications.
504	Server Timeout	The request cannot be fulfilled within a given time. This status code is returned to the client only when the timeout parameter is specified in the request.
505	HTTP Version Not Supported	The server does not support the HTTP protocol version used in the request.

7.2 Error Codes

Status Code	Error Code	Message	Description	Solution
200	SVCSTG.INV.2000000	null	The request is properly executed.	No action is required after the request is executed.
200	SVCSTG_AMS_2000000	null	The request is properly executed.	No action is required after the request is executed.

Status Code	Error Code	Message	Description	Solution
300	AOM.08001300	The maximum number of rules has been reached.	The maximum number of rules has been reached.	Delete unneeded rules and try again.
400	AOM.0400	Bad request.	Incorrect request parameter.	Check whether the parameter meets requirements.
400	AOM.02001101	Invalid rule name.	Invalid rule name.	Check whether the parameter meets requirements.
400	AOM.02001102	The rule name already exists.	The rule name already exists.	Check whether the parameter meets requirements.
400	AOM.02001103	Invalid description.	Invalid description.	Check whether the parameter meets requirements.
400	AOM.02001104	Invalid threshold.	Invalid threshold.	Check whether the parameter meets requirements.
400	AOM.02001105	Invalid period.	Invalid period.	Check whether the parameter meets requirements.
400	AOM.02001106	Invalid email.	Invalid email.	Check whether the parameter meets requirements.
400	AOM.02001107	The maximum number of rules has been reached.	The maximum number of rules has been reached.	Check whether the parameter meets requirements.
400	AOM.02001108	Invalid time range.	Invalid time range.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02001109	Threshold rule xxx does not exist.	Threshold rule xxx does not exist.	Check whether the parameter meets requirements.
400	AOM.02001110	Invalid limit.	Invalid limit.	Check whether the parameter meets requirements.
400	AOM.02001111	Invalid offset.	Invalid offset.	Check whether the parameter meets requirements.
400	AOM.02001112	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.02001115	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.02001118	Invalid number of consecutive periods.	Invalid number of consecutive periods.	Check whether the parameter meets requirements.
400	AOM.02001119	Invalid statistic.	Invalid statistic.	Check whether the parameter meets requirements.
400	AOM.02001120	Invalid comparison operator.	Invalid comparison operator.	Check whether the parameter meets requirements.
400	AOM.02001121	The rule does not exist.	The rule does not exist.	Check whether the parameter meets requirements.
400	AOM.02001400	Bad request.	Bad request.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02002101	Invalid rule.	Invalid rule.	Check whether the parameter meets requirements.
400	AOM.02002102	The rule name already exists.	The rule name already exists.	Check whether the parameter meets requirements.
400	AOM.02002103	Invalid description.	Invalid description.	Check whether the parameter meets requirements.
400	AOM.02002104	Invalid threshold.	Invalid threshold.	Check whether the parameter meets requirements.
400	AOM.02002105	Invalid period.	Invalid period.	Check whether the parameter meets requirements.
400	AOM.02002106	Invalid email.	Invalid email.	Check whether the parameter meets requirements.
400	AOM.02002107	The maximum number of rules has been reached.	The maximum number of rules has been reached.	Check whether the parameter meets requirements.
400	AOM.02002108	Invalid time range.	Invalid time range.	Check whether the parameter meets requirements.
400	AOM.02002109	Invalid project ID.	Invalid project ID.	Check whether the parameter meets requirements.
400	AOM.02002110	Invalid limit.	Invalid limit.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.0200211 1	Invalid offset.	Invalid offset.	Check whether the parameter meets requirements.
400	AOM.0200211 2	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.0200211 5	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.0200211 8	Invalid number of consecutive periods.	Invalid number of consecutive periods.	Check whether the parameter meets requirements.
400	AOM.0200211 9	Invalid statistic.	Invalid statistic.	Check whether the parameter meets requirements.
400	AOM.0200212 0	Invalid comparison operator.	Invalid comparison operator.	Check whether the parameter meets requirements.
400	AOM.0200212 1	The rule does not exist.	The rule does not exist.	Check whether the parameter meets requirements.
400	AOM.0200240 0	Bad request.	Bad request.	Check whether the parameter meets requirements.
400	AOM.0200310 1	Invalid rule.	Invalid rule.	Check whether the parameter meets requirements.
400	AOM.0200310 2	The rule name already exists.	The rule name already exists.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02003103	Invalid description.	Invalid description.	Check whether the parameter meets requirements.
400	AOM.02003104	Invalid threshold.	Invalid threshold.	Check whether the parameter meets requirements.
400	AOM.02003105	Invalid period.	Invalid period.	Check whether the parameter meets requirements.
400	AOM.02003106	Invalid email.	Invalid email.	Check whether the parameter meets requirements.
400	AOM.02003107	The maximum number of rules has been reached.	The maximum number of rules has been reached.	Check whether the parameter meets requirements.
400	AOM.02003108	Invalid time range.	Invalid time range.	Check whether the parameter meets requirements.
400	AOM.02003109	Invalid project ID.	Invalid project ID.	Check whether the parameter meets requirements.
400	AOM.02003110	Invalid limit.	Invalid limit.	Check whether the parameter meets requirements.
400	AOM.02003111	Invalid offset.	Invalid offset.	Check whether the parameter meets requirements.
400	AOM.02003112	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02003115	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.02003118	Invalid number of consecutive periods.	Invalid number of consecutive periods.	Check whether the parameter meets requirements.
400	AOM.02003119	Invalid statistic.	Invalid statistic.	Check whether the parameter meets requirements.
400	AOM.02003120	Invalid comparison operator.	Invalid comparison operator.	Check whether the parameter meets requirements.
400	AOM.02003121	The rule does not exist.	The rule does not exist.	Check whether the parameter meets requirements.
400	AOM.02003400	Bad request.	Bad request.	Check whether the parameter meets requirements.
400	AOM.02004101	Invalid rule.	Invalid rule.	Check whether the parameter meets requirements.
400	AOM.02004102	The rule name already exists.	The rule name already exists.	Check whether the parameter meets requirements.
400	AOM.02004103	Invalid description.	Invalid description.	Check whether the parameter meets requirements.
400	AOM.02004104	Invalid threshold.	Invalid threshold.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02004105	Invalid period.	Invalid period.	Check whether the parameter meets requirements.
400	AOM.02004106	Invalid email.	Invalid email.	Check whether the parameter meets requirements.
400	AOM.02004107	The maximum number of rules has been reached.	The maximum number of rules has been reached.	Check whether the parameter meets requirements.
400	AOM.02004108	Invalid time range.	Invalid time range.	Check whether the parameter meets requirements.
400	AOM.02004109	Invalid project ID.	Invalid project ID.	Check whether the parameter meets requirements.
400	AOM.02004110	Invalid limit.	Invalid limit.	Check whether the parameter meets requirements.
400	AOM.02004111	Invalid offset.	Invalid offset.	Check whether the parameter meets requirements.
400	AOM.02004112	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.02004115	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.02004118	Invalid number of consecutive periods.	Invalid number of consecutive periods.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02004119	Invalid statistic.	Invalid statistic.	Check whether the parameter meets requirements.
400	AOM.02004120	Invalid comparison operator.	Invalid comparison operator.	Check whether the parameter meets requirements.
400	AOM.02004121	The rule does not exist.	The rule does not exist.	Check whether the parameter meets requirements.
400	AOM.02004400	Bad request.	Bad request.	Check whether the parameter meets requirements.
400	AOM.02005101	Invalid rule.	Invalid rule.	Check whether the parameter meets requirements.
400	AOM.02005102	The rule name already exists.	The rule name already exists.	Check whether the parameter meets requirements.
400	AOM.02005103	Invalid description.	Invalid description.	Check whether the parameter meets requirements.
400	AOM.02005104	Invalid threshold.	Invalid threshold.	Check whether the parameter meets requirements.
400	AOM.02005105	Invalid period.	Invalid period.	Check whether the parameter meets requirements.
400	AOM.02005106	Invalid email.	Invalid email.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02005107	The maximum number of rules has been reached.	The maximum number of rules has been reached.	Check whether the parameter meets requirements.
400	AOM.02005108	Invalid time range.	Invalid time range.	Check whether the parameter meets requirements.
400	AOM.02005109	Invalid project ID.	Invalid project ID.	Check whether the parameter meets requirements.
400	AOM.02005110	Invalid limit.	Invalid limit.	Check whether the parameter meets requirements.
400	AOM.02005111	Invalid offset.	Invalid offset.	Check whether the parameter meets requirements.
400	AOM.02005112	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.02005115	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.02005118	Invalid number of consecutive periods.	Invalid number of consecutive periods.	Check whether the parameter meets requirements.
400	AOM.02005119	Invalid statistic.	Invalid statistic.	Check whether the parameter meets requirements.
400	AOM.02005120	Invalid comparison operator.	Invalid comparison operator.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02005121	The rule does not exist.	The rule does not exist.	Check whether the parameter meets requirements.
400	AOM.02005400	Bad request.	Bad request.	Check whether the parameter meets requirements.
400	AOM.02021011	The number of alarm rules exceeds the limit.	The number of alarm rules exceeds the limit.	Delete unnecessary alarm rules.
400	AOM.02017001	Invalid parameters.	Invalid parameters.	Check whether the parameter meets requirements.
400	AOM.02025026	Input alarmParams is invalid: rule name or type is empty.	The rule name or type cannot be empty.	Check whether the parameter meets requirements.
400	AOM.04007101	Invalid namespace.	Invalid namespace.	Check whether the parameter meets requirements.
400	AOM.04007102	Invalid inventory ID.	Invalid inventory ID.	Check whether the parameter meets requirements.
400	AOM.04007103	The project ID cannot be left blank.	The project ID cannot be left blank.	Check whether the parameter meets requirements.
400	AOM.04007104	Invalid type.	Invalid type.	Check whether the parameter meets requirements.
400	AOM.04007105	Invalid limit.	Invalid limit.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.04007106	Invalid offset.	Invalid offset.	Check whether the parameter meets requirements.
400	AOM.04007107	Invalid parent inventory ID.	Invalid parent inventory ID.	Check whether the parameter meets requirements.
400	AOM.04007108	Invalid type and relation.	Invalid type and relation.	Check whether the parameter meets requirements.
400	AOM.04007109	Invalid metric name.	Invalid metric name.	Check whether the parameter meets requirements.
400	AOM.04007110	Invalid relation.	Invalid relation.	Check whether the parameter meets requirements.
400	AOM.04007111	The type and relation cannot be left blank.	The type and relation cannot be left blank.	Check whether the parameter meets requirements.
400	AOM.04007112	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.04007115	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.04007118	Invalid number of consecutive periods.	Invalid number of consecutive periods.	Check whether the parameter meets requirements.
400	AOM.04007119	Invalid statistic.	Invalid statistic.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.04007120	Invalid comparison operator.	Invalid comparison operator.	Check whether the parameter meets requirements.
400	AOM.04007400	Bad request.	Bad request.	Check whether the parameter meets requirements.
400	AOM.04008101	Invalid namespace.	Invalid namespace.	Check whether the parameter meets requirements.
400	AOM.04008102	Invalid inventory ID.	Invalid inventory ID.	Check whether the parameter meets requirements.
400	AOM.04008103	The project ID cannot be left blank.	The project ID cannot be left blank.	Check whether the parameter meets requirements.
400	AOM.04008104	Invalid type.	Invalid type.	Check whether the parameter meets requirements.
400	AOM.04008105	Invalid limit.	Invalid limit.	Check whether the parameter meets requirements.
400	AOM.04008106	Invalid offset.	Invalid offset.	Check whether the parameter meets requirements.
400	AOM.04008107	Invalid parent inventory ID.	Invalid parent inventory ID.	Check whether the parameter meets requirements.
400	AOM.04008108	Invalid type and relation.	Invalid type and relation.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.04008109	Invalid metric name.	Invalid metric name.	Check whether the parameter meets requirements.
400	AOM.04008110	Invalid relation.	Invalid relation.	Check whether the parameter meets requirements.
400	AOM.04008111	The type and relation cannot be left blank.	The type and relation cannot be left blank.	Check whether the parameter meets requirements.
400	AOM.04008112	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.04008115	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	AOM.04008118	Invalid number of consecutive periods.	Invalid number of consecutive periods.	Check whether the parameter meets requirements.
400	AOM.04008119	Invalid statistic.	Invalid statistic.	Check whether the parameter meets requirements.
400	AOM.04008120	Invalid comparison operator.	Invalid comparison operator.	Check whether the parameter meets requirements.
400	AOM.04008400	Bad request.	Bad request.	Check whether the parameter meets requirements.
400	AOM.07001400	Invalid parameter.	Invalid parameter.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.11015003	The request body is empty.	The request body is empty.	Check whether the parameter meets requirements.
400	AOM.11015004	Parse request parameter failed.	Parse request parameter failed.	Check whether the parameter meets requirements.
400	AOM.11015005	Too many Prometheus instances.	Too many Prometheus instances.	Check whether the parameter meets requirements.
400	AOM.11017013	The Prometheus instance ID is empty.	The Prometheus instance ID is empty.	Check whether the parameter meets requirements.
400	AOM.11017014	Prometheus instance not found.	Prometheus instance not found.	Check whether the parameter meets requirements.
400	AOM.11017015	Invalid Prometheus instance name	Invalid Prometheus instance name.	Check whether the parameter meets requirements.
400	AOM.11017016	Invalid Prometheus instance ID.	Invalid Prometheus instance ID.	Check whether the parameter meets requirements.
400	AOM.11017017	Invalid Prometheus instance type.	Invalid Prometheus instance type.	Check whether the parameter meets requirements.
400	AOM.11017018	Invalid Prometheus instance status.	Invalid Prometheus instance status.	Check whether the parameter meets requirements.
400	AOM.11017019	Invalid application name.	Invalid application name.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.4001021	Duplicate group name.	Duplicate group name.	Check whether the parameter meets requirements.
400	AOM.4001023	Group name must be set.	The group name cannot be empty.	Check whether the parameter meets requirements.
400	AOM.4001024	The recording field cannot be empty.	The recording field cannot be empty.	Check whether the parameter meets requirements.
400	AOM.4001025	The expression cannot be empty.	The expression cannot be empty.	Check whether the parameter meets requirements.
400	AOM.4001026	Recording rule format invalid.	Invalid recording rule format.	Check whether the parameter meets requirements.
400	AOM.4001028	The requested content exceeds the maximum.	The request is too long.	Check whether the parameter meets requirements.
400	AOM.05001002	The dashboard type is empty.	The dashboard type is empty.	Check whether the parameter meets requirements.
400	SVCSTG.INV.4000115	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000001	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000002	Invalid namespace.	Invalid namespace.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	SVCSTG_AMS_4000003	Dimensions cannot be left blank.	Dimensions cannot be left blank.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000005	Invalid metric data type.	Invalid metric data type.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000006	The metric data value cannot be left blank.	The metric data cannot be left blank.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000007	Invalid dimension.	Invalid dimension.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000008	The request exceeds 40 KB.	The request cannot exceed 40 KB.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000009	The number of elements in the dimension array exceeds the allowed limit.	Too many elements in the dimension array.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000010	Invalid collection time.	Invalid collection time.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000101	The namespace or alarm name is invalid, or the project ID is left blank.	The namespace or alarm name is invalid, or the project ID is left blank.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000102	The inventory ID is invalid, the metric data value is left blank, or the threshold rule name already exists.	The inventory ID is invalid, the metric data value is left blank, or the threshold rule name already exists.	Check whether the parameter meets requirements, or change the rule name and try again.

Status Code	Error Code	Message	Description	Solution
400	SVCSTG_AMS_4000103	Invalid range or alarm description.	Invalid range or alarm description.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000104	Invalid statistics or alarm threshold.	Invalid statistics or alarm threshold.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000105	Invalid limit, metric, or alarm period.	Invalid limit, metric, or alarm period.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000106	Invalid offset, time range, or email.	Invalid offset, time range, or email.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000107	The number of data points in a time range exceeds 1440 or the maximum number of threshold rules has been reached.	The number of data points in a time range exceeds 1440 or the maximum number of threshold rules has been reached.	Check whether the parameter meets the requirements or contact technical support.
400	SVCSTG_AMS_4000108	Invalid time range.	Invalid time range.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000109	Invalid metric name or project ID.	Invalid metric name or project ID.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000110	Invalid filled value or limit.	Invalid filled value or limit.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000111	Invalid offset.	Invalid offset.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	SVCSTG_AMS_4000115	Invalid request parameter.	Invalid request parameter.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000118	Invalid number of consecutive periods.	Invalid number of consecutive periods.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000119	Invalid statistic.	Invalid statistic.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000120	Invalid comparison operator.	Invalid comparison operator.	Check whether the parameter meets requirements.
400	SVCSTG_AMS_4000121	The rule does not exist.	The rule does not exist.	Check whether the threshold rule exists.
400	SVCSTG_AMS_4001019	Invalid MetricData parameter.	Invalid MetricData parameter.	Check whether the parameter meets requirements.
400	AOM.02006404	The rule to be deleted does not exist.	The rule does not exist.	Check whether the threshold rule exists.
400	AOM.02005404	The rule does not exist.	The rule does not exist.	Check whether the threshold rule exists.
400	AOM.02004404	The rule does not exist.	The rule does not exist.	Check whether the threshold rule exists.
400	AOM.02004001	Incorrect request parameter.	Incorrect request parameter.	Check whether the parameter meets requirements.
400	AOM.02005001	Incorrect request parameter.	Incorrect request parameter.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.02003001	Incorrect request parameter.	Incorrect request parameter.	Check whether the parameter meets requirements.
400	AOM.02021006	The action rule does not exist.	The action rule does not exist.	Check whether the parameter meets requirements.
400	AOM.02011400	Incorrect request parameter.	Incorrect request parameter.	Check whether the parameter meets requirements.
400	AOM.02013125	Failed to send data to Kafka.	Failed to send data to Kafka.	Contact technical support.
400	AOM.02024016	The alarm rule is empty.	The alarm rule is empty.	Check whether the parameter meets requirements.
400	AOM.08015002	The silence rule name does not exist.	The silence rule name does not exist.	Check whether the parameter meets requirements.
400	AOM.08011001	The silence rule name already exists.	The silence rule name already exists.	Check whether the parameter meets requirements.
400	AOM.08012003	Invalid request parameter.	Incorrect request body parameter.	Check whether the parameter meets requirements.
400	AOM.08018012	The alarm action rule already exists.	The alarm action rule already exists.	Check whether the parameter meets requirements.
400	AOM.08020006	The alarm action rule does not exist.	The alarm action rule does not exist.	Check whether the parameter meets requirements.
400	AOM.08019006	The alarm action rule does not exist.	The alarm action rule does not exist.	Check whether the parameter meets requirements.

Status Code	Error Code	Message	Description	Solution
400	AOM.08032002	Invalid request body.	Invalid request body.	Check whether the parameter meets requirements.
400	AOM.08033002	Invalid request body.	Invalid request body.	Check whether the parameter meets requirements.
400	AOM.020015VCSTG_AMS_4000115	Invalid request parameter.	Incorrect request parameter.	Check whether the parameter meets requirements.
400	AOM.020035VCSTG_AMS_4000123	The rule does not exist.	The rule does not exist.	Check whether the parameter meets requirements.
400	AOM.02001102	The threshold rule already exists.	The threshold rule already exists.	Check whether the parameter meets requirements.
400	AOM.32000003	Invalid parameter.	Invalid parameter.	Enter a valid parameter.
400	AOM.32000005	The object does not exist.	The object does not exist.	Enter a valid parameter.
401	AOM.0401	Unauthorized.	Incorrect authentication information.	Check the authentication information carried in the request.
401	AOM.02001401	Unauthorized.	Unauthorized.	Contact technical support.
401	AOM.02002401	Unauthorized.	Unauthorized.	Contact technical support.
401	AOM.02003401	Unauthorized.	Unauthorized.	Contact technical support.
401	AOM.02004401	Unauthorized.	Unauthorized.	Contact technical support.
401	AOM.02005401	Unauthorized.	Unauthorized.	Contact technical support.

Status Code	Error Code	Message	Description	Solution
401	AOM.04007401	Request unauthorized.	Request unauthorized.	Contact technical support.
401	AOM.04008401	Request unauthorized.	Request unauthorized.	Contact technical support.
401	AOM.05401000	Authentication failed.	Authentication failed.	Check the authentication information carried in the request.
401	SVCSTG.AMS.2000051	Authentication failed.	Authentication failed.	Check the authentication information carried in the request.
401	SVCSTG.AMS.4010000	Authentication failed.	Authentication failed.	Check the authentication information carried in the request.
403	AOM.0403	Forbidden.	Insufficient permissions.	Check your permissions.
403	AOM.02001403	Forbidden.	Forbidden.	Contact technical support.
403	AOM.02002403	Forbidden.	Forbidden.	Contact technical support.
403	AOM.02003403	Forbidden.	Forbidden.	Contact technical support.
403	AOM.02004403	Forbidden.	Forbidden.	Contact technical support.
403	AOM.02005403	Forbidden.	Forbidden.	Contact technical support.
403	AOM.04007403	Request forbidden.	Request forbidden.	Contact technical support.
403	AOM.04008403	Request forbidden.	Request forbidden.	Contact technical support.
403	AOM.07001403	Insufficient permissions.	Insufficient permissions.	Obtain required permissions.
403	SVCSTG.INV.4030000	Insufficient permissions.	Insufficient permissions.	Use an authorized account.

Status Code	Error Code	Message	Description	Solution
403	AOM.32000002	No permission.	No permission.	Contact technical support.
404	SVCSTG.INV.4040000	Inventory does not exists.	The resource does not exist.	Check whether the resource exists.
429	AOM.07001429	The traffic has been restricted.	The traffic has been restricted.	Send fewer API call requests.
429	AOM.08001429	Too many requests.	Too many requests.	Check whether the parameter meets requirements.
500	AOM.0500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.12000002	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02001500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02001501	The Cassandra session is null.	The Cassandra session is null.	Contact technical support.
500	AOM.02001502	The Cassandra execution is abnormal.	The Cassandra execution is abnormal.	Contact technical support.
500	AOM.02002500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02002501	The Cassandra session is null.	The Cassandra session is null.	Contact technical support.
500	AOM.02002502	The Cassandra execution is abnormal.	The Cassandra execution is abnormal.	Contact technical support.
500	AOM.02003500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02003501	The Cassandra session is null.	The Cassandra session is null.	Contact technical support.

Status Code	Error Code	Message	Description	Solution
500	AOM.02003502	The Cassandra execution is abnormal.	The Cassandra execution is abnormal.	Contact technical support.
500	AOM.02004500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02004501	The Cassandra session is null.	The Cassandra session is null.	Contact technical support.
500	AOM.02004502	The Cassandra execution is abnormal.	The Cassandra execution is abnormal.	Contact technical support.
500	AOM.02005500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02005501	The Cassandra session is null.	The Cassandra session is null.	Contact technical support.
500	AOM.02005502	The Cassandra execution is abnormal.	The Cassandra execution is abnormal.	Contact technical support.
500	AOM.02021500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02022500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02024500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.04007500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.04007501	The Cassandra session is null.	The Cassandra session is null.	Contact technical support.
500	AOM.04007502	The Cassandra execution is abnormal.	The Cassandra execution is abnormal.	Contact technical support.
500	AOM.04008500	Internal server error.	Internal server error.	Contact technical support.

Status Code	Error Code	Message	Description	Solution
500	AOM.04008501	The Cassandra session is null.	The Cassandra session is null.	Contact technical support.
500	AOM.04008502	The Cassandra execution is abnormal.	The Cassandra execution is abnormal.	Contact technical support.
500	AOM.11014001	Internal server error.	Internal server error.	Contact technical support.
500	AOM.11014002	Incorrect conversion result.	Incorrect conversion result.	Contact technical support.
500	AOM.05001005	Internal server error.	Internal server error.	Contact technical support.
500	AOM.5001010	Internal server error.	Internal server error.	Contact technical support.
500	AOM.5001019	The rule already exists.	The rule already exists.	Contact technical support.
500	APM.00000500	Internal Server Error	Internal server error.	Contact technical support.
500	AOM.08001500	Internal Server Error	Internal server error.	Contact technical support.
500	AOM.08020500	Internal server error.	Internal server error.	Contact technical support.
500	AOM.02001500	Internal server error.	Internal server error.	Contact technical support.
500	SVCSTG.INV.5000001	The Elasticsearch session is null.	The Elasticsearch session is null.	Contact technical support.
500	SVCSTG.INV.5000002	The Elasticsearch execution is abnormal.	The Elasticsearch execution is abnormal.	Contact technical support.
500	SVCSTG.INV.5000003	The ICMGR invocation is abnormal.	The ICMGR invocation is abnormal.	Contact technical support.
500	SVCSTG.INV.5000006	The rule name already exists.	The rule name already exists.	Use another name.

Status Code	Error Code	Message	Description	Solution
500	SVCSTG.INV.5000007	The maximum number of rules has been reached.	The maximum number of rules has been reached.	Delete unnecessary rules and add new ones.
500	SVCSTG_AMS_5000000	Internal server error.	Internal server error.	Contact technical support.
500	AOM.32000000	Internal service error.	An internal error occurred.	Contact technical support.
500	AOM.32000013	The Agent ID does not exist.	The Agent ID does not exist.	Contact technical support.
500	AOM.32000016	Database operation failed.	Database operation failed.	Contact technical support.
500	AOM.32000023	The Agent is abnormal.	The Agent is abnormal.	Contact technical support.
503	AOM.0503	Server unavailable.	Server unavailable.	Contact technical support.
503	AOM.02001503	Server unavailable.	Server unavailable.	Contact technical support.
503	AOM.02002503	Server unavailable.	Server unavailable.	Contact technical support.
503	AOM.02003503	Server unavailable.	Server unavailable.	Contact technical support.
503	AOM.02004503	Server unavailable.	Server unavailable.	Contact technical support.
503	AOM.02005503	Server unavailable.	Server unavailable.	Contact technical support.
503	AOM.04007503	Server unavailable.	Server unavailable.	Contact technical support.
503	AOM.04008503	Server unavailable.	Server unavailable.	Contact technical support.
503	AOM.07001503	Service error.	Service error.	Check whether the backend service is normal.

Status Code	Error Code	Message	Description	Solution
503	SVCSTG_AMS_5030001	The Cassandra session is null.	The Cassandra session is null.	Contact technical support.
503	SVCSTG_AMS_5030002	The Cassandra execution is abnormal.	The Cassandra execution is abnormal.	Contact technical support.

7.3 Obtaining an Account ID, Project ID, and Enterprise Project ID

Obtaining an Account ID and Project ID from the Console

When making API calls, you may need to enter the username, user ID, project name, and project ID in some URIs. You can obtain them on the **My Credentials** page.

- Step 1** Log in to the management console.
- Step 2** Hover over the username in the upper right corner, and choose **My Credentials**.
- Step 3** On the **API Credentials** page, view the username, account ID, project name, and project ID.

----End

Obtaining an Enterprise Project ID from the Console

When making API calls, you may need to enter an enterprise project ID in some URIs. You can obtain it on the **Project Management** page.

- Step 1** Log in to the Enterprise Project Management Service console.
- Step 2** Access the **Project Management** page.
- Step 3** To obtain the enterprise project ID, click the name of the target enterprise project to go to the details page.

----End

7.4 Common Request Headers

Table 7-2 Common request headers

Name	Description	Mandatory	Example
X-Auth-Token	User token.	Yes for token-based authentication	-
Content-Type	Content type. Enter application/json; charset=utf-8 .	Yes	application/json; charset=utf8
x-sdk-date	Time to send a request. The format is <i>YYYYMMDD'T'HHMMSS'Z'</i> . GMT time is used.	Yes for AK/SK-based authentication	20160629T101459Z
Authorization	Signature authentication information. It can be obtained from the result of request signing.	Yes for AK/SK-based authentication	-
Host	Request server information, which is obtained from the URL of a service API. The value is hostname[:port] . If no port is specified, the default port will be used. For HTTPS, port 443 is used by default.	Yes for AK/SK-based authentication	-

7.5 Common Response Headers

A response usually contains the following headers:

Table 7-3 Response headers

Name	Description	Example
Date	(Standard HTTP header) Time when a message is sent. This field complies with RFC822 definitions.	Mon, 12 Nov 2007 15:55:01 GMT
Server	(Standard HTTP header) Software that a server uses to process the request.	Apache
Content-Length	(Standard HTTP header) Length of the response body, which is represented by a decimal number and stored in bytes.	xxx
Content-Type	(Standard HTTP header) Media type of the response body sent to the recipient.	application/json

8 Change History

Table 8-1 Change history

Released On	Description
2025-06-30	Added the following content: - Added APIs to Alarm APIs. - Added APIs to Prometheus Monitoring APIs. - Added APIs to Prometheus Instance APIs. - Added APIs to Configuration Management APIs. - Added content to Error Codes.
2024-06-30	- Added the following content: - Added APIs to Alarm APIs. - Added APIs to Monitoring APIs. - Optimized the description of monitoring APIs and the description of error codes. - Deleted the description of auto scaling APIs.
2022-08-16	Optimized the description of error codes .
2020-03-30	This issue is the first official release.