

Data Warehouse Service

API Reference

Issue 01
Date 2022-06-16



Copyright © Huawei Technologies Co., Ltd. 2022. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Contents

1 Before You Start.....	1
1.1 Overview.....	1
1.2 API Calling.....	1
1.3 Endpoints.....	1
1.4 Basic Concepts.....	1
2 API Overview.....	3
3 Calling APIs.....	4
3.1 Making an API Request.....	4
3.2 Authentication.....	8
3.3 Response.....	9
4 Getting Started.....	11
5 API Description.....	17
5.1 Cluster Management APIs.....	17
5.1.1 Creating a Cluster.....	17
5.1.2 Querying the Cluster List.....	21
5.1.3 Querying Cluster Details.....	27
5.1.4 Querying the Supported Node Types.....	36
5.1.5 Deleting a Cluster.....	38
5.1.6 Restarting a Cluster.....	40
5.1.7 Scaling Out Clusters.....	41
5.1.8 Resetting a Password.....	43
5.2 Snapshot Management APIs.....	45
5.2.1 Creating a Snapshot.....	45
5.2.2 Querying the Snapshot List.....	47
5.2.3 Querying Snapshot Details.....	50
5.2.4 Deleting a Manual Snapshot.....	52
5.2.5 Restoring a Cluster.....	53
6 Permissions Policies and Supported Actions.....	58
7 Appendix.....	61
7.1 Status Code.....	61
7.2 Error Code.....	64

7.3 Creating a VPC.....	75
7.4 Obtaining a Project ID.....	76
7.5 Obtaining an Account ID.....	76
7.6 Obtaining the Cluster ID.....	77
8 Change History.....	78

1

Before You Start

1.1 Overview

Welcome to GaussDB(DWS). GaussDB(DWS) is a fully-managed and enterprise-level cloud data warehouse service. It is O&M-free, compatible with the PostgreSQL ecosystem, and supports online cluster scale-out and efficient loading of multiple data sources. GaussDB(DWS) helps enterprises efficiently analyze and monetize massive data online.

This document describes how to use application programming interfaces (APIs) to create, query, and delete GaussDB(DWS) clusters and snapshots. For details about all supported operations, see [API Overview](#).

Before calling an API, get familiar with related concepts of GaussDB(DWS). For details, see "Service Overview" in the *Data Warehouse Service User Guide*.

1.2 API Calling

GaussDB(DWS) supports representational state transfer (REST) APIs, allowing you to call APIs using HTTPS. For details, see [Calling APIs](#).

1.3 Endpoints

An endpoint is the **request address** for calling an API. Endpoints vary depending on services and regions. For the endpoints of all services, see [Regions and Endpoints](#).


1.4 Basic Concepts

- Account

This account has full access to all cloud services and resources associated with it. It can be used to reset user passwords and grant user permissions. The domain should not be used directly to perform routine management. For security purposes, create users and grant them permissions for routine management.

- **Users**
An IAM user is created using an account for cloud services. Each IAM user has its own identity credentials (password and access keys).
The account name, username, and password are required for API authentication.
- **Region**
A region is a geographic area in which cloud resources are deployed.
Availability zones (AZs) in the same region can communicate with each other over an intranet, while AZs in different regions are isolated from each other.
Deploying cloud resources in different regions can better suit certain user requirements or comply with local laws or regulations.
- **AZ**
An AZ contains one or more physical data centers. Each AZ has independent power and network devices. Within an AZ, computing, network, storage, and other resources are logically divided into multiple clusters. AZs within a region are interconnected using high-speed optical fibers to support cross-AZ high-availability systems.
- **Item**
Projects group and isolate resources (including compute, storage, and network resources) across physical regions. A default project is provided for each service region, and subprojects can be created under each default project.
Users can be granted permissions to access all resources in a specific project.
For more refined access control, create subprojects under a project and apply for resources in the subprojects. IAM users can then be assigned permissions to access only specific resources in the subprojects.

Figure 1-1 Project isolating model

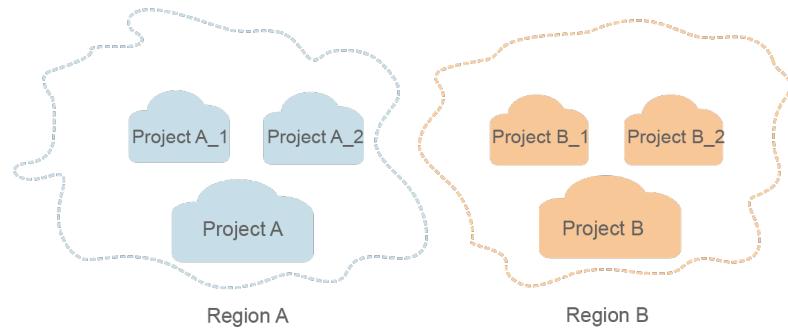

- **Enterprise project**
Enterprise projects group and manage resources across regions. Resources in enterprise projects are logically isolated from each other. An enterprise project can contain resources of multiple regions, and resources can be added to or removed from enterprise projects.

2 API Overview

You can use the following GaussDB(DWS) functions with the APIs.

Function	API	Description
Cluster management	Creating a Cluster	Creates a cluster.
	Querying the Cluster List	Queries and displays the cluster list.
	Querying Cluster Details	Queries cluster details.
	Querying the Supported Node Types	Queries all node types supported by GaussDB(DWS).
	Deleting a Cluster	Deletes a cluster.
	Restarting a Cluster	Restarts a cluster.
	Scaling Out Clusters	Scales out a cluster.
	Resetting a Password	Resets the cluster administrator password.
Snapshot management	Creating a Snapshot	Creates snapshots for a specified cluster.
	Querying the Snapshot List	Queries the snapshot list.
	Querying Snapshot Details	Queries the snapshot details using the snapshot ID.
	Deleting a Manual Snapshot	Deletes a snapshot.
	Restoring a Cluster	Restores a cluster using a snapshot.

3 Calling APIs

3.1 Making an API Request

This section describes the structure of a REST API request, and describes how to call an API by obtaining a user token of the IAM service. The obtained token can then be used to authenticate the calling of other APIs.

Request URI

A request URI is in the following format:

{URI-scheme}://{Endpoint}/{resource-path}?{query-string}

Although a request URI is included in the request header, most programming languages or frameworks require the request URI to be transmitted separately.

Table 3-1 URI parameter description

Parameter	Description
URI-scheme	Protocol used to transmit requests. All APIs use HTTPS.
Endpoint	Domain name or IP address of the server bearing the REST service. The endpoint varies between services in different regions. It can be obtained from Regions and Endpoints .
resource-path	Access path of an API for performing a specified operation. Obtain the path from the URI of an API. For example, the resource-path of the API used to obtain a user token is /v3/auth/tokens .
query-string	Query parameter, which is optional. Ensure that a question mark (?) is included before each query parameter that is in the format of " <i>Parameter name=Parameter value</i> ". For example, ?limit=10 indicates that a maximum of 10 data records will be displayed.

 NOTE

To simplify the URI display in this document, each API is provided only with a **resource-path** and a request method. The **URI-scheme** of all APIs is **HTTPS**, and the endpoints of all APIs in the same region are identical.

Request Methods

The HTTP protocol defines the following request methods that can be used to send a request to the server:

Table 3-2 HTTP methods

Method	Description
GET	Requests the server to return specified resources.
PUT	Requests the server to update specified resources.
POST	Requests the server to add resources or perform special operations.
DELETE	Requests the server to delete specified resources, for example, an object.
HEAD	Same as GET except that the server must return only the response header.
PATCH	Requests the server to update partial content of a specified resource. If the resource does not exist, a new resource will be created.

For example, in the case of the API used to obtain a user token, the request method is POST. The request is as follows:

```
POST https://{{endpoint}}/v3/auth/tokens
```

Request Header

You can also add additional header fields to a request, such as the fields required by a specified URI or HTTP method. For example, to request for the authentication information, add **Content-type**, which specifies the request body type.

For details about common request headers, see [Table 3-3](#).

Table 3-3 Common request header fields

Field	Description	Mandatory	Example
x-sdk-date	Time when the request is sent. The time is in YYYYMMDD'T'HHMMSS'Z' format. The value is the current GMT time of the system.	No	20150907T101459Z
Host	Server information of the resource being requested. The value can be obtained from the URL of the service API. The value is in the format of <i>hostname[:port]</i> . If the port number is not specified, the default port is used. The default port number for HTTPS is 443 .	No	code.test.com or code.test.com:443
Content-Type	Request body MIME type. You are advised to use the default value application/json . For APIs used to upload objects or images, the value can vary depending on the flow type.	Yes	application/json
Content-Length	Length of the request body. The unit is byte.	No	3495
X-Project-id	Project ID. Obtain the project ID by following the instructions in Obtaining a Project ID .	No	e9993fc787d94b6c886cb aa340f9c0f4

Field	Description	Mandatory	Example
X-Auth-Token	User token. The user token is a response to the API used to obtain a user token. This API is the only one that does not require authentication. The X-Subject-Token value contained in the returned message header is the token.	No This parameter is mandatory for token-based authentication.	The following is part of an example token: MIIPAgYJKoZIhvcNAQc-Co...ggg1BBIINPXsidG9rZ
X-Language	Request language.	No	en_us

The API used to obtain a user token does not require authentication. Therefore, only the **Content-type** field needs to be added to requests for calling the API. An example of such requests is as follows:

```
POST https://{{endpoint}}/v3/auth/tokens
Content-type: application/json
```

Request Body

The body of a request is often sent in a structured format (JSON or XML) as specified in the **Content-type** header field. The request body transfers content except the request header. If the request body contains Chinese characters, these characters must be coded in UTF-8.

The request body varies between APIs. Some APIs do not require the request body, such as the APIs requested using the GET and DELETE methods.

In the case of the API used to obtain a user token, the request parameters and parameter description can be obtained from the API request. The following provides an example request with a body included. Replace **user_name**, **domainname** (account name), ********* (login password), and **xxxxxxxxxxxxxxxxxxxx** (project ID) with actual ones. Obtain the project ID from [Regions and Endpoints](#) from the database administrator.

NOTE

The **scope** parameter specifies where a token takes effect. In the example, the token takes effect only on the resources specified by the project. In the following example, the token takes effect only for the resources in a specified project. For more information about this API, see "Obtaining a User Token".

```
POST https://{{endpoint}}/v3/auth/tokens
Content-type: application/json
```

```
{  
    "auth": {  
        "identity": {  
            "methods": [  
                "password"  
            ],  
            "password": {  
                "user": {  
                    "name": "user_name",  
                    "password": "*****",  
                    "domain": {  
                        "name": "domainname"  
                    }  
                }  
            }  
        },  
        "scope": {  
            "project": {  
                "id": "xxxxxxxxxxxxxxxxxxxx"  
            }  
        }  
    }  
}
```

If all data required for the API request is available, you can send the request to call the API through [curl](#), [Postman](#), or coding. In the response to the API used to obtain a user token, **x-subject-token** is the desired user token. This token can then be used to authenticate the calling of other APIs.

3.2 Authentication

Calling an API can be authenticated using tokens.

Token-based Authentication

A token specifies temporary permissions in a computer system. During API authentication using a token, the token is added to request headers to get permissions for calling the API.



The validity period of a token is 24 hours. When using a token for authentication, cache it to prevent frequently calling the IAM API used to obtain a user token.

When calling the API to obtain a user token, you must set **auth.scope** in the request body to **project**.

```
{  
    "auth": {  
        "identity": {  
            "methods": [  
                "password"  
            ],  
            "password": {  
                "user": {  
                    "name": "user_name",  
                    "password": "*****",  
                    "domain": {  
                        "name": "domainname"  
                    }  
                }  
            }  
        },  
        "scope": {  
            "project": {  
                "id": "xxxxxxxxxxxxxxxxxxxx"  
            }  
        }  
    }  
}
```

```
"scope": {  
    "project": {  
        "id": "xxxxxxxx"  
    }  
}
```

After a token is obtained, the **X-Auth-Token** header field must be added to requests to specify the token when calling other APIs. For example, if the token is **ABCDEFJ....**, **X-Auth-Token: ABCDEFJ....** can be added to a request.

3.3 Response

Status Code

After sending a request, you will receive a response, including a status code, response header, and response body.

A status code is a group of digits, ranging from 1xx to 5xx. It indicates the status of a request. For more information, see [Status Code](#).

For example, if status code **201** is returned for calling the API used to obtain a user token, the request is successful.

Response Header

Similar to a request, a response also has a header, for example, **content-type**.

[Figure 3-1](#) shows the response header fields for the API used to obtain a user token. The **x-subject-token** header field is the desired user token. You can use this token to authenticate the calling of other APIs.

Figure 3-1 Header fields of the response to the request for obtaining a user token

```
connection → keep-alive  
  
content-type → application/json  
  
date → Tue, 12 Feb 2019 06:52:13 GMT  
  
server → Web Server  
  
strict-transport-security → max-age=31536000; includeSubdomains;  
  
transfer-encoding → chunked  
  
via → proxy A  
  
x-content-type-options → nosniff  
  
x-download-options → noopener  
  
x-frame-options → SAMEORIGIN  
  
x-iam-trace-id → 218d45ab-d674-4995-af3a-2d0255ba41b5  
  
x-subject-token → [REDACTED]  
  
x-xss-protection → 1; mode=block;
```

Response Body

The body of a response is often returned in structured format (for example, JSON or XML) as specified in the **Content-type** header field. The response body transfers content except the response header.

The following is part of the response body for the API used to obtain a user token.

```
{  
  "token": {  
    "expires_at": "2019-02-13T06:52:13.855000Z",  
    "methods": [  
      "password"  
    ],  
    "catalog": [  
      {  
        "endpoints": [  
          {  
            "region_id": "my-kualalumpur-1",  
.....
```

If an error occurs during API calling, an error code and a message will be displayed. The following shows an error response body.

```
{  
  "error_msg": "The format of message is error",  
  "error_code": "AS.0001"  
}
```

In the response body, **error_code** is an error code, and **error_msg** provides information about the error.

4 Getting Started

This section describes how to use GaussDB(DWS) APIs to manage clusters. The procedure of the management clusters is as follows:

1. Call the API in [Authentication](#) to obtain the user token, which will be put into the request header for authentication in a subsequent request.
2. Call the API in [Querying the Supported Node Types](#) to obtain the supported node types.
3. Call the API in [Creating a Cluster](#) to create a cluster.
4. Call the API in [Querying the Cluster List](#) to obtain the cluster information.
5. Call the API in [Querying Cluster Details](#) to view cluster details.
6. Call the API in [Creating a Snapshot](#) to create a snapshot.
7. Call the API in [Querying the Snapshot List](#) to check whether the snapshot is successfully created.
8. Call the API in [Restoring a Cluster](#) to restore a cluster using its snapshot.
9. Call the API in [Deleting a Manual Snapshot](#) to delete an unwanted snapshot.
10. Call the API in [Deleting a Cluster](#) to delete a finished or unwanted cluster.

Prerequisites

- You have created a VPC, subnet, and security group and obtained their IDs. For details, see [Creating a VPC](#).
- You have obtained the [IAM endpoint](#) and [GaussDB\(DWS\) endpoint](#)
- You have obtained the project ID. For details, see [Obtaining a Project ID](#).

Managing a Cluster

The following values are examples (replace them based on the actual situation).

- IAM endpoint: **iam_endpoint**
- GaussDB(DWS) endpoint: **dws_endpoint**
- VPC ID: **219ab8a0-1272-4049-a383-8ad0b770fa11**
- Subnet ID: **d23ef2e9-8b90-49b3-bc4a-fd7d6bea6bec**

- Security group ID: **12e3c23a-8710-4b75-95e4-5c8d7f68ef3c**
- Project ID: **9bc552e6-19af-4326-800d-281a92984636**

Perform the following operations to manage the cluster.

Step 1 Before calling other APIs, call the API in [Authentication](#) to obtain the token and set it as an environment variable.

```
curl -H "Content-type:application/json" https://{{iam_endpoint}}/v3/auth/tokens -X POST -d '{  
    "auth": {  
        "identity": {  
            "methods": [  
                "password"  
            ],  
            "password": {  
                "user": {  
                    "name": "testname",  
                    "domain": {  
                        "name": "testname"  
                    },  
                    "password": "Passw0rd"  
                }  
            }  
        },  
        "scope": {  
            "project": {  
                "name": "my-kualalumpur-1"  
            }  
        }  
    }  
}' -v -k
```

1. Obtain the value of **X-Subject-Token** from the response header as follows. **X-Subject-Token** indicates the token.

X-Subject-Token:MIidkgYJKoZlhcNAQcColidgCCA38CAQExDTALBglghkgBZQMEAeWgXXXX...

2. Run the following command to set the token as an environment variable:

export Token={X-Subject-Token}

X-Subject-Token is the token obtained in the preceding step.

export Token=MIidkgYJKoZlhcNAQcColidgCCA38CAQExDTALBglghkgBZQMEAeWgXXXX...

Step 2 Call the API in [Querying the Supported Node Types](#) to obtain the supported node types.

```
curl -X GET -H 'Content-type:application/json;charset=utf-8' -H "X-Auth-Token:$Token" https://{{dws_endpoint}}/v1.0/9bc552e6-19af-4326-800d-281a92984636/node_types -v -k
```

The request response is as follows:

```
status CODE 200  
{  
    "node_types": [  
        {  
            "spec_name": "dws.d2.xlarge",  
            "id": "ebe532d6-665f-40e6-a4d4-3c51545b6a67",  
            "detail": [  
                {  
                    "type": "vCPU",  
                    "value": "4"  
                },  
                {  
                    "value": "1675",  
                    "type": "LOCAL_DISK",  
                    "unit": "GB"  
                },  
                {  
                    "type": "mem",  
                    "value": "32",  
                }  
            ]  
        }  
    ]  
}
```

```
        "unit": "GB"
    }
],
},
{
    "spec_name": "dws.m1.xlarge.ultrahigh",
    "id": "ebe532d6-665f-40e6-a4d4-3c51545b4f71",
    "detail": [
        {
            "type": "vCPU",
            "value": "4"
        },
        {
            "value": "512",
            "type": "SSD",
            "unit": "GB"
        },
        {
            "type": "mem",
            "value": "32",
            "unit": "GB"
        }
    ]
}
]
```

Step 3 Call the API in [Creating a Cluster](#) to create a cluster.

The examples for configuring the cluster are as follows:

- Cluster name: **dws-demo**
- Administrator username: **dbadmin**
- Administrator password: **Dws2017demo!**
- Port: **8000**
- Node type: **dws.d1.xlarge**
- Number of nodes: **3**
- Elastic IP (EIP): **auto_assign**

```
curl -X POST -H 'Content-type:application/json;charset=utf-8' -H "X-Auth-Token:$Token" -d '{  
    "node_type": "dws.d1.xlarge",  
    "number_of_node": 3,  
    "subnet_id": "d23ef2e9-8b90-49b3-bc4a-fd7d6bea6bec",  
    "security_group_id": "12e3c23a-8710-4b75-95e4-5c8d7f68ef3c",  
    "vpc_id": "219ab8a0-1272-4049-a383-8ad0b770fa11",  
    "port": 8000,  
    "name": "dws-demo",  
    "user_name": "dbadmin",  
    "user_pwd": "Dws2017demo!",  
    "public_ip": {  
        "public_bind_type": "auto_assign"  
    }  
}' https://{{dws_endpoint}}/v1.0/9bc552e6-19af-4326-800d-281a92984636/clusters -v -k
```

If status code **200** is returned, the request for creating a cluster is successfully sent.

Step 4 Call the API in [Querying the Cluster List](#) to obtain the cluster information.

```
curl -X GET -H 'Content-type:application/json;charset=utf-8' -H "X-Auth-Token:$Token" https://{{dws_endpoint}}/v1.0/9bc552e6-19af-4326-800d-281a92984636/clusters -k -v
```

The request response is as follows:

```
{  
    "clusters": [  
        {
```

```
{
  "id": "7ba031f6-81f4-4670-ad20-c490b91877e5",
  "status": "AVAILABLE",
  "sub_status": "NORMAL",
  "task_status": null,
  "action_progress": null,
  "node_type": "dws.d1.xlarge",
  "subnet_id": "d23ef2e9-8b90-49b3-bc4a-fd7d6bea6bec",
  "security_group_id": "12e3c23a-8710-4b75-95e4-5c8d7f68ef3c",
  "number_of_node": 3,
  "availability_zone": "my-kualalumpur-1",
  "port": 8000,
  "name": "dws-demo",
  "version": "1.1.0",
  "vpc_id": "219ab8a0-1272-4049-a383-8ad0b770fa11",
  "user_name": "dbadmin",
  "public_ip": {
    "public_bind_type": "auto_assign",
    "eip_id": "85b20d7e-9eb7-4b2a-98f3-3c8843ea3574"
  },
  "public_endpoints": [
    {
      "public_connect_info": "10.0.0.8:8000",
      "jdbc_url": "jdbc:postgresql://10.0.0.8:8000/<YOUR_DATABASE_name>"
    }
  ],
  "endpoints": [
    {
      "connect_info": "192.168.0.10:8000",
      "jdbc_url": "jdbc:postgresql://192.168.0.10:8000/<YOUR_DATABASE_name>"
    },
    {
      "connect_info": "192.168.0.12:8000",
      "jdbc_url": "jdbc:postgresql://192.168.0.12:8000/<YOUR_DATABASE_name>"
    }
  ],
  "updated": "2018-01-15T12:50:06",
  "created": "2018-01-15T12:50:06",
  "recent_event": 1
}
]
```

- If **status** is **CREATING**, the cluster is being created. If **status** is **AVAILABLE**, the cluster is successfully created.
- The UUID of cluster **dws-demo** is **7ba031f6-81f4-4670-ad20-c490b91877e5**. Record the UUID for subsequent use.

Step 5 Call the API in [Querying Cluster Details](#) to view cluster details.

```
curl -X GET -H "Content-type:application/json" -H "X-Auth-Token:$Token"
https://[{dws_endpoint}]/v1.0/9bc552e6-19af-4326-800d-281a92984636/clusters/7ba031f6-81f4-4670-ad20-c490b91877e5 -k -v
```

The request response is as follows:

```
{
  "cluster": {
    "id": "7ba031f6-81f4-4670-ad20-c490b91877e5",
    "status": "AVAILABLE",
    "name": "dws-demo",
    "updated": "2018-01-15T12:50:06",
    "created": "2018-01-15T12:50:06",
    "user_name": "dbadmin",
    "sub_status": "NORMAL",
    "task_status": null,
    "action_progress": null,
    "node_type": "dws.d1.xlarge",
    "node_type_id": "5ddb1071-c5d7-40e0-a874-8a032e81a697",
```

```

"subnet_id": "d23ef2e9-8b90-49b3-bc4a-fd7d6bea6bec",
"security_group_id": "12e3c23a-8710-4b75-95e4-5c8d7f68ef3c",
"number_of_node": 3,
"availability_zone": "my-kualalumpur-1",
"port": 8000,
"vpc_id": "219ab8a0-1272-4049-a383-8ad0b770fa11",
"public_ip": {
    "public_bind_type": "auto_assign",
    "eip_id": "85b20d7e-9eb7-4b2a-98f3-3c8843ea3574"
},
"public_endpoints": [
{
    "public_connect_info": "10.0.0.8:8000",
    "jdbc_url": "jdbc:postgresql://10.0.0.8:8000/<YOUR_DATABASE_name>"
}
],
"endpoints": [
{
    "connect_info": "192.168.0.10:8000",
    "jdbc_url": "jdbc:postgresql://192.168.0.10:8000/<YOUR_DATABASE_name>"
},
{
    "connect_info": "192.168.0.12:8000",
    "jdbc_url": "jdbc:postgresql://192.168.0.12:8000/<YOUR_DATABASE_name>"
}
],
"version": "1.1.0",
"maintain_window": {
    "day": "Wed",
    "start_time": "22:00",
    "end_time": "02:00"
},
"recent_event": 1,
"tags": null,
"parameter_group": {
    "id": "157e9cc4-64a8-11e8-adc0-fa7ae01bbebc",
    "name": "Default-Parameter-Group-dws",
    "status": "In-Sync"
}
}
]
}

```

public_endpoints and **endpoints** can be queried from the response. After the cluster is successfully created, you can use **public_endpoints** or **endpoints** to access the cluster from an external source.

Step 6 Call the API in [Creating a Snapshot](#) to create a snapshot.

Create snapshot **snapshotForDemoCluster** for cluster **dws-demo**.

```
curl -X POST -H "Content-type:application/json" -H "X-Auth-Token:$Token" -d '{
```

```

    "snapshot": {
        "name": "snapshotForDemoCluster",
        "cluster_id": "7ba031f6-81f4-4670-ad20-c490b91877e5",
        "description": "Snapshot description"
    }
}' https://[dws_endpoint]/v1.0/9bc552e6-19af-4326-800d-281a92984636/snapshots -k -v
```

The request response is as follows:

```
{
    "snapshot": {
        "id": "2a4d0f86-67cd-408a-8b66-017454fb7793"
    }
}
```

If status code **200** is returned, the request for creating a snapshot is successfully sent. Record **id** so that the ID can be used when you query the snapshot details later.

- Step 7** Call the API in [Querying the Snapshot List](#) to check whether the snapshot is successfully created.

```
curl -X GET -H 'Content-type:application/json;charset=utf-8' -H "X-Auth-Token:$Token" https://  
{dws_endpoint}/v1.0/9bc552e6-19af-4326-800d-281a92984636/snapshots/  
2a4d0f86-67cd-408a-8b66-017454fb7793 -k -v
```

If the snapshot status in the response is **AVAILABLE**, the snapshot is successfully created. If the snapshot status is **CREATING**, the snapshot is being created.

```
{  
    "snapshot": {  
        "id": "2a4d0f86-67cd-408a-8b66-017454fb7793",  
        "name": "snapshotForDemoCluster",  
        "description": "Snapshot description",  
        "started": "2018-01-18T13:59:23Z",  
        "finished": "2018-01-18T13:01:40Z",  
        "size": 500,  
        "status": "AVAILABLE",  
        "type": "MANUAL",  
        "cluster_id": "4f87d3c4-9e33-482f-b962-e23b30d1a18c"  
    }  
}
```

- Step 8** Call the API in [Restoring a Cluster](#) to restore a cluster using its snapshot.

Restore snapshot **snapshotForDemoCluster** to new cluster **dws-restore**.

```
curl -X POST -H 'Content-type:application/json;charset=utf-8' -H "X-Auth-Token:$Token" -d '{  
    "restore": {  
        "name": "dws-restore"  
    }  
}' https://{dws_endpoint}/v1.0/9bc552e6-19af-4326-800d-281a92984636/snapshots/  
2a4d0f86-67cd-408a-8b66-017454fb7793/actions -v -k
```

If status code **200** is returned, the cluster is successfully restored. You can check the cluster restoration status by performing operations in [Querying Snapshot Details](#).

- Step 9** Call the API in [Deleting a Manual Snapshot](#) to delete an unwanted snapshot.

```
curl -X DELETE -H 'Content-type:application/json;charset=utf-8' -H "X-Auth-Token:$Token" https://  
{dws_endpoint}/v1.0/9bc552e6-19af-4326-800d-281a92984636/snapshots/  
2a4d0f86-67cd-408a-8b66-017454fb7793 -v -k
```

If status code **202** is returned, the snapshot is successfully deleted.

- Step 10** Call the API in [Deleting a Cluster](#) to delete an unwanted cluster.

```
curl -X DELETE -H 'Content-type:application/json;charset=utf-8' -H "X-Auth-Token:$Token" -d '{  
    "keep_last_manual_snapshot":0  
}' https://{dws_endpoint}/v1.0/9bc552e6-19af-4326-800d-281a92984636/clusters/7ba031f6-81f4-4670-  
ad20-c490b91877e5 -v -k
```

If status code **202** is returned, the cluster is successfully deleted.

----End

5 API Description

5.1 Cluster Management APIs

A data warehouse cluster is the smallest management unit in GaussDB(DWS). A cluster is a data warehouse that runs independently. You can manage the cluster life cycle in GaussDB(DWS).

5.1.1 Creating a Cluster

Function

This API is used to create clusters.

The cluster must run in a VPC. Before creating a cluster, you need to create a VPC and obtain the VPC and subnet IDs.

This API is an asynchronous API. It takes 10 to 15 minutes to create a cluster.

NOTE

Currently, only standard data warehouses can be created via this API.

URI

- URI format
POST /v1.0/{project_id}/clusters
- Parameter description

Table 5-1 URI parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the ID, see Obtaining a Project ID .

Request Message

- Request example

```
POST /v1.0/89cd04f168b84af6be287f71730fdb4b/clusters
```

```
{
  "cluster": {
    "node_type": ,
    "number_of_node": 3,
    "subnet_id": "374eca02-cfc4-4de7-8ab5-dbebf7d9a720",
    "security_group_id": "dc3ec145-9029-4b39-b5a3-ace5a01f772b",
    "vpc_id": "85b20d7e-9eb7-4b2a-98f3-3c8843ea3574",
    "availability_zone": "my-kualalumpur-1",
    "port": 8000,
    "name": "dws-1",
    "user_name": "dbadmin",
    "user_pwd": "Password!",
    "public_ip": {
      "public_bind_type": "auto_assign",
      "eip_id": ""
    }
  }
}
```

- Parameter description

Table 5-2 Request parameters

Parameter	Mandatory	Type	Description
cluster	Yes	CreateClusterInfo object	Cluster object

Table 5-3 CreateClusterInfo

Parameter	Mandatory	Type	Description
node_type	Yes	String	Node type.
number_of_node	Yes	Integer	Number of cluster nodes. For a cluster, the value ranges from 3 to 256. For a hybrid data warehouse (standalone), the value is 1.
subnet_id	Yes	String	Subnet ID, which is used for configuring cluster network.
security_group_id	Yes	String	ID of a security group, which is used for configuring cluster network.
vpc_id	Yes	String	VPC ID, which is used for configuring cluster network.

Parameter	Mandatory	Type	Description
availability_zone	No	String	AZ of a cluster.
port	No	Integer	Service port of a cluster. The value ranges from 8000 to 30000. The default value is 8000 .
name	Yes	String	Cluster name, which must be unique. The cluster name must contain 4 to 64 characters, which must start with a letter. Only letters, digits, hyphens (-), and underscores (_) are allowed.
user_name	Yes	String	Administrator username for logging in to a GaussDB(DWS) cluster. The username must: <ul style="list-style-type: none">• Consist of lowercase letters, digits, or underscores.• Start with a lowercase letter or an underscore.• Contain 1 to 63 characters.• Cannot be a keyword of the GaussDB(DWS) database.
user_pwd	Yes	String	Administrator password for logging in to a GaussDB(DWS) cluster
public_ip	No	PublicIp object	Public IP address. If the parameter is not specified, public connection is not used by default.
number_of_cn	No	Integer	Number of deployed CNs. The value ranges from 2 to the number of cluster nodes minus 1. The maximum value is 20 and the default value is 3 .
enterprise_project_id	No	String	Enterprise project. The default enterprise project ID is 0 .

Table 5-4 PublicIP

Parameter	Mandatory	Type	Description
public_bind_type	Yes	String	Binding type of an EIP. The value can be one of the following: <ul style="list-style-type: none">• auto_assign• not_use• bind_existing
eip_id	No	String	EIP ID

Response Message

- Example response

```
{
  "cluster": {
    "id": "7d85f602-a948-4a30-afd4-e84f47471c15"
  }
}
```
- Parameter description

Table 5-5 Response parameters

Parameter	Type	Description
cluster	Cluster object	Cluster object

Table 5-6 Cluster

Parameter	Type	Description
id	String	Cluster ID

Status Code

- Normal
200
- Exception

Table 5-7 Returned values

Returned Value	Description
400 Bad Request	Request error.
401 Unauthorized	Authorization failed.

Returned Value	Description
403 Forbidden	No operation permission.
404 Not Found	No resources found.
500 Internal Server Error	Internal service error.
503 Service Unavailable	The service is unavailable.

5.1.2 Querying the Cluster List

Function

This API is used to query and display the cluster list.

URI

- URI format
GET /v1.0/{project_id}/clusters
- Parameter description

Table 5-8 URI parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the ID, see Obtaining a Project ID .

Request

Request example

```
GET /v1.0/89cd04f168b84af6be287f71730fdb4b/clusters
```

Response

- Example response

```
{  
  "clusters": [  
    {  
      "id": "7d85f602-a948-4a30-afd4-e84f47471c15",  
      "status": "AVAILABLE",  
      "sub_status": "READONLY",  
      "task_status": "SNAPSHOTTING",  
      "action_progress": {"SNAPSHOTTING": "20%"},  
      "node_type": "dws.d1.xlarge.ultrahigh",  
      "subnet_id": "374eca02-cfc4-4de7-8ab5-dbebf7d9a720",  
      "security_group_id": "dc3ec145-9029-4b39-b5a3-ace5a01f772b",  
      "number_of_node": 3,  
      "node_ip": "10.10.10.10",  
      "node_port": 1433  
    }  
  ]  
}
```

```

"availability_zone": "my-kualalumpur-1",
"port": 8000,
"name": "dws-1",
"version": "1.2.0",
"vpc_id": "85b20d7e-9eb7-4b2a-98f3-3c8843ea3574",
"user_name": "dbadmin",
"public_ip": {
    "public_bind_type": "auto_assign",
    "eip_id": "85b20d7e-9eb7-4b2a-98f3-3c8843ea3574"
},
"public_endpoints": [
    {
        "public_connect_info": "10.0.0.8:8000",
        "jdbc_url": "jdbc:postgresql://10.0.0.8:8000/<YOUR_DATABASE_name>"
    }
],
"endpoints": [
    {
        "connect_info": "192.168.0.12:8000",
        "jdbc_url": "jdbc:postgresql://192.168.0.12:8000/<YOUR_DATABASE_name>"
    }
],
"updated": "2016-02-10T14:28:14Z",
"created": "2016-02-10T14:26:14Z",
"enterprise_project_id": "aca4e50a-266f-4786-827c-f8d6cc3fbada",
"recent_event": 6
"tags": [
    {
        "key": "key1",
        "value": "value1"
    },
    {
        "key": "key2",
        "value": "value2"
    }
],
"count": "2"
}

```

- Parameter description

Table 5-9 Response parameter description

Parameter	Type	Description
clusters	Array of ClusterInfo objects	List of cluster objects
count	Integer	Total number of cluster objects

Table 5-10 ClusterInfo

Parameter	Type	Description
id	String	Cluster ID

Parameter	Type	Description
status	String	Cluster status. The value can be one of the following: <ul style="list-style-type: none">● CREATING● AVAILABLE● UNAVAILABLE● CREATION FAILED
sub_status	String	Sub-status of clusters in the AVAILABLE state. The value can be one of the following: <ul style="list-style-type: none">● NORMAL● READONLY● REDISTRIBUTING● REDISTRIBUTION-FAILURE● UNBALANCED● UNBALANCED READONLY● DEGRADED● DEGRADED READONLY● DEGRADED UNBALANCED● UNBALANCED REDISTRIBUTING● UNBALANCED REDISTRIBUTION-FAILURE● READONLY REDISTRIBUTION-FAILURE● UNBALANCED READONLY REDISTRIBUTION-FAILURE● DEGRADED REDISTRIBUTION-FAILURE● DEGRADED UNBALANCED REDISTRIBUTION-FAILURE● DEGRADED UNBALANCED READONLY REDISTRIBUTION-FAILURE● DEGRADED UNBALANCED READONLY

Parameter	Type	Description
task_status	String	<p>Cluster management task. The value can be one of the following:</p> <ul style="list-style-type: none">● RESTORING● SNAPSHOTTING● GROWING● REBOOTING● SETTING_CONFIGURATION● CONFIGURING_EXT_DATASOURCE● DELETING_EXT_DATASOURCE● REBOOT_FAILURE● RESIZE_FAILURE
action_progress	Map<String, String>	<p>Task information, consisting of a key and a value. The key indicates an ongoing task, and the value indicates the progress of the ongoing task.</p> <ul style="list-style-type: none">● Valid key values include:<ul style="list-style-type: none">- GROWING- RESTORING- SNAPSHOTTING- REPAIRING- CREATING● The value indicates the task progress. <p>Example:</p> <pre>"action_progress": {"SNAPSHOTTING": "16%"}</pre>
node_type	String	Node type
subnet_id	String	Subnet ID
security_group_id	String	Security group ID
number_of_node	Integer	Number of cluster nodes. For a cluster, the value ranges from 3 to 256. For a hybrid data warehouse (standalone), the value is 1.
availability_zone	String	AZ
port	Integer	Service port of a cluster. The value ranges from 8000 to 30000. The default value is 8000 .
name	String	Cluster name
version	String	Data warehouse version

Parameter	Type	Description
vpc_id	String	VPC ID
user_name	String	Cluster administrator name
public_ip	PublicIp object	Public IP address. If the parameter is not specified, public connection is not used by default.
public_endpoints	Array of PublicEndpoints objects	Public network connection information about the cluster. If the parameter is not specified, the public network connection information is not used by default.
endpoints	Array of Endpoints objects	Private network connection information about the cluster.
updated	String	Last modification time of a cluster. Format: ISO8601:YYYY-MM-DDThh:mm:ssZ
created	String	Cluster creation time. Format: ISO8601:YYYY-MM-DDThh:mm:ssZ
tags	Array of Tags object	Tags in a cluster
recent_event	Integer	Number of events
failed_reasons	FailedReason object	Cause of failure. If the parameter is left empty, the cluster is in the normal state.

Table 5-11 PublicIp

Parameter	Mandatory	Type	Description
public_bind_type	Yes	String	Binding type of an EIP. The value can be one of the following: <ul style="list-style-type: none">• auto_assign• not_use• bind_existing
eip_id	No	String	EIP ID

Table 5-12 Tags

Parameter	Type	Description
value	String	Value. A value can contain a maximum of 43 Unicode characters, which can be null. The first and last characters cannot be spaces. Only letters, digits, hyphens (-), and underscores (_) are allowed. It cannot contain the following characters: =*<>\, /
key	String	Key. A key can contain a maximum of 36 Unicode characters, which cannot be null. The first and last characters cannot be spaces. Only letters, digits, hyphens (-), and underscores (_) are allowed. It cannot contain the following characters: =*<>\, /

Table 5-13 PublicEndpoints

Parameter	Type	Description
public_connect_info	String	Public network connection information
jdbc_url	String	JDBC URL of the public network

Table 5-14 Endpoints

Parameter	Man dato ry	Type	Description
connect_info	Yes	String	Private network connection information
jdbc_url	Yes	String	JDBC URL on the private network. The following is the default format: jdbc:postgresql://< connect_info>/<YOUR_DATABASE_name>

Table 5-15 FailedReason

Parameter	Type	Description
error_code	String	Error code
error_msg	String	Error message

Returned Value

- Normal
200
- Exception

Table 5-16 Returned values

Returned Value	Description
400 Bad Request	Request error.
401 Unauthorized	Authorization failed.
403 Forbidden	No operation permission.
404 Not Found	No resources found.
500 Internal Server Error	Internal service error.
503 Service Unavailable	The service is unavailable.

5.1.3 Querying Cluster Details

Function

This API is used to query cluster details.

URI

- URI format
GET /v1.0/{project_id}/clusters/{cluster_id}
- Parameter description

Table 5-17 URI parameters

Parameter	Mandatory	Type	Description
project_id	Yes	String	Project ID. For details about how to obtain the ID, see Obtaining a Project ID .
cluster_id	Yes	String	Cluster ID. For details about how to obtain the ID, see Obtaining the Cluster ID .

Request Message

Request example

GET /v1.0/89cd04f168b84af6be287f71730fdb4b/clusters/b5c45780-1006-49e3-b2d5-b3229975bbc7

Response Message

- Example response

```
{  
    "cluster": {  
        "id": "7d85f602-a948-4a30-afd4-e84f47471c15",  
        "status": "AVAILABLE",  
        "name": "dws-1",  
        "updated": "2018-02-10T14:28:14Z",  
        "created": "2018-02-10T14:28:14Z",  
        "user_name": "dbadmin",  
        "sub_status": "READONLY",  
        "task_status": "SNAPSHOTTING",  
        "action_progress": {"SNAPSHOTTING": "20%"},  
        "node_type": "dws.m1.xlarge.ultrahigh",  
  
        "subnet_id": "374eca02-cfc4-4de7-8ab5-dbebf7d9a720",  
        "security_group_id": "dc3ec145-9029-4b39-b5a3-ace5a01f772b",  
        "number_of_node": 3,  
        "availability_zone": "my-kualalumpur-1",  
        "port": 8000,  
        "vpc_id": "85b20d7e-9eb7-4b2a-98f3-3c8843ea3574",  
        "public_ip": {  
            "public_bind_type": "auto_assign",  
            "eip_id": "85b20d7e-9etypeb2a-98f3-3c8843ea3574"  
        },  
        "private_ip": ["192.168.0.12", "192.168.0.66"],  
        "public_endpoints": [  
            {  
                "public_connect_info": "10.0.0.8:8000",  
                "jdbc_url": "jdbc:postgresql://10.0.0.8:8000/<YOUR_DATABASE_name>"  
            }  
        ],  
        "endpoints": [  
            {  
                "connect_info": "192.168.0.10:8000",  
                "jdbc_url": "jdbc:postgresql://192.168.0.10:8000/<YOUR_DATABASE_name>"  
            }  
        ],  
        "version": "1.2.0",  
        "maintain_window": {  
            "day": "Wed",  
            "start_time": "22:00",  
            "end_time": "02:00"  
        },  
        "resize_info": {  
            "target_node_num": "6",  
            "origin_node_num": "3",  
            "resize_status": "GROWING",  
            "start_time": "2018-02-14T14:28:14Z"  
        },  
        "enterprise_project_id": "6a6a18fe-417a-4188-9214-75fd08c22065",  
        "recent_event": 6,  
        "tags": [  
            {  
                "key": "key1",  
                "value": "value1"  
            },  
            {  
                "key": "key2",  
                "value": "value2"  
            }  
        ],  
  
        "parameter_group": {  
            "id": "157e9cc4-64a8-11e8-adc0-fa7ae01bbebc",  
            "name": "Default-Parameter-Group-dws ",  
            "status": "In-Sync"  
        }  
}
```

- ```
 }
 }
```
- Parameter description

**Table 5-18** Response parameter description

| Parameter | Type                                 | Description    |
|-----------|--------------------------------------|----------------|
| cluster   | <a href="#">ClusterDetail object</a> | Cluster object |

**Table 5-19** ClusterDetail

| Parameter | Type   | Description                                                                                                                                                                                                       |
|-----------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| id        | String | Cluster ID                                                                                                                                                                                                        |
| status    | String | Cluster status. The value can be one of the following: <ul style="list-style-type: none"><li>• <b>CREATING</b></li><li>• <b>AVAILABLE</b></li><li>• <b>UNAVAILABLE</b></li><li>• <b>CREATION FAILED</b></li></ul> |
| name      | String | Cluster name                                                                                                                                                                                                      |
| updated   | String | Last modification time of a cluster. Format: ISO8601:YYYY-MM-DDThh:mm:ssZ                                                                                                                                         |
| created   | String | Cluster creation time. Format: ISO8601: YYYY-MM-DDThh:mm:ssZ                                                                                                                                                      |
| user_name | String | Administrator name                                                                                                                                                                                                |

| Parameter  | Type   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| sub_status | String | Sub-status of clusters in the <b>AVAILABLE</b> state. The value can be one of the following: <ul style="list-style-type: none"><li>• <b>NORMAL</b></li><li>• <b>READONLY</b></li><li>• <b>REDISTRIBUTING</b></li><li>• <b>REDISTRIBUTION-FAILURE</b></li><li>• <b>UNBALANCED</b></li><li>• <b>UNBALANCED   READONLY</b></li><li>• <b>DEGRADED</b></li><li>• <b>DEGRADED   READONLY</b></li><li>• <b>DEGRADED   UNBALANCED</b></li><li>• <b>UNBALANCED   REDISTRIBUTING</b></li><li>• <b>UNBALANCED   REDISTRIBUTION-FAILURE</b></li><li>• <b>READONLY   REDISTRIBUTION-FAILURE</b></li><li>• <b>UNBALANCED   READONLY   REDISTRIBUTION-FAILURE</b></li><li>• <b>DEGRADED   REDISTRIBUTION-FAILURE</b></li><li>• <b>DEGRADED   UNBALANCED   REDISTRIBUTION-FAILURE</b></li><li>• <b>DEGRADED   UNBALANCED   READONLY   REDISTRIBUTION-FAILURE</b></li><li>• <b>DEGRADED   UNBALANCED   READONLY</b></li></ul> |

| Parameter         | Type                | Description                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| task_status       | String              | <p>Cluster management task. The value can be one of the following:</p> <ul style="list-style-type: none"> <li>• RESTORING</li> <li>• SNAPSHOTTING</li> <li>• GROWING</li> <li>• REBOOTING</li> <li>• SETTING_CONFIGURATION</li> <li>• CONFIGURING_EXT_DATASOURCE</li> <li>• DELETING_EXT_DATASOURCE</li> <li>• REBOOT_FAILURE</li> <li>• RESIZE_FAILURE</li> </ul> |
| action_progress   | Map<String, String> | <p>The key indicates an ongoing task. The value can be one of the following:</p> <ul style="list-style-type: none"> <li>• GROWING</li> <li>• RESTORING</li> <li>• SNAPSHOTTING</li> <li>• REPAIRING</li> <li>• CREATING</li> </ul> <p>The value indicates the task progress.</p>                                                                                   |
| node_type         | String              | Node type                                                                                                                                                                                                                                                                                                                                                          |
| subnet_id         | String              | Subnet ID                                                                                                                                                                                                                                                                                                                                                          |
| security_group_id | String              | Security group ID                                                                                                                                                                                                                                                                                                                                                  |
| number_of_node    | Integer             | Number of cluster nodes. For a cluster, the value ranges from 3 to 256. For a hybrid data warehouse (standalone), the value is 1.                                                                                                                                                                                                                                  |
| availability_zone | String              | AZ                                                                                                                                                                                                                                                                                                                                                                 |

| Parameter        | Type                                             | Description                                                                                                                                                   |
|------------------|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| port             | Integer                                          | Service port of a cluster. The value ranges from 8000 to 30000. The default value is <b>8000</b> .                                                            |
| vpc_id           | String                                           | VPC ID                                                                                                                                                        |
| public_ip        | <a href="#">PublicIp</a> object                  | Public IP address. If the parameter is not specified, public connection is not used by default.                                                               |
| private_ip       | Array of strings                                 | List of private network IP addresses                                                                                                                          |
| public_endpoints | Array of <a href="#">PublicEndpoints</a> objects | Public network connection information about the cluster. If the parameter is not specified, the public network connection information is not used by default. |
| endpoints        | Array of <a href="#">Endpoints</a> objects       | Private network connection information about the cluster.                                                                                                     |
| version          | String                                           | Data warehouse version                                                                                                                                        |
| maintain_window  | <a href="#">MaintainWindow</a> object            | Cluster maintenance window                                                                                                                                    |
| resize_info      | <a href="#">ResizeInfo</a> object                | Cluster scale-out details                                                                                                                                     |
| recent_event     | Integer                                          | Number of events                                                                                                                                              |
| tags             | Array of <a href="#">Tags</a> objects            | Labels in a cluster                                                                                                                                           |
| parameter_group  | <a href="#">ParameterGroup</a> object            | Parameter group details                                                                                                                                       |
| node_type_id     | String                                           | Node type ID                                                                                                                                                  |
| failed_reasons   | <a href="#">FailedReason</a> object              | Cause of failure. If the parameter is left empty, the cluster is in the normal state.                                                                         |

**Table 5-20** FailedReason

| Parameter  | Type   | Description   |
|------------|--------|---------------|
| error_code | String | Error code    |
| error_msg  | String | Error message |

**Table 5-21** PublicIp

| Parameter        | Mandatory | Type   | Description                                                                                                                                                                                 |
|------------------|-----------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| public_bind_type | Yes       | String | Binding type of an EIP. The value can be one of the following: <ul style="list-style-type: none"><li>• <b>auto_assign</b></li><li>• <b>not_use</b></li><li>• <b>bind_existing</b></li></ul> |
| eip_id           | No        | String | EIP ID                                                                                                                                                                                      |

**Table 5-22** PublicEndpoints

| Parameter           | Mandatory | Type   | Description                                                                                                                          |
|---------------------|-----------|--------|--------------------------------------------------------------------------------------------------------------------------------------|
| public_connect_info | No        | String | Public network connection information                                                                                                |
| jdbc_url            | No        | String | JDBC URL of the public network. The following is the default format:<br>jdbc:postgresql://<public_connect_info>/<YOUR_DATABASE_name> |

**Table 5-23** Endpoints

| Parameter    | Mandatory | Type   | Description                            |
|--------------|-----------|--------|----------------------------------------|
| connect_info | Yes       | String | Private network connection information |

| Parameter | Mandatory | Type   | Description                                                                                                                     |
|-----------|-----------|--------|---------------------------------------------------------------------------------------------------------------------------------|
| jdbc_url  | Yes       | String | JDBC URL on the private network. The following is the default format:<br>jdbc:postgresql://< connect_info>/<YOUR_DATABASE_name> |

**Table 5-24** MaintainWindow

| Parameter  | Mandatory | Type   | Description                                                                                                                                                                                                                        |
|------------|-----------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| day        | No        | String | Maintenance time in each week in the unit of day. The value can be one of the following: <ul style="list-style-type: none"><li>• Mon</li><li>• Tue</li><li>• Wed</li><li>• Thu</li><li>• Fri</li><li>• Sat</li><li>• Sun</li></ul> |
| start_time | No        | String | Maintenance start time in HH:mm format. The time zone is GMT+0.                                                                                                                                                                    |
| end_time   | No        | String | Maintenance end time in HH:mm format. The time zone is GMT+0.                                                                                                                                                                      |

**Table 5-25** ResizeInfo

| Parameter       | Type    | Description                                                                                                                                 |
|-----------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------|
| target_node_num | Integer | Number of nodes after the scale-out                                                                                                         |
| origin_node_num | Integer | Number of nodes before the scale-out                                                                                                        |
| resize_status   | String  | Scale-out status. The value can be one of the following: <ul style="list-style-type: none"><li>• GROWING</li><li>• RESIZE_FAILURE</li></ul> |

| Parameter  | Type   | Description                                               |
|------------|--------|-----------------------------------------------------------|
| start_time | String | Scale-out start time. Format: ISO8601:YYYY-MM-DDThh:mm:ss |

**Table 5-26 Tags**

| Parameter | Type   | Description                                                                                                                                                                                                                                                |
|-----------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| key       | String | Key. A key can contain a maximum of 36 Unicode characters, which cannot be null. The first and last characters cannot be spaces. Only letters, digits, hyphens (-), and underscores (_) are allowed. It cannot contain the following characters: =*<>\, /  |
| value     | String | Value. A value can contain a maximum of 43 Unicode characters, which can be null. The first and last characters cannot be spaces. Only letters, digits, hyphens (-), and underscores (_) are allowed. It cannot contain the following characters: =*<>\, / |

**Table 5-27 ParameterGroup**

| Parameter | Mandatory | Type   | Description                                                                                                                                                                                                                                                                                           |
|-----------|-----------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| id        | Yes       | String | Parameter group ID                                                                                                                                                                                                                                                                                    |
| name      | Yes       | String | Parameter group name                                                                                                                                                                                                                                                                                  |
| status    | Yes       | String | Cluster parameter status. The value can be one of the following:<br><ul style="list-style-type: none"> <li>• In-Sync: synchronized</li> <li>• Applying: in application</li> <li>• Pending-Reboot: restart for the modification to take effect</li> <li>• Sync-Failure: application failure</li> </ul> |

## Status Code

- Normal
- 200
- Exception

**Table 5-28** Returned values

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 400 Bad Request           | Request error.              |
| 401 Unauthorized          | Authorization failed.       |
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.1.4 Querying the Supported Node Types

### Function

This API is used to query the node types supported by GaussDB(DWS).

### URI

- URI format  
GET /v2/{project\_id}/node-types

**Table 5-29** URI parameters

| Parameter  | Man<br>dato<br>ry | Type   | Description                                                                                      |
|------------|-------------------|--------|--------------------------------------------------------------------------------------------------|
| project_id | Yes               | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> . |

### Request Message

- Request example  
GET /v2/89cd04f168b84af6be287f71730fdb4b/node-types

### Response Message

- Example response  
status CODE 200  
{  
  "node\_types": [  
    {  
      "spec\_name": "dws.d2.xlarge",  
      "id": "ebe532d6-665f-40e6-a4d4-3c51545b6a67",  
      "detail": [  
        {  
          "type": "vCPU",  
          "value": "4"  
        }  
      ]  
    }  
  ]  
}

```
 },
 {
 "value": "1675",
 "type": "LOCAL_DISK",
 "unit": "GB"
 },
 {
 "type": "mem",
 "value": "32",
 "unit": "GB"
 }
]
 },
 {
 "spec_name": "dws.m1.xlarge.ultrahigh",
 "id": "ebe532d6-665f-40e6-a4d4-3c51545b4f71",
 "detail": [
 {
 "type": "vCPU",
 "value": "4"
 },
 {
 "value": "512",
 "type": "SSD",
 "unit": "GB"
 },
 {
 "type": "mem",
 "value": "32",
 "unit": "GB"
 }
]
 }
]
}
```

- Parameter description

**Table 5-30** Response parameter description

| Parameter  | Type                                    | Description               |
|------------|-----------------------------------------|---------------------------|
| node_types | Array of<br><b>NodeTypes</b><br>objects | List of node type objects |

**Table 5-31** NodeTypes

| Parameter | Type                                 | Description         |
|-----------|--------------------------------------|---------------------|
| spec_name | String                               | Name of a node type |
| detail    | Array of<br><b>Detail</b><br>objects | Node type details   |
| id        | String                               | Node type ID        |

**Table 5-32 Detail**

| Parameter | Type   | Description     |
|-----------|--------|-----------------|
| type      | String | Attribute type  |
| value     | String | Attribute value |
| unit      | String | Attribute unit  |

## Status Code

- Normal  
200
- Exception

**Table 5-33 Returned values**

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 400 Bad Request           | Request error.              |
| 401 Unauthorized          | Authorization failed.       |
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.1.5 Deleting a Cluster

### Function

This API is used to delete clusters. All resources of the deleted cluster, including customer data, will be released. For data security, create a snapshot for the cluster that you want to delete before deleting the cluster.

### URI

- URI format  
`DELETE /v1.0/{project_id}/clusters/{cluster_id}`
- Parameter description

**Table 5-34** URI parameters

| Parameter  | Man<br>dato<br>ry | Type   | Description                                                                                                             |
|------------|-------------------|--------|-------------------------------------------------------------------------------------------------------------------------|
| project_id | Yes               | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> .                        |
| cluster_id | Yes               | String | ID of the cluster to be deleted. For details about how to obtain the ID, see <a href="#">Obtaining the Cluster ID</a> . |

## Request Message

- Request example

```
DELETE /v1.0/89cd04f168b84af6be287f71730fdb4b/clusters/4ca46bf1-5c61-48ff-b4f3-0ad4e5e3ba90
{
 "keep_last_manual_snapshot":0
}
```
- Parameter description

**Table 5-35** Request parameters

| Parameter                 | Man<br>dato<br>ry | Type    | Description                                                                   |
|---------------------------|-------------------|---------|-------------------------------------------------------------------------------|
| keep_last_manual_snapshot | Yes               | Integer | The number of latest manual snapshots that need to be retained for a cluster. |

## Response Message

Example response

status CODE 202

## Status Code

- Normal  
202
- Exception

**Table 5-36** Returned values

| Returned Value   | Description           |
|------------------|-----------------------|
| 400 Bad Request  | Request error.        |
| 401 Unauthorized | Authorization failed. |

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.1.6 Restarting a Cluster

### Function

This API is used to restart clusters.

### URI

- URI format  
POST /v1.0/{project\_id}/clusters/{cluster\_id}/restart
- Parameter description

**Table 5-37** URI parameters

| Parameter  | Man<br>dato<br>ry | Type   | Description                                                                                                               |
|------------|-------------------|--------|---------------------------------------------------------------------------------------------------------------------------|
| project_id | Yes               | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> .                          |
| cluster_id | Yes               | String | ID of the cluster to be restarted. For details about how to obtain the ID, see <a href="#">Obtaining the Cluster ID</a> . |

### Request Message

- Request example  
POST /v1.0/89cd04f168b84af6be287f71730fdb4b/clusters/4ca46bf1-5c61-48ff-b4f3-0ad4e5e3ba90/restart  
{  
    "restart":{}  
}
- Parameter description

**Table 5-38** Request parameters

| Parameter | Mandatory | Type   | Description   |
|-----------|-----------|--------|---------------|
| restart   | Yes       | Object | Restart flag. |

## Response Message

Example response

```
status CODE 200
```

## Status Code

- Normal  
200
- Exception

**Table 5-39** Returned values

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 400 Bad Request           | Request error.              |
| 401 Unauthorized          | Authorization failed.       |
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.1.7 Scaling Out Clusters

### Function

This API is used to scale out clusters.

### URI

- URI format  
`POST /v1.0/{project_id}/clusters/{cluster_id}/resize`
- Parameter description

**Table 5-40** URI parameters

| Parameter  | Mandatory | Type   | Description                                                                                                                |
|------------|-----------|--------|----------------------------------------------------------------------------------------------------------------------------|
| project_id | Yes       | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> .                           |
| cluster_id | Yes       | String | ID of the cluster to be scaled out. For details about how to obtain the ID, see <a href="#">Obtaining the Cluster ID</a> . |

## Request Message

- Request example

scale\_out sample API is as follows:

```
POST /v1.0/89cd04f168b84af6be287f71730fdb4b/clusters/4ca46bf1-5c61-48ff-b4f3-0ad4e5e3ba90/
resize
{
 "scale_out": {
 "count": 3
 }
}
```

- Parameter description

**Table 5-41** Request parameters

| Parameter | Mandatory | Type                            | Description          |
|-----------|-----------|---------------------------------|----------------------|
| scale_out | No        | <a href="#">ScaleOut object</a> | Scale out an object. |

**Table 5-42** ScaleOut

| Parameter | Mandatory | Type    | Description                 |
|-----------|-----------|---------|-----------------------------|
| count     | Yes       | Integer | Number of nodes to be added |

## Response Message

Example response

```
status CODE 200
```

## Status Code

- Normal

200

- Exception

**Table 5-43** Returned values

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 400 Bad Request           | Request error.              |
| 401 Unauthorized          | Authorization failed.       |
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.1.8 Resetting a Password

### Function

This API is used to reset the password of cluster administrator.

### URI

- URI format  
POST /v1.0/{project\_id}/clusters/{cluster\_id}/reset-password
- Parameter description

**Table 5-44** URI parameters

| Parameter  | Mandatory | Type   | Description                                                                                                                             |
|------------|-----------|--------|-----------------------------------------------------------------------------------------------------------------------------------------|
| project_id | Yes       | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> .                                        |
| cluster_id | Yes       | String | ID of the cluster whose password is to be reset. For details about how to obtain the ID, see <a href="#">Obtaining the Cluster ID</a> . |

### Request Message

- Request example  
POST /v1.0/89cd04f168b84af6be287f71730fdb4b/clusters/4ca46bf1-5c61-48ff-b4f3-0ad4e5e3ba90/reset-password  
{

```
 "new_password": "NewPassword!"
 }
```

- Parameter description

**Table 5-45** Request parameters

| Parameter    | Man<br>dato<br>ry | Type   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------|-------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| new_password | Yes               | String | <p>New password of the GaussDB(DWS) cluster administrator</p> <p>A password must conform to the following rules:</p> <ul style="list-style-type: none"><li>• Contains 8 to 32 characters.</li><li>• Cannot be the same as the username or the username written in reverse order.</li><li>• Contains at least three types of the following:<ul style="list-style-type: none"><li>– Lowercase letters</li><li>– Uppercase letters</li><li>– Digits</li><li>– Special characters: ~!?,.;-_'"(){}[]/<br/>&lt;&gt;@#%^&amp;*+ =</li></ul></li><li>• Cannot be the same as previous passwords.</li><li>• Cannot be a weak password.</li></ul> |

## Response Message

Example response

```
status CODE 200
```

## Status Code

- Normal  
200
- Exception

**Table 5-46** Returned values

| Returned Value   | Description           |
|------------------|-----------------------|
| 400 Bad Request  | Request error.        |
| 401 Unauthorized | Authorization failed. |

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.2 Snapshot Management APIs

A GaussDB(DWS) snapshot is a complete backup of a cluster. Snapshots are stored in the storage space of Object Storage Service (OBS). A snapshot can be used to restore a cluster to a newly created one that has the same flavor. Currently, you can only restore a cluster to a new one.

### 5.2.1 Creating a Snapshot

#### Function

This API is used to create snapshots for a specified cluster.

#### URI

- URI format  
POST /v1.0/{project\_id}/snapshots
- Parameter description

**Table 5-47** URI parameters

| Parameter  | Mandatory | Type   | Description                                                                                      |
|------------|-----------|--------|--------------------------------------------------------------------------------------------------|
| project_id | Yes       | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> . |

#### Request Message

- Request example  
POST /v1.0/89cd04f168b84af6be287f71730fdb4b/snapshots  
{  
    "snapshot": {  
        "name": "snapshot-3",  
        "cluster\_id": "44b277eb-39be-4921-be31-3d61b43651d7",  
        "description": "Snapshot-3 description"  
    }  
}

- Parameter description

**Table 5-48** Request parameters

| Parameter | Mandatory | Type                            | Description      |
|-----------|-----------|---------------------------------|------------------|
| snapshot  | Yes       | <a href="#">Snapshot object</a> | Snapshot object. |

**Table 5-49** Snapshot

| Parameter   | Mandatory | Type   | Description                                                                                                                                                                                    |
|-------------|-----------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| name        | Yes       | String | Snapshot name, which must be unique and start with a letter. It consists of 4 to 64 characters, which are case-insensitive and contain letters, digits, hyphens (-), and underscores (_) only. |
| cluster_id  | Yes       | String | ID of the cluster for which you want to create a snapshot. For details about how to obtain the ID, see <a href="#">Obtaining the Cluster ID</a> .                                              |
| description | No        | String | Snapshot description. If no value is specified, the description is empty. Enter a maximum of 256 characters. The following special characters are not allowed: !<>'=&"                         |

## Response Message

- Example response  
status CODE 200

```
{
 "snapshot": {
 "id": "2a4d0f86-67cd-408a-8b66-017454fb7793"
 }
}
```
- Parameter description

**Table 5-50** Response parameter description

| Parameter | Type                                    | Description     |
|-----------|-----------------------------------------|-----------------|
| snapshot  | <a href="#">SnapshotResponse object</a> | Snapshot object |

**Table 5-51** SnapshotResp

| Parameter | Type   | Description |
|-----------|--------|-------------|
| id        | String | Snapshot ID |

## Status Code

- Normal  
200
- Exception

**Table 5-52** Returned values

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 400 Bad Request           | Request error.              |
| 401 Unauthorized          | Authorization failed.       |
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.2.2 Querying the Snapshot List

### Function

This API is used to query the snapshot list.

### URI

- URI format  
GET /v1.0/{project\_id}/snapshots
- Parameter description

**Table 5-53** URI parameters

| Parameter  | Man<br>dato<br>ry | Type   | Description                                                                                      |
|------------|-------------------|--------|--------------------------------------------------------------------------------------------------|
| project_id | Yes               | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> . |

## Request Message

Request example

```
GET /v1.0/89cd04f168b84af6be287f71730fdb4b/snapshots
```

## Response Message

- Example response

status CODE 200

```
{
 "snapshots": [
 {
 "id": "2a4d0f86-67cd-408a-8b66-017454fb7793",
 "name": "snapshot-1",
 "description": "",
 "started": "2016-08-23T03:59:23Z",
 "finished": "2016-08-23T04:01:40Z",
 "size": 500,
 "status": "AVAILABLE",
 "type": "MANUAL",
 "cluster_id": "4f87d3c4-9e33-482f-b962-e23b30d1a18c"
 },
 {
 "id": "4af11460-06ec-48a4-b3ad-0e3bbcd8ab1",
 "name": "snapshot-2",
 "description": "",
 "started": "2016-08-23T18:20:00Z",
 "finished": "2016-08-23T18:22:12Z",
 "size": 500,
 "status": "AVAILABLE",
 "type": "MANUAL",
 "cluster_id": "4f87d3c4-9e33-482f-b962-e23b30d1a18c"
 }
}
```

- Parameter description

**Table 5-54** Response parameter description

| Parameter | Type                                    | Description                      |
|-----------|-----------------------------------------|----------------------------------|
| snapshots | Array of<br><b>Snapshots</b><br>objects | List of snapshot objects         |
| count     | Integer                                 | Total number of snapshot objects |

**Table 5-55** Snapshots

| Parameter   | Type   | Description          |
|-------------|--------|----------------------|
| id          | String | Snapshot ID          |
| name        | String | Snapshot name        |
| description | String | Snapshot description |

| Parameter  | Type   | Description                                                                                                                               |
|------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------|
| started    | String | Time when a snapshot starts to be created.<br>Format: ISO8601: YYYY-MM-DDThh:mm:ssZ                                                       |
| finished   | String | Time when a snapshot is complete. Format: ISO8601: YYYY-MM-DDThh:mm:ssZ                                                                   |
| size       | Double | Snapshot size, in GB                                                                                                                      |
| status     | String | Snapshot status: <ul style="list-style-type: none"><li>• CREATING</li><li>• AVAILABLE</li><li>• UNAVAILABLE</li></ul>                     |
| type       | String | Snapshot type. It can be: <ul style="list-style-type: none"><li>• MANUAL</li><li>• AUTOMATED</li></ul>                                    |
| cluster_id | String | ID of the cluster for which snapshots are created. For details about how to obtain the ID, see <a href="#">Obtaining the Cluster ID</a> . |

## Status Code

- Normal  
200
- Exception

**Table 5-56** Returned values

| Returned Value            | Description              |
|---------------------------|--------------------------|
| 400 Bad Request           | Request error.           |
| 401 Unauthorized          | Authorization failed.    |
| 403 Forbidden             | No operation permission. |
| 404 Not Found             | No resources found.      |
| 500 Internal Server Error | Internal service error.  |

| Returned Value          | Description                 |
|-------------------------|-----------------------------|
| 503 Service Unavailable | The service is unavailable. |

## 5.2.3 Querying Snapshot Details

### Function

This API is used to query snapshot details by using the snapshot ID.

### URI

- URI format  
GET /v1.0/{project\_id}/snapshots/{snapshot\_id}
- Parameter description

**Table 5-57** URI parameters

| Parameter   | Man<br>dato<br>ry | Type   | Description                                                                                      |
|-------------|-------------------|--------|--------------------------------------------------------------------------------------------------|
| project_id  | Yes               | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> . |
| snapshot_id | Yes               | String | Snapshot ID                                                                                      |

### Request Message

Request example

GET /v1.0/89cd04f168b84af6be287f71730fdb4b/snapshots/b5c45780-1006-49e3-b2d5-b3229975bbc7

### Response Message

- Example response  
status CODE 200  
{  
    "snapshot": {  
        "id": "2a4d0f86-67cd-408a-8b66-017454fb7793",  
        "name": "snapshot-1",  
        "description": "snapshot description",  
        "started": "2016-08-23T03:59:23Z",  
        "finished": "2016-08-23T04:01:40Z",  
        "size": 500,  
        "status": "AVAILABLE",  
        "type": "MANUAL",  
        "cluster\_id": "4f87d3c4-9e33-482f-b962-e23b30d1a18c"  
    }  
}
- Parameter description

**Table 5-58** Response parameter description

| Parameter | Type                                  | Description     |
|-----------|---------------------------------------|-----------------|
| snapshot  | <a href="#">SnapshotDetail object</a> | Snapshot object |

**Table 5-59** SnapshotDetail

| Parameter   | Type   | Description                                                                                                                               |
|-------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------|
| id          | String | Snapshot ID                                                                                                                               |
| name        | String | Snapshot name                                                                                                                             |
| description | String | Snapshot description                                                                                                                      |
| started     | String | Time when a snapshot starts to be created.<br>Format: ISO8601: YYYY-MM-DDThh:mm:ssZ                                                       |
| finished    | String | Time when a snapshot is complete. Format:<br>ISO8601: YYYY-MM-DDThh:mm:ssZ                                                                |
| size        | Double | Snapshot size, in GB                                                                                                                      |
| status      | String | Snapshot status: <ul style="list-style-type: none"><li>• CREATING</li><li>• AVAILABLE</li><li>• UNAVAILABLE</li></ul>                     |
| type        | String | Snapshot type. It can be: <ul style="list-style-type: none"><li>• MANUAL</li><li>• AUTOMATED</li></ul>                                    |
| cluster_id  | String | ID of the cluster for which snapshots are created. For details about how to obtain the ID, see <a href="#">Obtaining the Cluster ID</a> . |

## Status Code

- Normal  
200
- Exception

**Table 5-60** Returned values

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 400 Bad Request           | Request error.              |
| 401 Unauthorized          | Authorization failed.       |
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.2.4 Deleting a Manual Snapshot

### Function

This API is used to delete a specified manual snapshot.

### URI

- URI format  
`DELETE /v1.0/{project_id}/snapshots/{snapshot_id}`
- Parameter description

**Table 5-61** URI parameters

| Parameter   | Man<br>dato<br>ry | Type   | Description                                                                                      |
|-------------|-------------------|--------|--------------------------------------------------------------------------------------------------|
| project_id  | Yes               | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> . |
| snapshot_id | Yes               | String | Snapshot ID                                                                                      |

### Request Message

Request example

```
DELETE /v1.0/89cd04f168b84af6be287f71730fdb4b/snapshots/4ca46bf1-5c61-48ff-b4f3-0ad4e5e3ba90
```

### Response Message

Example response

```
status CODE 202
```

## Status Code

- Normal  
202
- Exception

**Table 5-62** Returned values

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 400 Bad Request           | Request error.              |
| 401 Unauthorized          | Authorization failed.       |
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

## 5.2.5 Restoring a Cluster

### Function

This API is used to restore clusters using the snapshot.

### URI

- URI format  
POST /v1.0/{project\_id}/snapshots/{snapshot\_id}/actions
- Parameter description

**Table 5-63** URI parameters

| Parameter   | Mandatory | Type   | Description                                                                                      |
|-------------|-----------|--------|--------------------------------------------------------------------------------------------------|
| project_id  | Yes       | String | Project ID. For details about how to obtain the ID, see <a href="#">Obtaining a Project ID</a> . |
| snapshot_id | Yes       | String | ID of the snapshot to be restored                                                                |

### Request Message

- Request example  
POST /v1.0/89cd04f168b84af6be287f71730fdb4b/snapshots/4ca46bf1-5c61-48ff-b4f3-0ad4e5e3ba90/actions

```
{"restore": {
 "name": "dws-1",
 "subnet_id": "374eca02-cfc4-4de7-8ab5-dbebf7d9a720",
 "security_group_id": "dc3ec145-9029-4b39-b5a3-ace5a01f772b",
 "vpc_id": "85b20d7e-9eb7-4b2a-98f3-3c8843ea3574",
 "availability_zone": "my-kualalumpur-1",
 "port": 8000,
 "public_ip": {
 "public_bind_type": "auto_assign",
 "eip_id": ""
 },
 "enterprise_project_id": "aca4e50a-266f-4786-827c-f8d6cc3fbada"
}
```

- Parameter description

**Table 5-64** Request parameters

| Parameter | Mandatory | Type           | Description           |
|-----------|-----------|----------------|-----------------------|
| restore   | Yes       | Restore object | Object to be restored |

**Table 5-65** Restore

| Parameter | Mandatory | Type   | Description                                                                                                                                                                               |
|-----------|-----------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| name      | Yes       | String | Cluster name, which must be unique. The cluster name must contain 4 to 64 characters, which must start with a letter. Only letters, digits, hyphens (-), and underscores (_) are allowed. |
| subnet_id | No        | String | Subnet ID, which is used for configuring cluster network. The default value is the same as that of the original cluster.                                                                  |

| Parameter         | Mandatory | Type                            | Description                                                                                                                      |
|-------------------|-----------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| security_group_id | No        | String                          | Security group ID, which is used for configuring cluster network. The default value is the same as that of the original cluster. |
| vpc_id            | No        | String                          | VPC ID, which is used for configuring cluster network. The default value is the same as that of the original cluster.            |
| availability_zone | No        | String                          | AZ of a cluster. The default value is the same as that of the original cluster.                                                  |
| port              | No        | Integer                         | Service port of a cluster. The value ranges from 8000 to 30000. The default value is <b>8000</b> .                               |
| public_ip         | No        | <a href="#">PublicIp</a> object | Public IP address. If the parameter is not specified, public connection is not used by default.                                  |

**Table 5-66** PublicIp

| Parameter        | Mandatory | Type   | Description                                                                                                                                                                                 |
|------------------|-----------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| public_bind_type | Yes       | String | Binding type of an EIP. The value can be one of the following: <ul style="list-style-type: none"><li>• <b>auto_assign</b></li><li>• <b>not_use</b></li><li>• <b>bind_existing</b></li></ul> |
| eip_id           | No        | String | EIP ID                                                                                                                                                                                      |

## Response Message

- Example response

```
{
 "cluster": {
 "id": "7d85f602-a948-4a30-afd4-e84f47471c15"
 }
}
```
- Parameter description

**Table 5-67** Response parameter description

| Parameter | Type                     | Description    |
|-----------|--------------------------|----------------|
| cluster   | <b>Cluster</b><br>object | Cluster object |

**Table 5-68** Cluster

| Parameter | Type   | Description |
|-----------|--------|-------------|
| id        | String | Cluster ID  |

## Status Code

- Normal  
200
- Exception

**Table 5-69** Returned values

| Returned Value   | Description           |
|------------------|-----------------------|
| 400 Bad Request  | Request error.        |
| 401 Unauthorized | Authorization failed. |

| Returned Value            | Description                 |
|---------------------------|-----------------------------|
| 403 Forbidden             | No operation permission.    |
| 404 Not Found             | No resources found.         |
| 500 Internal Server Error | Internal service error.     |
| 503 Service Unavailable   | The service is unavailable. |

# 6 Permissions Policies and Supported Actions

This section describes fine-grained permissions management for your GaussDB(DWS) service using IAM. You can skip this section if your cloud account already satisfies your needs.

By default, new IAM users do not have permissions assigned. You need to add the users to one or more groups, and attach permissions policies or roles to these groups. Users inherit permissions from the groups to which they are added and can perform specified operations on cloud services based on the permissions.

You can grant users permissions by using roles and policies. Roles are provided by IAM to define service-based permissions depending on users' job responsibilities. Policies define API-based permissions for operations on specific resources under certain conditions, allowing for more fine-grained, secure access control of cloud resources.

## NOTE

Policy-based authorization is useful if you want to allow or deny the access to an API.

An account has all of the permissions required to call all APIs, but IAM users must have the required permissions specifically assigned. The permissions required for calling an API are determined by the actions supported by the API. Only users who have been granted permissions allowing the actions can call the API successfully. For example, if an IAM user wants to query the GaussDB(DWS) cluster list using an API, the user must have been granted permissions that allow the **dws:openAPICluster:list** action.

## Supported Actions

DWS provides system-defined policies that can be directly used in IAM. Database administrators can also create custom policies and use them to supplement system-defined policies, implementing more refined access control. Actions supported by policies are specific to APIs. The following are common concepts related to policies:

- **Permissions:** Allow or deny operations on specified resources under specific conditions.

- **APIs:** RESTful APIs that can be called in a custom policy.
- **Actions:** Added to a custom policy to control permissions for specific operations.
- **IAM or enterprise projects:** Type of projects for which an action will take effect. Policies that contain actions supporting both IAM and enterprise projects can be assigned to user groups and take effect in both IAM and Enterprise Management. Policies that only contain actions supporting IAM projects can be assigned to user groups and only take effect for IAM. Such policies will not take effect if they are assigned to user groups in Enterprise Management.

 **NOTE**

The check mark (✓) indicates that an action takes effect. The cross mark (✗) indicates that an action does not take effect.

GaussDB(DWS) supports the following actions that can be defined in custom policies:

- [Managing Clusters](#)
- [Managing Snapshots](#)

## Managing Clusters

| Permissions               | APIs                                                  | Actions                          | IAM Project | Enterprise Project |
|---------------------------|-------------------------------------------------------|----------------------------------|-------------|--------------------|
| Creating clusters         | POST /v1.0/{project_id}/clusters                      | dws:openAPICluster:create        | ✓           | ✗                  |
| Querying the cluster list | GET /v1.0/{project_id}/clusters                       | dws:openAPICluster:list          | ✓           | ✗                  |
| Querying cluster details  | GET /v1.0/{project_id}/clusters/{cluster_id}          | dws:openAPICluster:getDetail     | ✓           | ✗                  |
| Querying the node type    | GET /v2/{project_id}/node-types                       | dws:openAPILavers:node-types:get | ✓           | ✗                  |
| Deleting clusters         | DELETE /v1.0/{project_id}/clusters/{cluster_id}       | dws:openAPICluster:delete        | ✓           | ✗                  |
| Restarting clusters       | POST /v1.0/{project_id}/clusters/{cluster_id}/restart | dws:openAPICluster:restart       | ✓           | ✗                  |

| Permissions                                  | APIs                                                         | Actions                             | IAM Project | Enterprise Project |
|----------------------------------------------|--------------------------------------------------------------|-------------------------------------|-------------|--------------------|
| Scales out a cluster.                        | POST /v1.0/{project_id}/clusters/{cluster_id}/resize         | dws:cluster:scaleOutOrOpenAPIResize | ✓           | x                  |
| Resetting the cluster administrator password | POST /v1.0/{project_id}/clusters/{cluster_id}/reset-password | dws:openAPICluster:resetPassword    | ✓           | x                  |

## Managing Snapshots

| Permissions                | APIs                                                    | Actions                     | IAM Project | Enterprise Project |
|----------------------------|---------------------------------------------------------|-----------------------------|-------------|--------------------|
| Creating snapshots         | POST /v1.0/{project_id}/snapshots                       | dws:openAPISnapshot:create  | ✓           | x                  |
| Querying the snapshot list | GET /v1.0/{project_id}/snapshots                        | dws:openAPISnapshot:list    | ✓           | x                  |
| Querying snapshot details  | GET /v1.0/{project_id}/snapshots/{snapshot_id}          | dws:openAPISnapshot:detail  | ✓           | x                  |
| Deleting snapshots         | DELETE /v1.0/{project_id}/snapshots/{snapshot_id}       | dws:openAPISnapshot:delete  | ✓           | x                  |
| Restoring clusters         | POST /v1.0/{project_id}/snapshots/{snapshot_id}/actions | dws:openAPISnapshot:restore | ✓           | x                  |

# 7 Appendix

## 7.1 Status Code

**Table 7-1** describes the status code.

**Table 7-1** Status code

| Status Code | Code                          | Description                                                                                                                                                                                         |
|-------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 100         | Continue                      | The client continues sending the request.<br>This interim response is used to inform the client that the initial part of the request has been received and has not yet been rejected by the server. |
| 101         | Switching Protocols           | Switching protocols. The target protocol must be more advanced than the source protocol.<br>For example, the current HTTP protocol is switched to a later version.                                  |
| 201         | Created                       | The request for creating a resource has been fulfilled.                                                                                                                                             |
| 202         | Accepted                      | The request has been accepted, but the processing has not been completed.                                                                                                                           |
| 203         | Non-Authoritative Information | The server successfully processed the request, but is returning information that may be from another source.                                                                                        |
| 204         | NoContent                     | The server has successfully processed the request, but has not returned any content.<br>The status code is returned in response to an HTTP OPTIONS request.                                         |

| Status Code | Code              | Description                                                                                                                                                                                                                              |
|-------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 205         | Reset Content     | The server has fulfilled the request, but the requester is required to reset the content.                                                                                                                                                |
| 206         | Partial Content   | The server has processed certain GET requests.                                                                                                                                                                                           |
| 300         | Multiple Choices  | There are multiple options for the location of the requested resource. The response contains a list of resource characteristics and addresses from which the user or user agent (such as a browser) can choose the most appropriate one. |
| 301         | Moved Permanently | The requested resource has been assigned a new permanent URI, and the new URI is contained in the response.                                                                                                                              |
| 302         | Found             | The requested resource resides temporarily under a different URI.                                                                                                                                                                        |
| 303         | See Other         | Retrieve a location.<br>The response to the request can be found under a different URI and should be retrieved using a GET or POST method.                                                                                               |
| 304         | Not Modified      | The requested resource has not been modified. When the server returns this status code, it does not return any resources.                                                                                                                |
| 305         | Use Proxy         | The requested resource must be accessed through a proxy.                                                                                                                                                                                 |
| 306         | Unused            | The HTTP status code is no longer used.                                                                                                                                                                                                  |
| 400         | BadRequest        | Invalid request.<br>The client should not repeat the request without modifications.                                                                                                                                                      |
| 401         | Unauthorized      | The status code is returned after the client provides the authentication information, indicating that the authentication information is incorrect or invalid.                                                                            |
| 402         | Payment Required  | This status code is reserved for future use.                                                                                                                                                                                             |
| 403         | Forbidden         | The server understood the request, but is refusing to fulfill it.<br>The client should not repeat the request without modifications.                                                                                                     |
| 404         | NotFound          | The requested resource cannot be found.<br>The client should not repeat the request without modifications.                                                                                                                               |

| Status Code | Code                            | Description                                                                                                                                                                                                                                                                         |
|-------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 405         | MethodNotAllowed                | The method specified in the request is not supported for the requested resource.<br>The client should not repeat the request without modifications.                                                                                                                                 |
| 406         | Not Acceptable                  | The server cannot fulfill the request according to the content characteristics of the request.                                                                                                                                                                                      |
| 407         | Proxy Authentication Required   | This status code is similar to 401, but indicates that the client must first authenticate itself with the proxy.                                                                                                                                                                    |
| 408         | Request Time-out                | The request timed out.<br>The client may repeat the request without modifications at any later time.                                                                                                                                                                                |
| 409         | Conflict                        | The request could not be completed due to a conflict with the current state of the resource.<br>This status code indicates that the resource that the client attempts to create already exists, or the request fails to be processed because of the update of the conflict request. |
| 410         | Gone                            | The requested resource is no longer available.<br>The status code indicates that the requested resource has been deleted permanently.                                                                                                                                               |
| 411         | Length Required                 | The server refuses to process the request without a defined Content-Length.                                                                                                                                                                                                         |
| 412         | Precondition Failed             | The server does not meet one of the preconditions that the requester puts on the request.                                                                                                                                                                                           |
| 413         | Request Entity Too Large        | The request is larger than that a server is able to process. The server may close the connection to prevent the client from continuing the request. If the server cannot process the request temporarily, the response will contain a Retry-After header field.                     |
| 414         | Request-URI Too Large           | The URI provided was too long for the server to process.                                                                                                                                                                                                                            |
| 415         | Unsupported Media type          | The server is unable to process the media format in the request.                                                                                                                                                                                                                    |
| 416         | Requested range not satisfiable | The requested range is invalid.                                                                                                                                                                                                                                                     |
| 417         | Expectation Failed              | The server fails to meet the requirements of the Expect request-header field.                                                                                                                                                                                                       |

| Status Code | Code                       | Description                                                                                                                                                                                                                                                                                                                                         |
|-------------|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 422         | UnprocessableEntity        | The request is well-formed but is unable to be processed due to semantic errors.                                                                                                                                                                                                                                                                    |
| 429         | TooManyRequests            | The client has sent more requests than its rate limit is allowed within a given amount of time, or the server has received more requests than it is able to process within a given amount of time. In this case, it is advisable for the client to re-initiate requests after the time specified in the Retry-After header of the response expires. |
| 500         | InternalServerError        | The server is able to receive the request but it could not understand the request.                                                                                                                                                                                                                                                                  |
| 501         | Not Implemented            | The server does not support the requested function.                                                                                                                                                                                                                                                                                                 |
| 502         | Bad Gateway                | The server is acting as a gateway or proxy and receives an invalid request from a remote server.                                                                                                                                                                                                                                                    |
| 503         | ServiceUnavailable         | The requested service is invalid.<br>The client should not repeat the request without modifications.                                                                                                                                                                                                                                                |
| 504         | ServerTimeout              | The request cannot be fulfilled within a given time. This status code is returned to the client only when the <b>Timeout</b> parameter is specified in the request.                                                                                                                                                                                 |
| 505         | HTTP Version not supported | The server does not support the HTTP protocol version used in the request.                                                                                                                                                                                                                                                                          |

## 7.2 Error Code

No data is returned if an API fails to be called. You can locate the cause of error according to the error code of each API. When the calling fails, HTTP status code 4xx or 5xx is returned. The returned message body contains the specific error code and error information. If you fail to locate the cause of error, contact the database customer service and technical support and provide the error code so that we can help you solve the problem as soon as possible.

**Table 7-2 Error code**

| Status Code | Error Code | Error Information                          | Description                                | Solution                                                                                                     |
|-------------|------------|--------------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| 400         | DWS.5001   | Invalid instance name.                     | Invalid instance name.                     | Enter a valid instance name according to the instance name description and try again later.                  |
| 400         | DWS.5002   | Invalid database type.                     | Invalid database type.                     | Enter a valid database type according to the database parameter description and try again later.             |
| 400         | DWS.5003   | Invalid database version.                  | Invalid database version.                  | Enter a valid database version according to the database parameter description and try again later.          |
| 400         | DWS.5004   | Empty datastore field.                     | Empty datastore field.                     | Enter the correct datastore according to the actual situation and try again later.                           |
| 400         | DWS.5005   | Database type or version not supported.    | Database type or version not supported.    | Enter a valid database type and version according to the database parameter description and try again later. |
| 400         | DWS.5006   | Invalid specifications.                    | Invalid specifications.                    | Select the correct flavor and try again later.                                                               |
| 400         | DWS.5010   | Invalid region.                            | Invalid region.                            | Select a valid region and try again.                                                                         |
| 400         | DWS.5011   | Invalid AZ.                                | Invalid AZ.                                | Select a valid AZ and try again.                                                                             |
| 400         | DWS.5012   | The region or AZ does not exist.           | The region or AZ does not exist.           | Enter a correct region or AZ and try again later.                                                            |
| 400         | DWS.5013   | Invalid password of database <b>root</b> . | Invalid password of database <b>root</b> . | Enter a valid password according to the password description.                                                |
| 400         | DWS.5014   | Invalid VPC ID.                            | Invalid VPC ID.                            | Enter a valid ID according to the description of parameter <b>vpc_id</b> .                                   |

| Status Code | Error Code | Error Information                                                | Description                                                      | Solution                                                                          |
|-------------|------------|------------------------------------------------------------------|------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 400         | DWS.5015   | Invalid subnet ID.                                               | Invalid subnet ID.                                               | Enter a valid ID according to the description of parameter <b>subnet_id</b> .     |
| 400         | DWS.5016   | Invalid security group ID.                                       | Invalid security group ID.                                       | Enter a valid ID according to the description of the security group ID parameter. |
| 400         | DWS.5017   | Invalid retention period of automated backups.                   | Invalid retention period of automated backups.                   | Enter a proper retention period and try again later.                              |
| 400         | DWS.5018   | Invalid automated backup period.                                 | Invalid automated backup period.                                 | Enter a proper automated backup period and try again later.                       |
| 404         | DWS.5021   | The VPC does not exist or does not belong to the user.           | The VPC does not exist or does not belong to the user.           | Enter a correct VPC and try again later.                                          |
| 404         | DWS.5022   | The subnet does not exist or does not belong to the VPC.         | The subnet does not exist or does not belong to the VPC.         | Enter a correct subnet and try again later.                                       |
| 404         | DWS.5023   | The security group does not exist or does not belong to the VPC. | The security group does not exist or does not belong to the VPC. | Enter a correct security group and try again later.                               |
| 400         | DWS.5027   | Invalid AZ.                                                      | Invalid AZ.                                                      | Enter a correct AZ and try again later.                                           |
| 400         | DWS.5033   | The volume size is not a multiple of 10.                         | The volume size is not a multiple of 10.                         | Enter a valid size and try again.                                                 |
| 400         | DWS.5034   | Flavors do not match.                                            | Flavors do not match.                                            | Select a correct flavor and try again.                                            |

| Status Code | Error Code | Error Information                                                 | Description                                                       | Solution                                                                                               |
|-------------|------------|-------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| 403         | DWS.5036   | Datastore does not exist or does not have sufficient permissions. | Datastore does not exist or does not have sufficient permissions. | Enter a correct Datastore and try again.                                                               |
| 400         | DWS.5037   | The parameter does not exist.                                     | The parameter does not exist.                                     | Enter the correct parameter group and try again.                                                       |
| 400         | DWS.5038   | The parameter value is out of range.                              | The parameter value is out of range.                              | Enter a valid parameter and try again.                                                                 |
| 400         | DWS.5039   | Duplicate parameters.                                             | Duplicate parameters.                                             | Enter a valid parameter and try again.                                                                 |
| 400         | DWS.5045   | The current tenant is not allowed to perform this operation.      | The current tenant is not allowed to perform this operation.      | Ensure that the current tenant is the same as the tenant to which the cluster belongs and try again.   |
| 400         | DWS.5046   | nics is left black.                                               | nics is left black.                                               | Enter a correct nics and try again.                                                                    |
| 400         | DWS.5047   | Invalid instance quantity.                                        | Invalid instance quantity.                                        | Enter a correct instance quantity.                                                                     |
| 400         | DWS.5048   | Invalid extended parameter.                                       | Invalid extended parameter.                                       | Enter a valid extended parameter according to the corresponding description of the extended parameter. |
| 409         | DWS.5050   | The cluster name already exists.                                  | The cluster name already exists.                                  | Enter a correct cluster name and try again later.                                                      |
| 400         | DWS.5051   | Invalid IP address.                                               | Invalid IP address.                                               | Enter a valid IP address and try again.                                                                |
| 400         | DWS.5052   | Invalid value of the AZ.                                          | Invalid value of the AZ.                                          | Enter a correct AZ and try again later.                                                                |
| 400         | DWS.5053   | The value of locality between instances is invalid.               | The value of locality between instances is invalid.               | Enter a correct locality value and try again later.                                                    |

| Status Code | Error Code | Error Information                              | Description                                    | Solution                                                                        |
|-------------|------------|------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------|
| 400         | DWS.5054   | The parameter group ID is invalid.             | The parameter group ID is invalid.             | Enter a correct parameter group ID and try again later.                         |
| 400         | DWS.5056   | Invalid string length.                         | Invalid string length.                         | Enter a valid string and try again.                                             |
| 400         | DWS.5057   | The cluster name pattern is invalid.           | The cluster name pattern is invalid.           | Enter a valid cluster name according to the cluster name description.           |
| 400         | DWS.5059   | Database username contains invalid characters. | Database username contains invalid characters. | Enter a valid database username according to the database username description. |
| 400         | DWS.5060   | Integer type is of wrong range.                | Integer type is of wrong range.                | Enter a valid Integer type and try again later.                                 |
| 400         | DWS.5061   | The volume type is illegal.                    | The volume type is illegal.                    | Enter a valid volume type and try again later.                                  |
| 400         | DWS.5062   | The volume tag is illegal.                     | The volume tag is illegal.                     | Enter a valid volume tag and try again later.                                   |
| 400         | DWS.5063   | Invalid Specific field.                        | Invalid Specific field.                        | Enter a correct Specific value and try again later.                             |
| 400         | DWS.5064   | Invalid UUID.                                  | Invalid UUID.                                  | Enter a valid UUID and try again.                                               |
| 400         | DWS.5065   | Invalid format.                                | Invalid format.                                | Use a valid format and try again.                                               |
| 400         | DWS.5070   | Flavor ref is invalid in xml.                  | Flavor ref is invalid in xml.                  | Enter correct flavor ref and try again later.                                   |
| 400         | DWS.5071   | The volume type is invalid in XML.             | The volume type is invalid in XML.             | Enter a correct disk type and try again later.                                  |
| 400         | DWS.5078   | Invalid disk size.                             | Invalid disk size.                             | Enter a valid disk size and try again later.                                    |
| 400         | DWS.5079   | The backup period is not permitted.            | The backup period is not permitted.            | Enter a proper backup period and try again later.                               |
| 400         | DWS.5080   | The backup retention period is not permitted.  | The backup retention period is not permitted.  | Enter a proper backup retention duration and try again later.                   |

| Status Code | Error Code | Error Information                                                     | Description                                                           | Solution                                                                        |
|-------------|------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------|
| 400         | DWS.5081   | The instance disk type is not allowed.                                | The instance disk type is not allowed.                                | Select a valid instance type and try again.                                     |
| 400         | DWS.5082   | The database user name is not supported.                              | The database user name is not supported.                              | Enter a valid database username according to the database username description. |
| 400         | DWS.5083   | Invalid affinity in the XML configuration.                            | Invalid affinity in the XML configuration.                            | Enter a valid affinity value and try again.                                     |
| 400         | DWS.5084   | Incorrect volume configuration in the XML file.                       | Incorrect volume configuration in the XML file.                       | Enter a correct volume value and try again later.                               |
| 400         | DWS.5086   | The same instance type does not meet flavor consistency requirements. | The same instance type does not meet flavor consistency requirements. | Enter the correct flavor and try again later.                                   |
| 400         | DWS.5087   | The same instance type does not meet disk consistency requirements.   | The same instance type does not meet disk consistency requirements.   | Enter a correct disk and try again later.                                       |
| 400         | DWS.5089   | Unsupported type.                                                     | Unsupported type.                                                     | Enter a supported type and try again.                                           |
| 400         | DWS.5091   | The number of nodes has reached the maximum.                          | The number of nodes has reached the maximum.                          | Enter a valid node quantity and try again.                                      |
| 400         | DWS.5093   | Flavor information is invalid.                                        | Flavor information is invalid.                                        | Enter valid flavor information and try again later.                             |
| 400         | DWS.5095   | The current instance type does not support this operation.            | The current instance type does not support this operation.            | Select a correct instance type and try again.                                   |

| Status Code | Error Code | Error Information                                                                                  | Description                                                                                        | Solution                                                                                                           |
|-------------|------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| 400         | DWS.5096   | Invalid disk quantity.                                                                             | Invalid disk quantity.                                                                             | Enter valid disk quantity and try again later.                                                                     |
| 400         | DWS.5097   | Region or AZ does not exist.                                                                       | Region or AZ does not exist.                                                                       | Enter a correct region or AZ and try again later.                                                                  |
| 400         | DWS.5098   | Invalid EIP binding type.                                                                          | Invalid EIP binding type.                                                                          | Enter a correct EIP binding type and try again later.                                                              |
| 400         | DWS.5104   | The subnet of an instance must be unique.                                                          | The subnet of an instance must be unique.                                                          | Ensure that the subnet of the instance is unique and try again.                                                    |
| 400         | DWS.5106   | Invalid instance type.                                                                             | Invalid instance type.                                                                             | Enter a valid instance type and try again later.                                                                   |
| 400         | DWS.5107   | Invalid cluster mode.                                                                              | Invalid cluster mode.                                                                              | Enter a valid disk mode and try again later.                                                                       |
| 400         | DWS.5111   | The backup file ID does not exist.                                                                 | The backup file ID does not exist.                                                                 | Enter a correct backup file ID and try again later.                                                                |
| 400         | DWS.5130   | Invalid agency name.                                                                               | Invalid agency name.                                                                               | Enter a valid agency name and then try again.                                                                      |
| 400         | DWS.5133   | Invalid EIP ID.                                                                                    | Invalid EIP ID.                                                                                    | Enter a valid EIP ID and try again.                                                                                |
| 400         | DWS.5135   | The EIP does not exist.                                                                            | The EIP does not exist.                                                                            | Enter a valid EIP and try again.                                                                                   |
| 400         | DWS.5144   | Invalid password of the cluster administrator.                                                     | Invalid password of the cluster administrator.                                                     | Enter a valid cluster administrator password according to the description of the cluster administrator's password. |
| 400         | DWS.5145   | The cluster administrator password cannot contain the username, or the username spelled backwards. | The cluster administrator password cannot contain the username, or the username spelled backwards. | Enter a valid cluster administrator password as prompted and try again later.                                      |

| Status Code | Error Code | Error Information                                                                                                             | Description                                                                                                                   | Solution                                                                    |
|-------------|------------|-------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| 400         | DWS.5146   | The ECS group parameter is missing.                                                                                           | The ECS group parameters is missing.                                                                                          | Enter a valid parameter and try again.                                      |
| 400         | DWS.5147   | Invalid ECS group parameter.                                                                                                  | Invalid ECS group parameter.                                                                                                  | Enter a valid parameter and try again.                                      |
| 400         | DWS.5148   | The number of ECS groups has reached the upper limit.                                                                         | The number of ECS groups has reached the upper limit.                                                                         | Enter a valid ECS group quantity and try again.                             |
| 400         | DWS.5149   | The snapshot ID is invalid.                                                                                                   | The snapshot ID is invalid.                                                                                                   | Enter a valid snapshot ID according to the snapshot ID description.         |
| 400         | DWS.5165   | Invalid null content in the data file.                                                                                        | Invalid null content in the data file.                                                                                        | Enter the correct control content and try again later.                      |
| 400         | DWS.5166   | Invalid noescaping parameter in text format                                                                                   | Invalid noescaping parameter in text format                                                                                   | Enter the correct noescaping parameter and try again later.                 |
| 400         | DWS.5167   | Invalid header parameter in the data file. The supported values are true/on and false/off.                                    | Invalid header parameter in the data file. The supported values are true/on and false/off.                                    | Enter the correct header parameter and try again later.                     |
| 400         | DWS.5168   | Invalid <b>fill_missing_fields</b> parameter in the data file. The supported values are <b>true/on</b> and <b>false/off</b> . | Invalid <b>fill_missing_fields</b> parameter in the data file. The supported values are <b>true/on</b> and <b>false/off</b> . | Enter the correct <b>fill_missing_fields</b> parameter and try again later. |

| Status Code | Error Code | Error Information                                                                                                           | Description                                                                                                                 | Solution                                                                  |
|-------------|------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| 400         | DWS.5169   | Invalid <b>ignore_extra_data</b> parameter in the data file. The supported values are <b>true/on</b> and <b>false/off</b> . | Invalid <b>ignore_extra_data</b> parameter in the data file. The supported values are <b>true/on</b> and <b>false/off</b> . | Enter the correct <b>ignore_extra_data</b> parameter and try again later. |
| 400         | DWS.5170   | Invalid number of incorrect data formats during data import.                                                                | Invalid number of incorrect data formats during data import.                                                                | Enter the correct number of incorrect data formats and try again later.   |
| 400         | DWS.5171   | Invalid username or password for logging in to the database.                                                                | Invalid username or password for logging in to the database.                                                                | Enter the correct username or password and try again later.               |
| 400         | DWS.5172   | The database does not exist.                                                                                                | The database does not exist.                                                                                                | Enter the correct database name and try again later.                      |
| 400         | DWS.5173   | The schema where the database table resides does not exist.                                                                 | The schema where the database table resides does not exist.                                                                 | Enter a correct schema and try again later.                               |
| 400         | DWS.5174   | The database table does not exist.                                                                                          | The database table does not exist.                                                                                          | Enter the correct database table and try again later.                     |
| 400         | DWS.5175   | The database username cannot be blank.                                                                                      | The database username cannot be blank.                                                                                      | Enter the username and try again later.                                   |
| 400         | DWS.5176   | The password corresponding to the database username cannot be blank.                                                        | The password corresponding to the database username cannot be blank.                                                        | Enter the password and try again later.                                   |

| Status Code | Error Code | Error Information                                                                        | Description                                                                              | Solution                                                                                                  |
|-------------|------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| 400         | DWS.5177   | Name of the database where the table to which data is loaded is located cannot be blank. | Name of the database where the table to which data is loaded is located cannot be blank. | Enter the database name and try again later.                                                              |
| 400         | DWS.5178   | Schema where the table to which data is loaded is located cannot be blank.               | Schema where the table to which data is loaded is located cannot be blank.               | Enter the schema and try again later.                                                                     |
| 400         | DWS.5179   | Database table to which data is loaded cannot be blank.                                  | Database table to which data is loaded cannot be blank.                                  | Enter the database table and try again later.                                                             |
| 400         | DWS.5180   | Invalid path for OBS file loading.                                                       | Invalid path for OBS file loading.                                                       | Enter a correct OBS loading path and try again later.                                                     |
| 400         | DWS.5181   | Failed to load data. The error information is #failedReason# .                           | Failed to load data. The error information is #failedReason#.                            | Rectify the fault according to the error information and try again later.                                 |
| 400         | DWS.5182   | The current job is stopped.                                                              | The current job is stopped.                                                              | Select a loading job and cancel it.                                                                       |
| 400         | DWS.5183   | The current job has been canceled.                                                       | The current job has been canceled.                                                       | Select a loading job and cancel it.                                                                       |
| 400         | DWS.5184   | Invalid format of the data source file. The supported file formats are CSV and TEXT.     | Invalid format of the data source file. The supported file formats are CSV and TEXT.     | Enter a correct data source file format and try again later. The supported file formats are CSV and TEXT. |

| Status Code | Error Code | Error Information                                                                                          | Description                                                                                                | Solution                                                                                                              |
|-------------|------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| 400         | DWS.5185   | Invalid encoding format of the data file. The supported file formats are GBK, UTF8, Latin1, and SQL_ASCII. | Invalid encoding format of the data file. The supported file formats are GBK, UTF8, Latin1, and SQL_ASCII. | Enter a correct encoding format and try again later. The supported file formats are GBK, UTF8, Latin1, and SQL_ASCII. |
| 400         | DWS.5186   | Invalid field delimiter of row data in a data source file.                                                 | Invalid field delimiter of row data in a data source file.                                                 | Enter a correct field delimiter and try again later.                                                                  |
| 400         | DWS.5187   | Invalid quote character for a CSV file.                                                                    | Invalid quote character for a CSV file.                                                                    | Enter a correct quote character and try again later.                                                                  |
| 400         | DWS.5189   | Failed to obtain the AK/SK.                                                                                | Failed to obtain the AK/SK.                                                                                | Contact the database customer service or try again later.                                                             |
| 400         | DWS.5191   | The tag does not exist.                                                                                    | The tag does not exist.                                                                                    | Enter the correct tag and try again later.                                                                            |
| 400         | DWS.5194   | The number of tags exceeds the maximum value.                                                              | The number of tags exceeds the maximum value.                                                              | Verify the number of tags for the resource and try again later.                                                       |
| 400         | DWS.5197   | The tag is invalid.                                                                                        | The tag is invalid.                                                                                        | Enter the correct tag and try again later.                                                                            |
| 400         | DWS.5198   | Invalid username.                                                                                          | Invalid username.                                                                                          | Enter a correct username and try again.                                                                               |
| 400         | DWS.5199   | Invalid password.                                                                                          | Invalid password.                                                                                          | Enter a valid password and try again.                                                                                 |
| 400         | DWS.5200   | The flavor has been sold out. Switch to another AZ or region.                                              | The flavor has been sold out. Switch to another AZ or region.                                              | Create a cluster of another flavor or switch to another AZ or region.                                                 |
| 400         | DWS.5202   | The subnet ID cannot be left blank.                                                                        | The subnet ID cannot be left blank.                                                                        | Enter a correct subnet ID and try again later.                                                                        |

| Status Code | Error Code | Error Information                                      | Description                                            | Solution                                                                                                                                    |
|-------------|------------|--------------------------------------------------------|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| 400         | DWS.5203   | The security group ID cannot be left blank.            | The security group ID cannot be left blank.            | Enter a valid security group ID and try again later.                                                                                        |
| 400         | DWS.5206   | Databases of this version do not support the function. | Databases of this version do not support the function. | Ensure that the API parameters match the cluster version. If the parameters do not match the version, correct the parameters and try again. |

## 7.3 Creating a VPC

### Background

Before creating a cluster, you need to create a VPC to provide a secure and isolated network environment for using GaussDB(DWS).

If you have already created a VPC, you do not need to create it again.

#### NOTE

For details about how to create a VPC, see [Creating a VPC](#) in the *Virtual Private Cloud User Guide*.

### Procedure

- Step 1** Log in to the management console.
- Step 2** Under **Network**, click **Virtual Private Cloud**.
- Step 3** On the **Virtual Private Cloud** page, click **Create VPC** to create a VPC.
- Step 4** Obtain the VPC and subnet ID for subsequent use in [Creating a Cluster](#).
- Step 5** On the **Virtual Private Cloud** page, choose **Access Control > Security Groups** in the navigation tree on the left, and click **Create Security Group** to create a security group.
- Step 6** Obtain the security group ID for subsequent use in [Creating a Cluster](#).

----End

## 7.4 Obtaining a Project ID

### Obtaining a Project ID by Calling the API

You can obtain the project ID by calling the IAM API used to query project information based on the specified criteria.

The API used to obtain a project ID is **GET https://{{Endpoint}}/v3/projects/**. {{Endpoint}} indicates the IAM endpoint and can be obtained from [Regions and Endpoints](#). For details about API authentication, see [Authentication](#).

The following is an example response. The value of **id** of **projects** indicates the project ID.

```
{
 "projects": [
 {
 "domain_id": "65382450e8f64ac0870cd180d14e684b",
 "is_domain": false,
 "parent_id": "65382450e8f64ac0870cd180d14e684b",
 "name": "my-kualalumpur-1",
 "description": "",
 "links": {
 "next": null,
 "previous": null,
 "self": "https://www.example.com/v3/projects/a4a5d4098fb4474fa22cd05f897d6b99"
 },
 "id": "a4a5d4098fb4474fa22cd05f897d6b99",
 "enabled": true
 }
],
 "links": {
 "next": null,
 "previous": null,
 "self": "https://www.example.com/v3/projects"
 }
}
```

### Obtaining a Project ID from the Console

A project ID is required for some URLs when an API is called. To obtain a project ID, perform the following operations:

1. Log in to the management console.
2. Click the username and select **My Credential** from the drop-down list.  
On the page, view the project ID in the project list.

## 7.5 Obtaining an Account ID

An account ID is required for some URLs when an API is called. To obtain the account ID, perform the following steps:

1. Log in to the management console.
2. Click the username and select **My Credential** from the drop-down list.  
On the **My Credential** page, view the **Account ID**.

## 7.6 Obtaining the Cluster ID

A cluster ID (**cluster\_id**) is required for some URLs when an API is called. To obtain a cluster ID, perform the following operations:

1. Log in to the GaussDB(DWS) console.
2. In the navigation pane on the left, click **Clusters**.
3. In the cluster list, find the target cluster and click the cluster name. The **Basic Information** page is displayed.
4. View the cluster ID.

**Figure 7-1** Viewing the cluster ID

The screenshot shows the 'Basic Information' tab selected in the top navigation bar. Below it, the 'Cluster Information' section displays various cluster details. A red box highlights the 'Cluster ID' field, which contains the value '25351769c'. Other visible fields include 'Cluster Name' (redacted), 'Cluster Status' (Available), 'Parameter Configuration Status' (Synchronized), 'Nodes' (3), 'Logical cluster switch' (off), 'Cluster Version' (8.1.0.100), 'Used Storage Capacity' (0.28% / 0.83/300 GB), 'Created' (Apr 27, 2021 15:36:47 GMT+08:00), 'Last Snapshot Created' (..), and 'Maintenance Window' (Friday 06:00-10:00 GMT+08:00, Configure).

# 8 Change History

| Date       | Description                               |
|------------|-------------------------------------------|
| 2022-08-11 | This issue is the first official release. |